

Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 1 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845

9 771682 584003 55299

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

IMPORTANT NOTICE:

THE GOVERNMENT PRINTING WORKS WILL NOT BE HELD RESPONSIBLE FOR ANY ERRORS THAT MIGHT OCCUR DUE TO THE SUBMISSION OF INCOMPLETE / INCORRECT / ILLEGIBLE COPY.

NO FUTURE QUERIES WILL BE HANDLED IN CONNECTION WITH THE ABOVE.

Contents

No.		Gazette No.	Page No.
GOVERNMENT NOTICES • GOEWERMENTSKENNISGEWINGS			
Forestry, Fisheries and the Environment, Department of / Bosbou, Visserye en die Omgewingsake, Departement van			
7877	National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004): Publication of the Leopard Conservation Strategy and Action Plan, 2026 for public comment	55299	14
Health, Department of / Gesondheid, Departement van			
7878	Health Professions Act, 1974 (Act No. 56 of 1974): Regulations relating to the qualifications for registration of Biokineticists: Amendment, 2026	55299	63
7879	National Health Act, 2003 (Act No. 61 of 2003): Regulations on Organ Transplantation	55299	72
Public Works and Infrastructure, Department of / Openbare Werke en Infrastruktuur, Departement van			
7880	Property Valuers Profession Act, 2000 (Act no. 47 of 2000): Invitation to the members of public to nominate persons to serve on the 7th term council of the South African Council for the Property Valuers Profession	55299	96
Rural Development and Land Reform, Department of / Landelike Ontwikkeling en Grondhervorming, Departement van			
7881	Restitution of Land Rights Act, 1994 (Act No. 22 of 1994): Erf 1, Paterson	55299	98
7882	Restitution of Land Rights Act, 1994 (Act No. 22 of 1994): Erf No. 545, Hankey consolidated into Erf No. 1434	55299	99
7883	Restitution of Land Rights Act 1994 (Act No. 22 of 1994) as amended: Land Claim Gazette Notice: Portions 7 and 9 of the Farm Leeuwkloof 285 JR - Z0188	55299	100
PROCLAMATION NOTICES • PROKLAMASIE KENNISGEWINGS			
Justice and Constitutional Development, Department of / Justisie en Staatkundige Ontwikkeling, Departement van			
344	Special Investigating Units and Special Tribunals Act, 1996 (Act No. 74 of 1996): Referral of matters to existing Special Investigating Unit and Special Tribunal	55299	101
Social Development, Department of / Maatskaplike Ontwikkeling, Departement van			
345	National Development Agency Act, 1998 (Act No 108 of 1998) as amended: Nomination for candidates to be appointed by the Minister of Social Development as members of the Board of the National Development Agency	55299	104
GENERAL NOTICES • ALGEMENE KENNISGEWINGS			
Employment and Labour, Department of / Indiensneming en Arbeid, Departement van			
4127	Labour Relations Act 66 of 1995 (As Amended): Accreditation of Bargaining Councils - 4 September 2026 (CCMA)	55299	105
4128	Labour Relations Act 66 of 1995 (As Amended): Accreditation of Private Agencies - 4 September 2026 (CCMA)..	55299	108
Independent Communications Authority of South Africa / Onafhanklike Kommunikasie-owerheid van Suid-Afrika			
4129	Independent Communications Authority of South Africa Act, 2000 (Act No.13 of 2000): Notice of intention to conduct market inquiry into the Impact of Over-The-Counter ("OTT") services on Licensees and Regulatory Framework in South Africa	55299	111
4130	Independent Communications Authority of South Africa Act, 2000 (Act No.13 of 2000): Notice of intention to conduct market inquiry into the affordability of telecommunications services in South Africa	55299	116
Trade, Industry and Competition, Department of / Handel, Nywerheid en Kompetisie, Departement van			
4131	Competition Act 89 of 1998 as amended: 02 Complaint Referral	55299	121
Transport, Department of / Vervoer, Departement van			
4132	Marine Traffic Act, 1981 (Act No. 2 of 1981): Marine Traffic Amendment Regulations, 2026	55299	122
4133	Merchant Shipping Act, 1951 (Act No. 57 of 1951): Amendment to the Second Schedule of the Act in terms of Section 356bis (2)	55299	159
4134	Merchant Shipping Act, 1951 (Act No. 57 of 1951): Merchant Shipping (Crew Accommodation) Regulations, 2026	55299	673

BOARD NOTICES • RAADSKENNISGEWINGS

984 Health Professions Act, 1974 (Act No. 56 of 1974): Rules relating to the registration by Medical Practitioners and Dentists of Additional Qualifications: Amendment..... 55299 767

government printing
Department:
Government Printing Works
REPUBLIC OF SOUTH AFRICA

HIGH ALERT: SCAM WARNING!!!

TO ALL SUPPLIERS AND SERVICE PROVIDERS OF THE GOVERNMENT PRINTING WORKS

It has come to the attention of the *GOVERNMENT PRINTING WORKS* that there are certain unscrupulous companies and individuals who are defrauding unsuspecting businesses disguised as representatives of the *Government Printing Works* (*GPW*).

The scam involves the fraudsters using the letterhead of *GPW* to send out fake tender bids to companies and requests to supply equipment and goods.

Although the contact person's name on the letter may be of an existing official, the contact details on the letter are not the same as the *Government Printing Works*'. When searching on the Internet for the address of the company that has sent the fake tender document, the address does not exist.

The banking details are in a private name and not company name. Government will never ask you to deposit any funds for any business transaction. *GPW* has alerted the relevant law enforcement authorities to investigate this scam to protect legitimate businesses as well as the name of the organisation.

Example of e-mails these fraudsters are using:

PROCUREMENT@GPW-GOV.ORG

Should you suspect that you are a victim of a scam, you must urgently contact the police and inform the *GPW*.

GPW has an official email with the domain as **@gpw.gov.za**

Government e-mails DO NOT have org in their e-mail addresses. All of these fraudsters also use the same or very similar telephone numbers. Although such number with an area code 012 looks like a landline, it is not fixed to any property.

GPW will never send you an e-mail asking you to supply equipment and goods without a purchase/order number. *GPW* does not procure goods for another level of Government. The organisation will not be liable for actions that result in companies or individuals being resultant victims of such a scam.

Government Printing Works gives businesses the opportunity to supply goods and services through RFQ / Tendering process. In order to be eligible to bid to provide goods and services, suppliers must be registered on the National Treasury's Central Supplier Database (CSD). To be registered, they must meet all current legislative requirements (e.g. have a valid tax clearance certificate and be in good standing with the South African Revenue Services - SARS).

The tender process is managed through the Supply Chain Management (SCM) system of the department. SCM is highly regulated to minimise the risk of fraud, and to meet objectives which include value for money, open and effective competition, equitability, accountability, fair dealing, transparency and an ethical approach. Relevant legislation, regulations, policies, guidelines and instructions can be found on the tender's website.

Fake Tenders

National Treasury's CSD has launched the Government Order Scam campaign to combat fraudulent requests for quotes (RFQs). Such fraudulent requests have resulted in innocent companies losing money. We work hard at preventing and fighting fraud, but criminal activity is always a risk.

How tender scams work

There are many types of tender scams. Here are some of the more frequent scenarios:

Fraudsters use what appears to be government department stationery with fictitious logos and contact details to send a fake RFQ to a company to invite it to urgently supply goods. Shortly after the company has submitted its quote, it receives notification that it has won the tender. The company delivers the goods to someone who poses as an official or at a fake site. The Department has no idea of this transaction made in its name. The company is then never paid and suffers a loss.

OR

Fraudsters use what appears to be government department stationery with fictitious logos and contact details to send a fake RFQ to Company A to invite it to urgently supply goods. Typically, the tender specification is so unique that only Company B (a fictitious company created by the fraudster) can supply the goods in question.

Shortly after Company A has submitted its quote it receives notification that it has won the tender. Company A orders the goods and pays a deposit to the fictitious Company B. Once Company B receives the money, it disappears. Company A's money is stolen in the process.

Protect yourself from being scammed

- If you are registered on the supplier databases and you receive a request to tender or quote that seems to be from a government department, contact the department to confirm that the request is legitimate. Do not use the contact details on the tender document as these might be fraudulent.
- Compare tender details with those that appear in the Tender Bulletin, available online at **www.gpwonline.co.za**
- Make sure you familiarise yourself with how government procures goods and services. Visit the tender website for more information on how to tender.
- If you are uncomfortable about the request received, consider visiting the government department and/or the place of delivery and/or the service provider from whom you will be sourcing the goods.
- In the unlikely event that you are asked for a deposit to make a bid, contact the SCM unit of the department in question to ask whether this is in fact correct.

Any incidents of corruption, fraud, theft and misuse of government property in the *Government Printing Works* can be reported to:

Supply Chain Management: Ms. Anna Marie Du Toit, Tel. (012) 748 6292.
Email: **Annamarie.DuToit@gpw.gov.za**

Marketing and Stakeholder Relations: Ms Bonakele Mbhele, at Tel. (012) 748 6193.
Email: **Bonakele.Mbhele@gpw.gov.za**

Security Services: Mr Daniel Legoabe, at tel. (012) 748 6176.
Email: **Daniel.Legoabe@gpw.gov.za**

Closing times for **ORDINARY WEEKLY** *GOVERNMENT GAZETTE* 2026

*The closing time is **15:00** sharp on the following days:*

- **23 December,** Tuesday for the issue of Friday **02 January 2026**
- **02 January,** Friday for the issue of Friday **09 January 2026**
- **09 January,** Friday for the issue of Friday **16 January 2026**
- **16 January,** Friday for the issue of Friday **23 January 2026**
- **23 January,** Friday for the issue of Friday **30 January 2026**
- **30 January,** Friday for the issue of Friday **06 February 2026**
- **06 February,** Friday for the issue of Friday **13 February 2026**
- **13 February,** Friday for the issue of Friday **20 February 2026**
- **20 February,** Friday for the issue of Friday **27 February 2026**
- **27 February,** Friday for the issue of Friday **06 March 2026**
- **06 March,** Friday for the issue of Friday **13 March 2026**
- **13 March,** Friday for the issue of Thursday **20 March 2026**
- **20 March,** Friday for the issue of Friday **27 March 2026**
- **26 March,** Thursday for the issue of Thursday **02 April 2026**
- **01 April,** Wednesday for the issue of Friday **10 April 2026**
- **10 April,** Friday for the issue of Friday **17 April 2026**
- **17 April,** Friday for the issue of Friday **24 April 2026**
- **22 April,** Wednesday for the issue of Thursday **30 April 2026**
- **30 April,** Thursday for the issue of Friday **08 May 2026**
- **08 May,** Friday for the issue of Friday **15 May 2026**
- **15 May,** Friday for the issue of Friday **22 May 2026**
- **22 May,** Friday for the issue of Friday **29 May 2026**
- **29 May,** Friday for the issue of Friday **05 June 2026**
- **05 June,** Friday for the issue of Friday **12 June 2026**
- **11 June,** Thursday for the issue of Friday **19 June 2026**
- **19 June,** Friday for the issue of Friday **26 June 2026**
- **26 June,** Friday for the issue of Friday **03 July 2026**
- **03 July,** Friday for the issue of Friday **10 July 2026**
- **10 July,** Friday for the issue of Friday **17 July 2026**
- **17 July,** Friday for the issue of Friday **24 July 2026**
- **24 July,** Friday for the issue of Friday **31 July 2026**
- **31 July,** Friday for the issue of Friday **07 August 2026**
- **06 August,** Thursday for the issue of Friday **14 August 2026**
- **14 August,** Friday for the issue of Friday **21 August 2026**
- **21 August,** Friday for the issue of Friday **28 August 2026**
- **28 August,** Friday for the issue of Friday **04 September 2026**
- **04 September,** Friday for the issue of Friday **11 September 206**
- **11 September,** Friday for the issue of Friday **18 September 2026**
- **17 September,** Thursday for the issue of Friday **25 September 2026**
- **25 September,** Friday for the issue of Friday **02 October 2026**
- **02 October,** Friday for the issue of Friday **09 October 2026**
- **09 October,** Friday for the issue of Friday **16 October 2026**
- **16 October,** Friday for the issue of Friday **23 October 2026**
- **23 October,** Friday for the issue of Friday **30 October 2026**
- **30 October,** Friday for the issue of Friday **06 November 2026**
- **06 November,** Friday for the issue of Friday **13 November 2026**
- **13 November,** Friday for the issue of Friday **20 November 2026**
- **20 November,** Friday for the issue of Friday **27 November 2026**
- **27 November,** Friday for the issue of Friday **04 December 2026**
- **04 December,** Friday for the issue of Friday **11 December 2026**
- **10 December,** Thursday for the issue of Friday **18 December 2026**
- **17 December,** Thursday for the issue of Thursday **24 December 2026**
- **23 December,** Wednesday for the issue of Thursday **31 December 2026**

LIST OF TARIFF RATES

FOR PUBLICATION OF NOTICES

COMMENCEMENT: 1 APRIL 2018

NATIONAL AND PROVINCIAL

Notice sizes for National, Provincial & Tender gazettes 1/4, 2/4, 3/4, 4/4 per page. Notices submitted will be charged at R1008.80 per full page, pro-rated based on the above categories.

Pricing for National, Provincial - Variable Priced Notices		
Notice Type	**Page Space**	**New Price (R)**
Ordinary National, Provincial	1/4 - Quarter Page	252.20
Ordinary National, Provincial	2/4 - Half Page	504.40
Ordinary National, Provincial	3/4 - Three Quarter Page	756.60
Ordinary National, Provincial	4/4 - Full Page	1008.80

EXTRA-ORDINARY

All Extra-ordinary National and Provincial gazette notices are non-standard notices and attract a variable price based on the number of pages submitted.

The pricing structure for National and Provincial notices which are submitted as **Extra ordinary submissions** will be charged at R**3026.32** per page.

GOVERNMENT PRINTING WORKS - BUSINESS RULES

The **Government Printing Works** (**GPW**) has established rules for submitting notices in line with its electronic notice processing system, which requires the use of electronic *Adobe* Forms. Please ensure that you adhere to these guidelines when completing and submitting your notice submission.

Closing Times for Acceptance of Notices

1. The *Government Gazette* and *Government Tender Bulletin* are weekly publications that are published on Fridays and the closing time for the acceptance of notices is strictly applied according to the scheduled time for each gazette.

2. Please refer to the Submission Notice Deadline schedule in the table below. This schedule is also published online on the Government Printing works website www.gpwonline.co.za

   All re-submissions will be subject to the standard cut-off times.
   All notices received after the closing time will be rejected.

Government Gazette Type	Publication Frequency	Publication Date	Submission Deadline	Cancellations Deadline
National Gazette	Weekly	Friday	Friday 15h00 for next Friday	Tuesday, 15h00 - 3 working days prior to publication
Regulation Gazette	Weekly	Friday	Friday 15h00 for next Friday	Tuesday, 15h00 - 3 working days prior to publication
Petrol Price Gazette	Monthly	Tuesday before 1st Wednesday of the month	One day before publication	1 working day prior to publication
Road Carrier Permits	Weekly	Friday	Thursday 15h00 for next Friday	3 working days prior to publication
Unclaimed Monies (Justice, Labour or Lawyers)	January / September 2 per year	Last Friday	One week before publication	3 working days prior to publication
Parliament (Acts, White Paper, Green Paper)	As required	Any day of the week	None	3 working days prior to publication
Manuals	Bi- Monthly	2nd and last Thursday of the month	One week before publication	3 working days prior to publication
State of Budget (National Treasury)	Monthly	30th or last Friday of the month	One week before publication	3 working days prior to publication
Extraordinary Gazettes	As required	Any day of the week	*Before 10h00 on publication date*	*Before 10h00 on publication date*
Legal Gazettes A, B and C	Weekly	Friday	One week before publication	Tuesday, 15h00 - 3 working days prior to publication
Tender Bulletin	Weekly	Friday	Friday 15h00 for next Friday	Tuesday, 15h00 - 3 working days prior to publication
Gauteng	Weekly	Wednesday	Two weeks before publication	3 days **after** submission deadline
Eastern Cape	Weekly	Monday	One week before publication	3 working days prior to publication
Northern Cape	Weekly	Monday	One week before publication	3 working days prior to publication
North West	Weekly	Tuesday	One week before publication	3 working days prior to publication
KwaZulu-Natal	Weekly	Thursday	One week before publication	3 working days prior to publication
Limpopo	Weekly	Friday	One week before publication	3 working days prior to publication
Mpumalanga	Weekly	Friday	One week before publication	3 working days prior to publication

GOVERNMENT PRINTING WORKS - BUSINESS RULES

Government Gazette Type	Publication Frequency	Publication Date	Submission Deadline	Cancellations Deadline
Gauteng Liquor License Gazette	Monthly	Wednesday before the First Friday of the month	Two weeks before publication	3 working days **after** submission deadline
Northern Cape Liquor License Gazette	Monthly	First Friday of the month	Two weeks before publication	3 working days **after** submission deadline
National Liquor License Gazette	Monthly	First Friday of the month	Two weeks before publication	3 working days **after** submission deadline
Mpumalanga Liquor License Gazette	Bi-Monthly	Second & Fourth Friday	One week before publication	3 working days prior to publication

Extraordinary Gazettes

3. *Extraordinary Gazettes* can have only one publication date. If multiple publications of an *Extraordinary Gazette* are required, a separate Z95/Z95Prov *Adobe* Forms for each publication date must be submitted.

Notice Submission Process

4. Download the latest *Adobe* form, for the relevant notice to be placed, from the **Government Printing Works** website www.gpwonline.co.za.

5. The *Adobe* form needs to be completed electronically using *Adobe Acrobat* / *Acrobat Reader*. Only electronically completed *Adobe* forms will be accepted. No printed, handwritten and/or scanned *Adobe* forms will be accepted.

6. The completed electronic *Adobe* form has to be submitted via email to submit.egazette@gpw.gov.za. The form needs to be submitted in its original electronic *Adobe* format to enable the system to extract the completed information from the form for placement in the publication.

7. Every notice submitted **must** be accompanied by an official **GPW** quotation. This must be obtained from the *eGazette* Contact Centre.

8. Each notice submission should be sent as a single email. The email **must** contain **all documentation relating to a particular notice submission**.

   8.1. Each of the following documents must be attached to the email as a separate attachment:

      8.1.1. An electronically completed *Adobe* form, specific to the type of notice that is to be placed.

         8.1.1.1. For National *Government Gazette* or *Provincial Gazette* notices, the notices must be accompanied by an electronic Z95 or Z95Prov *Adobe* form

         8.1.1.2. The notice content (body copy) **MUST** be a separate attachment.

      8.1.2. A copy of the official **Government Printing Works** quotation you received for your notice. *(Please see Quotation section below for further details)*

      8.1.3. A valid and legible Proof of Payment / Purchase Order: **Government Printing Works** account customer must include a copy of their Purchase Order**. Non-Government Printing Works** account customer needs to submit the proof of payment for the notice

      8.1.4. Where separate notice content is applicable (Z95, Z95 Prov and TForm 3, it should **also** be attached as a separate attachment. *(Please see the Copy Section below, for the specifications)*.

      8.1.5. Any additional notice information if applicable.

GOVERNMENT PRINTING WORKS - BUSINESS RULES

9. The electronic *Adobe* form will be taken as the primary source for the notice information to be published. Instructions that are on the email body or covering letter that contradicts the notice form content will not be considered. The information submitted on the electronic *Adobe* form will be published as-is.

10. To avoid duplicated publication of the same notice and double billing, Please submit your notice **ONLY ONCE.**

11. Notices brought to **GPW** by "walk-in" customers on electronic media can only be submitted in *Adobe* electronic form format. All "walk-in" customers with notices that are not on electronic *Adobe* forms will be routed to the Contact Centre where they will be assisted to complete the forms in the required format.

12. Should a customer submit a bulk submission of hard copy notices delivered by a messenger on behalf of any organisation e.g. newspaper publisher, the messenger will be referred back to the sender as the submission does not adhere to the submission rules.

QUOTATIONS

13. Quotations are valid until the next tariff change.

    13.1. ***Take note:*** **GPW**'s annual tariff increase takes place on ***1 April*** therefore any quotations issued, accepted and submitted for publication up to ***31 March*** will keep the old tariff. For notices to be published from 1 April, a quotation must be obtained from **GPW** with the new tariffs. Where a tariff increase is implemented during the year, **GPW** endeavours to provide customers with 30 days' notice of such changes.

14. Each quotation has a unique number.

15. Form Content notices must be emailed to the *eGazette* Contact Centre for a quotation.

    15.1. The *Adobe* form supplied is uploaded by the Contact Centre Agent and the system automatically calculates the cost of your notice based on the layout/format of the content supplied.

    15.2. It is critical that these *Adobe* Forms are completed correctly and adhere to the guidelines as stipulated by **GPW**.

16. **APPLICABLE ONLY TO GPW ACCOUNT HOLDERS**:

    16.1. **GPW** Account Customers must provide a valid **GPW** account number to obtain a quotation.

    16.2. Accounts for **GPW** account customers **must** be active with sufficient credit to transact with **GPW** to submit notices.

        16.2.1. If you are unsure about or need to resolve the status of your account, please contact the **GPW** Finance Department prior to submitting your notices. (If the account status is not resolved prior to submission of your notice, the notice will be failed during the process).

17. **APPLICABLE ONLY TO CASH CUSTOMERS:**

    17.1. Cash customers doing **bulk payments** must use a **single email address** in order to use the **same proof of payment** for submitting multiple notices.

18. The responsibility lies with you, the customer, to ensure that the payment made for your notice(s) to be published is sufficient to cover the cost of the notice(s).

19. Each quotation will be associated with one proof of payment / purchase order / cash receipt.

    19.1. This means that **the quotation number can only be used once to make a payment.**

GOVERNMENT PRINTING WORKS - BUSINESS RULES

COPY (SEPARATE NOTICE CONTENT DOCUMENT)

20. Where the copy is part of a separate attachment document for Z95, Z95Prov and TForm03

20.1. Copy of notices must be supplied in a separate document and may not constitute part of any covering letter, purchase order, proof of payment or other attached documents.

The content document should contain only one notice. (You may include the different translations of the same notice in the same document).

20.2. The notice should be set on an A4 page, with margins and fonts set as follows:

Page size = A4 Portrait with page margins: Top = 40mm, LH/RH = 16mm, Bottom = 40mm; Use font size: Arial or Helvetica 10pt with 11pt line spacing;

Page size = A4 Landscape with page margins: Top = 16mm, LH/RH = 40mm, Bottom = 16mm; Use font size: Arial or Helvetica 10pt with 11pt line spacing;

CANCELLATIONS

21. Cancellation of notice submissions are accepted by **GPW** according to the deadlines stated in the table above in point 2. Non-compliance to these deadlines will result in your request being failed. Please pay special attention to the different deadlines for each gazette. Please note that any notices cancelled after the cancellation deadline will be published and charged at full cost.

22. Requests for cancellation must be sent by the original sender of the notice and must accompanied by the relevant notice reference number (N-) in the email body.

AMENDMENTS TO NOTICES

23. With effect from 01 October 2015, **GPW** will not longer accept amendments to notices. The cancellation process will need to be followed according to the deadline and a new notice submitted thereafter for the next available publication date.

REJECTIONS

24. All notices not meeting the submission rules will be rejected to the customer to be corrected and resubmitted. Assistance will be available through the Contact Centre should help be required when completing the forms. (012-748 6200 or email info.egazette@gpw.gov.za). Reasons for rejections include the following:

24.1. Incorrectly completed forms and notices submitted in the wrong format, will be rejected.

24.2. Any notice submissions not on the correct *Adobe* electronic form, will be rejected.

24.3. Any notice submissions not accompanied by the proof of payment / purchase order will be rejected and the notice will not be processed.

24.4. Any submissions or re-submissions that miss the submission cut-off times will be rejected to the customer. The Notice needs to be re-submitted with a new publication date.

GOVERNMENT PRINTING WORKS - BUSINESS RULES

APPROVAL OF NOTICES

25. Any notices other than legal notices are subject to the approval of the Government Printer, who may refuse acceptance or further publication of any notice.

26. No amendments will be accepted in respect to separate notice content that was sent with a Z95 or Z95Prov notice submissions. The copy of notice in layout format (previously known as proof-out) is only provided where requested, for Advertiser to see the notice in final Gazette layout. Should they find that the information submitted was incorrect, they should request for a notice cancellation and resubmit the corrected notice, subject to standard submission deadlines. The cancellation is also subject to the stages in the publishing process, i.e. If cancellation is received when production (printing process) has commenced, then the notice cannot be cancelled.

GOVERNMENT PRINTER INDEMNIFIED AGAINST LIABILITY

27. The Government Printer will assume no liability in respect of—

27.1. any delay in the publication of a notice or publication of such notice on any date other than that stipulated by the advertiser;

27.2. erroneous classification of a notice, or the placement of such notice in any section or under any heading other than the section or heading stipulated by the advertiser;

27.3. any editing, revision, omission, typographical errors or errors resulting from faint or indistinct copy.

LIABILITY OF ADVERTISER

28. Advertisers will be held liable for any compensation and costs arising from any action which may be instituted against the Government Printer in consequence of the publication of any notice.

CUSTOMER INQUIRIES

Many of our customers request immediate feedback/confirmation of notice placement in the gazette from our Contact Centre once they have submitted their notice – While **GPW** deems it one of their highest priorities and responsibilities to provide customers with this requested feedback and the best service at all times, we are only able to do so once we have started processing your notice submission.
GPW has a 2-working day turnaround time for processing notices received according to the business rules and deadline submissions.
Please keep this in mind when making inquiries about your notice submission at the Contact Centre.

29. Requests for information, quotations and inquiries must be sent to the Contact Centre ONLY.

30. Requests for Quotations (RFQs) should be received by the Contact Centre at least **2 working days** before the submission deadline for that specific publication.

GOVERNMENT PRINTING WORKS - BUSINESS RULES

Payment of cost

31. The Request for Quotation for placement of the notice should be sent to the Gazette Contact Centre as indicated above, prior to submission of notice for advertising.

32. Payment should then be made, or Purchase Order prepared based on the received quotation, prior to the submission of the notice for advertising as these documents i.e. proof of payment or Purchase order will be required as part of the notice submission, as indicated earlier.

33. Every proof of payment must have a valid **GPW** quotation number as a reference on the proof of payment document.

34. Where there is any doubt about the cost of publication of a notice, and in the case of copy, an enquiry, accompanied by the relevant copy, should be addressed to the Gazette Contact Centre, **Government Printing Works**, Private Bag X85, Pretoria, 0001 email: info.egazette@gpw.gov.za before publication.

35. Overpayment resulting from miscalculation on the part of the advertiser of the cost of publication of a notice will not be refunded, unless the advertiser furnishes adequate reasons why such miscalculation occurred. In the event of underpayments, the difference will be recovered from the advertiser, and future notice(s) will not be published until such time as the full cost of such publication has been duly paid in cash or electronic funds transfer into the **Government Printing Works** banking account.

36. In the event of a notice being cancelled, a refund will be made only if no cost regarding the placing of the notice has been incurred by the **Government Printing Works**.

37. The **Government Printing Works** reserves the right to levy an additional charge in cases where notices, the cost of which has been calculated in accordance with the List of Fixed Tariff Rates, are subsequently found to be excessively lengthy or to contain overmuch or complicated tabulation.

Proof of publication

38. Copies of any of the *Government Gazette* or *Provincial Gazette* can be downloaded from the **Government Printing Works** website www.gpwonline.co.za free of charge, should a proof of publication be required.

39. Printed copies may be ordered from the Publications department at the ruling price. The **Government Printing Works** will assume no liability for any failure to post or for any delay in despatching of such *Government Gazette*(s)

GOVERNMENT PRINTING WORKS CONTACT INFORMATION

Physical Address:	**Postal Address:**	**GPW Banking Details:**
Government Printing Works	Private Bag X85	**Bank:** ABSA Bosman Street
149 Bosman Street	Pretoria	**Account No.:** 405 7114 016
Pretoria	0001	**Branch Code:** 632-005

For Gazette and Notice submissions: Gazette Submissions:	**E-mail:** submit.egazette@gpw.gov.za
For queries and quotations, contact: Gazette Contact Centre:	**E-mail:** info.egazette@gpw.gov.za
	Tel: 012-748 6200
Contact person for subscribers: Mrs M. Toka:	**E-mail:** subscriptions@gpw.gov.za
	Tel: 012-748-6066 / 6060 / 6058
	Fax: 012-323-9574

GOVERNMENT NOTICES • GOEWERMENTSKENNISGEWINGS

DEPARTMENT OF FORESTRY, FISHERIES AND THE ENVIRONMENT

NO. 7877 **4 September 2026**

NATIONAL ENVIRONMENTAL MANAGEMENT: BIODIVERSITY ACT, 2004 (ACT NO. 10 OF 2004)

THE DRAFT NATIONAL LEOPARD CONSERVATION STRATEGY AND ACTION PLAN, 2026 FOR PUBLIC COMMENT

I, David Maynier, Minister of Forestry, Fisheries and the Environment, hereby publish the draft National Leopard Conservation Strategy and Action Plan, 2026, in terms of sections 99 and 100 of the National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004), for public comments, as set out in the Schedule hereto.

The draft National Leopard Conservation Strategy and Action Plan, 2026, (draft Strategy and Action Plan) proposes a shared national vision that *"leopards thrive in living landscapes, support cultural traditions and local livelihoods through inclusive, community-driven conservation."* It seeks to offer direction that aligns with the aspirational Vision of the White Paper on Conservation and Sustainable Use of South Africa's Biodiversity 2023 and the values and hopes of South Africans concerning leopards, and how leopards can benefit both society and the environment.

It envisions acknowledging leopards as a vital component of the nation's natural heritage, valued across cultures for their ecological, cultural and symbolic significance. By protecting leopard habitats and biodiversity, this Strategy and Action Plan could catalyse sustainable development and transformation within South Africa. The draft Strategy and Action Plan is also supported by goals and strategic activities that are based on the species a) ecological role, b) social and cultural values, and c) the livelihoods and impacts of leopards.

Members of the public are invited to submit written comments on the draft Strategy and Action Plan within 30 (thirty) days from the date of publication of this Notice in the Government *Gazette* or in the newspaper, whichever date is the last date, to the following addresses:

By post to: The Director General: Department of Forestry, Fisheries and the Environment
Attention: Ms Asnath Hlungwani/Ms. Mashudu Mahada
Private Bag X447
PRETORIA
0001
By hand at: Environment House, 473 Steve Biko Road, Arcadia, Pretoria, 0083
By email: ConservationManagement@dffe.gov.za.

Electronic copies of the Government Notice can be downloaded from the following link: https://www.dffe.gov.za/legislation/gazetted_notices.

Any enquiries in connection with this Government Notice can be directed to Ms Asnath Hlungwani / Ms Mashudu Mahada on 076 819 3783 / 060 602 6560, or via email: MMahada@dffe.gov.za / Ahlungwani@dffe.gov.za.

Comments received after the closing date may not be considered.

DAVID MAYNIER
MINISTER OF FORESTRY, FISHERIES AND THE ENVIRONMENT

This gazette is also available free online at **www.gpwonline.co.za**

SCHEDULE

A National Leopard Conservation Strategy and Action Plan

2026


Photo credit: Nikki Balme

The document was drafted by a team comprising representatives from The Department of Forestry and Fisheries (DFFE), South African National Parks (SANParks), The South African National Biodiversity Institute (SANBI), iSimangaliso Wetland Park, Panthera, Cape Nature, North West Provincial Government, Mpumalanga Tourism & Parks Agency, and Ezemvelo KZN Wildlife.

This gazette is also available free online at **www.gpwonline.co.za**

Table of Content

Abbreviations and Acronyms 5
ACKNOWLEDGEMENTS 7
FOREWORD 8
EXECUTIVE SUMMARY 9
1. Introduction 11
2. Species Background 12
2.1 Taxonomy – South African Context 12
2.2 Ecology and Distribution 12
2.3 Population and Trends 13
2.4 Cultural and Economic Significance 14
2.5 Threats 14
2.6 Current Conservation Measures and Gaps 15
3 Policy and Legislative Context 16
4 Principles 16
5 Consultation Process 21
5.1 Multiple values and costs, constraints and responses 24
5.2 Strategic Trade Offs 25
6 National Vision and Impact Statement 29
7 Strategic Framework 29
7.1 Ecological Role of Leopards 29
7.2 Social and Cultural Values 30
7.3 Livelihood Impacts of Leopards 31
8 Enabling Conditions 31
1) Sustainable Finance 31
2) Participation, Communication, Education and Awareness 32
3) Legislation & Policy Reform 32
9 Strategic Framework Table (Table 4. Strategic Framework Table) 33
10. Strategic Action Plan (Table 5. Strategic Action Plan Table) 37
11. Implementation, Revision, Monitoring, and Evaluation 45
12. References & Further Reading 46

This gazette is also available free online at **www.gpwonline.co.za**

LIST OF TABLES

Table 1. Summary of key threats to leopards in South Africa. 15

Table 2. Stakeholders that participated in the consultation workshops. 21

Table 3. Summary table of the key points captured during feedback on values, costs, and constraints from the 31 national stakeholder workshops conducted in all provinces in South Africa from August to December 2024. 26

Table 4. Strategic Framework Table ..... **Error! Bookmark not defined.**

Table 5. Strategic Action Plan Table ..... **Error! Bookmark not defined.**

LIST OF FIGURES

Figure 1. Distribution of Leopard (*Panthera pardus*) within South Africa 13

Figure 2. Locations of the 28 in-person stakeholder workshops held across all provinces of South Africa in relation to surveys of key leopard populations. 24

This gazette is also available free online at **www.gpwonline.co.za**

Abbreviations and Acronyms

BGIS	Biodiversity Geographic Information System
BMPs	Biodiversity Management Plans
CATHSSETA	Culture, Art, Tourism, Hospitality, and Sport Sector Education and Training Authority
CHASA	Confederation of Hunting Associations of South Africa
CITES	Convention on International Trade in Endangered Species of Wild Fauna and Flora
CLT	Cape Leopard Trust
CMS	Convention on the Conservation of Migratory Species of Wild Animals
COGTA	Department of Cooperative Governance and Traditional Affairs
CPHC	Custodians of Professional Hunting and Conservation South Africa
CSIR	Council for Scientific and Industrial Research
DALRRD	Department of Agriculture, Land Reform, and Rural Development
DCA	Damage Causing Animal
DFFE	Department of Forestry, Fisheries and the Environment
DIRCO	Department of International Relations and Cooperation
DTIC	Department of Trade, Industry and Competition
EAP	Environmental Assessment Practitioners Association of South Africa
ECDC	Eastern Cape Development Corporation
ECPTA	Eastern Cape Parks and Tourism Agency
EIA	Environmental Impact Assessment
EMS	EMS Foundation
EWT	Endangered Wildlife Trust
HWC	Human-Wildlife Conflict
HSI	Humane Society International
IDP	Integrated Development Plan
IKSHA	Indigenous Knowledge for Heritage: Animal Council
IUCN	International Union for Conservation of Nature
GBF	Kunming-Montreal Global Biodiversity Framework
GEF	Global Environment Facility
GIS	Geographic Information System
LCF	Leopard Consultative Forum
LEMA	Limpopo Environmental Management Act
LICC	Leopard Implementation Coordination Committee
MOU	Memorandum of Understanding
NBF	National Biodiversity Framework
NBSAP	National Biodiversity Strategy and Action Plan
NEMA	National Environmental Management Act
NEM: BA	National Environmental Management: Biodiversity Act
NEM: PAA	National Environmental Management: Protected Areas Act
NGO	Non-Governmental Organization
NHBC	National Hunting and Biodiversity Council
NSPCA	National Society for the Prevention of Cruelty to Animals
PA	Protected Area
PHASA	Professional Hunters Association of South Africa
PDIs	Previously Disadvantaged Individuals
SANBI	South African National Biodiversity Institute

This gazette is also available free online at **www.gpwonline.co.za**

SANParks	South African National Parks
SAPS	South African Police Service
SAHGCA	South African Hunters Game & Conservation Association
SAVA	South African Veterinary Association
SDF	Spatial Development Framework
SDG's	Sustainable Development Goals
TOPs	Threatened or Protected Species Regulations
WAPFSA	Wildlife Animal Protection Forum South Africa
WP	White Paper on the Conservation of the Sustainable Use of South Africa's Biodiversity
WRSA	Wildlife Ranching South Africa
WWF-SA	World Wide Fund for Nature – South Africa

This gazette is also available free online at **www.gpwonline.co.za**

ACKNOWLEDGEMENTS

Individuals from the following groups are acknowledged for their contributions to the development of this National Leopard Conservation Strategy and Action Plan.

The core revision team with representatives from:

- DFFE
- SANBI
- SANParks
- Panthera
- iSimangaliso
- Cape Nature
- North West Provincial Government
- Mpumalanga Tourism & Parks Agency
- Ezemvelo KZN Wildlife

Groups and individuals participating in the consultations, including representatives from the:

- National and provincial houses of traditional leaders
- Traditional health practitioners
- National committee of People and Parks
- Leopard specialists and academics
- Conservation NGOs which have interests in leopard and animal welfare
- Officials from national and provincial State departments and entities with conservation mandates
- Provincial People and Parks committees representing communities living adjacent to:
  - Hluhluwe-iMfolozi Park
  - uMkhuze Game Reserve (a section of the Isimangaliso Wetland Park)
  - Kruger National Park
  - Great Fish River Nature Reserve
  - Addo Elephant National Park
  - Pilanesberg Provincial Nature Reserve

Community members living with leopards that congregated for the 28 workshops held in:

- Musina
- Awelani
- Tshipise
- Malamulele
- Phalaborwa
- Polokwane
- Mogalakwena
- Bushbuckridge
- Hazyview
- Mbombela
- Pilanesberg
- Pretoria
- Dinokeng
- uMkhuze
- Hluhluwe-iMfolozi
- Bloemfontein
- Taung
- Kuruman
- Upington
- Keimoes
- Springbok
- Alice
- Addo
- Humansdorp
- George
- Paarl
- Hout Bay
- Cape Town

This gazette is also available free online at **www.gpwonline.co.za**

FOREWORD

Leopards are an ecologically important apex predator, a source of deep cultural pride and a bridge between South Africa's natural heritage and its diverse peoples. This assertion is supported by the feedback received from the nearly 2,000 individuals consulted across 31 workshops in all nine provinces during the preparation of this National Leopard Conservation Strategy and Action Plan. In addition to this contemporary understanding, the leopard's significance is entrenched in South African society, reflected in indigenous traditions where the leopard (Ingwe, nkwe, nngwe, yingwe, luiperd) symbolises strength, nobility, and royal lineage - a connection that has endured for centuries.

Contemporary history places South Africa at a critical juncture in leopard conservation, with leopards having experienced substantial range loss and extirpation across an estimated 67% of the country. Today, leopards persist in fragmented populations, with robust numbers mainly within formally protected fenced areas, while the majority of suitable habitat occurs outside these areas on private and communal land. Leopards remain the last truly free-roaming large predators in South Africa, yet they face mounting pressures from habitat loss and fragmentation, human-wildlife conflict, illegal killing, and declining prey availability.

Despite these challenges, South Africa still holds viable leopard populations across seven of its nine provinces. The country's leopard landscapes, from the mountainous Western Cape to the savannahs of Limpopo and the thickets of KwaZulu-Natal, retain the potential to support healthy, connected populations. A key element of this Strategy is a focus on managing leopards across different land tenure arrangements (state, private, and community-owned) in a more coordinated and inclusive manner, recognising that most leopards live outside of formally protected areas.

Escalating human-wildlife conflict, driven by livestock predation and competition for space, remains a significant concern. Retaliatory killings, often in response to livestock losses, poisonings, and snaring, pose direct threats to leopard populations. These pressures are compounded by a complex array of stakeholder values, ranging from cultural and spiritual significance to trophy hunting and ecotourism, that must be balanced through equitable, transparent, and evidence-based governance.

Efforts within South Africa to develop an inclusive biodiversity economy, and to ensure that an increased number of South African citizens, particularly previously disadvantaged communities, value leopards as living assets, are seen as essential to reducing human-leopard conflict and building tolerance. This Strategy includes specific activities to achieve these objectives, from community-led ecotourism and benefit-sharing mechanisms to livestock guarding programmes and rapid-response conflict mitigation frameworks. Coordinated and structured efforts by government, the private sector, traditional leaders, and communities are urgently needed to address the challenges facing leopard conservation. This Strategy therefore aims to introduce an approach to leopard stewardship such that a leopard provides ecological, cultural, and economic benefits to the people who live alongside them.

This National Leopard Conservation Strategy and Action Plan provides a strategic framework and detailed action plan for conserving leopards in South Africa. It consolidates previous policy and planning work on leopard management into a single, integrated tool, drawing on the White Paper on the Conservation and Sustainable Use of South Africa's Biodiversity, the Policy Position on Elephant, Lion, Leopard and Rhinoceros, and most importantly, the values, costs, constraints, and aspirations expressed by stakeholders during the national consultation process. The Strategy uses a whole-of-society approach in the interest of both leopards and the people of South Africa, grounded in transformation, equity, and sustainable coexistence.

This gazette is also available free online at **www.gpwonline.co.za**

EXECUTIVE SUMMARY

Leopards are a highly adaptable apex predator and the most widespread of all large carnivore species. Yet in South Africa, they have experienced substantial range loss, estimated at 67% of their historical distribution. Leopards remain the last truly free-roaming large predators in the country, occurring both inside and outside formally protected areas, with the majority of suitable habitat on private and communal land. This presents both an opportunity and a challenge: leopards can persist across multi-use landscapes, but they face escalating pressures from habitat loss and fragmentation, human-wildlife conflict, illegal killing, declining prey availability, and governance gaps.

This National Leopard Conservation Strategy and Action Plan responds to these challenges. It is the first nationally coordinated strategy for leopards in South Africa, developed through a whole-of-society approach that consulted 1,980 participants across 31 workshops in all nine provinces. Stakeholders included traditional leaders, traditional health practitioners, religious leaders, community members (including People and Parks programmes), academics, conservation and welfare NGOs, wildlife industry representatives (farmers, reserve managers, hunters, tourism operators), and national and provincial government authorities.

A situational analysis was conducted to translate the Strategy into actionable components. The analysis examined current realities, identified implementation obstacles and key gaps, and specified resourced actions needed to make the Strategy implementable. It confirmed that while ecological and policy foundations exist, the absence of a coordinated, legally grounded, and adequately resourced implementation plan is the single greatest barrier to effective leopard conservation in South Africa. The analysis directly informed the Strategic Action Plan by addressing gaps in governance, data, funding, and inclusion.

While not a formal Biodiversity Management Plan (BMP) as contemplated in Section 43 of NEMBA, this National Leopard Conservation Strategy and Action Plan follows the same rigorous process framework. It is developed to guide the conservation, sustainable use, and inclusive governance of leopards (*Panthera pardus*) across South Africa. Like a BMP, it establishes measures to ensure the protection, conservation, and sustainable management of the species, enables evaluation of progress, and forms part of a dynamic, continuous management planning process that allows for review and monitoring of actions to accommodate changing priorities and emerging issues.

This Strategy has been developed to ensure the long-term survival of viable leopard populations across their range in South Africa, recognising that most suitable leopard habitat occurs outside of formally protected areas. It consolidates and integrates prior national initiatives, scientific assessments, and stakeholder inputs into a single national framework for leopards, in alignment with the White Paper on the Conservation and Sustainable Use of South Africa's Biodiversity and the Policy Position on the Conservation and Sustainable Use of Elephant, Lion, Leopard and Rhinoceros. The persons, organisations, or organs of state responsible for implementing the interventions, including monitoring and reporting of progress, are identified. It serves as a tool to guide the management of leopards in the country, considering the concurrent responsibilities of National and Provincial spheres of Government as they relate to environmental and nature conservation matters.

This Strategy was drafted by a Core Team comprising officials of the DFFE, SANParks, SANBI, and iSimangaliso Wetland Park, with the support of provincial conservation authorities. Importantly, this Strategy took a whole-of-society approach through engagements with traditional leaders, traditional health practitioners, religious leaders, community members (including People and Parks programmes), academics, conservation and welfare NGOs, wildlife industry representatives (including game and cattle farmers, reserve managers, hunters, and tourism operators), and members of national and provincial government concerned with leopards.

This gazette is also available free online at www.gpwonline.co.za

Strategic imperatives and plans that have been considered in the development of this Strategy include the National Leopard Monitoring Framework, the Leopard Consultative Forum (LCF) processes, and the findings of the national stakeholder consultation conducted across all nine provinces involving 1,980 participants. The Strategy also draws on the White Paper on the Conservation and Sustainable Use of South Africa's Biodiversity, the Policy Position on the Conservation and Sustainable Use of Elephant, Lion, Leopard and Rhinoceros, and the report of the High-Level Panel of experts (2020). Furthermore, this Strategy considers provincial legislative frameworks, CITES obligations, South Africa's standing reservation for leopards under CMS, and relevant international commitments including the Kunming-Montreal Global Biodiversity Framework (GBF). Critically, the Strategy is grounded in the values, costs, constraints, and aspirations expressed by traditional leaders, traditional health practitioners, religious groups, community members, landowners, and conservation stakeholders during the consultation process. In this respect, this Strategy serves as the national species recovery plan for leopards in South Africa, addressing issues of habitat loss and fragmentation, human-wildlife conflict, illegal killing, declining prey availability, and governance gaps, amongst other priorities such as advancing transformation, community empowerment, cultural heritage preservation, and livelihood improvement through predator-based economies.

The Strategy articulates a Vision: *Leopards thrive in living landscapes, support cultural traditions and local livelihoods through inclusive community-driven conservation.* It is structured around three core Goals:

1. **Ecological Role of Leopards** – Conserve leopards and their landscapes by strengthening ecological resilience, connecting habitats, and reducing threats.
2. **Social and Cultural Values** – Preserve cultural heritage, promote sustainable practices, and ensure safe and inclusive access to leopards and protected areas.
3. **Livelihood Impacts of Leopards** – Increase fair opportunities for people to benefit from leopards while reducing the challenges they pose to livelihoods.

The Strategy explicitly recognises that it is not possible to simultaneously accommodate all stakeholder needs. Strategic trade-offs are required, particularly between consumptive use (trophy hunting, traditional use of derivatives) and non-consumptive use (tourism, intrinsic value). A strategy focused exclusively on preservation will alienate a large proportion of stakeholders. Conversely, unregulated consumptive use will lead to rapid extirpation. This Strategy aims to balance these competing objectives through equitable, transparent, and evidence-based governance.

The Strategy establishes **enabling conditions for success: sustainable finance; participation, communication, education and awareness; legislation and policy reform.** It provides a detailed Strategic Action Plan with nineteen key activities assigned to priority levels, a phased ten-year timeline, and clear lead institutions and accountability mechanisms. A Leopard Implementation Coordination Committee (LICC) will oversee implementation, with annual reporting to the Minister of DFFE, a five-year Action Plan review cycle, and a ten-year review of the Vision and Goals. This ensures the same level of commitment, accountability, and adaptive management expected of a formal BMP, while retaining the strategic flexibility appropriate to a national conservation strategy.

The Strategy requires provinces, protected area management authorities, and relevant stakeholders to revise or develop institutional plans for leopards aligned to this Strategy. This Strategy serves as the national species recovery plan for leopards in South Africa, addressing both conservation imperatives and the aspirations of the country's diverse peoples, advancing transformation, community empowerment, cultural heritage preservation, and livelihood improvement through predator-based economies.

This gazette is also available free online at **www.gpwonline.co.za**

1. Introduction

The African leopard *Panthera pardus pardus* derives its name from the Greek word *leopardus*, a combination of *leon* (lion) and *pardus* (panther). Leopards are a highly adaptable species and are therefore widespread across their range. Leopards are listed as Vulnerable on the IUCN Red List of Threatened Species and on Appendix I of the Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES). Across the region, in Botswana, Namibia, Mozambique, Zimbabwe, and Zambia, leopard range is relatively contiguous and populations exist at low densities across large areas. Within South Africa, they live in smaller, fragmented, higher density populations within formally protected fenced areas. However, most suitable leopard habitat in South Africa occurs outside of protected areas and thus a substantial proportion of the national leopard population occurs outside of these areas. Transboundary movement does occur and as such, important transboundary leopard landscapes are a focal point for conservation and coexistence initiatives. With reference to the transboundary nature of leopards, since 2017, leopards have been listed on Appendix II of the Convention on the Conservation of Migratory Species of Wild Animals (CMS). South Africa however, currently has a standing reservation for leopards under CMS, meaning that the country is not bound by the obligations that would normally apply to leopards under CMS; for example, adopting certain conditions around consumptive use.

Due to their extensive range, leopards form an important component of many ecosystems and therefore they can be considered an umbrella species, whose protection also conserves other species and systems. Occurring widely both inside and outside of formally protected areas, African leopards are highly representative of the human-wildlife nexus, as such, carry cost, and benefit values for people living with them. With landscapes between many protected areas containing human settlements and associated highly modified habitat, leopard-human conflict presents a significant cost for communities and landowners and poses one of the most difficult challenges facing their conservation. Conversely, leopards are also revered by many South African cultures and religions and are frequently upheld nationally and internationally as a flagship species for the country. Their skins and body parts are valued for use in religious ceremonies and for traditional medicine, and hold great intergenerational spiritual value. The species is also considered an important asset for attracting international tourism and revenue from photographic safaris and trophy hunting, and consequently, is associated with local job creation and more broadly, local livelihood improvement. As a result, stakeholder agendas, attitudes, and values placed on leopards are diverse and complex, requiring creative and dynamic whole-system approaches to their conservation.

In South Africa, leopards are managed through a combination of legal, policy, scientific, and governance frameworks. This multifaceted approach is grounded in a broad legal and policy framework that includes national legislation, species-specific regulations, and strategic biodiversity planning (see section 3). The framework is designed to ensure the long-term survival of leopards through regulated activities, scientific monitoring, and adaptive management. It also integrates provincial regulations, international commitments, and collaborative governance structures to support implementation across different jurisdictions and conservation contexts.

The National Constitution (1996) recognises that South Africa belongs to all people who live in it and makes reference to the objective of establishing a society on, amongst others, fundamental human rights. These human rights include the right to environmental protection and indirectly, the protection of animals. Other rights, however, protect ownership of property, the exercise of cultural and religious rights and allow for the use of animals such as leopards. However, a shared vision for managing and conserving leopards amongst South Africa's citizens is lacking. The country is a nation of diverse cultures, with a historical and ongoing legacy of social injustices. Many of its citizens have no access to cultural and other values of leopards and do not have opportunities to participate in decision-making processes concerning the species.

This gazette is also available free online at www.gpwonline.co.za

2. Species Background

2.1 Taxonomy – South African Context

Kingdom: Animalia
Phylum: Chordata
Class: Mammalia
Order: Carnivora
Family: Felidae
Genus: *Panthera*
Species: *P. pardus* (Linnaeus, 1758)

2.2 Ecology and Distribution

Although the smallest of the five big cat species found within the genus *Panthera* (including tigers - *Panthera tigris*, lions - *Panthera leo*, jaguars - *Panthera onca*, and snow leopards - *Panthera uncia*), leopards have a body mass ranging from 20-90 kg for males and 17-60 kg for females. They are generalist apex predators considered the most adaptable among the big cats. Leopards prey upon a wide range of species and can inhabit many diverse environments. They are a solitary, territorial species, with males defending an exclusive territory that typically contains the territories of several females. Leopards are not migrant but disperse across large areas, which facilitates sufficient gene flow to ensure genetic viability within the population.

The home ranges of male and female leopards differ significantly, with males having much larger ranges than females (generally at least double the size). The average home range size of male leopards in the species global distribution was found to be 161.1-± 39.2 km^2, with females having an average home range of 68.1 ± 12.7 km^2 (Rodríguez-Recio *et al.*, 2022). Home range size can vary greatly depending on multiple factors such as prey availability, landscape productivity, human activity, seasonality, and the presence of other large carnivores (including other leopards). In the Waterberg, Limpopo region of South Africa, male leopards have range sizes of around 290 km² (Swanepoel, 2008). In the arid Kgalagadi, male and female home ranges averaged 2,182 km² and 488 km² respectively (Bothma, 1998). Male leopards in the Soutpansberg Mountains, have shown a home range of approximately 100 km², whereas female ranges in the same area were approximately 20 km² (S. Williams unpubl. data). Interspecific interactions can have a large influence on leopard ecology and survival affecting their movement and home ranges.

Leopards are the most widespread of all large carnivore species, yet have still experienced a substantial loss (28–51%) of their historical range in Southern Africa, with South Africa experiencing the greatest range loss; leopards have been extirpated across 67% of the country (Jacobson *et al.*, 2016) (Figure 1). Unlike other apex predators in South Africa, leopards are not restricted by fences and are the last truly free-roaming, large predators; however, in regions with high human density or significant habitat modification, the species has gone locally extinct. With the exception of the Free State Province and the larger Karoo basin in the Northern and Western Cape, leopards are widely distributed in all provinces in South Africa (Figure 1). They also occur in all biomes of the country, but to a lesser extent in the Nama Karoo and Succulent Karoo biomes. Although leopards were historically found in Lesotho and the Free State Province, they are now extremely rare or non-existent in these regions.

This gazette is also available free online at www.gpwonline.co.za

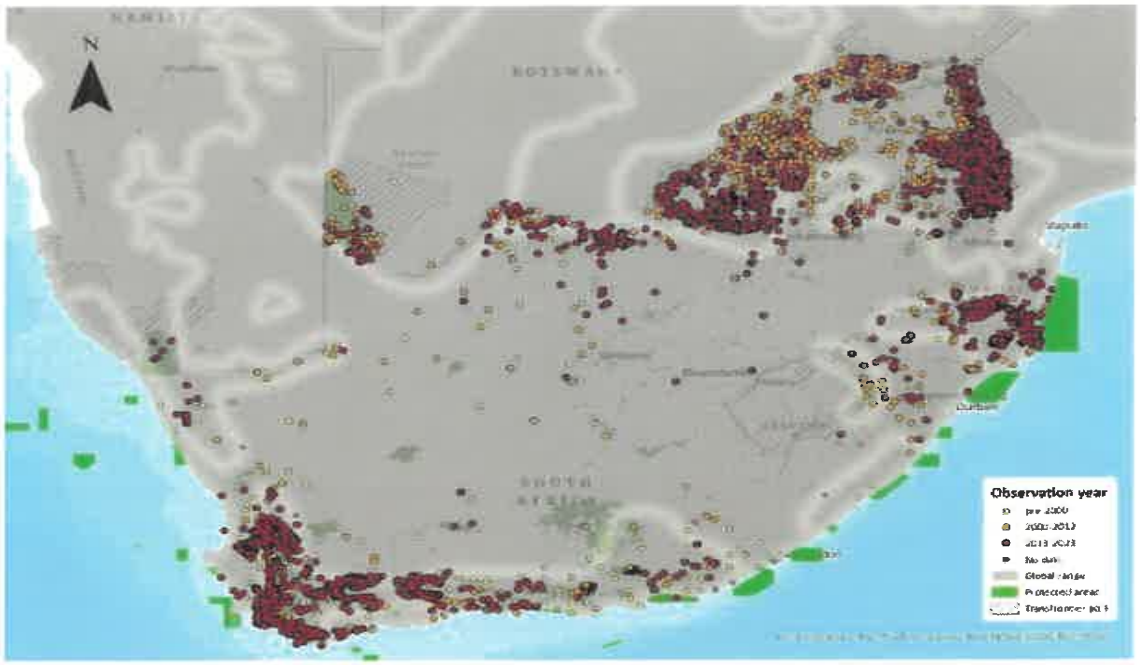


Figure 1. Distribution of Leopard (Panthera pardus) within South Africa (Mann et al., 2025)

2.3 Population and Trends

There are no rigorous estimates for the size of the South African leopard population and published estimates vary greatly from 2,185 - 23,400 individuals. However, the National Leopard Monitoring project showed a ~2.6% annual population increase (Woodgate et al., 2025). This contrasts with a previously reported national decline of ~3% per year up to 2022 (Garbett et al., 2023) and an ~8% decline in earlier assessments (Mann et al., 2017).

Provincially, leopard population trends vary. The most recent data for Limpopo and North-West provinces showed more positive or stable long-term trends than KwaZulu-Natal (KZN) and Mpumalanga, with KZN showing a ~3% annual decline. In Limpopo, leopard densities declined from 2013-2015 but appeared stable from 2017 onward (Mann et al., 2017). By 2021, Limpopo's populations were more stable than KwaZulu-Natal's (KZN), possibly due to fewer threats or greater resilience. KZN's leopard populations appeared to continue on a downward trend: three of five long-term sites (Eastern Shores, Hluluwe-iMfolozi Park, Ithala) showed declines, whilst Tembe and uMkhuze are recovering (Garbett et al., 2023).

Populations in Kruger National Park (KNP), adjacent private reserves, and Loskop Dam Nature Reserve (Mpumalanga) remain stable, with high densities in Sabi Sands (Mann et al., 2017). Timbavati (Mpumalanga) showed a sharp 2018-2019 decline, possibly due to COVID-19 survey disruptions, but 2021-2022 estimates appear to have rebounded (Garbett et al., 2023). Data for the Eastern Cape are scarce, but suggest that leopard densities are also low in this province, with a recent density estimate of 1.07 leopards/100 km^2 in the Baviaanskloof and a seemingly stable population in Kwandwe (Eastern Cape) (Woodgate et al., 2024). In the Western Cape leopards are fairly widely distributed but exist at extremely low densities ranging from 0.35 leopards/100 km^2 in the Overberg, Langeberg, and Garden Route regions to 1.96 in the Piketberg and the Olifantsrivier Mountains leopards/100 km^2.

This gazette is also available free online at **www.gpwonline.co.za**

Little Karoo sites increased from 0.6 to 1.1 leopards/100 km² (2012–2017) (Mann et al., 2017). Trends elsewhere in South Africa are unknown due to insufficient data; large, protected areas are probably stable, but this is speculative.

2.4 Cultural and Economic Significance

Leopards carry deep cultural and spiritual importance in South Africa, particularly among Indigenous communities and traditional religious groups. Within Zulu culture, the leopard (Ingwe) symbolises strength, nobility, and royal lineage, and its derivatives (mainly skins) are worn by traditional chiefs during important ceremonies. Similarly, leopard skins and parts are used by religious leaders and practitioners in the Nazareth Baptist Church, as well as in traditional healing and spiritual practices. These uses are rooted in longstanding Indigenous Knowledge Systems (IKSs) and represent an enduring cultural connection between people and wildlife.

Leopards contribute both directly and indirectly to national and local economies. In the formal wildlife economy, they are a high-value species in regulated trophy hunting operations, which can generate income for private and communal landowners and fund conservation efforts. Leopards are also a significant ecotourism draw, especially in iconic reserves such as Sabi Sands, where their elusive nature and charisma attract local and international visitors, supporting jobs in guiding, hospitality, and wildlife management.

At the community level, leopards affect livelihoods in complex ways. On one hand, they can provide income opportunities through community-based conservation initiatives, citizen science projects, and wildlife-based enterprises. On the other hand, they are also a source of human-wildlife conflict, particularly in livestock-farming areas where they may prey on small stock. These losses can undermine tolerance and lead to retaliatory killings. Addressing this tension is critical: integrating leopards into benefit-sharing schemes, improving livestock protection, and co-developing coexistence frameworks can enhance both rural livelihoods and long-term species conservation. Thus, leopards are not only an ecologically important species, but also culturally symbolic and economically impactful species whose conservation must consider both cultural identity and human well-being.

2.5 Threats

Leopards in South Africa face a complex array of threats, primarily driven by human activities, habitat changes, and ecological pressures (Table 1). One of the most pressing issues is habitat loss and fragmentation caused by expanding agriculture, urban development, and infrastructure projects. This reduces the availability of suitable leopard habitat and disrupts natural movement corridors, isolating populations and affecting genetic flow. Human-wildlife conflict is another significant threat, as leopards frequently come into contact with livestock in farming areas. In response, they are often killed in retaliation, especially where preventative measures like livestock guarding or secure enclosures are not in place. Illegal killing also pose serious risks. Leopards are targeted for their skins and body parts, which are used in traditional medicine, ceremonial attire, and spiritual practices.

Declining prey availability in some regions, driven by habitat degradation and overhunting, further forces leopards into high conflict areas or marginal habitats. Over time, habitat fragmentation and isolation can lead to genetic bottlenecks, reducing population viability. These threats are often compounded by governance gaps, where inconsistent policies, weak coordination between jurisdictions, and limited enforcement capacity undermine effective leopard conservation. The below table provides a summary of the key threats to national leopard populations.

This gazette is also available free online at www.gpwonline.co.za

Table 1. Summary of key threats to leopards in South Africa.

Threat Type	Description	Citations
Anthropogenic mortality	Retaliatory killings, poaching, snaring, cultural/spiritual demand for body parts/skins, and illegal trade.	(Naude et al., 2020; Müller et al., 2021; Viollaz et al., 2021; Greyling et al., 2023; Tensen et al., 2022; Naude et al., 2020; Amin et al., 2022).
Habitat loss/fragmentation	Agricultural expansion, land transformation, and loss of corridors.	(Hinde et al., 2023; Greyling et al., 2023; McManus et al., 2022; Amin et al., 2022).
Human-wildlife conflict	Livestock predation leading to conflict and retaliatory killings.	(Müller et al., 2021; Viollaz et al., 2021; J.E.T. et al., 2024; Greyling et al., 2023).
Genetic isolation	Inbreeding due to disrupted dispersal and habitat fragmentation.	(Naude et al., 2020; Morris et al., 2022; Tensen et al., 2022; McManus et al., 2022).
Prey depletion	Overhunting and poaching of prey species.	(Greyling et al., 2023; Searle et al., 2020; McManus et al., 2022).
Governance gaps	Uneven provincial capacity, inconsistent permits/enforcement, fragmented monitoring, ineffective conflict response.	(Mercugliano et al., 2025; McManus et al., 2022; Falayi et al., 2021; Viollaz et al., 2021).

2.6 Current Conservation Measures and Gaps

A range of conservation measures have been implemented to manage leopard populations in South Africa, but these efforts are largely fragmented, inconsistent, and limited in scale or impact.

Key approaches include adaptively managed trophy hunting, management of damage-causing animals, conflict mitigation measures, and research-based monitoring. These interventions are guided by a comprehensive national legislative and policy framework that regulates wildlife use and conservation, with national monitoring and reporting systems providing coordination. However, implementation may vary across provinces, conservation authorities, and private reserves in response to differing ecological and management contexts.

A significant gap is the limited amount of standardised, long-term population monitoring, which hinders evidence-based decision-making and undermines the ability to set sustainable hunting quotas or assess conservation outcomes. Furthermore, while leopards occur widely outside protected areas, especially on private and communal land, there is little formal support or incentive structure in place to promote their conservation in these landscapes. Human-wildlife conflict remains a major issue, with limited access to support mechanisms for affected communities and inconsistent application of mitigation strategies.

Some legal and policy frameworks are misaligned or poorly enforced, and limited inter-agency coordination and insufficient resources make conservation interventions challenging. There are also few formal benefit-sharing mechanisms to ensure communities have incentives to tolerate and protect leopards. Despite the species' ecological, cultural, and economic importance, efforts remain disjointed, and national level coordination often fails to drive strategic and inclusive conservation.

These gaps demonstrate the need for a comprehensive, nationally coordinated strategy that aligns conservation actions, strengthens governance and enforcement, builds local capacity, and ensures equitable benefits. A national

This gazette is also available free online at www.gpwonline.co.za

leopard strategy provides an opportunity to unify diverse stakeholders under a common vision for safeguarding the species and its habitats across the country.

3 Policy and Legislative Context

The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA) and its Specific Environmental Management Acts (SEMA's) thereunder, such as the National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004) (NEM: BA) and the National Environmental Management: Protected Areas Act, 2003 (Act No. 57 of 2003) (NEM: PAA) and their regulations, provide legal support for South Africa's environmental management regime, which is based on the environmental right outlined in Section 24 of the Constitution. A combination of regulatory tools is grounded within the national environmental framework, which complement international commitments and collaborative governance to support implementation across a broad spectrum of contexts. Each province with concurrent competence has its own set of legal frameworks that apply to it. Aspects of leopard protection and sustainable use are also governed by laws from other branches of government. The below provides an overview of South Africa's environmental legal and policy framework.

3.1 National Legal and Policy Frameworks

a. *National Environmental Management: Biodiversity Act (NEM:BA, Act 10 of 2004)*

- Provides for the protection of species and ecosystems at national level through listing as Threatened or Protected Species (TOPS).

b. *TOPS Regulations (2007) and* List of critically endangered, endangered, vulnerable and protected species

- Leopards are listed as Vulnerable, and permits are required for any restricted activity, such as hunting, catching, killing, capturing, moving or keeping, as defined in NEM:BA, 2004.
- Further regulate the permit system set out in Chapter 7 of the NEM: BA in so far as that system applies to restricted activities, as defined in NEM: BA involving specimens of listed threatened or protected species.
- Provide for the registration of captive breeding operations, commercial exhibition facilities, game farms, nurseries, scientific institutions, sanctuaries and rehabilitation facilities and wildlife traders.
- Provide for the regulation of the carrying out of a restricted activity.
- Provide for the prohibition of restricted activities involving specific listed threatened or protected species.
- Provide for the protection of wild populations of listed threatened or protected species.

c. *CITES Regulations:*

- It is a requirement of CITES that Parties must regulate international trade through national legislation, hence the promulgation of the CITES Regulations in 2010 under NEMBA, to give effect to the provisions of CITES.

d. *National Biodiversity Framework (NBF) and National Biodiversity Strategy and Action Plan (NBSAP)*

This gazette is also available free online at **www.gpwonline.co.za**

- Set national priorities for species conservation, including leopards as part of carnivore conservation and landscape-level planning.

e. *The White Paper*, published in Government Gazette No. 48785, under Government Notice No. 3537, of 14 June 2023 for implementation, provides a foundation for conservation and sustainable use in terms of its four goals, namely:

1) Enhanced Biodiversity Conservation (All biological diversity and its components conserved);

2) Sustainable Use (The sustainable use of biodiversity contributes to the thriving of terrestrial landscapes and ecosystems, local livelihoods, and human well-being, while a duty of care avoids, minimises, or remedies adverse impacts on biodiversity);

3) Equitable Access and Benefit Sharing (Benefits derived and shared from the use and development of South Africa's genetic and biological resources should not compromise the national interests); and

4) Transformed Biodiversity Conservation and Sustainable Use (Effect is given to the environmental right as contained in Section 24 of the Constitution which facilitates redress, and promotes transformation).

As well as two crosscutting Enablers:

1) Enabler 1: Integrated, Mainstreamed and Effective Biodiversity Conservation and Sustainable Use: Integrated policy and practice across government and the effective implementation of Multilateral Environmental Agreements; and

2) Enabler 2: Enhanced Means of Implementation: Expanded and developed ability to effectively conserve biodiversity, to manage its use and benefit sharing, whilst addressing factors threatening biodiversity.

The White Paper sets out the vision: "*An inclusive, transformed society living in harmony with nature, where biodiversity conservation and sustainable use ensure healthy ecosystems, with improved benefits that are fairly and equitably shared for present and future generations*", with the Mission: "*To conserve and manage South Africa's biodiversity, and ensure healthy ecosystems, ecological integrity and connectivity, with transformative socio-economic benefits to society for current and future generations through ecologically sustainable, and socially equitable use of what people values from nature*". The White Paper impact statement is "*Thriving People and Nature*".

The White Paper explicitly recognises that responsibility rests with a range of stakeholders, including, but not limited to, the state, traditional leaders, traditional health practitioners, communities, private landowners, industry, academia, non-government organisations and civil society. Building partnerships, particularly community – private partnerships, between these constituencies will be important, and this National Strategy for Conserving Leopards in South Africa takes this approach.

f. *Policy Position on the Conservation and Sustainable Use of Elephant, Lion, Leopard and Rhinoceros*:
The Policy Position on the Conservation and Sustainable Use of Elephant, Lion, Leopard and Rhinoceros (Policy Position) was published for implementation on 24 April 2024 and was based on the Rhino COI, the HLP Report, and the White Paper. The Policy Position contains two objectives pertinent to leopards which fall under two policy objectives. Each policy objective has associated Actions for Implementation some of which are relevant to this strategy. The policy objectives are:

Policy objective 3: to ensure that the use of leopard is sustainable and incentivises and enhances their conservation in the wild:

I. An integrated, shared and strategic approach to leopard conservation and management implemented;

This gazette is also available free online at **www.gpwonline.co.za**

II. Incentives for leopard conservation through, inter alia creating zones for the management of leopard on private and communal land implemented, with mechanisms to mitigate the illegal harvesting of leopard;
III. Norms and Standards for hunting leopard implemented;
IV. Revised leopard hunting off-take allocations to enhance, broaden, and transform benefits from leopard hunting implemented;
V. Interventions for mitigating the creation of damage causing leopards, and, through mitigation, transitioning from Damage Causing Animal destruction to evidence-based sustainable harvesting of leopard through hunting, where appropriate; and
VI. Mechanisms to collaborate with traditional and spiritual leaders and traditional healers, and to ensure legal, equitable, and sustainable access to, and benefits derived from, leopard parts and derivatives, e.g. skins for traditional, cultural, and spiritual needs, that enhances the dignity and freedoms required for such traditional and spiritual practices.

Policy objective 4: To promote live export of the five species only to range states or any other appropriate and acceptable destinations with suitable habitats on the African continent:

I. Develop enabling regulatory tools to prevent the introduction of wild specimens of the five species into captivity, to prevent the export of specimens of the five species, except to range states or any other appropriate and acceptable destinations with suitable habitat on the African continent, for reintroduction into the wild;

II. At the time of export, to ensure commitment from the Management Authority of the importing country to prevent (i) export to third countries other than appropriate and acceptable destinations with suitable habitats on the African continent; and (ii) international commercial trade of parts and derivatives.

g. *National Biodiversity Economy Strategy*

The revised National Biodiversity Economy Strategy (NBES) (Government Gazette, No. 50279, published for public comment on 8 March 2024) was developed to optimise biodiversity-based business potentials across the terrestrial, fresh water, estuarine, and marine and coastal realms, and to contribute to economic growth with local beneficiation, job creation, poverty alleviation, and food security, whilst maintaining the ecological integrity of the biodiversity resource base, for thriving people and nature.

The NBES focuses on using South Africa's rich natural resources to support both conservation and economic development. It promotes inclusive growth in areas like ecotourism, sustainable wildlife and marine use, and bioprospecting, with an emphasis on benefiting local communities and previously disadvantaged individuals. By strengthening policies, building capacity, encouraging innovation, providing financial support, and improving market access, the strategy aims to create a thriving biodiversity economy that supports both people and nature.

Consistent with the policy context of the White Paper, the NBES is founded on the key pillars of conservation, sustainable use and beneficiation of biodiversity business value chains which will promote sustainable and inclusive socio-economic development. This requires growing and sustaining conservation land and seascapes while promoting and facilitating inclusive biodiversity-based businesses that drive a thriving and inclusive biodiversity sector. Importantly, broadening the NBES in revision provides increased opportunity to contribute to achieving more elements of the National Development Plan and the Sustainable Development Goals. This emphasises the importance of sustainable use of biodiversity as key to inclusive socio-economic development, especially when effectively mainstreamed into cross-sectoral planning.

3.2 Provincial Legislation and Implementation Frameworks

Each province manages leopards through provincial biodiversity legislation and permitting systems, aligned to NEM:BA. Key provinces include:

- **Limpopo**: The Limpopo Environmental Management Act, 2003 (Act No. 7 of 2003).
- **Mpumalanga**: The Mpumalanga Nature Conservation Act 10 of 1998 (Act No. 10 of 1998).
- **KwaZulu-Natal**: KwaZulu-Natal Nature Conservation Management Act (Act 9 of 1997).

This gazette is also available free online at **www.gpwonline.co.za**

- **Eastern Cape:** The Ciskei Nature Conservation Act No.10 of 1987 (Act No. 10 of 1987); The Transkei Decree No 9 of 1992.
- **North West:** North West Biodiversity Management Act, 2016 (Act No. 4 of 2016).
- **Western Cape**: Western Cape Biodiversity Act 6 of 2021.
- **Free State**: Free State Nature Conservation Ordinance 8 of 1969.
- **Gauteng:** The Gauteng Provincial Environmental Management Framework (GPEMF), 2021.
- **Northern Cape:** Northern Cape Nature Conservation Act, 9 of 2009.

Provinces are also responsible for monitoring leopard populations and evaluating hunting applications, under guidance from national structures.

3.3 International Agreements

a. *The Convention on Biological Diversity (CBD)*

South Africa is a signatory to the CBD, and this imposes an international responsibility on the country to conserve its leopard populations. The objectives of the CBD are the conservation of biological diversity, the sustainable use of its components and the fair and equitable sharing of the benefits arising from the utilization of genetic resources. The programmes of work developed under the CBD encourage Parties to take a wide range of actions to biodiversity conservation and sustainable use.

b. *The Global Biodiversity Framework (GBF) and relevant targets*

The Global Biodiversity Framework emanated from the CBD Conference of Parties held in 2022. The outcome of the COP resulted in the generation of 23 targets aimed at addressing critical issues affecting biodiversity conservation. Parties to the CBD are obligated to adapt and domesticate these targets in order to enable optimal implementation. There are several targets that will play an indirect role for the Leopard Conservation Strategy, in its implementation, specifically:

Target 3 which is to *"Ensure and enable that by 2030 at least 30 per cent of terrestrial, inland water, and of coastal and marine areas, especially areas of particular importance for biodiversity and ecosystem functions and services, are effectively conserved and managed through ecologically representative, well-connected and equitably governed systems of protected areas and other effective area-based conservation measures, recognizing indigenous and traditional territories where applicable, and integrated into wider landscapes, seascapes and the ocean, while ensuring that any sustainable use, where appropriate in such areas, is fully consistent with conservation outcomes, recognizing and respecting the rights of indigenous peoples and local communities, including over their traditional territories"*. Target 3 supports improved protection and connectivity for leopard through potential expansion of habitats.

Target 4 which is to "*Ensure urgent management actions to halt human induced extinction of known threatened species and for the recovery and conservation of species, in particular threatened species, to significantly reduce extinction risk, as well as to maintain and restore the genetic diversity within and between populations of native, wild and domesticated species to maintain their adaptive potential, including through in situ and ex situ conservation and sustainable management practices, and effectively manage human-wildlife interactions to minimize human-wildlife conflict for coexistence"*

c. *CITES (Convention on International Trade in Endangered Species)*

- Leopards are listed on Appendix I: international commercial trade is highly restricted.
- South Africa receives an annual export quota for leopard trophies (currently 150), subject to scientific review and population status.

This gazette is also available free online at **www.gpwonline.co.za**

b. *IUCN Red List Assessments*

- Guides conservation priorities; South African leopards are nationally listed as Vulnerable, although local extinctions are occurring.

3.4 Scientific and Technical Frameworks

a. *National Leopard Monitoring Framework*

- Combines camera trapping, expert consultation, and structured models to inform trophy hunting quota setting.
- Involves collaboration between SANBI, DFFE, NGOs, Wildlife Industry organisations, researchers, and provincial authorities.

b. *Research and Adaptive Management*

- Scientific studies on density, connectivity, human-wildlife conflict, and genetic integrity are used to adapt management.
- Increasing use of spatially explicit population models to guide sustainable use decisions.

3.5 Governance and Stakeholder Platforms

a. Wildlife Forum

- Consultative platform between government, wildlife industry and conservation NGO stakeholders on matters related to wildlife industry and the biodiversity economy

b. Wildlife Wellbeing Forum

- Consultative platform between government, animal welfare and wellbeing organisations in support of the well-being of wild animals, including elements of conservation, protection, management and ecologically sustainable, responsible and humane use of wildlife

c. *Leopard Consultative Forum (LCF)*

- Consultative platform for government and non-government stakeholders in support of conservation and sustainable use of leopards to ensure equitable values and benefits within the legislative structure.

d. *National Hunting and Biodiversity Council (NHBC)*

- Coordinates between hunting industry, government, and conservation NGOs on policy implementation.

e. *Stakeholder Consultations*

- Public participation processes are required for major policy shifts (e.g., Norms and Standards updates, hunting quotas) as prescribed in section 99 and 100 of NEMBA.

4 Principles

The Strategy is embedded within South Africa's biodiversity conservation and sustainable use aspirations as outlined in the White Paper. As such, these are the backbone of the Strategy as well:

This gazette is also available free online at **www.gpwonline.co.za**

Transformation - The biodiversity sector must become more inclusive and equitable, addressing past injustices and empowering historically disadvantaged communities.

Sustainable Development - Conservation and use of biodiversity must integrate environmental, economic, and social objectives, ensuring present needs are met without compromising those of future generations.

Good Governance - Effective institutions, transparent decision-making, coherent legislation, and clear accountability are critical for managing biodiversity. Governance must be strong, integrated, and capable.

Evidence-Based Decision-Making - Policies, planning, and management must be informed by reliable scientific data, traditional knowledge, and monitoring. Decisions should be grounded in best available evidence.

Duty of Care - Individuals and organisations have a legal and moral responsibility to avoid, minimise, or remedy negative impacts on biodiversity. This duty supports long-term ecosystem health and ethical resource use.

Apart from these foundational principles, two additional ones are of importance.

Adaptive Management and Flexibility - Conservation must be responsive to changing socio-economic conditions and expectations. Management should remain flexible, guided by learning, evidence, and regular feedback to stay effective in a dynamic context.

Minimal Interference - Management should prioritise minimal intervention, allowing natural processes to guide carnivore dynamics unless action is necessary to prevent harm, support population viability, or resolve significant conflict.

This Strategy was thus developed and constructed within these principled aspects.

5 Consultation Process

A stakeholder mapping process was conducted to identify key stakeholders that would be important in the consultation process for the development of the Strategy. This process resulted in the identification of the stakeholders in Table 2.

Table 2. Stakeholders that participated in the consultation workshops.

Stakeholder Groups	Stakeholders
National Government Departments and their Entities	• Department of Forestry, Fisheries and the Environment (Biodiversity and Conservation; Regulatory Compliance and Sector Monitoring) • Department of International Relations and Cooperation (DIRCO) • Department of Sports, Arts and Culture • Department of Tourism • Department of Science, Technology and Innovation • South African National Biodiversity Institute (SANBI) • South African National Parks (SANParks) • iSimangaliso Wetland Park • South African National Police Services (SAPS)
Provincial Government and their Entities	• Eastern Cape Province: Department of Economic Development, Environmental Affairs and Tourism • Eastern Cape Parks & Tourism Agency (ECPTA)

This gazette is also available free online at **www.gpwonline.co.za**

	• Free State: Department of Economic, Small Business Development, Tourism and Environmental Affairs • Gauteng Province: Department of Environment • Limpopo Province: Department of Economic Development, Environment and Tourism • Northern Cape Province: Department of Environment and Nature Conservation • North West: Department of Economic Development, Environment, Conservation and Tourism • CapeNature • Ezemvelo KwaZulu-Natal Wildlife • Mpumalanga Tourism and Parks Agency • North West Parks and Tourism Board
Community Organisations and Programs	• People and Parks Programme • Traditional Health Practitioners and Healers Organisations • Traditional Leaders • Religious Leaders • Nature Speaks • IKSHA: Indigenous Knowledge for Heritage: Animal Council • National Unitary Profession Association for African Traditional Health Practitioners of South Africa (NUPAATHPSA) • Nature Heritage Alliance • Healers for Change
Academic Institutions	• African Leadership University • Nelson Mandela University • Tshwane University of Technology • University of Cape Town • University of Mpumalanga • University of Pretoria • University of Venda • University of Witwatersrand • Stellenbosch University
Non-Government Organisations; Industry; Research & Wildlife Sector	• Biodiversity Law Centre • Cape Leopard Trust (CLT) • The Confederation of Hunting Associations of South Africa (CHASA) • Custodians of Professional Hunting and Conservation South Africa (CPHC) • Endangered Wildlife Trust (EWT) • Elizabeth Margaret Steyn (EMS) Foundation • Humane Society International (HSI), now known as Humane World • Ingwe Leopard Project • Landmark Foundation • Leopard Consultative Forum - represents collective NGOs • Natural Justice • National Society for the Prevention of Cruelty to Animals (NSPCA) • Professional Hunters Association of South Africa (PHASA) • Predation Forum • Private Protected Area Managers and Landowners

This gazette is also available free online at **www.gpwonline.co.za**

	• South African Hunters and Game Conservation Association (SAHGCA) • South African Veterinary Association (SAVA) • TRAFFIC • The African Farmers Association of South Africa • The Agricultural Economics Association of South Africa • Wildlife ACT • Wildlife Animal Protection Forum South Africa (WAPFSA) • Wildlife Well-being Forum • Wildlife Ranching South Africa (WRSA) • WWF-SA • Tourism Operators

A series of 31 stakeholder consultation workshops were conducted at key locations, determined as leopard 'hotspot' areas where communities live near prominent leopard populations. These locations spanned all the nine provinces in South Africa and workshops were held between 28th August 2024 and 3rd December 2024. The Core Team running the workshops consisted of the DFFE, Panthera, SANParks, SANBI, iSimangaliso, and the Cheetah Advisory Group, with the support of all the provinces. The workshops were aimed at engaging with provincial structures and communities, including traditional leaders, traditional health practitioners, and People and Parks programs. The workshops introduced the project and the purpose and content of the workshop and then allowed participants to form breakout groups. These groups focused on discussing and giving feedback on the main workshop questions.

Individual questionnaires were also disseminated at the beginning of the workshop to gather additional information for stakeholder mapping. All feedback during a final plenary session was recorded and all completed written materials were collected. Three of the thirty-one workshops were conducted virtually, using the same consultation approach, to capture feedback from academics, conservation and welfare NGO's, species specialists (including veterinarians)[1], wildlife industry - game and cattle farmers, reserve managers, hunters, tourism operators[2], national entities and provinces[3], and intergovernmental structures[4]. Overall, the workshops were attended by 1,980 participants in total. However, given that many of these participants serve as representatives of their respective stakeholder groups, the reach and influence of the consultations extended beyond the number of individuals who directly attended, resulting in a significantly larger audience being engaged.

This gazette is also available free online at www.gpwonline.co.za

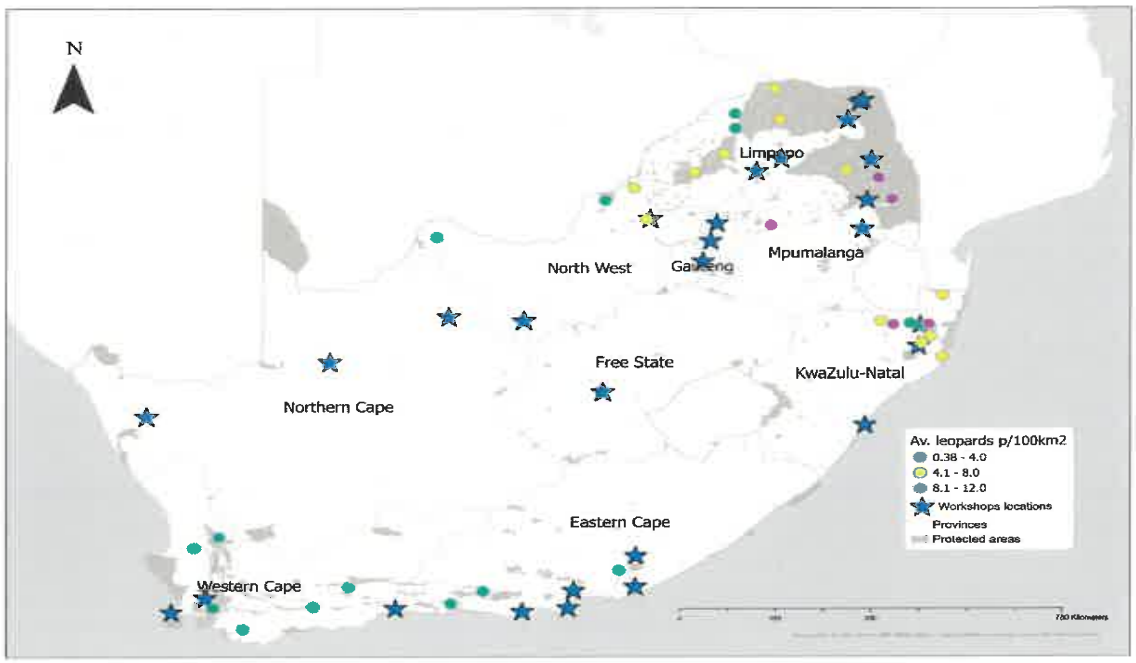


Figure 2. Locations of the 28 in-person stakeholder workshops held across all provinces of South Africa in relation to surveys of key leopard populations.

The workshop feedback was collated by the core strategy review team and the contents processed to inform the development of the Vision, Goals, and Strategic Actions for the Strategy (Table 3). The workshops also helped to identify enabling factors required to achieve the main goals of the Strategy. Analysis of the feedback on the three main workshop questions was facilitated using Word Cloud software to identify the most prevalent words/terms featured in workshop feedback. The three main workshop questions were:

1. What is the species value/cost to you?

2. What are the constraints to you realising those values or minimising costs?

3. What can be done to remove those constraints?

All workshop feedback reports were captured in a stakeholder engagement report which included a summary of the key points that came out in the answers to the three workshop questions on species value, cost/constraints, and solutions. The stakeholder engagement report contains all material used during the workshops, the word clouds that were generated to identify most-used words during feedback, and figures showing workshop attendance by province and a breakdown of the most prominent answers to the workshop questions per target group e.g. communities, NGO's etc. The below table illustrates the key values, costs, constraints and associated themes that were captured during the workshops, which have formed the basis for the development of the key strategic activities in this document.

5.1 Multiple values and costs, constraints and responses

This gazette is also available free online at **www.gpwonline.co.za**

The aspirations expressed by the stakeholders during the consultation process can fit under three key themes - 1. Ecological role of leopards, 2. Social and cultural values, and 3. Livelihood impact of leopards. The national stakeholder consultation workshops were conducted with the intention of developing this Strategy from the bottom-up, thus, this Strategy reflects the country's vision for conserving leopards and their national heritage in South Africa.

Stakeholders expressed a range of critical insights (Table 3), which highlighted the complex and often competing values associated with leopards in South Africa, reflecting a wide spectrum of cultural, economic, ecological, and social perspectives. At one end of the spectrum, are deeply rooted cultural and spiritual values, where leopards are seen as totemic animals integral to heritage, identity, and traditional governance systems. On the other end, lies a conservation science and regulatory view, emphasising biodiversity protection, legal compliance, and ecological integrity. Amid these extremes lies a diversity of perspectives, including those focused on economic livelihoods, education, human safety, and equitable access.

A clear dichotomy emerges between those advocating for consumptive use driven by traditional leaders and traditional health practitioners, and trophy hunting stakeholders, and those advocating for strict preservation and protection, often aligned with ecological and non-consumptive tourism initiatives. Recognising this multiplicity of values and the systemic costs carried by different groups is essential. Effective leopard conservation depends on acknowledging and navigating these competing pressures, not only between use and preservation, but between inclusion and exclusion, identity and legality, cultural survival and ecological protection. The challenge lies in designing a governance system that is as adaptive and pluralistic as the values it seeks to protect.

5.2 Strategic Trade Offs

This Strategy explicitly recognises that it is not possible to simultaneously accommodate all the needs and desires of all stakeholders. During the stakeholder engagement exercise, it became apparent that there is a high demand for the consumptive use of leopards by many stakeholders, including traditional leaders, traditional health practitioners, cultural and religious groups, and trophy hunters. Stakeholders within the agricultural sector highlighted the ongoing challenges associated with leopard–human interactions and emphasised the need for improved management tools that both support livelihoods and address the needs of leopards. A system needs to accommodate and balance these needs in a fair, equitable and transparent fashion, while also accommodating the needs of non-consumptive users. These include the tourism industry, and members of the public who attach intrinsic value to the presence of wild leopards in their natural environment. Preserving leopards as a key element of South Africa's biodiversity heritage, and an important element of functioning ecosystems is an equally important consideration. This Strategy thus seeks to identify the trade-offs.

A Strategy that focusses exclusively on the preservation of leopards and does not allow for any consumptive use is not acceptable to a large proportion of stakeholders and may thus prove ineffective and ultimately detrimental to a range of stakeholders and the long-term conservation of leopards. Conversely, a policy of allowing unfettered consumptive use of leopards may result in the rapid extirpation of leopards from most of their range in South Africa. This Strategy aims to balance these competing objectives to ensure the preservation of all the values including cultural and natural heritage associated with leopards.

This gazette is also available free online at www.gpwonline.co.za

Table 3. Summary table of the key points captured during feedback on values, costs, and constraints from the 31 national stakeholder workshops conducted in all provinces in South Africa from August to December 2024.

VALUES	COSTS	CONSTRAINTS
Cultural and Spiritual Significance • **Leopards, lions, and cheetahs** are regarded as totemic animals and symbols of **ancestry, heritage, leadership, strength, and spirituality**. • Use of animal skins and parts in **traditional attire**, **healing**, **ceremonial roles**, and **ancestral connection** was widespread. • Many groups expressed that these animals are **part of identity and cultural continuity**.	**Barriers to Cultural Practice** • **Inaccessibility to skins and animal parts** disrupts traditional healing, ceremonies, and regalia making. • **Cultural loss**: When people cannot practice their customs linked to species, they perceive it as a diminishing of identity and heritage. • **Erosion of cultural identity**: Restrictions on traditional attire and ceremonies involving leopard, lion, and cheetah parts limit cultural expression. • **Loss of spiritual connection**: Communities lose access to spiritually significant species and landscapes, weakening traditional beliefs and rituals. • **Criminalisation of practices**: The use of animal skins or parts in rituals may be criminalised, creating tension between cultural rights and national laws. • **Exclusion from decision-making**: Traditional authorities and practitioners often lack a formal voice in conservation governance, leading to marginalisation. • **Breakdown of intergenerational knowledge transfer**: Younger generations may lose interest or ability to engage in traditional practices due to legal or logistical barriers. • **Undermining of traditional governance systems**: State-led conservation approaches sometimes override customary rules and spiritual stewardship, weakening indigenous leadership. • **Spiritual distress and loss of meaning**: Inability to perform ancestral rituals or access sacred sites causes emotional and spiritual harm to practitioners.	• **Loss of traditional knowledge**: Elders and knowledge holders are not always involved in conservation discussions, leading to erosion of indigenous practices. • **Lack of formal recognition**: Cultural and spiritual practices involving leopards, lions, and cheetahs are often not acknowledged in formal conservation frameworks. • **Restricted access to natural areas**: Community members may be prevented from accessing areas that are spiritually significant or used for traditional practices due to conservation restrictions. • **Conflict with modern legal frameworks**: Traditional use of animal parts (e.g., skins for attire or rituals) often conflicts with national and international wildlife protection laws. • **Stigmatisation of beliefs**: Cultural and spiritual beliefs related to predators may be misunderstood or stigmatised by authorities and broader society. • **Limited participation in decision-making**: Traditional leaders and spiritual practitioners may not be adequately included in conservation planning and policy development. • **Economic pressures**: Poverty and land competition may shift focus away from cultural and spiritual values to survival needs, reducing the practice of traditions linked to large carnivores. • **Inadequate policy integration**: There is a gap between conservation policies and the integration of customary law and beliefs. • **Reduced and declining leopard populations**: Fewer leopards mean reduced availability of derivatives.
Economic and Livelihood Value Species were framed as **community assets**, critical for **poverty alleviation** and **economic inclusion**. • **Ecotourism income**: Big cats are central to wildlife tourism and generate significant revenue through photographic safaris and wildlife experiences. • **Trophy hunting revenue**: Legal hunting of lions and leopards (less so cheetahs) and derivative sales can provide economic returns to landowners and communities.	**Economic and Livelihood Costs** • **Cost of livestock replacement** and inadequate or absent **compensation schemes**. • **Economic strain** on farmers and rural households due to predation. • **Fence maintenance and management**: Expensive for both state and private landowners, particularly in lion-occupied areas. • **Opportunity costs**: Inability to legally benefit from species derivatives pushes people to black markets or denies cultural practices. • **Loss of tourism revenue**: In areas affected by poaching or species decline.	**Economic Hardship** • **Poverty drives illegal hunting and human-wildlife conflict**: Illegal hunting for subsistence or sale and increased HWC due to its threat to livelihoods. • **No or delayed compensation** for livestock losses or human injury. • **Inconsistent benefit-sharing**: Limited flow of tourism or hunting revenue to rural or traditional communities hosting predators. • **Lack of access to predator-related economic opportunities**: Barriers to entry in tourism, conservation, or wildlife ranching sectors.

This gazette is also available free online at www.gpwonline.co.za

VALUES	COSTS	CONSTRAINTS
• **Job creation**: Employment in tourism, conservation, guiding, and park operations linked to predator presence. • **Livestock guarding and related services**: Emerging income-generating practices related to non-lethal predator management (e.g., guard dogs, fencing).	**Human-Wildlife Conflict** • **Loss of livestock**: A dominant concern across all provinces, especially in areas adjacent to protected areas. • **Risk to human safety**: Attacks on people, especially when animals escape reserves. • **Emotional distress and trauma**: Fear, disrupted schooling (especially for children in affected areas), and reduced quality of life.	• **Uncompensated losses**: Inadequate or absent compensation schemes create resentment and discourage coexistence with predators **Infrastructure and Safety Gaps** • **Broken or inadequate fencing**, allowing species to escape or livestock to wander into reserves. • **Lack of rapid response mechanisms** for managing escapes or reporting danger. • **Weak support systems**: Insufficient veterinary, extension, or financial services for managing livestock losses or implementing mitigation. • **Limited law enforcement presence** to prevent poaching or support community safety. • **Policy and land-use conflicts**: Misalignment between conservation areas and local development or grazing priorities.
Biodiversity and Ecological Integrity • Stakeholders consistently linked these species to **ecosystem balance** and **biodiversity health**. • They are seen as **keystone and indicator species** and important for **food chain regulation** and environmental health. • **Ecological tourism value**: Their ecological presence underpins the appeal of protected areas and wildlife tourism.	**Ecological and Population Management Costs** • **Risk of species extinction** • **Genetic bottlenecks**: Fragmentation and small population sizes threaten ecological resilience and long-term species viability. • **Human-wildlife conflict impact**: Escalating conflict can result in reactive removals, disrupting ecological roles. • **Over management or mismanagement**: Poorly designed reintroductions, artificial management, or lack of scientific guidance can compromise ecological integrity.	**Ecological and Species Management Challenges** • **Species perceived as unmanageable** • **Habitat loss**, prey depletion, and drought may worsen conflict or reduce species value. • **Habitat fragmentation**: Expanding human land use reduces viable habitat and ecological connectivity. • **Limited ecological data**: Insufficient monitoring and ecological studies impede adaptive management. • **Uncoordinated conservation efforts**: Fragmented governance between provinces and sectors undermines coherent ecological planning. • **Illegal or poorly regulated off-takes**: Unsanctioned killings disrupt predator-prey dynamics and population stability • **Ineffective predator control** or relocation programs fail to address root causes of conflict.
Education and Intergenerational Value • **Cultural knowledge transmission**: These species are integral to stories, customs, and oral traditions passed between generations. • **Learning through co-existence**: Longstanding practices of living alongside predators foster unique traditional ecological knowledge.	• **Erosion of traditional knowledge**: Loss of species and conflict-driven attitudes reduce opportunities for passing on ecological wisdom. • **Disconnection from nature**: Youth in modernised or urban communities are increasingly alienated from natural and cultural ties to predators. • **Misinformation and fear**: Lack of balanced education fosters fear and antagonism toward predators, especially where conflict is high.	**Insufficient Education and Awareness** • **Lack of conservation education** in schools and communities leads to misunderstandings or fear of species. • **No public information** about species behaviour, ecosystem roles, or how to access legal support. • **Limited public campaigns or materials** in local languages or formats suited to community needs.

This gazette is also available free online at www.gpwonline.co.za

VALUES	COSTS	CONSTRAINTS
• **Inspiration for stewardship**: Big cats symbolise strength and wisdom, motivating conservation values in younger generations. • **Symbolic education tools**: Used in traditional teachings and modern environmental education to promote biodiversity awareness.	• **Marginalisation of Indigenous perspectives**: Formal education systems often neglect or exclude traditional and cultural narratives related to these species.	• **Limited access to education**: Remote or rural communities may lack resources to support conservation or cultural education. • **Generational shifts**: Younger generations may prioritise economic survival over conservation traditions due to poverty or modern influences. • **Language and content barriers**: Conservation messaging may not be delivered in accessible or culturally relevant ways. • **Lack of inclusion in formal systems**: Traditional knowledge holders are rarely integrated into official environmental education curricula.

Equity, Access, and Transformation
• Repeated emphasis on **fair access** to:
  ○ National parks
  ○ Permits for derivatives
  ○ Decision-making spaces
• There was strong demand for **inclusivity**, **co-management**, and **recognition of traditional knowledge**.
• Call for **transformation in legislation**, permitting, and benefit sharing.
• Emphasis on **redefining conservation** to include cultural, spiritual, and economic values of wildlife for previously marginalised communities.
• Call for **Restorative justice** —addressing past exclusion and exploitation of indigenous and local communities in protected area management and species use.
	Social and Institutional Costs
	• **Lack of trust and communication**: Between communities and protected area managers or government.
	• **Absence of co-management or meaningful inclusion**: Stakeholders feel marginalised in decision-making and from conservation benefits.
	• **Over-reliance on external NGOs or donors**: May skew local priorities or reduce agency.
	• **Disconnection from cultural ties to wildlife**.
		Limited Access
		• **Restricted physical access to protected areas** (high entry fees, distance, lack of transport).
		• **Inaccessible animal parts and carcasses**, even from natural deaths or euthanasia.
		• **Legal and policy frameworks** sometimes restrict access to body parts/derivatives (such as skins for traditional use), which limits equitable cultural practices.
		• **Exclusion from wildlife-based economies**, including tourism, hunting, or game farming.
		
		Marginalisation and Exclusion from Decision-Making
		• **Communities, traditional leaders, and healers feel excluded** from policy formation and management planning.
		• **Lack of meaningful engagement** by conservation authorities, leading to poor buy-in and resentment.
		• **Top-down governance** fails to account for local realities and traditional ecological knowledge.

Justice and Redress
• Stakeholders stressed the need to address:
  ○ **Land dispossession**
  ○ **Policy exclusion**
  ○ **Unequal benefit distribution**
• Values were strongly aligned with **restorative justice**, **empowerment**, and **dignity**.
	Legal and Regulatory Barriers
	• **Restrictive legislation**: Difficult/complex permitting processes limit access to skins, bones, or carcasses.
	• **Lack of transparency and clarity** in rules leads to accidental non-compliance.
	• **Inaccessible policies**: Communities feel excluded from shaping and benefiting from wildlife policies.
		Regulatory and Policy Barriers
		• **Complicated, inconsistent permitting processes** across provinces.
		• **Strict laws not adapted to traditional practices**, limiting access to species for healing, ceremonial, or cultural use.
		• **Lack of legal clarity and transparency**, particularly around ownership of derivatives, protected status, and redress mechanisms.

This gazette is also available free online at www.gpwonline.co.za

6 National Vision and Impact Statement

VISION:

Leopards thrive in living landscapes, support cultural traditions and local livelihoods through inclusive community driven conservation.

Impact Statement: Transformed and equitable leopard conservation that promotes sustainable development.

The vision is based on the values expressed by the stakeholders during the consultation process, which encompasses three core themes: environmental outcomes and the role that leopards play in these; social outcomes that embody the values that stakeholders associated with leopards; and livelihood outcomes and how leopards can contribute to or impact on these. Living landscapes refer to interconnected, multi-use areas where leopards, people, and livelihoods coexist, supported by ecological connectivity and sustainable land-use practices. These landscapes form the foundation for participatory and inclusive conservation, enabling local communities, landowners, and other stakeholders to collaboratively manage habitats and reduce conflict while safeguarding leopard populations across both protected and non-protected areas. The vision embraces leopards as integral to cultural identity, spiritual symbolism, and as economic assets for stakeholders, while also recognizing costs they carry. It is aspirational and transformative, rooted in the real experiences and expressed needs of people and leopards, and oriented toward solutions that restore dignity, equity, and sustainability in leopard conservation, with a duty of care where both people and nature can thrive.

7 Strategic Framework

The stakeholder consultations highlighted the importance of recognising key trade-offs specific to leopards alongside acknowledging the diverse aspirations of stakeholders. Navigating these trade-offs through equitable and transparent engagement with stakeholders will ensure that trade-offs consider the values, needs, and aspirations of all South Africans.

As the first National Strategy and Action Plan for leopards, the Strategy is structured to give effect to the White Paper on Conservation and Sustainable Use of South Africa's Biodiversity (White Paper) and the Policy Position on the Conservation and Sustainable Use of Elephant, Lion, Leopard and Rhinoceros, with specific reference to leopards. By prioritising conservation and sustainable use that benefits both leopards and communities, as well as livelihoods, traditions, and the wellbeing of people living with leopards, the Strategy supports the policy's vision of responsible stewardship and improved conservation outcomes.

7.1 Ecological Role of Leopards

GOAL 1. *Conserve leopards and their landscapes by strengthening ecological resilience, connecting habitats, and reducing threats.*

Leopards play an important role in maintaining healthy ecosystems, fulfilling critical ecological functions through their role as apex predators. Their presence contributes substantially to maintaining complex food webs, regulating prey populations, and thereby promoting biodiversity and ecosystem stability and resilience. Leopards, therefore, carry an existence value of their own. They can act as a keystone species for broader ecosystem restoration and biodiversity management.

As habitat generalists, leopards enhance landscape connectivity, with natural ranges covering large areas. In South Africa, leopard populations are fragmented, and their natural movement is restricted, disrupting gene flow, their natural ecology and ecological influence, and increasing their vulnerability to local extinction. Interventions focusing on restoring leopard populations in historical ranges and increasing connectivity across areas where leopards occur are important for securing a future for leopards and leopard landscapes in South Africa.

However, conserving leopards must balance ecological needs with human needs and aspirations. Human-leopard conflict poses one of the largest barriers to striking this balance in South Africa. Leopard conflict with livestock and game farmers requires innovative solutions that protect both wildlife, people and their livelihoods. Solutions that lie within local partnerships show promise in being able to achieve safe, fair, and effective outcomes that improve coexistence and provide benefits for stakeholders with diverse interests. Supporting biodiversity stewardship initiatives and creating mechanisms for cooperative landscapes will contribute toward building an inclusive and participatory, landscape-scale approach to leopard conservation that uplifts natural systems and enhances human lives.

7.2 Social and Cultural Values

GOAL 2. *Preserve cultural heritage, promote sustainable practices, and ensure safe and inclusive access to leopards and protected areas.*

Leopards hold profound social and cultural significance in South Africa, serving as symbols of power, spirituality, and ancestral connection for many communities. Traditional leaders and Traditonal Health Practitioners have historically used leopard derivatives, such as skins and bones, in ceremonies and regalia, embedding the species in cultural identity and practices. However, the current complex legislative process has created tensions, often effectively impeding expression of these traditions through criminalising acquisition or possession of leopard derivatives without providing legal alternatives. Recognising these cultural values is essential to fostering inclusive conservation that respects both biodiversity and heritage, while addressing historical inequities in resource access.

The sustainable use of leopard resources must balance cultural needs with ecological protection. Communities seek regulated access to derivatives from naturally deceased or euthanised animals to express their heritage, traditions, and religious and cultural practices. Integrating traditional knowledge into conservation policies, such as declaring leopards as "royal animals" or incorporating community-led monitoring, can bridge cultural practices and modern management. This approach aligns with calls for policy reform, including simplified permitting processes and the inclusion of traditional leaders in decision-making.

Ensuring safe and inclusive access to leopards and their habitats also hinges on addressing livelihood concerns. Human-wildlife conflict, particularly livestock predation, undermines coexistence and perpetuates negative perceptions. Solutions like support for improved livestock husbandry and community-based enterprises can mitigate conflicts while creating economic benefits. By effectively merging social equity, cultural preservation, and ecological sustainability, South Africa can model a conservation framework that honours both people and wildlife.

This gazette is also available free online at **www.gpwonline.co.za**

7.3 Livelihood Impacts of Leopards

GOAL 3. *Increase fair opportunities for people to benefit from leopards while reducing the challenges they pose to livelihoods.*

Leopards, while ecologically vital, pose significant challenges to rural livelihoods in South Africa, particularly through livestock and game animal predation and by posing a threat to human safety. Livestock depredation often leads to economic losses for farmers and subsequent retaliatory killings of leopards, undermining conservation efforts. Addressing this tension requires solutions that both mitigate the risks leopards pose and create tangible benefits for communities. Strategies such as increased capacity and tools for communities to avoid and manage conflict and the introduction of payments for ecosystem services schemes for example, have proven effective in reducing conflicts while fostering coexistence. These measures allow communities to protect their livelihoods while contributing to leopard conservation, but can be challenging to implement at scale and require significant investment, as well as community buy-in.

Beyond conflict mitigation, leopards present unique opportunities for economic empowerment through sustainable wildlife-based enterprises. Community-led ecotourism initiatives, such as cultural heritage experiences and photographic safaris can generate income and jobs, directly linking conservation to local beneficiation. Additionally, responsible hunting, regulated access to leopard derivatives (e.g., skins or bones from naturally deceased animals) for traditional use or legal trade could provide further economic incentives. Ensuring that these benefits are equitably distributed among stakeholders, including marginalised groups, is critical to building long-term support for conservation.

To maximise these opportunities, systemic barriers must be addressed. Inadequate policies, lack of funding, and limited access to markets often hinder community participation in wildlife economies. Key actions include streamlining permitting processes, allocating tourism revenue to local development, and providing training for communities to undertake conservation-related roles. Public-private partnerships and donor support can also play a pivotal role in scaling up these initiatives. By aligning ecological goals with livelihood needs, leopards can play a role as ecological assets and can act as catalysts for sustainable development.

8 Enabling Conditions

Three enabling conditions **1) Sustainable Finance, 2) Participation, Communication, Education and Awareness, 3) Legislation & Policy Reform,** are essential for achieving the three core Strategy goals of ecological resilience, cultural and social values, and livelihood improvement. With multiple enablers cutting across all three goals, they provide the foundation for, and facilitate, the implementation of and successful outcomes for the strategic activities. Participation, communication, education and awareness increases public understanding and pride in leopard conservation in a relatable manner, while legislative and policy reform establishes the legal clarity and cultural recognition required for equitable implementation. Sustainable and diversified funding mechanisms provide the resources needed to support conservation activities and community benefits. Without these enabling principles, the three main goals risk being unsupported, misaligned with local contexts, or unsustainable in the long term. Their integration guarantees that conservation efforts are locally relevant, socially accepted, and ecologically effective.

1) Sustainable Finance

This gazette is also available free online at www.gpwonline.co.za

Objective: Secure and sustain diverse funding mechanisms to support inclusive and equitable leopard conservation, and long-term human-wildlife coexistence.

This enabler focuses on establishing a resilient and diversified conservation finance system that provides long-term support for leopard conservation across all land-use sectors. Strategic actions will strengthen the enabling environment for sustained investment, incentivise stewardship and conservation-compatible land management, and expand partnerships that mobilise public, private, and philanthropic resources. Together, these strategic actions will create a stable and adaptive funding framework that supports leopard conservation, strengthens stewardship across landscapes, and promotes shared benefits for people and ecosystems.

2) Participation, Communication, Education and Awareness

Objective: Foster a deeper understanding and appreciation of leopards by promoting culturally relevant, inclusive education that integrates indigenous knowledge, supports intergenerational learning, and reshapes public perceptions.

This enabler focuses on building a shared conservation ethic that recognises the ecological, cultural, and social significance of leopards. Strategic actions will promote inclusive communication, knowledge exchange, and learning opportunities that reflect South Africa's diverse cultural perspectives and experiences. Particular emphasis will be placed on recognising indigenous and local knowledge systems, strengthening intergenerational learning, and fostering meaningful participation in conservation decision-making. Together, these strategic actions will strengthen public appreciation of leopards, build trust and shared ownership of conservation outcomes, and support a more inclusive and socially relevant approach to leopard conservation that benefits present and future generations.

3) Legislation & Policy Reform

Objective: Establish a coherent and inclusive legal framework that aligns regulations, respects cultural practices, and strengthens enforcement to support both leopard conservation and equitable community access.

This enabler focuses on creating a clear, consistent, and effective regulatory environment that supports sustainable leopard conservation while recognising South Africa's diverse cultural, social, and economic contexts. Strategic actions will strengthen policy alignment across jurisdictions, improve governance and accountability, enhance monitoring and reporting systems, and promote coordinated compliance and enforcement approaches. Together, these strategic actions will provide a clear, inclusive, and enforceable legal framework that reduces uncertainty, strengthens cooperation among stakeholders, supports sustainable conservation outcomes, and promotes equitable participation in and benefits from leopard conservation.

This gazette is also available free online at **www.gpwonline.co.za**

This gazette is also available free online at www.gpwonline.co.za

9 Strategic Framework Table

ECOLOGICAL ROLE OF LEOPARDS		
GOAL 1: Conserve leopards and their landscapes by strengthening ecological resilience, connecting habitats, and reducing threats. IMPACT STATEMENT: Leopards live in ecologically healthy, connected landscapes with natural habitat.		
Strategic Priority	**Strategic Action**	**Outcomes**
Connected, resilient landscapes: Leopard populations move across both protected and unprotected landscapes, highlighting the importance of landscape-level conservation approaches. Stakeholders consistently recognised the ecological role of leopards in maintaining ecosystem functioning and supporting biodiversity health. Expanding ecological corridors and conservation areas is important for maintaining gene flow, improving landscape connectivity, and enhancing resilience to climate change.	**Activity 1.1** Protect, restore, and connect critical leopard habitats to ensure resilience and gene flow, and adaptive capacity to climate change.	• Improved protection and connectivity of leopard habitats through expanded reserves, corridors, and stewardship areas. • Increased ecological resilience to the impacts of climate change. • Enhanced opportunities for natural leopard dispersal and gene flow. • Cross-sector partnerships established to support habitat protection.
Ecological management, threat reduction, secure communities: Leopards are widely regarded as keystone and indicator species that play an important role in regulating food webs and maintaining ecosystem health. Reducing anthropogenic threats within protected areas is essential to maintaining functional ecosystems that support natural leopard behaviour and stable populations, while also minimising risks to neighbouring communities.	**Activity 1.2** Reduce anthropogenic threats to ensure persistent, dynamic leopard populations.	• Stabilised leopard populations supported by reduction of anthropogenic threats in protected areas. • Strengthened on the ground presence and infrastructure in key leopard areas. • Greater collaboration between public, private, and community reserves. • Increased protection of broader biodiversity through cross-cutting threat mitigation.

Evidence-led conservation: The presence of leopard contributes significantly to the attractiveness of protected areas and supports wildlife-based tourism. Long-term monitoring provides critical information on leopard population trends, distribution, and ecological roles, informing adaptive management and targeted threat mitigation.	**Activity 1.3** Strengthen and expand the national population monitoring and research system to inform adaptive management.	• Enhanced understanding of leopard ecology and ecosystem roles through integrated scientific and community-based monitoring. • Comprehensive, long-term data on leopard populations, distribution, and trends. • Expanded understanding of the ecological, cultural, and economic roles of leopards to guide inclusive conservation planning. • Research outputs translated into adaptive management recommendations.
Adaptive, inclusive management: Scientific data and traditional ecological knowledge together inform flexible management. Community participation helps shape decisions as conditions change.	**Activity 1.4** Implement evidence-based, adaptive population and landscape management.	• Science-based, adaptive landscape and population management plans guiding effective conservation action. • Inclusive management and decision making facilitates local level participation in conservation. • Integrated adaptive management framework institutionalised to ensure long-term, evidence-based conservation success. • Leopard conservation strategies regularly revised and improved based on up-to-date ecological, social, and conflict data. • Key stakeholders sign data-sharing agreements to improve collaboration. • National reporting and biodiversity assessments are strengthened by robust, coordinated data inputs.

SOCIAL AND CULTURAL VALUES

This gazette is also available free online at www.gpwonline.co.za

This gazette is also available free online at www.gpwonline.co.za

GOAL 2: Preserve cultural heritage, promote sustainable practices, and ensure safe and inclusive access to leopards and protected areas.

IMPACT STATEMENT: Leopards are sustainably integrated into cultural life, valuing their role in traditions and (cultural) identity, with communities able to access, celebrate and protect their heritage in inclusive, respectful ways.

Strategic Priority	Strategic Action	Outcomes
Living cultural heritage: Leopards remain totemic animals. Skins and parts are legally accessible for traditional attire, healing, and ceremonies. Identity and cultural continuity are preserved.	**Activity 2.1** Ensure preservation of traditional and cultural use of leopard derivatives and products.	• Increased community access to and use of protected areas, especially for cultural, educational, and spiritual practices. • Increased emotional and cultural connection to conservation spaces. • Strengthened partnerships between conservation authorities and traditional/community institutions. • Enhanced community participation in biodiversity education linked to visits. • Feasibility assessed and appropriate mechanisms established for improved regulation of traditional access to leopard parts.
Intergenerational knowledge transfer: Leopard stories, customs, and coexistence knowledge are transferred across generations. to youth. Traditional ecological knowledge is valued equally with scientific data.	**Activity 2.2** Strengthen intergenerational knowledge transfer and cultural connection to leopards.	• Enhanced intergenerational transmission of indigenous knowledge and cultural heritage related to leopards. • Higher levels of local engagement, pride, and cultural connection in leopard (and general) conservation initiatives. • Cultural significance of leopards is reaffirmed and strengthened.

This gazette is also available free online at www.gpwonline.co.za

LIVELIHOOD IMPACTS OF LEOPARDS		
GOAL 3: Increase fair opportunities for people to benefit from leopards while reducing the challenges they pose to livelihoods. IMPACT STATEMENT: Improve the livelihoods of people living alongside leopards while keeping conflict low.		
Strategic Priority	**Strategic Action**	**Outcomes**
Leopards as economic assets: Ecotourism, hunting revenue, and conservation jobs reach local communities. Livestock guarding services generate income. Poverty is alleviated through leopard-related enterprises.	**Activity 3.1** Catalyse inclusive, predator-based economic opportunities and skills development.	• Expanded wildlife-linked job opportunities in tourism, game farming, monitoring, and conservation. • Greater youth participation in conservation and tourism careers through targeted skills development and training support. • Reduced economic reliance on harmful or extractive land uses.
Improved conflict management and human safety: Livestock losses are compensated quickly and fairly. Rapid response teams prevent escalation. Farmers no longer need retaliatory killing to protect their livelihoods and communities feel safer.	**Activity 3.2** Implement a standardised national framework for human-leopard conflict mitigation and response.	• Improved community safety, leopard conflict response, and fair mitigation mechanisms in place that enhance tolerance and reduce economic losses from human-wildlife conflict. • Reduction in poisoning, snaring, and illegal lethal responses. • More community capacity and economic resilience in priority conflict areas.

This gazette is also available free online at www.gpwonline.co.za

10. Strategic Action Plan

ECOLOGICAL ROLE OF LEOPARDS

GOAL 1: Conserve leopards and their landscapes by strengthening ecological resilience, connecting habitats, and reducing threats.

Strategic Actions (Broad)	Key Activities (Detailed)	Key Performance Indicator (KPI)	Lead & Key Partners	Timeline (Phase)	Priority
1.1 Protect, restore, and connect critical leopard habitats to ensure resilience and gene flow, and adaptive capacity to climate change.	1.1.1 Map priority corridors	Priority corridors identified	Lead: DFFE Partners: SANBI; Management Authorities	Y1-Y2	High
	1.1.2 Establish corridor partnerships across different land uses	Number of partnerships established	Leads & Partners: Management Authorities; NGOs; SANBI; Landowners.	Ongoing	High
	1.1.3 Expand conservation estate (protected and conservation areas) to include key leopard habitat.	Number of hectares added into the conservation estate that includes leopard habitat	Lead: Management Authorities Partners: NGOs; SANBI (species index); Landowners	Ongoing	High
	1.1.4 Incorporate leopard corridor spatial data into SANBI BGIS as the foundation for conservation planning purposes	SANBI BGIS contains leopard corridor spatial data.	Lead: SANBI Partners: Management Authorities; NGOs; Research Institutions	Y1-Y5	Med

Strategic Actions (Broad)	Key Activities (Detailed)	Key Performance Indicator (KPI)	Lead & Key Partners	Timeline (Phase)	Priority
	1.1.5 Develop a climate change resilience and response mechanism for PAs and leopard corridors.	Number of action plans developed	Lead: DFFE Partners: SANBI; Management Authorities	Y6-Y10	Med
	1.1.6 Allocate resources for implementation of climate change resilience and response mechanism.	Number of resources identified and allocated	Lead: Management Authorities & all relevant partners	Y6-Y10	Med
1.2 Reduce anthropogenic threats to ensure persistent, dynamic leopard populations.	1.2.1 Interventions implemented in and around PAs to reduce anthropogenic threats.	Number of associated interventions implemented in and around PAs	Lead: Management Authorities of PAs Partners: Private/Community Reserve Associations, NGOs, other relevant parties	Ongoing	High
	1.2.2 Interventions implemented outside of PAs in high-conflict areas to reduce anthropogenic threats.	Number of interventions implemented by traditional authorities Number of interventions implemented by landowners, wildlife industry, NGOs, traditional health practitioners	Lead: Management Authorities & all relevant partners	Ongoing	High
1.3 Strengthen and expand the national population monitoring and research system to inform adaptive management.	1.3.1 Maintain and expand long-term, standardised population monitoring sites for leopards.	Number of additional monitoring sites Number of existing monitoring sites maintained	Lead: SANBI Partners: Provinces, Private Reserves, Wildlife Industry, NGOs, Research Institutions	Ongoing	High

This gazette is also available free online at www.gpwonline.co.za

This gazette is also available free online at www.gpwonline.co.za

Strategic Actions (Broad)	Key Activities (Detailed)	Key Performance Indicator (KPI)	Lead & Key Partners	Timeline (Phase)	Priority
	1.3.2 Secure resources for long-term population monitoring.	Relevant resources secured (funding, equipment, human capacity)	Lead: SANBI Partners: Provinces, Private Reserves, Wildlife Industry, NGOs, Research Institutions	Ongoing	High
	1.3.3 Explore modalities for creation of a database to collate leopard population data.	Report on findings/conclusions	Lead: DFFE Partners: SANBI, Provinces, Private Reserves, Wildlife Industry, NGOs, Research Institutions	Y3-Y6	Med
1.4 Implement evidence-based, adaptive population and landscape management.	1.4.1 Revision of NDF for leopard.	Publications of revisions of NDF for leopard	Lead: SANBI Partners: Provinces, Private Reserves, Wildlife Industry, NGOs, Research Institutions,	As and when required	High
	1.4.2 Integrate legal leopard DCA offtake data into the national monitoring framework for leopard.	National monitoring framework for leopard revised to include legal DCA offtake data.	Lead: SANBI Partners: DFFE; Management Authorities: Science NGOs, Private Reserves	Y2-Y5	High

SOCIAL AND CULTURAL VALUES

GOAL 2: Preserve cultural heritage, promote sustainable practices, and ensure safe and inclusive access to leopards and protected areas.

Strategic Actions (Broad)	Key Activities (Detailed)	Key Performance Indicator (KPI)	Lead & Key Partners	Timeline (Phase)	Priority
2.1 Ensure preservation of traditional and cultural use of leopard derivatives and products	2.1.1 Develop fit for purpose mechanisms to create opportunities for equitable and fair sharing of leopard products and derivates for cultural and spiritual use.	Mechanism for distribution for leopard derivatives and products from protected areas[1] Mechanism for distribution of leopard products and derivatives from the Wildlife industry[2] Upscaling and developing additional mechanisms for providing leopard skins for religious & cultural purposes[3]	Lead: DFFE in partnership with relevant key stakeholders [1] DFFE & Management Authorities [2] Management Authorities & Wildlife Industry [3] Traditional Leaders, National House of Traditional and Khoi-San Leaders, Traditional Health Practitioners, Religious Groups.	Y2-Y8	High
2.2 Strengthen intergenerational knowledge transfer and cultural connection to leopards.	2.2.1 Support programmes for knowledge transfer between elders, youth, and conservationists on leopard cultural heritage.	Number of intergenerational knowledge-sharing events held annually Development of cultural heritage resources (e.g., booklets, recordings)	Lead: Cultural Institutions / NGOs Partners: Traditional Councils, Schools, Museums (Iziko)	Ongoing	Med
	2.2.2 Incorporate Indigenous Knowledge Systems (IKS) into leopard conservation planning and monitoring.	IKS indicators and knowledge integrated into ≥ 2 provincial leopard management plans	Lead: SANBI (IKS Centre) Partners: DFFE, Universities, Traditional Knowledge Holders	Ongoing	Med

This gazette is also available free online at www.gpwonline.co.za

This gazette is also available free online at www.gpwonline.co.za

LIVELIHOOD IMPACTS OF LEOPARDS

GOAL 3: Increase fair opportunities for people to benefit from leopards while reducing the challenges they pose to livelihoods.

Strategic Actions (Broad)	Key Activities (Detailed)	Key Performance Indicator (KPI)	Lead & Key Partners	Timeline (Phase)	Priority
3.1 Catalyse inclusive, predator-based economic opportunities and skills development.	3.1.1 Develop and implement programmes to expand inclusive access to leopard-related jobs in tourism, monitoring, and conservation.	Number of inclusive leopard-related programs	Lead: DFFE (Biodiversity Economy) Partners: CATHSSETA, Tourism Business Council, Private Reserves, NGOs	Ongoing	High
	3.1.2 Incorporate leopard-related economic opportunities into the broader biodiversity program, encouraging integration with the Biodiversity Economy by leveraging NBES programmes (ecotourism) for leopard landscapes.	Number of NBES-aligned biodiversity economy programs that include leopard.	Lead: DFFE (Biodiversity Economy) Partners: CATHSSETA, Tourism Business Council, Private Reserves, NGOs	Ongoing	Med
3.2 Implement a standardised national framework for human-leopard conflict mitigation and response.	3.2.1 Contribute and provide input into the National GEF project (Reducing HWC through an evidence-based and integrated approach in Southern Africa).	HWC objectives of GEF project are met	Lead: DFFE (Biodiversity & Conservation) Partners: DALRRD, Provincial Disaster Management, NGOs	Y1-Y5	High

Enabler 1. Sustainable Financing

Strategic Actions	Key Activities (Detailed)	Key Performance Indicator (KPI)	Lead & Key Partners	Timeline (Phase)	Priority
E1.1 Secure sustainable funding mechanisms that support multi-level leopard conservation initiatives.	E1.1.1 Explore and implement dynamic, effective, and sustainable funding mechanisms that support multi-level leopard conservation initiatives.	New funding streams identified and implemented	Lead: DFFE, Partners: Provincial Authorities, NGOs, Private Sector	Ongoing	High
	E1.1.2 Develop and implement the Biodiversity Management Agreements (BMA) for tax incentives for safeguarding leopards.	Number of signed BMAs	Lead: DFFE (Biodiversity Management) Partners: National Treasury	Y2-Y10	High
	E1.1.3 Secure long-term funding through public-private partnerships (PPPs), donor support, and conservation levies.	Number of active funding agreements (levies/contracts/pledges)	Lead: DFFE Partners: Provincial Authorities, NGOs, Private Sector	Ongoing	High

This gazette is also available free online at www.gpwonline.co.za

This gazette is also available free online at www.gpwonline.co.za

Enabler 2. Participation, Communication, Education, and Awareness

Strategic Objective (Broad)	Specific Objective / Activity (Detailed)	Key Performance Indicator (KPI) / Result	Lead & Key Partners	Timeline (Phase)	Priority
E.2.1 Co-learn and promote widespread cultural awareness and education to foster pride, understanding, and support for leopard conservation.	E.2.2.1 Develop and implement a leopard communications strategy, integrating existing relevant communications initiatives (e.g. endangered species/predator-focussed).	Approved strategy and annual reports	Lead: DFFE (Communications) & SANBI Partners: Provincial Authorities, Department of Basic Education, Media Houses	Ongoing	High
	E.2.2.2 Leopard-related education integrated into stewardship/ranger roles, incorporating co-learning from communities living with leopards.	Number of communities receiving and participating in integrative learning	Lead: DFFE (Communications) & Provincial Authorities Partners: Department of Basic Education, Media Houses	Ongoing	High
E.2.2. Institutionalise inclusive, participatory sustainable use and governance.	2.3.1 Mandate seats for traditional leaders & health practitioners on the National Leopard Steering Committee and LICC.	Number of permanent seats Quarterly meetings with documented input.	Lead: DFFE (Biodiversity Management) Partners: CONTRALESA, National Khoi-San Council, Healer Associations	Y1-Y4	High

This gazette is also available free online at www.gpwonline.co.za

Enabler 3. Legislative and Policy Reform

Strategic Objective (Broad)	Specific Objective / Activity (Detailed)	Key Performance Indicator (KPI) / Result	Lead & Key Partners	Timeline (Phase)	Priority
E.3.1 Enhance policy, legal, and enforcement frameworks that support inclusive, participatory leopard conservation.	E.3.1.1 Strengthen the national monitoring and reporting framework by increasing provincial and community capacity.	Number of provinces with dedicated monitoring officers/funds. Completeness and timeliness of provincial data submissions to national database.	Lead: DFFE (Biodiversity Monitoring) Partners: Provincial Authorities, NGOs	Y2-Y5	High
	E.3.1.2 Consolidate Provincial Guidelines to align permitting and enforcement with new national norms.	Schedule for alignment completed and published. Number of provinces that have amended their procedures.	Lead: DFFE (Biodiversity Management) Partners: Provincial Authorities	Y3-Y8	High
	E.3.1.3 Increase Enforcement Capacity via training for Environmental Management Inspectors (EMIs) and fostering SAPS collaboration.	Number of EMIs and SAPS members trained in wildlife crime investigation. Number of joint investigations initiated.	Lead: DFFE (Compliance & Enforcement) Partners: SAPS, NGO Wildlife Crime Units	Ongoing	High

11. Implementation, Revision, Monitoring, and Evaluation

Progress, Review, and Adaptation Process

This Strategy serves as the national species recovery plan for leopards and provides direct inputs into provincial and national species recovery programmes. It is important that implementation is co-owned by all stakeholders, and initiatives by different stakeholders to lead processes will be supported and encouraged. A key element is establishing transparent reporting mechanisms with responsibility and accountability to all relevant stakeholders, including communities living with leopards.

A **Leopard Implementation Coordination Committee (LICC)** will be established within three months of the Strategy's publication, with formal Terms of Reference developed and approved by DFFE. The LICC serves as the primary implementation agent responsible for overseeing, coordinating, and reporting on Strategy implementation. The existing **Leopard Advisory Forum (LAF)** will serve as a reference group to the LICC, providing technical and stakeholder advice as needed.

The Strategy operates on a 5-year cycle, with an **Implementation Plan created and reviewed annually** (by the LICC) and actions revised when and if necessary based on implementation progress, new evidence, or changing circumstances. A formal **annual report** is submitted to the Minister of Forestry, Fisheries and the Environment each year, summarising progress, challenges, and any adaptations made to the Action Plan. The overall **Vision and Goals** are reviewed after 10 years, allowing sufficient time for meaningful ecological and social outcomes to manifest while maintaining long-term strategic direction.

The Way Forward

Moving forward, the focus must be on building institutional and social contexts to support implementation, including sustained funding, provincial capacity, legislative alignment, and collaborative approaches that reflect the aspirations of all stakeholders, especially those historically excluded from decision-making. The Strategic Action Plan provides the operational roadmap, structured around three core goals and containing over thirty activities, assigned priority levels and a phased five-year timeline, with clear lead institutions and accountability. This Plan achieves its vision by securing ecological connectivity, supporting cultural traditions through Indigenous knowledge integration and regulated access, advancing local livelihoods via predator-based economies and direct incentive mechanisms, and operationalising transformation through equitable governance, fair benefit-sharing, and sustainable development linked to the objectives of the Biodiversity Economy. Ultimately, sustained implementation, transparent reporting, and shared commitment from government, communities, civil society, and the private sector will determine success, redefining leopard conservation as a tool for national transformation that builds trust, delivers equitable benefits, and secures South Africa's natural and cultural heritage for future generations.

This gazette is also available free online at **www.gpwonline.co.za**

12. References & Further Reading

References

Amin, R., Wilkinson, A., Williams, K., Martins, Q., & Hayward, J. (2022). Assessing the status of leopard in the Cape Fold Mountains using a Bayesian spatial capture–recapture model in Just Another Gibbs Sampler. *African Journal of Ecology*. https://doi.org/10.1111/aje.12944

Bothma, J. D. P. (1998). A review of the ecology of the southern kalahari leopard. *Transactions of the Royal Society of South Africa*, 53(2). doi: 10.1080/00359199809520392.

Devens, C., Hayward, M., Tshabalala, T., Dickman, A., McManus, J., Smuts, B., & Somers, M. (2019). Estimating leopard density across the highly modified human-dominated landscape of the Western Cape, South Africa. *Oryx*, 55, 34 - 45. https://doi.org/10.1017/s0030605318001473

Falayi, M., Gambiza, J., & Schoon, M. (2021). Thematic Section: Conservation Implications of Social-ecological Change in Southern Africa A scoping review of environmental governance challenges in southern Africa from 2010 to 2020. *Environmental Conservation*. https://doi.org/10.1017/s0376892921000333

Garbett, Rebecca, Gareth Mann, Ross Pitman, Jessie Berndt, Sean Morar, Shannon Dubay, Valentine Tawira, Lauren Foden, Annie Basson, and Guy Balme, 2023. South African Leopard Monitoring Project Report on 2022 Leopard Monitoring activities for the South African National Biodiversity Institute. Panthera, Cape Town.

Greyling, E., Comley, J., Cherry, M., Leslie, A., & Müller, L. (2023). Facilitation of a free-roaming apex predator in working lands: evaluating factors that influence leopard spatial dynamics and prey availability in a South African biodiversity hotspot. *PeerJ*, 11. https://doi.org/10.7717/peerj.14575

Hinde, K., Wilkinson, A., Tokota, S., Amin, R., O'Riain, M., & Williams, K. (2023). Leopard density and the ecological and anthropogenic factors influencing density in a mixed-use landscape in the Western Cape, South Africa. *PLOS ONE*, 18. https://doi.org/10.1371/journal.pone.0293445

Jacobson, A. P. *et al.* (2016). Leopard (Panthera pardus) status, distribution, and the research efforts across its range. *PeerJ*, 2016(5), pp. 1–28. doi: 10.7717/peerj.1974.

JET, McKaughan, Stephens PA, Lucas C, Guichard-Kruger N, and Hill RA., 2024. Leopard density and determinants of space use in a farming landscape in South Africa. *Scientific Reports* 14, no. 1 10562.. https://doi.org/10.1038/s41598-024-61013-6

Mann GKH, Williams KS & da Silva JM. 2025. A conservation assessment of *Panthera pardus*. In Patel T, Smith C, Roxburgh L, da Silva JM & Raimondo D, editors. The Red List of Mammals of South Africa, Eswatini and Lesotho. South African National Biodiversity Institute and Endangered Wildlife Trust, South Africa.

Mann, G., O'Riain, M., & Parker, D. (2020). A leopard's favourite spots: Habitat preference and population density of leopards in a semi-arid biodiversity hotspot. *Journal of Arid Environments*, 181, 104218. https://doi.org/10.1016/j.jaridenv.2020.104218

Mann, G., Pitman, R., Whittington-Jones, G., Thomas, L., Broadfield, J., Taylor, J., Rogan, M., and Balme, G., 2017. South African Leopard Monitoring Project. Annual report on monitoring activities in 2017. Report to the Scientific Authority of South Africa, November 2017.

This gazette is also available free online at **www.gpwonline.co.za**

McManus, J., Schurch, M., Goets, S., Faraut, L., Couldridge, V., & Smuts, B. (2022). Delineating Functional Corridors Linking Leopard Habitat in the Eastern and Western Cape, South Africa. *Conservation*. https://doi.org/10.3390/conservation2010009

Mercugliano, E., Boshoff, M., Dissegna, A., Cerizza, A., Laner, L., Indovina, A., Biasetti, P., Da Re, R., Mascarello, G., & De Mori, B. (2025). Wildlife management and conservation in South Africa: informing legislative reform through expert consultation using the Policy Delphi methodology. *Frontiers in Veterinary Science*, 12. https://doi.org/10.3389/fvets.2025.1549222

Morris, D., McWhorter, T., Boardman, W., Simpson, G., Wentzel, J., Coetzee, J., Du Plessis, F., & Moodley, Y. (2022). Gene flow connects key leopard (Panthera pardus) populations despite habitat fragmentation and persecution. *Biodiversity and Conservation*, 32, 945-963. https://doi.org/10.1007/s10531-022-02531-5

Müller, L., Briers-Louw, W., Seele, B., Lochner, C., & Amin, R. (2021). Population size, density, and ranging behaviour in a key leopard population in the Western Cape, South Africa. *PLoS ONE*, 17. https://doi.org/10.1371/journal.pone.0254507

Naude, V., Balme, G., O'Riain, J., Hunter, L., Fattebert, J., Dickerson, T., & Bishop, J. (2020). Unsustainable anthropogenic mortality disrupts natal dispersal and promotes inbreeding in leopards. *Ecology and Evolution*, 10, 3605 - 3619. https://doi.org/10.1002/ece3.6089

Naude, V., Balme, G., Rogan, M., Needham, M., Whittington-Jones, G., Dickerson, T., Mabaso, X., Nattrass, N., Bishop, J., Hunter, L., & O'Riain, M. (2020). Longitudinal assessment of illegal leopard skin use in ceremonial regalia and acceptance of faux alternatives among followers of the Shembe Church, South Africa. *Conservation Science and Practice*, 2. https://doi.org/10.1111/csp2.289

Patel, T., Smith, C., Roxburgh, L., da Silva, J. & Raimondo, D. 2025. *The Red List of Mammals of South Africa, Eswatini and Lesotho*. EWT and SANBI.

Rodríguez-Recio, M., Burgos, T., Krofel, M., Lozano, J., Moleón, M., & Virgós, E. (2022). Estimating global determinants of leopard home range size. *Animal Conservation*, 25(6), pp. 748–758.

Searle, C., Bauer, D., Kesch, M., Hunt, J., Mandisodza-Chikerema, R., Flyman, M., Macdonald, D., Dickman, A., & Loveridge, A. (2020). Drivers of leopard (Panthera pardus) habitat use and relative abundance in Africa's largest transfrontier conservation area. *Biological Conservation*. https://doi.org/10.1016/j.biocon.2020.108649

Swanepoel, LH 2008, Ecology and conservation of leopards, Panthera pardus, on selected game ranches in the Waterberg region, Limpopo, South Africa, MSc dissertation, University of Pretoria, Pretoria.

Tensen, L., Power, J., Camacho, G., Godinho, R., Van Vuuren, J., & Fischer, K. (2022). Molecular tracking and prevalence of the red colour morph restricted to a harvested leopard population in South Africa. *Evolutionary Applications*, 15, 1028 - 1041. https://doi.org/10.1111/eva.13423

Viollaz, J., Thompson, S., & Petrossian, G. (2021). When Human–Wildlife Conflict Turns Deadly: Comparing the Situational Factors That Drive Retaliatory Leopard Killings in South Africa. *Animals: An Open Access Journal from MDPI*, 11. https://doi.org/10.3390/ani11113281

Woodgate, Z., Garbett, R., Mann, G., Dubay, S., Foden, L., Honiball, TL., Basson, A., Theron, D., Maciejewski, K., & Balme, G., 2024. South African Leopard Monitoring Project Report on 2024 Leopard Monitoring activities for the South African National Biodiversity Institute. Panthera, Cape Town.

Woodgate, Z., Garbett, R., Mann, G., Dubay, S., Foden, L., Honiball, TL., Basson, A., Theron, D., Maciejewski, K., & Balme, G., 2025. South African Leopard Monitoring Project Report on 2025 Leopard Monitoring activities for the South African National Biodiversity Institute. Panthera, Cape Town.

This gazette is also available free online at **www.gpwonline.co.za**

Further Reading

Balme, G. A., Slotow, R., & Hunter, L. T. B. (2009). Impact of conservation interventions on the dynamics and persistence of a persecuted leopard (Panthera pardus) population. *Biological Conservation, 142*(11), 2681–2690.

Balme, G. A., Slotow, R., & Hunter, L. T. B. (2010). Edge effects and the impact of non-protected areas in carnivore conservation: Leopards in the Phinda–Mkhuze Complex, South Africa. *Animal Conservation, 13*(3), 315–323.

Bouderka, S., Perry, T. W., Parker, D. M., Beukes, M., & Mgqatsa, N. (2022). Count me in: Leopard population density in an area of mixed land-use, Eastern Cape, South Africa. *African Journal of Ecology*. https://doi.org/10.1111/aje.13078

Comley, J., van Tonder, J., Greyling, E., Wilkinson, A., Williams, K. S., Annecke, W. J., & Leslie, A. J. (2025). Unveiling threat patterns for leopards and mesopredators in agricultural landscapes of South Africa. *People and Nature*.

Constant, N. L. (2024). *A socio-ecological approach towards understanding conflict between leopards (Panthera pardus) and humans in South Africa: Implications for leopard conservation and farming livelihoods* [Doctoral thesis].

Devens, C. H., Tshabalala, T., McManus, J., & Smuts, B. (2018). Counting the spots: The use of a spatially explicit capture–recapture technique and GPS data to estimate leopard (Panthera pardus) density in the Eastern and Western Cape, South Africa. *African Journal of Ecology, 56*(4), 972–985.

Jacobson, A. P., Gerngross, P., Lemeris, J. R., Jr., Schoonover, R. F., Anco, C., Breitenmoser-Würsten, C., Dollar, L. (2016). Leopard (Panthera pardus) status, distribution, and the research efforts across its range. *PeerJ, 4*, e1974.

Martins, Q., & Martins, N. (2006). Leopards of the Cape: Conservation and conservation concerns. *International Journal of Environmental Studies, 63*(5), 579–585.

McManus, J., Faraut, L., Couldridge, V., van Deventer, J. V., Samuels, I., Cilliers, D.,Smuts, B. (2022). Assessment of leopard translocations in South Africa. *Frontiers in Conservation Science, 3*, 943078.

Pitman, R. T. (2024). The conservation biology and ecology of the African leopard Panthera pardus pardus. *The Plymouth Student Scientist, 17*(1), 1–35.

Rogan, M. S., Distiller, G., Balme, G. A., Pitman, R. T., Mann, G. K. H., Dubay, S. M., O'Riain, M. J. (2022). Troubled spots: Human impacts constrain the density of an apex predator inside protected areas. *Ecological Applications, 32*(2), e02498.

Swanepoel, L. H., Lindsey, P. A., Somers, M. J., van Hoven, W., & Dalerum, F. (2013). Extent and fragmentation of suitable leopard habitat in South Africa. *Animal Conservation, 16*(1), 41–50.

Williams, S. T., Williams, K. S., Lewis, B. P., & Hill, R. A. (2017). Population dynamics and threats to an apex predator outside protected areas: Implications for carnivore management. *Royal Society Open Science, 4*(11), 161090.

Wilkinson, A., Fabricius, M., Brink, E., Garbett, R., Hahndiek, E., & Williams, K. S. (2024). Leopard dispersal across a fragmented landscape in the Western Cape, South Africa. *African Journal of Ecology*.

This gazette is also available free online at **www.gpwonline.co.za**

DEPARTMENT OF HEALTH

NO. 7878 **4 September 2026**

HEALTH PROFESSIONS ACT, 1974 (ACT NO.56 OF 1974)

REGULATIONS RELATING TO THE QUALIFICATIONS FOR REGISTRATION OF BIOKINETICISTS: AMENDMENT,2026

The Minister of Health has, in terms of section 24 of the Health Professions Act, 1974 (Act No. 56 of 1974), and on the recommendation of the Health Professions Council of South Africa, made regulations in the Schedule.

DR PAKISHE AARON MOTSOALEDI, MP
MINISTER OF HEALTH
DATE:

SCHEDULE

Definitions

1. In these regulations any word or expression to which a meaning has been assigned in the Act shall bear such meaning and unless the context indicates otherwise-

"regulations" means the Regulations relating to the qualifications for the registration of Biokineticists as published under Government Notice R. 398. in *Government Gazette* No. 35366 of 21 May 2012, and

"the Act" means the Health Professions Act, 1974 (Act No.56 of 1974).

Amendment of regulation 2 of the regulations

2. Regulation 2 of the regulations is hereby amended by insertion of the following qualifications –

Examining Authority and Qualification	**Abbreviation for registration**
University of Cape Town Bachelor of Medical Science Honours in Biokinetics	(BMed Sc Hons) UCT
University of the Free State Bachelor of Biokinetics	BBiok Free State UFS
University of Stellenbosch Bachelor of Science (Biokinetics) Stellenbosch	BSc (Biokinetics) Stell
University of Johannesburg Bachelor of Science (Biokinetics) Johannesburg	BSc (Biokinetics) Johannesburg
Tshwane University of Technology Bachelor of Health Sciences in biokinetics	BHSC (Biokinetics) TUT

Short title

3. The Regulations are called Regulations Relating to the Qualifications for registration of Biokineticists: Amendment, 2026.

NAWU WA VATIRHI VA SWA RIHANYO, 1974 (NAWU WA NO.56 LEMBE RA 1974)

ANTSWISO EKA SWINAWANA LESWI FAMBISANAKA NA KU FIKELELA EKA NTSARISO WA SWA BIOKINETIKI,2026

Holobye wa Rihanyo, hi ku landza xiyenge xa 24 xa Nawu wa Tiphurofexini ta swa Rihanyo, 1974 (Nawu wa 56 lembe ra 1974), naswona endzhaku ko tihlanganisa na Huvo ya Tiphurofexini ta Rihanyo ya Afrika-Dzonga, u endlile swinawana eka Xedulu.

DOKODELA PAKISHE AARON MOTSOALEDI, XIRHO XA PALAMENDE
HOLOBYE WA RIHANYO
SIKU : 6/8/24

XEDULU

Tinhlamuselo

1. Eka swinawana leswi rito rin'wana na rin'wana kumbe xivulavulelo lexi nhlamuselo yi nyikiweke xona eka Nawu xi ta va na nhlamuselo yoleyo naswona handle ka loko mongo wu kombisa swin'wana-

"swinawana" swi vula swinawana leswi fambelanaka na tidyondzo ta swa ku tsarisiwa ka Vativi va Biokinetiki tanihilaha yi kandziyisiweke hakona ehansi ka Xitiviso xa Mfumo R. 398 . eka *Gazete ya Mfumo* ya 35366 ya ti 21 Mawuwani 2012 , na

"Nawu" swi vula Nawu wa Tiphurofexini ta swa Rihanyo, 1974 (Nawu wa 56 lembe ra 1974).

Ku cinciwa ka nawu wa 2 wa milawu

2. Xinawana xa 2 xa swinawanahi lexi xi antswisiweke hi ku nghenisiwa ka tidyondzo leti landzelaka –

Swiyenge leswi nga na matimba ya ku kambela na tidyondzo	**Nkomiso wa ntsarisa**
Yunivhesiti ya Cape Town Bachelor ya Sayense ya Vutshunguri ya onasi eka Biyokinetiki	(BMed Sc Hons) UCT
Yunivhesiti ya Free State Bachelor ya Biokinetics	BBiok Xifundzha xa Ntshunxeko UFS
Yunivhesiti ya Stellenbosch Bachelor ya Sayense (Biokinetics) Stellenbosch	BSc (Biyokinetiki) Stell
Yunivhesiti ya Johannesburg	BSc (Biyokinetiki) Jhb

Swiyenge leswi nga na matimba ya ku kambela na tidyondzo	**Nkomiso wa ntsarisa**
Bachelor ya Sayense (Biokinetics) Johannesburg	
Tshwane Yunivhesiti ya Thekinoloji Bachelor ya Sayense ya Rihanyo eka biokinetics	BHSC (Biyokinetiki) TUT

Nhlokomhaka yo koma

3. Swinawana swi vitaniwa swinawana leswi fambelanaka na tidyondzo ta ku tsarisiwa ka ntsariso wa swa Biyokinetiki: Antswiso, 2026.

UMTHETHO WABASEBENZI BEZAMAPHILO, 1974 (UMTHETHO 56 KA 1974)

IMITHETHOLAWULO EPHATHELENE NEZIQU ZOKUTLOLISELA UBUBHAYOKHINETHIKHI : ISIKHIBELELO, 2026

UNgqongqotjhe wezamaPhilo, ngokwesigaba 24 somThetho wemiSebenzi yezamaPhilo, 1974 (UmThetho 56 ka-1974), begodu ngemva kokubonisana nomKhandlu wemiSebenzi yezamaPhilo weSewula Afrika, wenze imithetholawulo kuTjhejuli.

DORH. PAKISHE AARON MOTSOALEDI, MP
UNGQONGQOTJHE WEZAMAPHILO
ILANGA:

ITJHEJULI

linhlathululo

1. Emithethwenilawulo le elinye nelinye igama namkha ithemu elisetjenziswe kilomthetholawulo linehlathululo efanako nesemThethweni, ngaphandle kwalokha umutjho utjho okuhlukileko- -

"imithetholawulo" kutjho imiThetholawulo ephathelene neziqu zokuzitlolisela ubuBhayokhinethiki njengombana igadangisiwe ngaphasi kwesaziso sakarhulumende R. 398. emtlolweni wezaziso zombuso No. 35366 ka 21 kuMrhayili 2012, no

"UmThetho" kutjho umThetho wemiSebenzi yezamaPhilo, 1974 (umThetho wama- 56 ka-1974).

Ukukhitjelelwa komthetholawulo 2 wemithetholawulo

2. UmThetholawulo 2 wemithetholawulo ukhitjelelwe ngokufaka iziqu ezilandelako –

Ngubani oneGunya lokuHlola neZiqu	**IsiRhunyezo sokutlolisa**
IYunivesithi ye-Cape Town IBhatjhela yeSayensi yezokweLapha , i-Onasi kuBhayokhinethikhi *(Bachelor of Medical Science Honours in Biokinetics)*	(BMed Sc Hons) UCT
IYunivesithi ye-Free State IBhatjhela yeBhayokhinethikhi	BBiok Free State UFS
IYunivesithi ye-Stellenbosch IBhatjhela yeSayenzi (iBhayokhinethikhi) e-Stellenbosch	BSc (Biokinetics) Stell
IYunivesithi ye-Johannesburg IBhatjhela yeSayensi (iBhayokhinethikhi) e-Johannesburg	BSc (Biokinetics) Johannesburg
IYunivesithi yeTshwane yeTheknoloji	

Ngubani oneGunya lokuHlola neZiqu	**IsiRhunyezo sokutlolisa**
IBhatjhela yeSayensi yezamaPhilo kuBhayokhinethikhi	BHSC (Biokinetics) TUT

Isihlokwana

3. ImiThetholawulo le ibizwa ngemiThetholawulo ephathelene neZiqu zokutlolisela UbuBhayokhinethikhi: IsiKhibelelo, 2026.

DEPARTMENT OF HEALTH

NO. 7879 **4 September 2026**

NATIONAL HEALTH ACT, 2003 (ACT No.61 of 2003)

REGULATIONS ON ORGAN TRANSPLANTATION

The Minister of Health intends, in terms of section 68(1)(r) of the National Health Act, 2003 (Act No. 61 of 2003), to make the Regulations in the Schedule.

Interested persons are invited to submit any substantiated comments on the proposed Regulations, or representations they may wish to make in regard thereto, to the Director-General: Health, Private Bag X828, Pretoria, 0001 for the attention of the Deputy Director: Organ Transplant and Renal Dialysis, Mr Lindsey Andrews-Jacobs, lindsey.jacobs@health.gov.za within three months of this Notice.

DR PAKISHE AARON MOTSOALEDI, MP
MINISTER OF HEALTH
DATE: 14/8/2026

This gazette is also available free online at **www.gpwonline.co.za**

SCHEDULE

Definitions

1. In these Regulations any expression to which a meaning has been assigned in the Act bears that meaning and, unless the context indicates otherwise –

"chain of custody" means the documented and traceable process recording the possession, transfer, and handling of a human organ from the point of retrieval to the point of transplantation;

"deceased donor" means an organ donor who has been diagnosed with brain death or circulatory death;

"donor" means a person from whom an organ may be, is intended to be, or is being or has been removed, for use by another person;

"recipient" means a person who may receive, or is intended to receive, or is receiving or has received, organ from a donor;

"organ" means any organ removed or intended to be removed from a living or deceased donor for the purpose of transplantation;

"the Act" means the National Health Act, 2003 (Act No.61 of 2003); and

"transplant" means the transplantation of an organ or part of an organ of a donor in a recipient.

Application of regulations

2. The Regulations apply to all public and private health establishments.

Human resources in transplantation

3. (1) The national department must assign a function or designate an official to coordinate organ donation and transplantation.

(2) National transplant coordinator must—

This gazette is also available free online at www.gpwonline.co.za

(a) co-ordinate and oversee national organ donation and transplantation services;
(b) develop and review policies, norms, standards and guidelines in relation to organ donation and transplantation;
(c) establish, maintain and manage a national organ donation and transplantation information system or database for data collection analysis and reporting;
(d) monitor and evaluate transplantation service performance, outcomes and compliance;
(e) facilitate and support research, innovation and knowledge development in organ donation and transplantation, in accordance with the applicable laws; and
(f) provide general information about organ donation and transplantation to the general public through public campaigns awareness and education.

(3) Provincial Department must assign a function or designate an official to coordinate organ donation and transplantation within the province, who must, amongst others—

(a) coordinate organ donation and transplantation activities in line with the national department of Health;
(b) liaise with the department, health establishments and non-governmental organisations, health authorities, health professionals and the general public to facilitate the implementation of transplant services;
(b) collect, manage and submit organ referral, donation and transplantation data to the department;
(c) promote public campaigns for awareness and education in organ donation and transplantation within the province; and
(d) Monitor, evaluate and support compliance with organ donation and transplant services within the provinces.

(4) Health establishments performing donor referrals, organ donation, organ removal and organ transplantation must ensure that appropriately qualified health care professionals are designated to coordinate organ donation and transplantation related services within the health establishment, which must—

(a) identify and refer potential donors;
(b) facilitate the removal of organs from deceased and living donors;

This gazette is also available free online at www.gpwonline.co.za

(c) promote awareness and education on organ donation and transplantation to health care user, health care providers and the general public;

(d) ensure the collection, recording and submission of organ referral, donation and transplantation data to the relevant provincial and national system or database; and

(e) facilitate and ensure the pre-transplant work-up and coordination of suitable living donors as part of a living donor transplant program.

Procurement and preservation of organs

4. (1) Appropriate tissue or blood group typing, organ function testing, infectious disease and malignancy screening must be done on all donors; with risk communicated to any recipients as part of informed consent.

(2) Organ procured from living or deceased persons for transplantation must be preserved appropriately to allow for safe transplantation.

(3) Organs must be preserved in a South African Health Products Regulatory Authority approved solution in sterile containers and transported to a person designated to receive procured organs at a licensed transplant facility.

(4) Procured organs must be packaged and labelled under appropriate storage conditions and sealed to maintain sterility.

(5) A donor that donated an organ for transplantation purposes must be provided with a unique identification number.

Supply of procured organs

5. (1) Organs for transplantation, must be transported and documented to ensure a clear chain of custody from the donor centre to the recipient centre.

(2) The retrieval team must communicate the conditions of the organs at procurement to the transplantation team.

This gazette is also available free online at www.gpwonline.co.za

(3) Despite sub regulation (2), the health care provider performing the transplantation operation must assess the suitability for transplantation of the procured organ and include this as part of informed consent.

Records of organ referral, donation and transplantations

6. (1) Every organ referral, donation and transplantation must be recorded in a register kept by the transplant facility.

(2) The record of any transplantation must at least contain the—

(a) unique donor number and annual serial number for each transplant;
(b) date of the transplant;
(c) name, address, sex, age and nationality of the recipient and the file number;
(d) relationship of the donor to the recipient;
(e) names of the health care providers involved in the transplant and aftercare of the patient;
(f) name of the organ retrieval team;
(g) place where the organ was removed; and
(h) disposal and reason for, any organ removed that is not used for transplantation.

(3) The record may include any further information that is deemed to be necessary by the national department of Health.

(4) (a) The record of the transplantation must be treated as confidential and must be kept in a place where it is reasonably protected against fire, theft, and destruction when not in use.

(b) The record of the transplantation must, unless the Minister determines otherwise, be retained for a minimum period as required by the National Archives of South Africa Act, 1996 (Act No. 43 of 1996).

This gazette is also available free online at www.gpwonline.co.za

CHAPTER 2
DONATION OF ORGANS

Institutions or persons to which human bodies may be donated

7. An organ, may be donated to any of the following institutions or persons-

(a) a registered hospital;

(b) a university;

(c) authorised institutions; or

(d) any person who required therapy in which the organ concerned can be used for therapeutic purposes.

Requirements for organ transplant facilities

8. A facility performing organ transplants must: -

(a) have a clinical lead from the multidisciplinary transplant team must have at least two years of experience in transplant medicine;

(b) have the capacity and commitment to undertake uninterrupted lifetime, long-term care including immunosuppressive therapy and monitoring of recipients and donors or arrange an alternative service provider;

(c) have multidisciplinary expertise or regular access to such expertise in order to provide optimum care for the assessment, transplantation and follow-up of organ donors and transplant recipients including the allied health services;

(d) have full clinical support services to ensure the health and well-being of both organ donors and transplant recipients must be available twenty-four hours a day to transplant units; and

(e) every 30 days provide a report of deceased donation, living donation, waiting list and transplant activities with donor, recipient and graft outcome including donor referrals, to the national department.

This gazette is also available free online at www.gpwonline.co.za

Licensing of transplant units

9. (1) Authorisations, permits or designations contemplated in these Regulation shall be granted in respect of transplant units, provided they comply with the stipulated criteria determined by the Director-General.

(2) The Director-General must, within 12 months of promulgation of these Regulations, publish Licensing Criteria for Organ Transplant Units.

This gazette is also available free online at **www.gpwonline.co.za**

CHAPTER 3
DONATION OF ORGANS BY LIVING PERSONS

Removal of organs from living persons for transplantation

10. (1) A person may not remove organ from the body of a living person for the purpose referred to in section 56 of the Act unless:

(a) An explanation in respect of the following has been given to the donor and the recipient of the relevant tissue or organ:

(i) the cost, risks and benefits of each of the treatment options or proposed health interventions; and

(ii) the consent required from both the donor and the recipient must be obtained in accordance with the provisions of sections 6, 7, and 8 of the Act.

(b) The organ donor and recipient comply with the clinical and psychological requirements for organ donation and transplantation reflected as **Annexure A** of these Regulations or any other minimum requirements set out by the Director-General.

(c) The hospital or authorized institution undertaking the donor operation take all appropriate steps to ensure and document that the donor is willing to donate, free from inducement and coercion.

(d) There is no financial and non-financial incentive to donate and understands that he or she may decline to donate at any time.

(e) The recipient has been informed of a lifelong follow-up protocol.

(f) The donor has been informed that he or she may, without prejudice, withdraw the donation at any time.

This gazette is also available free online at www.gpwonline.co.za

(2) No person may remove an organ from a living person for transplant into another person without the Minister's written approval unless the person into whom the organ is to be transplanted is biologically related to the person from whom the organ is removed.

(3) For the purpose of this regulation, a person is biologically related to:

(a) natural parents and children;
(b) brother and sisters sharing one or both natural parents;
(c) the brother and sister of the natural parent;
(d) the natural children of the natural brothers and sisters of the natural parents;
(e) natural children of natural brothers and sisters; and
(f) Biologically related grandparents and grandchildren.

(4) No person shall in any particular case be treated as related in any of those ways unless adequate proof of the claimed relationship has been established by the authorised institution, any doubt with regard to the relationship may be referred to the Minister for approval.

Procedure for application for Ministerial approval for local living unrelated

11. For transplants between persons not contemplated in regulation 10(2), the Minister may grant permission for the transplant, on receipt of an application and documentation detailed in **Annexure B** of these regulations or deemed necessary by the Director-General.

Use of organ removed from living persons

12. Organ removed from living persons may only be used for medical, dental, therapeutic and diagnostic purposes.

This gazette is also available free online at **www.gpwonline.co.za**

Transplants relating to Non-South African Citizens as a living donor or recipient

13. A Non-South African citizen living donor or recipient may not undergo a transplant operation in a South African health establishment or health agency unless:

(a) Written approval by the Minister has been obtained on receipt of:

(i) The documents contemplated in **Annexure B** or deemed necessary by the Department;

(ii) A written undertaking from the referring health care provider confirming that post-transplantation care is sufficient to ensure the continued health and well-being of the living donor and the recipient will be provided in their respective countries of residence;

(iii) Proof of identification of the recipient and the living donor;

(b) In cases where a recipient is accompanied by his or her own living donor, tissue typing shall be typed within South Africa in order to determine whether there are a match and the removal of the organ and its subsequent use must comply with the provisions of the Act and these regulations, as well as the professional and ethical rules of the Health Professions Council of South Africa.

Treatment of deceased donor's body after removal of tissue

14 The health care provider that removes organs from a deceased donor is responsible for the physical reconstruction of the appearance of the deceased donor after the removal procedure.

This gazette is also available free online at **www.gpwonline.co.za**

CHAPTER 5
ALLOCATION OF DONOR ORGANS

Allocation and use of human organs from a deceased person and keeping of records, registers and returns

15. (1) Allocation of organs obtained from the body of a deceased person in the circumstances contemplated in section 62 of the Act, may not take into account the race, religious beliefs and political affiliation, culture, language, gender, sex, sexual orientation, disability, ethnic, social origin, birth, conscience or any other aspect of the deceased person's life that has no bearing on the physical state or quality of the organ in question.

(2) A register must be kept by-

(a) the institution where transplants are being performed or the institution that has removed any organ in terms of Sections 59 to 64 of the Act;

(b) any authorised institution that receives or deals in organ allocation; or

(c) An institution must record, or ensure recording, the details in sub regulation within the next working day after removing an organ.

(3) The following particulars must be recorded in the register mentioned in sub-regulation (2): -

(a) The unique identifier number for each donor must be recorded on the register;

(b) Date of the transplant and procurement;

(c) The name, address, sex, age, identification number and nationality of the recipient and the file number where applicable;

(d) The relationship of the donor to the recipient;

(e) The names of the primary surgeon or doctor involved in the transplant and care of the recipient;

(f) The name of the surgeon that removed the organ;

(g) The Health establishment where the organ was procured; and

(h) Any further information that is deemed to be necessary by the Director-General.

This gazette is also available free online at www.gpwonline.co.za

(4) A register referred to in sub-regulation (2) shall-

(a) be kept in accordance with section 17 of the Act; and

(b) unless where the Minister determines otherwise in writing, be retained for a minimum period as required by the National Archives of South Africa Act, 1996 (Act No. 43 of 1996).

(5) Every authorised institution and transplant unit must, on a monthly basis or deemed necessary by the Director-General, provide the national department of Health with the information in their register.

(6) The national department of Health must keep a national database, in which details of all transplant records received from authorised institutions or transplant units, are collated.

Application for authorisation to allocate organs

16. (1) An application for organ allocation authorisation must be made to the Director-General using **Annexure C**, indicating the nature of the individual organ for which authorisation is required.

(2) The public health establishments are exempt from applying for authorisation, however, they must submit documents or any information required by the Director-General, to notify the Director-General of the intent to allocate the deceased organ.

(3) Any public-private health establishment partnership must obtain authorization from the Director-General to perform organ allocation from a deceased person.

(4) The application contemplated in sub-section (1) must contain the following information:

This gazette is also available free online at www.gpwonline.co.za

(a) the names of the health establishments or public-private health establishment partnerships involved;
(b) location of the premises where transplantation business is to be conducted;
(c) the organ that require organ allocation authorisation;
(d) the standard operating procedure;
(e) an indication of how records and data shall be kept;
(f) details of the responsible person; and
(g) any other information the Director-General may consider necessary for the consideration of the application.

(3) Any authorized health establishment, public-private health establishment partnership must:
(a) use the approved standard operating procedure to conduct their organ allocation;
(b) notify the Director-General in writing immediately of any changes to the information of the approved authorization; and
(c) make a new application for any other organ allocation authorisation that differs from the approved authorisation.

(4) All existing organ allocation health establishments or public-private health establishment partnerships, must within 12 months of the promulgation of these regulations, submit the required documentation for authorisation.

(5) Any person who contravenes or fails to comply with any of the provisions of these regulations is guilty of an offense and liable on conviction to fine or imprisonment not exceeding ten years or both fine and imprisonment.

(6) The Director-General may convene an oversight body to review and report on organ allocation systems.

This gazette is also available free online at www.gpwonline.co.za

Suspension or withdrawal of authorisation

17. (1) If the Director-General is of the opinion in respect of an inspection report, auditing, and recommendation by the health officer that there are reasonable grounds to suspect that:

(a) Any premises or equipment used by an authorised health establishment or person are in any way hazardous to health;

(b) The authorised health establishment or person is not complying with the Act or these regulations;

(c) The rights of the organ donor or recipient are violated; or

(d) The authorised organ allocation health establishment, public-private health establishment, person, or committee is not complying with the approved authorisation; and

(e) The authorised health establishment, public-private health establishment, person, or committee after being offered an opportunity by the health officer to rectify the situation referred to in subsections (a), (b), (c), or (d), of the Regulation, failed to rectify such situation,

the Director-General may suspend or withdraw the authorization.

(2) Where non-compliance with these Regulations is found, the applicant or person responsible for the authorisation must be notified of the violation and must be given a period of 90 calendar days to take corrective measures.

(3) If non-compliance threatens the safety of patients or staff, the license shall be withdrawn with immediate effect by the national department.

Inspection and auditing

18. All authorised health establishments must be inspected and audited at least annually, and additional inspections may be conducted on an *ad-hoc* basis for the purpose of investigations following complaints or early warning system surveillance to ensure compliance with these Regulations.

This gazette is also available free online at **www.gpwonline.co.za**

CHAPTER 6
GENERAL AND SUPPLEMENTARY PROVISIONS

Payment in connection with the donation of organ

19. No person who-

(a) contemplates receiving or is about to receive organ must offer or provide any financial or non-financial or other reward to the donor or any other party, except as provided for in section 60 of the Act; or

(b) acts, or acted as a facilitator in the procurement supply or donation of organ may offer or promise any form of financial or non-financial or other rewards to the donor, recipient or another party, whether such offer is on his or her own behalf or on behalf of another party.

Protection of privacy

20. (1) No person may publish to any other person any facts whereby the identity of the person whose body or any specific organ thereof has been donated unless written consent thereto was granted in writing by the donor or any person authorised to give such consent in terms of any law or court order.

(2) No person may publish to any other person any fact whereby the identity of the recipient of any organ removed from another person before or after the death of the said person, may be established, unless-

(a) in case of a recipient who is still alive at the time of such publication or before such publication granted his or her consent thereto in writing; or

(b) in the case of a recipient who at the time of such disclosure has died-

(i) the recipient before his or her death granted consent to such publication in writing; or

This gazette is also available free online at www.gpwonline.co.za

(ii) the recipient did not before his or her death indicate in any manner that he or she would not be prepared to grant such consent and the spouse, partner, major child, parent, guardian, major brother or major sister of the recipient before such publication granted consent thereto in writing.

Surveillance and reporting of international transplant activities

21. (1) The Director-General must establish a database for collecting and analysing data related to South African residents who receive or donate organs outside the borders of the Republic of South Africa.

(2) All transplant centres, public and private health establishments, and any healthcare professional who suspect of such activities must report the information in the format prescribed by the Director-General.

Transplants performed abroad

22. The person contemplated in regulation 21(2) must report, the number of persons who are South African residents and who are known to have undergone organ transplantation and donation outside the country within the reporting year, where applicable;

(a) The type of transplant performed;
(b) The type of organ donation;
(c) Whether the donation was directed or non-directed;
(d) The origin of the living or deceased donor; and
(e) Where possible, the country where the transplant was performed.

Reporting of Donation received abroad

23. Failure by a registered health care practitioner to comply with the reporting requirements in terms of regulation 21 (2) constitute professional misconduct and must be reported to the relevant statutory health professions council for investigation and appropriate disciplinary action.

This gazette is also available free online at **www.gpwonline.co.za**

CHAPTER 7
APPOINTMENT AND FUNCTIONS OF THE INSPECTOR OF ANATOMY AND INVESTIGATING OFFICERS

Inspector of Anatomy

24 (1) The head of the provincial department in each province shall appoint a person in the provincial department as an inspector of anatomy who will have the same powers and functions referred to in sections 82, 84, 85, 86 and 87 of the Act.

(2) An inspector of anatomy shall exercise the powers and perform the duties conferred or imposed upon or delegated or assigned to him or her by or under these regulations, subject to the control and directions of the head of the provincial department.

(3) An inspector of anatomy shall exercise his or her powers and perform his or her duties in an area defined by the head of the provincial department.

Investigating Officers

25. (1) The head of the provincial department may appoint any person who is not in full-time employment of the State as an investigating officer to investigate any matter in terms of these regulations or may appoint such investigating officer to assist an inspector of anatomy.

(2) The head of the provincial department must furnish an investigating officer with a certificate of appointment, signed by the head of the provincial department stating that he or she has been appointed as an investigating officer in terms of these Regulations.

(3) An investigating officer must, on request, produce his or her certificate of appointment for inspection.

This gazette is also available free online at **www.gpwonline.co.za**

(4) An investigating officer may, subject to the control and directions of the head of the provincial department and for the purposes of the investigation for which he or she has been appointed, exercise any power conferred on an inspector of anatomy under regulation.

Powers of inspector of anatomy

26. An inspector of anatomy may-

(a) at any reasonable time for the proper performance of his or her functions and without prior notice enter any premises;
(b) in or upon where a human body or organ is used or is reasonably suspected to be used for any purpose referred to in section 56 of the Act;
(c) in or upon which the production from tissue or organ of any therapeutic, diagnostic or prophylactic substance or the supply of such substance so produced is carried on or is reasonably suspected to be carried on;
(d) examine any such premises or body, tissue or organ, product or substance or other object found therein or thereon or any activity or process carried out, on, in, or upon those premises, and may open any package or container in or upon those premises which contain or is suspected to contain such body, tissue or organ, product, substance or another object, in order to ascertain whether the provisions of the Act and these regulations with regard to those premises or that body, tissue or organ, products, substance, another object, activity or process are being complied with;
(e) at any time, demand from any person in or upon any such premises that he or she forthwith or at a time and place determined by the inspector produce to her or to him any register, record or other documents which is in the possession or custody or under the control of that person or any other person on his or her behalf;
(f) examine such a register, record or other document and require from any person referred to in paragraph (e) an explanation of anything appearing therein, and make copies thereof or extracts therefrom, or seize such a register, record or other documents, if, in her or his opinion, it may afford evidence of an offense in terms of the Act or these regulations; been employed in or upon such premises

This gazette is also available free online at www.gpwonline.co.za

or to have possession or custody of or control over anything referred to in this regulation;

(g) order any person contemplated in paragraphs (e) or (f) to appear before him or her at a time and place determined by him or her, and at that time and place question that person with regard to any matter which he or she is investigating;

(h) Following full investigative report, the anatomy of inspector remove and discard the remains of the human body which is kept in or upon premises entered by him or her in terms of paragraph (a) if he or she deems it advisable and recover the cost in connection with the removal and discarding from the institution or person under whose care of the body concerned was, immediately before such removal and discarding.

Offences and Penalties

27. Any person who contravenes or fails to comply with any provision of these regulations; shall be guilty of an offence and liable on conviction to a fine or to imprisonment not exceeding ten years or to both such fine and imprisonment.

Short title

28. These Regulations are called the Regulations on Transplantation, 2026.

This gazette is also available free online at **www.gpwonline.co.za**

ANNEXURE A
CRITERIA FOR SELECTION OF DONORS FOR TRANSPLANTATION

A. Deceased donor, organ transplantation

Selection of Donors

The decision to utilise the organs of a potential donor is based on the following criteria

a. Establishment and confirmation of brain death or circulatory death according to standard protocol
b. Assessment of the suitability of the organs involved as per standard protocol
c. The availability of consent from relatives or a directive of intent to be a donor from the deceased (such as a donor card)
d. The exclusion of communicable diseases and malignancy or other contraindications to the utilisation of donor organs as per standard protocol
e. The ability to maintain circulation or organ/tissue viability until organs/tissues can be removed for preservation and/or transplantation

Allocation of organs from deceased donors

The allocation of deceased donor organs to a potential recipient is based on the following criteria, weighted to accommodate specific requirements of the type of transplant and the needs of the patients on the waiting list according to established protocols of the region or facility

- Suitable ABO matching if applicable;
- Suitable cytotoxic antibody screening;
- Suitable HLA compatibility if applicable;
- Suitability of size and age, if applicable;
- Medical condition and degree of urgency, if applicable;
- Time on the waiting list, if applicable.

B. Living donor renal transplantation

Living donor transplantation (related or unrelated) should be encouraged because of the shortage of deceased donor organs

Criteria for selection of living donors

- Living donors must be aged 18 years or older
- Fully informed consent should be obtained from both donor and recipient as pertains to risks and benefits of the procedures
- Both donor and recipient should be recorded in a Transplant Database and lifetime follow up must be established

This gazette is also available free online at www.gpwonline.co.za

Related living donors

For related living donors, there is no need for a central regulatory mechanism, provided the genetic relationship can be shown to fall within a defined category as prescribed in regulation 10 (3):

- Donors must satisfy medical, ethical and psychiatric criteria for selection as per established protocols
- All donors and recipients in a living donor transplant program must be assessed and found suitable by a multi-disciplinary transplant selection panel

Unrelated living donors

- The motives of the donor should be assessed to be altruistic and in the best interest of the recipient, not self-serving or for profit.
- Unrelated donors may include but not be limited to spouses, friends and acquaintances.
- Medical investigations for both donor and recipient should conform to standard protocols.
- Donor and recipient should undergo a psychological assessment by an independent and suitably qualified social worker or psychologist to ensure that no form of coercion exists and that both parties are fully informed and understand the implications of the procedures.
- Application to perform unrelated living donor transplant procedures must be forwarded to the relevant office at the National Department of Health.
- Applications must be recommended by the Ministerial Advisory Committee (MAC) or another committee established for this purpose.
- Applications must be approved or disapproved by the Minister; the relevant office at the National Department of Health must communicate the Ministers final decision to the applicant.

C. Other transplants

Recipients and donors are selected according to guidelines set by the transplant centres.

This gazette is also available free online at **www.gpwonline.co.za**

ANNEXURE B
Transplant Request Unrelated living Donor Information to be supplied

A. Prospective Recipient and Donor

1. Full personal particulars - include social status, occupation, functionality and habits.
2. Full clinical details - history, physical examination (including height and weight). Exact diagnosis and cause of Chronic Renal Failure
3. Currant stage of primary disease, implications, co-morbidity, treatment (drug, non-drug) IN CASE OF THE RÉCIPIENT
4. Psychological assessment or by a Social worker.
5. Consent Form
6. Full workup details as follows: (NOT MORE THAT SIX MONTHS OLD RESULTS)
    a. Blood group
    b. Tissue typing and MLC
    c. Liver function
    d. Electrolytes, Na, K, Ca, Mg, Random Glucose, Lipogram
    e. Full blood count, INR, ESR
    f. Urine protein, sugar, blood, microscopy
    g. HbsAg, Hep C
    h. HIV
    i. CMV, IgM, IgG
    j. VDRL
    k. Creatinine clearance
    l. Chest X-ray
    m. ECG - Resting
    n. Stress ECG where indicated

7. Special Investigations
    a. Abdominal ultrasound to confirm the presence of two kidneys
    b. Renal Angiogram - for the renal ureteric anatomy.

This gazette is also available free online at www.gpwonline.co.za

ANNEXURE C
Application for authorisation to allocate organs

In terms of regulation {----------} of the Regulation the authorisation of health establishments, committees or public-private partnership application to allocate organs.

Please tick relevant box and complete the form.

Notification of intent		Application for authorisation	

TO BE COMPLETED BY THE RESPONSIBLE PERSON/S.

Name of the Institution/s involved

Postal address

City/Town		Code	

Street address of the health establishment, committee or public-private partnership

City/Town		Code	

Name of the responsible person/s

Name	
ID No	
Qualifications	
Professional registration no	
Telephone number (work)	
Telephone number (after hours)	
Email address	

This gazette is also available free online at **www.gpwonline.co.za**

Name	
ID No	
Qualifications	
Professional registration no	
Telephone number (work)	
Telephone number (after hours)	
Email address	

What organ/s allocation authorisation are requested?

Please attach a Standard Operating Procedure that will be used to guide the allocation of organs, and the details should include the handling of records. Public health establishments are required to complete the form and attach the Standard Operation Procedure or Terms of Reference that will guide their practice.

Please submit it to the relevant official at the National Department of Health.

This gazette is also available free online at **www.gpwonline.co.za**

DEPARTMENT OF PUBLIC WORKS AND INFRASTRUCTURE

NO. 7880 **4 September 2026**

SA COUNCIL FOR THE
PROPERTY VALUERS PROFESSION

INVITATION TO THE MEMBERS OF PUBLIC TO NOMINATE PERSONS TO SERVE ON THE 7TH TERM COUNCIL OF THE SOUTH AFRICAN COUNCIL FOR THE PROPERTY VALUERS PROFESSION

The Council hereby invites nominations for new members to serve on the South African Council for the Property Valuers Profession (SACPVP).

The SACPVP is a statutory body established by section 2 of the Property Valuers Profession Act, 2000 (Act no. 47 of 2000). SACPVP provides for the registration of professionals, candidates and specified categories in the property valuation profession; Provides for the regulation of relationship between the profession and the Council for the Built Environment as well as transforming the profession.

Requirements

In terms of section 4(3) of the Property Valuers Profession Act, 2000 (Act 47 of 2000), the SACPVP hereby *invites nominations from members of the public within the period specified in the notice from the date of the notice*, for its seventh term of office.

Council members of the SACPVP must have demonstrable leadership qualities and be committed to the development and transformation of the built environment professions. They must possess knowledge and/or expertise of the following built environment sector; property or real estate (valuation); economics; statistics; finance; accounting; human resources; law; education and training; regulatory environment or safety and health of the public. Due consideration will be given to race, gender, disability and geographic location in the composition of the Council.

Preference would be given to persons with either legal; finance; corporate governance or human resource experience to contribute to the strategic direction of the South African Council for the Property Valuers Profession in the interest of the built environment and the public whom they represent.

Disqualification

The following persons are not eligible for appointment to the South African Council of the Property Valuers Profession in terms of section 6 of the Property Valuers Profession Act.

(1) A person may not be appointed as a member of the council if that person—
- (a) is not a South African citizen and ordinarily resident in the Republic;
- (b) is an unrehabilitated insolvent;
- (c) has been convicted of an offence in the Republic, other than an offence committed prior to 27 April 1994 associated with political objectives, and was sentenced to imprisonment without an option of a fine, or, in the case of fraud, to a fine or imprisonment or both;
- (d) subject to subsection (3), has been convicted of an offence in a foreign country and was sentenced to imprisonment without an option of a fine, or, in the case of fraud, to a fine or imprisonment or both;
- (e) has, as a result of improper conduct, been removed from an office of trust;
- (f) has in terms of this Act been found guilty by the council of improper conduct.

Term of Office

The term of office of members will be four (4) years from the date of appointment by the Minister of Public Works and Infrastructure and approval of Cabinet. The Council meets at least four times per annum and the appointed person may be required to serve in the sub-committees of the Council. Council members may be reappointed for one consecutive term. Candidates will be subjected to a security screening process.

Nomination Particulars

Nominations should be made on the Nomination Form provided for on the SACPVP website or on request from the e-mail address here below. Please note that failure to comply with the above requirements may result in the disqualification of the nomination.

Nominations must be in writing, completed in the accompanying prescribed form* and contain the following information:

- Full name, address and contact details of the nominating person or organisation;
- Full name, identity number and contact details of the nominee;
- Signed acceptance of the nomination by the nominee;
- Declaration by nominee* that he/she is qualified to serve on the SACPVP in terms of section 6 of the Property Valuers Profession Act;
- A motivation (one page only) for appointment of the nominee to the SACPVP;
- A Curriculum Vitae of the nominee (not more than two pages) covering the following: the nominee's full name, ID number, race, gender, contact addresses, telephone numbers, qualifications, experience, knowledge and skills and current and former board memberships as well as the names and contact details of at least two referees;
- Certified copy of the nominee's South African ID document; and
- Certified copies of the nominee's qualifications.

THE CLOSING DATE FOR NOMINATIONS IS 04 NOVEMBER 2026

E-mail: Attention: ND Naidoo
Nominations@sacpvp.co.za
Please forward the completed nomination form and source documents

For enquiries please contact:

Website:
www.sacpvp.co.za
***The nomination form to be downloaded from the SACPVP Website**
Tel: (012) 348-8643

DEPARTMENT OF RURAL DEVELOPMENT AND LAND REFORM

NO. 7881 **4 September 2026**

GENERAL NOTICE IN TERMS OF THE RESTITUTION OF LAND RIGHTS ACT, 1994 (ACT NO.22 OF 1994)

Notice is hereby given in terms of Section 11 A (4) of the Restitution of Land Rights Act, No, 22 of 1994 as amended, due to an error in the Government Gazette Number 52914, Notice Number 6355 of 2025.

The above-mentioned gazette notice is hereby amended to include the correct reference number of the claim.

Reference : **6/2/2/D/57/0/0/8**

Claimant : **Ms. Nomasomi Maria Tembani**

Property Description	Land Owners	Extent
Erf 1, Paterson	Old Apostolic Church of Africa	2974 square meters

The property is situated in the in Paterson, Ndlambe Local Municipality, Sarah Baartman, Eastern Cape Province.

Province Date Claim Submitted : **12th of March 1998**

Current Owner : **Old Apostolic Church of Africa**

Current Land Use : **Vacant land**

The reason why the office of the Regional Land Claims Commissioner believes that the notice must be amended:

a) When the claim was gazetted it transpired that there was an error in stating the correct the reference number of the claimed property.

NOTICE is further given that at the expiry of the aforesaid 14 day period; the office of the Regional Land Claims Commissioner shall, unless cause to the contrary has been shown to his satisfaction, amend the notice.

The Regional Land Claims Commissioner
Eastern Cape P .O. Box 15402 Beacon Bay
East London
5241

Tel: (043) 700 6000
Fax: (043) 743 3687

Mr. Lebjane Maphutha
Regional Land Claims Commissioner
Date: 2026/07/15

DEPARTMENT OF RURAL DEVELOPMENT AND LAND REFORM

NO. 7882 **4 September 2026**

GENERAL NOTICE IN TERMS OF THE RESTITUTION OF LAND RIGHTS ACT, 1994 (ACT NO.22 OF 1994)

Notice is hereby given in terms of Section 11 A (2) of the Restitution of Land Rights Act, No. 22 of 1994 as amended, due to an error in the Government Gazette Number 42526, Notice Number 913 dated 14th of June 2019.

The above-mentioned gazette notice is hereby amended to specify the following correct extent of the land and property description.

Reference : KRO.6/2/3/D/50/780/875/64
Claimant : Selina Florence Visenou

Property Description	Extent	Title Deed
Erf No. 545 in Hankey consolidated into Erf. No. 1434 in Hankey situated in the Kouga Local Municipality, Sarah Baartman District Municipality, Eastern Cape Province	17700000M²	T1619/1991

The property is situated in the Kouga Local Municipality, Sarah Baartman District Municipality, Eastern Cape Province

Province Date Claim Submitted 27 September 1996

Current Owner Ferreira Pierre Riaan

Current Land Use Residential

The reason why the office of the Regional Land Claims Commissioner believes that the notice must be amended:

a) When the claim was gazetted, it transpired that there was an error in stating the correct extent of the land and property description.

NOTICE is further given that at the expiry of the aforesaid 90 days period, the office of the Regional Land Claims Commissioner shall, unless cause to the contrary has been shown to his satisfaction, amend the notice.

The Regional Land Claims Commissioner
Eastern Cape P.O. Box 15402 Beacon Bay
East London
5241

Tel: (043) 700 6000
Fax: (043) 743 3687

Mr. Lebjane Maphutha
Regional Land Claims Commissioner
Date: 2026/07/15

DEPARTMENT OF RURAL DEVELOPMENT AND LAND REFORM

NO. 7883 **4 September 2026**

GENERAL NOTICE IN TERMS OF THE RESTITUTION OF LAND RIGHTS ACT, 1994 (ACT 22 OF 1994) AS AMENDED

Notice is hereby given in terms of section 11(1) (c) of the Restitution of Land Rights Act, 1994 as amended) that a claim has been lodged for restitution of land rights on:

REF NO	CLAIMANT	PROPERTY DESCRIPTION & CLAIMED EXTENT	CURRENT LANDOWNERS	BONDS / NO BONDS	DEED OF TRANSFER	INTERESTED PARTIES
Z0188	Mr. Barekile Charles Skosana	Portions 7 and 9 of the farm Leeuwkloof 285 JR Claimed extent: 60.5 hectares	Dembe Holding Co Pty Ltd Own Vest Pty Ltd	B130319/2006 Endorsement on Portion 7 (Absa Bank LTD)	T21633/2025 T12652/2025	Land Claimants and the current Landowners

Take further notice that the Commission on Restitution of Land Rights investigated the claim in terms of the provisions of Rule 3 of the Rules Regarding Procedure of Commission Established in terms of section 16 of Restitution of Land Rights Act as amended. Any interested party on the claim is hereby invited to submit, representations in terms of section 11A of the Restitution of Land Rights Act 22 of 1994 as amended within 90 (ninety) working days from the publication date of this notice, any comments/information may be sent to:

Chief Directorate: Land Restitution Support Gauteng Province
Private Bag X03
ARCADIA
0007
Tel: (012) 310-6500
Fax: (012) 324-5812

MR. L.H. MAPHUTHA
REGIONAL LAND CLAIMS COMMISSIONER
DATE: 26/08/19

PROCLAMATION NOTICE 344 OF 2026

PROCLAMATION
by the
PRESIDENT of the REPUBLIC of SOUTH AFRICA

No. R. , 2026

SPECIAL INVESTIGATING UNITS AND SPECIAL TRIBUNALS ACT, 1996 (ACT NO. 74 OF 1996): REFERRAL OF MATTERS TO EXISTING SPECIAL INVESTIGATING UNIT AND SPECIAL TRIBUNAL

WHEREAS allegations as contemplated in section 2(2) of the Special Investigating Units and Special Tribunals Act, 1996 (Act No. 74 of 1996) (hereinafter referred to as "the Act"), have been made in respect of the affairs of the Eastern Cape Department of Public Works and Infrastructure (formerly known as the Eastern Cape Department of Roads and Public Works) (hereinafter referred to as "the Department");

AND WHEREAS the Department may have suffered losses that may be recovered;

AND WHEREAS I deem it necessary that the said allegations should be investigated and civil proceedings emanating from such investigation should be adjudicated upon;

NOW, THEREFORE, I hereby, under section 2(1) of the Act, and at the request of or in consultation with the Premier of the Eastern Cape, refer the matters mentioned in the Schedule, in respect of the Department, for investigation to the Special Investigating Unit established by Proclamation No. R. 118 of 31 July 2001 and determine that, for the purposes of the investigation of the matters, the terms of reference of the Special Investigating Unit are to investigate as contemplated in the Act, any alleged—

(a) serious maladministration in connection with the affairs of the Department;

(b) improper or unlawful conduct by employees of the Department;

(c) unlawful appropriation or expenditure of public money or property;

(d) unlawful, irregular or unapproved acquisitive act, transaction, measure or practice having a bearing upon State property;

(e) intentional or negligent loss of public money or damage to public property;

(f) offence referred to in Parts 1 to 4, or section 17, 20 or 21 (in so far as it relates to the aforementioned offences) of Chapter 2 of the Prevention and Combating of Corrupt Activities Act, 2004 (Act No. 12 of 2004), and which offences were committed in connection with the affairs of the Department; or

(g) unlawful or improper conduct by any person, which has caused or may cause serious harm to the interests of the public or any category thereof,

which took place between 1 January 2011 and the date of publication of this Proclamation or which took place prior to 1 January 2011 or after the date of publication of this Proclamation, but is relevant to, connected with, incidental or ancillary to the matters mentioned in the Schedule or involve the same persons, entities or contracts investigated under authority of this Proclamation, and to exercise or perform all the functions and powers assigned to or conferred upon the said Special Investigating Unit by the Act, including the recovery of any losses suffered by the Department or the State, in relation to the said matters in the Schedule.

Given under my Hand and the Seal of the Republic of South Africa at .....Pretoria..... this .....21..... day of .....July..... Two thousand and twenty-six

President

By Order of the President-in-Cabinet:

Minister of the Cabinet

This gazette is also available free online at **www.gpwonline.co.za**

Schedule

1. The procurement of, or contracting for goods, works or services in terms of:
   (a) SCMU5 - 10/11 – 0186 (Upgrading of Road DR08125 from the N2 to Sipetu Hospital (Phase 1) ±10km);
   (b) SCMU5 - 13/14 – 048 (Urgent Re-Gravelling of DR 18033 and DR08288);
   (c) SCMU5 - 13/14 - 052 (Emergency Preparation of Road, Platform and Parking for MEC Kolisile's Funeral);
   (d) Emergency Gravelling (DR08076: Flood damage repairs to gravel roads in the Elundini LMA – 08076); and
   (e) SCMU5 – 23/24 - 0048 (Appointment of a Service Provider(s) to Provide Security Services for Head Office Clusters for a Period of 36 Months),

   by or on behalf of the Department, and payments made in relation thereto in a manner that was–
   (aa) not fair, competitive, transparent, equitable or cost-effective; or
   (bb) contrary to applicable–
   (i) legislation;
   (ii) manuals, guidelines, practice notes, circulars or instructions issued by the National Treasury or the relevant Provincial Treasury;
   (iii) manuals, policies, procedures, prescripts, instructions or practices of or applicable to the Department;

   and any related unauthorised, irregular or fruitless and wasteful expenditure incurred by the Department or the State;
2. Any irregular, unlawful or improper conduct, including serious maladministration and the causes thereof, by–
   (a) officials or employees of the Department; or
   (b) the applicable suppliers or service providers of the Department; or
   (c) any other person or entity,

   in relation to the allegations as set out in paragraph 1 of this Schedule.

This gazette is also available free online at **www.gpwonline.co.za**

PROCLAMATION NOTICE 345 OF 2026

NOMINATION FOR CANDIDATES TO BE APPOINTED BY THE MINISTER OF SOCIAL DEVELOPMENT AS MEMBERS OF THE BOARD OF THE NATIONAL DEVELOPMENT AGENCY

REQUEST FOR NOMINATIONS

The Minister of Social Development invites nominations of suitably qualified persons for service as members of the Board of the National Development Agency (NDA).

In terms of the provisions of Section 5(2) of the National Development Agency Act, 1998 (Act No 108 of 1998) as amended, nominations are hereby requested for candidates to be appointed by the Minister to serve on the Board. This includes nominations from the following sectors - civil society organisations on disabilities; civil society organisations in rural areas; and civil society organisations in women and youth development.

The Minister will consider candidates with proven experience in fostering good governance, understanding of the legislative and policy framework applicable to the NDA as well as exceptional understanding of global and government initiatives on poverty eradication.

Nominated Civil Society Representatives should have competencies in one or more of the following disciplines:

- NGO Networks and Consortia on a full-time basis.
- Social Development Sector.
- Applied research and policy analysis related to poverty eradication.
- Resource mobilisation and grant funding.
- Membership of interdepartmental group of faith-based leadership.
- Financial management. CA qualification will be an added advantage.
- Corporate Governance.
- Project Management and Community Development

Preference will be given to candidates whose appointment will enhance representivity. Nominated candidates that were submitted in 2025 are required to resubmit. Candidates will be subject to security clearance and disclosure of business interests. Correspondence will be limited to short-listed candidates only.

Each nomination shall be lodged with the Department **EITHER** by post, e-mail or hand delivered by not later than **11 September 2026**. A Nomination Form is available on **www.dsd.gov.za**

A Nomination form must be accompanied by a comprehensive CV and directed to the Director-General of Social Development, for the attention of **Mr. Kenny Maluleke**, Private Bag X901, Pretoria 0001 or hand delivered HSRC Building, 134 Pretorius Street or email **NDABoard@dsd.gov.za**, **Tel: (012) 312 7062**

A Nomination which does not comply with the above-mentioned requirements by the closing date will be invalid.

Building a Caring Society. **Together.** www.dsd.gov.za

social development
Department:
Social Development
REPUBLIC OF SOUTH AFRICA

NDA
National Development Agency

A NATION THAT WORKS FOR ALL

2030 NDP

GENERAL NOTICES • ALGEMENE KENNISGEWINGS

DEPARTMENT OF EMPLOYMENT AND LABOUR

NOTICE 4127 OF 2026

NOTICE OF SEPTEMBER 2026

PLEASE FIND SET OUT BELOW A LIST OF BARGAINING COUNCILS THAT HAVE BEEN ACCREDITED BY THE CCMA IN TERMS OF THE PROVISIONS OF THE LABOUR RELATIONS ACT 66 OF 1995 (AS AMENDED) FOR CONCILIATION AND/ OR ARBITRATION AND/ OR INQUIRY BY ARBITRATOR, WITH THE TERMS OF ACCREDITATION ATTACHED FOR THE PERIOD 01 SEPTEMBER 2026 TO THE 30 SEPTEMBER 2029.

BARGAINING COUNCILS ACCREDITED TO CONDUCT CONCILIATION AND ARBITRATION, SUBJECT TO CONDITIONS WHERE APPLICABLE

(RENEWAL OF ACCREDITATION AS WELL AS THE SUBSIDY AMOUNT PAYABLE PER CLOSED CASE IS R769.90 AS FROM 01 APRIL 2026 UNTIL 31 MARCH 2027 (FOR 2026/2027 FINANCIAL YEAR ONLY)

Name of Bargaining Council	***Accredited Functions***
PRIVATE SECTOR BARGAINING COUNCILS	
Building Industry Bargaining Council (Southern and Eastern Cape)	*Accredited for conciliation and arbitration for party-party matters (which includes inquiry by arbitrator) from 01 October 2026 until 30 September 2029.*
Bargaining Council for the Civil Engineering Industry	*Accredited for conciliation and arbitration (which includes inquiry by arbitrator) from 01 September 2026 until 31 August 2029 on condition that the postponement rate is improved.*

(RENEWAL OF SUBSIDY)

The Governing Body of the CCMA also resolved to grant renewal of subsidy to the following Bargaining Councils:

1. *Building Industry Bargaining Council (Southern and Eastern Cape)*
2. *Bargaining Council for the Civil Engineering Industry*

TERMS OF ACCREDITATION FOR CONCILIATION, ARBITRATION AND INQUIRY BY ARBITRATOR

1. SCOPE OF ACCREDITATION:

Herewith categories of disputes for which Councils are eligible to apply for accreditation.

COUNCILS ARE ACCEDITED TO PERFORM THE FOLLOWING DISPUTE RESOLUTIONS FUNCTIONS:

Unfair dismissal disputes	*- Section 191*
Unfair Labour practice	*- Section 191*
Mutual Interest disputes	*- Section 64*
Interpretation of Collective Agreement disputes	*- Section 24 (1)*
Essential Services disputes	*- Section 74*
Inquiry by Arbitrator	*- Section 188A*
Regulation of non-standard work	*- Section 198, 198A, 198B, 198Cand 198D*
Disputes about Interpretation and Application of Chapter 2	*- Section 9*

COUNCILS MAY NOT SEEK ACCREDITATION FOR THE FOLLOWING DISPUTE RESOLUTION FUNCTIONS REGARDING DISPUTES OVER THE FOLLOWING (see FOOTNOTE 11 of SECTION 51):

Organisational rights (sections 16, 21 and 22);

Collective Agreements where the agreement does not provide for a dispute resolution procedure or the procedure is inoperative or any party frustrates the resolution of disputes (section 24(2) to (5));

Agency shops and closed shops (section 24(6) and (7) and section 26(11);
Determinations made by the Minister in respect of proposals made by a Statutory Council (section 45);
The interpretation and application of Collective Agreements of a Council whose registration has been cancelled (section 61(5) to (8));

Demarcation of sectors and areas of Councils (section 62);

The Interpretation or application of Part C (Bargaining Councils), Part D (Bargaining Councils in the Public Service), Part E (Statutory Councils) and Part F (General Provisions concerning Councils) (Section 63);

Picketing (section 69(8) to 10);

Proposals which are the subject of joint-decision making in a workplace forum (section 86);

Disclosure of information to workplace forums (section 89);

Interpretation or Application of the provisions of Chapter 5 of the LRA which deals with workplace forums (section 94);

Enforcement of the Collective Agreements by Bargaining Councils (section 33A) and;

Enforcement of arbitration awards in terms of section 143. Only the Director of the CCMA, unless the power has been delegated to a CCMA Senior Commissioner may certify awards as if it were an order of the Labour Court;

Facilitating mass retrenchment disputes section 189(A).

2. POWERS OF ACCREDITATION:

Only those persons who are accredited by the CCMA, or are part-time Commissioners appointed by the Governing Body of the Commission in the terms of section 117 (2) of the Labour Relations Act, may perform the accreditation functions of the council for the Council.

The following provisions of the LRA, as amended apply to Councils accredited for conciliation and arbitration:

(a) For the purpose of this paragraph any reference in Part C of Chapter VII of the LRA to:

"Commission" must be read as a reference to the Council;
"Commissioner" must be read as a reference to a conciliator or arbitrator appointed by the Council.
"Director" must be read as a reference to the Secretary of the Council.

(b) The provisions of the sections contained in Part C of Chapter VII (section 127(6)) of the LRA shall apply to the Council in the performance of its accredited functions subject to the Council's Constitution and/or Collective Agreements. For the purpose of this sub-paragraph the following applies:

(i) The provisions of section 133 to 136;
(ii) The provisions of section 138 to 142, S142A , S143, S144 and S145;
(iii) The provisions of section 146 unless the Collective Agreement of the Council provides that the Arbitration Act, Act 42 of 1965 applies to any arbitration conducted under its accredited function and which Collective Agreement is binding on the parties to the disputes; and
(iv) The provisions of section 148.

3. EXTENSION OF ACCREDITATION:

Despite the expiry of the period of accreditation as stated in the Certificate of Accreditation, the Council may continue to perform its accredited functions in respect of any dispute referred to it during the period of accreditation, but not yet resolved by the time the period expires, until the dispute is resolved either through conciliation or arbitration.

4. TRANSGRESSION OF TERMS OF ACCREDITATION:

If the accredited Council fails to comply with the terms of accreditation, the Governing Body of the CCMA may revoke accreditation. In terms of section 130 of the LRA, as amended the Governing Body of the CCMA may withdraw accreditation after having given reasonable notice of withdrawal.

5. AMENDMENT OF ACCREDITATION:

An Accredited Council may apply to the Governing Body of the CCMA in terms of section 129 of the LRA to amend its accreditation.

DEPARTMENT OF EMPLOYMENT AND LABOUR

NOTICE 4128 OF 2026

NOTICE OF SEPTEMBER 2026

PLEASE FIND SET OUT BELOW A LIST OF PRIVATE AGENCY THAT HAVE BEEN ACCREDITED BY THE CCMA IN TERMS OF THE PROVISIONS OF THE LABOUR RELATIONS ACT 66 OF 1995 (AS AMENDED) FOR CONCILIATION AND/ OR ARBITRATION AND/ OR INQUIRY BY ARBITRATOR, WITH THE TERMS OF ACCREDITATION ATTACHED FOR THE PERIOD 01 AUGUST 2026 TO THE 31 JULY 2029.

PRIVATE AGENCY ACCREDITED TO CONDUCT CONCILIATION AND ARBITRATION, SUBJECT TO CONDITIONS WHERE APPLICABLE
(RENEWAL OF ACCREDITATION OF PRIVATE AGENCY)

Name of Agency	***Accredited Functions***
PRIVATE AGENCIES	
Compliance Matters (Pty) Ltd	*Accredited for conciliation and arbitration (which includes inquiry by arbitrator) from* ***01 August 2026 until 31 July 2029.***

TERMS OF ACCREDITATION FOR CONCILIATION, ARBITRATION AND INQUIRY BY ARBITRATOR

***1. SCOPE OF ACCREDITATION**:*

Herewith categories of disputes for which Private Agencies are eligible to apply for accreditation.

PRIVATE AGENCIES ARE ACCEDITED TO PERFORM THE FOLLOWING DISPUTE RESOLUTIONS FUNCTIONS:

Unfair dismissal disputes	***- Section 191***
Unfair Labour practice	***- Section 191***
Interpretation of Collective Agreement disputes	***- Section 24 (1)***
Inquiry by Arbitrator	***- Section 188A***
Regulation of non-standard work	***- Section 198, 198A, 198B, 198C and 198D***

PRIVATE AGENCIES MAY NOT SEEK ACCREDITATION FOR THE FOLLOWING DISPUTE RESOLUTION FUNCTIONS REGARDING DISPUTES OVER THE FOLLOWING (see FOOTNOTE 11 of SECTION 51):

Organisational rights (sections 16, 21 and 22);

Collective Agreements where the agreement does not provide for a dispute resolution procedure or the procedure is inoperative or any party frustrates the resolution of disputes (section 24(2) to (5));

Agency shops and closed shops (section 24(6) and (7) and section 26(11);
Determinations made by the Minister in respect of proposals made by a Statutory Council (section 45);
The interpretation and application of Collective Agreements of a Council whose registration has been cancelled (section 61(5) to (8));

Demarcation of sectors and areas of Councils (section 62);

The Interpretation or application of Part C (Bargaining Councils), Part D (Bargaining Councils in the Public Service), Part E (Statutory Councils) and Part F (General Provisions concerning Councils) (Section 63);

Picketing (section 69(8) to 10);

Proposals which are the subject of joint-decision making in a workplace forum (section 86);

Disclosure of information to workplace forums (section 89);

Interpretation or Application of the provisions of Chapter 5 of the LRA which deals with workplace forums (section 94);

Enforcement of the Collective Agreements by Bargaining Councils (section 33A) and;

Enforcement of arbitration awards in terms of section 143. Only the Director of the CCMA, unless the power has been delegated to a CCMA Senior Commissioner may certify awards as if it were an order of the Labour Court;

Facilitating mass retrenchment disputes section 189(A).

***2. POWERS OF ACCREDITATION**:*

Only those persons who are accredited by the CCMA, or are part-time Commissioners appointed by the Governing Body of the Commission in the terms of section 117 (2) of the Labour Relations Act, may perform the accreditation functions of the Agency for the Private Agency.

The following provisions of the LRA, as amended apply to Private Agency accredited for conciliation and arbitration:

(a) For the purpose of this paragraph any reference in Part C of Chapter VII of the LRA to:

"Commission" must be read as a reference to the Private Agency;
"Commissioner" must be read as a reference to a conciliator or arbitrator appointed by the Private Agency.
"Director" must be read as a reference to the CEO of the Private Agency

(b) The provisions of the sections contained in Part C of Chapter VII (section 127(6)) of the LRA shall apply to the Private Agency in the performance of its accredited functions:

(i) The provisions of section 133 to 136;
(ii) The provisions of section 138 to 142, S143,S144 and S145;
(iii) The provisions of section 146
(iv) The provision of 148

***3. EXTENSION OF ACCREDITATION**:*

Despite the expiry of the period of accreditation as stated in the Certificate of Accreditation, the Private Agency may continue to perform its accredited functions in respect of any dispute referred to it during the period of accreditation, but not yet resolved by the time the period expires, until the dispute is resolved either through conciliation or arbitration.

4. TRANSGRESSION OF TERMS OF ACCREDITATION:
If the accredited Private Agency fails to comply with the terms of accreditation, the Governing Body of the CCMA may revoke accreditation. In terms of section 130 of the LRA, as amended the Governing Body of the CCMA may withdraw accreditation after having given reasonable notice of withdrawal.

5. AMENDMENT OF ACCREDITATION:

An Accredited Private Agencies may apply to the Governing Body of the CCMA in terms of section 129 of the LRA to amend its accreditation.


INDEPENDENT COMMUNICATIONS AUTHORITY OF SOUTH AFRICA

NOTICE 4129 OF 2026

NOTICE OF INTENTION TO CONDUCT MARKET INQUIRY

INTO THE IMPACT OF OVER-THE-COUNTER ("OTT") SERVICES ON LICENSEES AND REGULATORY FRAMEWORK IN SOUTH AFRICA

The Independent Communications Authority of South Africa ("the Authority") hereby publishes a notice of intention to conduct an inquiry into the Impact of OTT Services on Licensees and Regulatory Framework in terms of section 4B of the Independent Communications Authority of South Africa Act, 2000 (Act No.13 of 2000), to the extent reflected in the Schedule.



Mothibi G Ramusi

Chairperson

This gazette is also available free online at **www.gpwonline.co.za**

NOTICE OF INTENTION TO CONDUCT MARKET INQUIRY

INTO THE IMPACT OF OTT SERVICES ON LICENSEES AND REGULATORY FRAMEWORK IN SOUTH AFRICA

1. INTRODUCTION

1.1. The Independent Communications Authority of South Africa ("the Authority") hereby gives notice of its intention to conduct an inquiry into the Impact of OTT Services on Licensees and Regulatory Framework in terms of section 4B of the Independent Communications Authority of South Africa Act, 2000 (Act No.13 of 2000) ("the ICASA Act").

2. LEGAL BASIS FOR THE INQUIRY

2.1 The legal basis of the inquiry is in terms of section 4B of the ICASA Act, which states the following:

"The Authority must conduct an inquiry into any matter with regard to:

(a) the achievement of the objects of this Act or underlying statutes;
(b) regulations and guidelines made in terms of this Act or the underlying statutes;
(c) compliance by applicable person with this Act and the underlying statutes;

This gazette is also available free online at **www.gpwonline.co.za**

(d) compliance with the terms and conditions of any licence by the holder of such licence issued pursuant to the underlying statues; and

(e) the exercise and performance of its powers, functions and duties in terms of this Act or the underlying statutes."

3. THE PURPOSE OF THE INQUIRY

3.1. The purpose of this Inquiry is to establish the impact of OTTs on licensees in the telecommuting, broadcasting, and postal sector in terms of section 4B of the ICASA Act.

4. THE INQUIRY PROCESS

4.1. The Authority will commence and conduct the review in a series of phases as follows:

4.2. Phase 1 (commencement of the market inquiry)

4.2.1. The Authority publishes

(a) notice of intention to conduct an inquiry into OTT services, in the *Gazette;* and

(b) a questionnaire on OTT services market inquiry, on its website.

4.2.2. Stakeholders will be given ten (10) working days, from the date of publication of this Notice and the questionnaire, to send any questions of clarity.

4.2.3. The Authority will respond to all questions of clarity by publishing a briefing note on its website within ten (10) working days of the final date for submission of clarification questions.

4.2.4. Stakeholders are invited to submit written responses to the questionnaire within forty-five (45) working days from the date of publication of the above-mentioned briefing note.

This gazette is also available free online at **www.gpwonline.co.za**

The Authority may request one-on-one meetings in relation to information submitted by a stakeholder, where necessary to clarify information that is submitted.

4.3. Phase 2 (Discussion Document)

4.3.1. The Discussion Document will be published for public comment for a period of forty-five (45) working days.

4.3.2. Stakeholders may submit written representations on the Discussion Document by the set deadline and must indicate whether they require an opportunity to make oral representations, should the Authority hold public hearings.

4.3.3. Written representations on the Discussion Document will be made available for public scrutiny on the Authority's website.

4.4. Phase 3 (Public Hearings on the Discussion Document)

4.4.1. The Authority may hold public hearings and confirm details of the hearings in a notice to be published on the Authority's website.

4.4.2. The notice to be published in terms of clause 4.4.1 above will contain the date (s) and the order to which interested persons will be expected to make the oral representations to the Authority.

4.4.3. At the hearings, affected stakeholders may be requested to provide supplementary information, within seven working days.

4.5. Phase 4 (Findings Document)

Within 90 days from the date of conclusion of the Inquiry, the Authority will publish a summary of its findings in the Government Gazette and on the Authority's website.

This gazette is also available free online at **www.gpwonline.co.za**

5. Confidentiality

5.1. Stakeholders may request confidentiality, in terms of section 4D of the ICASA Act, on information submitted to the Authority during this review process.

5.2. Such request for confidentiality must be accompanied by a confidential and non-confidential version of the stakeholder's submission.

5.3. The Authority hereby refers stakeholders to the Guidelines for Confidentiality, published on 17 August 2018 in Gazette No 41839, to assist stakeholders when requesting confidentiality.

All communication relating to this process must be directed to the Chairperson (OTT Market Inquiry) at ottmarket@icasa.org.za.

This gazette is also available free online at **www.gpwonline.co.za**

INDEPENDENT COMMUNICATIONS AUTHORITY OF SOUTH AFRICA

NOTICE 4130 OF 2026

NOTICE OF INTENTION TO CONDUCT MARKET INQUIRY

INTO THE AFFORDABILITY OF TELECOMMUNICATIONS SERVICES IN SOUTH AFRICA

The Independent Communications Authority of South Africa ("the Authority") hereby publishes a notice of intention to conduct an inquiry into the affordability of telecommunications services in South Africa, in terms of section 4B of the Independent Communications Authority of South Africa Act, 2000 (Act No.13 of 2000), to the extent reflected in the Schedule.

Mothibi G Ramusi

Chairperson

This gazette is also available free online at **www.gpwonline.co.za**

NOTICE OF INTENTION TO CONDUCT MARKET INQUIRY

INTO THE AFFORDABILITY OF TELECOMMUNICATIONS SERVICES IN SOUTH AFRICA

1. INTRODUCTION

1.1. The Independent Communications Authority of South Africa ("the Authority") hereby gives notice of its intention to conduct an inquiry into the affordability of telecommunications services in South Africa, in terms of section 4B of the Independent Communications Authority of South Africa Act, 2000 (Act No.13 of 2000) ("the ICASA Act").

1.2. This Inquiry is explicitly aligned with ICASA's statutory mandate, previous market inquiries into data services, and its role in monitoring pricing outcomes following spectrum assignment and pro-competitive interventions.

2. LEGAL BASIS FOR THE INQUIRY

2.1 The legal basis of the inquiry is in terms of section 4B of the ICASA Act, which states the following:

This gazette is also available free online at www.gpwonline.co.za

"The Authority must conduct an inquiry into any matter with regard to:

(a) the achievement of the objects of this Act or underlying statutes;
(b) regulations and guidelines made in terms of this Act or the underlying statutes;
(c) compliance by applicable person with this Act and the underlying statutes;
(d) compliance with the terms and conditions of any licence by the holder of such licence issued pursuant to the underlying statues; and
(e) the exercise and performance of its powers, functions and duties in terms of this Act or the underlying statutes."

3. THE PURPOSE OF THE INQUIRY

3.1. Affordable access to telecommunications services is a critical enabler of digital inclusion, economic participation, education, and service delivery. Despite progress in network coverage and mobile broadband penetration in South Africa, concerns persist regarding the affordability of voice and broadband services, particularly for low-income households, rural communities, youth, and informal sector workers.

3.2. The purpose of this Inquiry is to provide an evidence-based, policy-relevant assessment of the affordability of telecommunications services, identifying structural cost drivers, household expenditure impacts, and potential regulatory or market interventions, in terms of section 4B of the ICASA Act.

4. THE INQUIRY PROCESS

4.1. The Authority will commence and conduct the review in a series of phases as follows:

4.2. Phase 1 (commencement of the market inquiry)

4.2.1. The Authority publishes

(a) notice of intention to conduct an inquiry into affordability of telecommunications services, in the *Gazette;* and
(b) a questionnaire on affordability of telecommunications services inquiry, on its website.

This gazette is also available free online at **www.gpwonline.co.za**

4.2.2. Stakeholders will be given ten (10) working days, from the date of publication of this Notice and the questionnaire, to send any questions of clarity.

4.2.3. The Authority will respond to all questions of clarity by publishing a briefing note on its website within ten (10) working days of the final date for submission of clarification questions.

4.2.4. Stakeholders are invited to submit written responses to the questionnaire within forty-five (45) working days from the date of publication of the above-mentioned briefing note.

The Authority may request one-on-one meetings in relation to information submitted by a stakeholder, where necessary to clarify information that is submitted.

4.3. Phase 2 (Discussion Document)

4.3.1. The Discussion Document will be published for public comment for a period of forty-five (45) working days.

4.3.2. Stakeholders may submit written representations on the Discussion Document by the set deadline and must indicate whether they require an opportunity to make oral representations, should the Authority hold public hearings.

4.3.3. Written representations on the Discussion Document will be made available for public scrutiny on the Authority's website.

4.4. Phase 3 (Public Hearings on the Discussion Document)

4.4.1. The Authority may hold public hearings and confirm details of the hearings in a notice to be published on the Authority's website.

This gazette is also available free online at **www.gpwonline.co.za**

4.4.2. The notice to be published in terms of clause 4.4.1 above will contain the date (s) and the order to which interested persons will be expected to make the oral representations to the Authority.

4.4.3. At the hearings, affected stakeholders may be requested to provide supplementary information, within seven working days.

4.5. Phase 4 (Findings Document)

Within 90 days from the date of conclusion of the Inquiry, the Authority will publish a summary of its findings in the Government Gazette and on the Authority's website.

5. Confidentiality

5.1. Stakeholders may request confidentiality, in terms of section 4D of the ICASA Act, on information submitted to the Authority during this review process.

5.2. Such request for confidentiality must be accompanied by a confidential and non-confidential version of the stakeholder's submission.

5.3. The Authority hereby refers stakeholders to the Guidelines for Confidentiality, published on 17 August 2018 in Gazette No 41839, to assist stakeholders when requesting confidentiality.

All communication relating to this process must be directed to the Chairperson (Affordability Market Inquiry) on affordtelecominquiry@icasa.org.za.

This gazette is also available free online at www.gpwonline.co.za

DEPARTMENT OF TRADE, INDUSTRY AND COMPETITION

NOTICE 4131 OF 2026

COMPETITION TRIBUNAL

NOTIFICATION OF COMPLAINT REFERRAL
The Competition Tribunal gives notice in terms of Section 51(3) & (4) of the Competition Act 89 of 1998 as amended, that it received the c COVCR074Jul20omplaint referrals listed below. The complaint(s) alleges that the respondent(s) engaged in a prohibited practice in contravention of the Competition Act 89 of 1998.

Case No.	Complainant	Respondent	Date received	Sections of the Act
CR089Aug26	Competition Commission	Tyebile Trading 16 CC	11/08/2026	4(1)(b)(i),4(1)(b)(iii)
CR101Aug26	Competition Commission	GET Mining Services (Pty) Ltd	14/08/2026	4(1)(b)(i),4(1)(b)(iii)

The Chairperson
Competition Tribunal

DEPARTMENT OF TRANSPORT

NOTICE 4132 OF 2026

MARINE TRAFFIC ACT, 1981 (ACT NO. 2 OF 1981)

MARINE TRAFFIC AMENDMENT REGULATIONS, 2026

The Minister of Transport has under section 14 of the Marine Traffic Act, 1981 (Act No 2 of 1981) made Regulations set out in the Schedule.

MS BD CREECY, MP
MINISTER OF TRANSPORT
DATE: 11/6/26

This gazette is also available free online at **www.gpwonline.co.za**

SCHEDULE

GENERAL EXPLANATORY NOTE:

[ ] Words in bold typed in square brackets indicate omissions from existing Regulations.

_____ Words underlined with a solid line indicate insertions in existing Regulations.

Definition

1. In this Schedule "the Regulations" means the Marine Traffic Regulations, 1985 published under Government Notice No. R. 194 in Government Gazette No. 9575 dated 01 February 1985.

Amendment of regulation 1 of the Regulations

2. Regulation 1 of the Regulations is hereby amended—

(a) by the insertion, after the definition of "authorized agency" of the following definition:

This gazette is also available free online at www.gpwonline.co.za

"'**detention officer**' for the purposes of Chapter VII, means a person authorised by the Authority in terms of regulations 19, 20 and 22;";

(b) by the insertion after the definition of "Merchant Shipping Act" of the following definition:

"'**Notice**' for the purposes of Chapter VII, means a Notice of Detention issued in terms of regulation 18;";

(c) by the insertion after the definition of "principal officer" of the following definition:

"'**return of service**' for the purposes of Chapter VII, means a declaration form issued in terms of regulation 20;";

(d) by the substitution for the definition of "South African national" of the following definition:

"'**South African national**', when used to describe any ship, submarine or other underwater vehicle, means a ship, submarine or other underwater vehicle which—

(a) is registered or required to be registered in terms of the Merchant Shipping Act;

(b) is licenced or required to be licenced in terms of the Merchant Shipping Act; or

(c) is exempted from licensing in terms of the Merchant Shipping Act, but—

(i) the whole of which is owned by persons all of whom are qualified in terms of the Merchant Shipping Act to own a South African ship; **[and]**or

This gazette is also available free online at **www.gpwonline.co.za**

(ii) the majority of the owners of which, either in number or extent of ownership, are persons resident in the Republic;";

Substitution of regulation 3 of the Regulations

3. Regulation 3 of the Regulations is hereby substituted for the following regulation:

"**3.** For purposes of these **[regulations]**Regulations navigation in such a manner as is necessitated by **[their]**a vessel's normal activities shall be deemed to constitute "passage" as defined in section 1 of the Act in the case of the following **[ships]**vessels:".

Substitution of regulation 4 of the Regulations

4. Regulation 4 of the Regulations is hereby substituted for the following regulation:

"**4.** The following **[ships]**vessels or classes of **[ships]**vessels are hereby exempted from the provisions of section 4(1) of the Act while **[they]**the vessels are engaged in their normal activities:

(a) South African national fishing **[boats]**vessels;
(b) South African national small vessels engaged in sporting or recreational activities;
(c) foreign small vessels engaged in sporting or recreational activities, provided such vessels engage in such activities under the supervision of a local authority or other Government authority, or an **[authorized]**authorised agency;
(d) South African national utility **[ships]**vessels; and
(e) foreign fishing **[boats]**vessels which have been chartered or which have contracted or which are otherwise **[authorized]**authorised in

This gazette is also available free online at **www.gpwonline.co.za**

accordance with the laws of the Republic to operate within the internal waters.".

Amendment of regulation 5 of the Regulations

5. Regulation 5 of the Regulations is hereby amended—

(a) by the substitution for subregulations (1) and (2) of the following subregulations:

"(1) The master of any **[ship]**vessel, other than a **[ship]**vessel contemplated in regulation16(1) or exempted in terms of the Act or regulation 4, shall, prior to the time of such **[ship's]**vessel's intended entry into internal waters other than a harbour or a fishing harbour, appoint a vessel's agent and apply during office hours to the principal officer at the nearest harbour for permission for such entry, stating the reasons for such entry, the **[ship's]**vessel's destination, route and the period for which it is intended to remain in such internal waters.";

"(2) The principal officer to whom an application is made in terms of subregulation (1), may—

(a) permit such **[ship]**vessel to enter internal waters;
(b) fix a reasonable period for the **[ship]**vessel to remain in internal waters;
(c) specify the area in which the **[ship]**vessel is to remain or to anchor;
(d) order or permit such a **[ship]**vessel to leave internal waters;
(e) require such a **[ship]**vessel to enter or leave internal waters by such routes as may be determined by **[him]**the principal officer; or
(f) require that one or more of the conditions set out in regulation 12 be complied with.".

(b) by the insertion after subregulation (2) of the following subregulations:

This gazette is also available free online at **www.gpwonline.co.za**

"(3) The vessel referred to in subregulation (1) shall be liable for the payment of a levy and any charges imposed by the Authority.

(4) Any person who contravenes the provisions of subregulation (1) shall be guilty of an offence and shall on conviction be liable to a minimum fine of R80 000.00 or imprisonment of two years.".

Substitution of regulation 6 of the Regulations

6. Regulation 6 of the Regulations is hereby substituted for the following regulation:

"**6.** Any **[ship]**vessel moored or berthed at a launching site is hereby exempted from the provisions of section 5 of the Act.".

Substitution of regulation 7 of the Regulations

7. Regulation 7 of the Regulations is hereby substituted for the following regulation:

"**Application for lay-up**

7. (1) Any person requiring permission by the **[Minister]**Authority in terms of section 5(1) of the Act to lay-up a **[ship]**vessel shall direct a written application for such permission to the principal officer at the harbour nearest to the proposed lay-up area, not less than **[30]**10 days prior to the estimated time of arrival in such area of such **[ship]**vessel or, if more than one **[ship]**vessel is to be laid up, not less than **[30]**10 days prior to the estimated time of arrival of the first **[ship]**vessel.

(2) An application referred to in subregulation (1) shall contain the following information in regard to the **[ship or ships]**vessel or vessels in question:

This gazette is also available free online at **www.gpwonline.co.za**

CONTINUES ON PAGE 130 OF BOOK 2

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**



Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 2 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845

9 771682 584003 55299

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

(a) **[The]**the name, official number, port of registry and gross tonnage of the **[ship]**vessel, the name and address of the owner of the **[ship]**vessel and of the owner's agent in the Republic**[.]**;

(b) **[The]**the type of **[ship]**vessel and the nature of the cargo aboard, if any, including fuel and lubricating oil**[.]**;

(c) **[The]**the proposed location of lay-up and anchoring and mooring arrangements**[.]**;

(d) **[The]**the maximum intended draught of the **[ship]**vessel in question during the period of lay-up**[.]**;

(e) **[The]**the number of officers and crew to remain on board the **[ship]**vessel during the period of lay-up**[.]**; and

(f) **[The]**the anticipated duration of the lay-up.".

Amendment of regulation 8 of the Regulations

8. Regulation 8 of the Regulations is hereby amended—

(a) by the substitution for the heading of regulation 8 of the of the following heading:

"**Guarantee for possible loss or damage caused by a laid-up [ship]vessel**"; and

(b) by the substitution for regulation 8 of the following regulation:

"**8.** (1) **[The]**A person desiring to lay up a **[ship]**vessel, shall together with **[his]**the application referred to in regulation 7, satisfy the **[Minister]**Authority that **[he]**the person has the financial means to meet any claims for damage or loss suffered either by the Government of the Republic or by third parties as a result of the vessel being laid up.

This gazette is also available free online at **www.gpwonline.co.za**

(2) Evidence of **[such]**the financial means referred to in subregulation (1) shall be either in the form of a bank guarantee or other security acceptable to the **[Minister; such guarantee or other security]**Authority, having due regard to any insurance arrangements which the owner of the said **[ship]**vessel has made to cover **[such]**the claims referred to in subregulation (1).".

Amendment of regulation 10 of the Regulations

9. Regulation 10 of the Regulations is hereby amended—

(a) by the substitution for subregulations (1), (2) and (3) of the following subregulations:

"(1) A period of lay-up shall not exceed six calendar months unless the **[Minister]**Authority extends such period upon written application made ***[mutatis mutandis]*** with necessary changes, in the manner prescribed in regulation 7(1) prior to the termination of the said period of six months.";

"(2) A period of lay-up commences when the **[ship]**vessel arrives in the area of lay-up."; and

"(3) A period of lay-up terminates—

(a) when the **[ship]**vessel departs from the area of lay-up; **[or]**

(b) one month after the serving of a notice by the **[Minister]**Authority, withdrawing **[his]**the permission for the lay-up; or

(c) immediately upon the serving of a notification by the **[Minister]**Authority, withdrawing **[his]**the permission for a lay-up under the circumstances whereby the lay-up is prejudicial to the peace, good order or security of the Republic.".

This gazette is also available free online at **www.gpwonline.co.za**

Amendment of regulation 11 of the Regulations

10. Regulation 11 of the Regulations is hereby amended—

(a) by the substitution for the heading of regulation 11 of the following heading:

"**Inspection of laid-up [ship]vessel**";

(b) by the substitution for regulation 11 of the following regulation:

"**11.** An **[authorized]**authorised person shall at any time have access to and may inspect a laid-up **[ship]**vessel, its cargo, stores, machinery in use and such certificates as are required in terms of the laws of the Republic to be carried on board the **[ship]**vessel.".

Substitution of regulation 12 of the Regulations

11. Regulation 12 of the Regulations is hereby substituted for the following regulation:

"**Conditions of lay-up**

12. The **[Minister]**Authority may require any person who is permitted to lay-up a **[ship]**vessel, to comply with one or more of the following conditions in respect of the **[ship]**vessel while so laid-up:

(1) (a) Any **[ship]**vessel to be laid up shall be retained in Class **[. The]**and the person desiring to lay-up a **[ship or ships]**vessel or vessels shall submit to the principal officer at the harbour nearest to the proposed lay-up area the following documents not less than 14 days prior to the arrival of the **[ship]**vessel or the first of the **[ships]**vessels:

(i) **[A]**a copy of the certificate of classification; or

This gazette is also available free online at **www.gpwonline.co.za**

(ii) a copy of the lay-up report or of the conditions of lay-up as provided for by the classification society or by a society recognised by the **[Minister]**Authority as being competent to issue such a certificate; and

(iii) confirmation of adequate insurance for the vessel.

(b) The certificates referred to in subparagraphs (i) and (ii) of paragraph (a) shall be kept on board the **[ship]**vessel.

(2) **[Unladen tankers]**An unladen tanker shall be ballasted to not less than 35 percent of deadweight while **[ships]**vessels other than **[tankers]**tankers shall be fully ballasted.

(3) (a) Cargo oil tanks, pipelines and bilges shall be empty, cleaned of sludge and of other deposits and shall be gas-freed.

(b) **The[said]** tanks referred to in paragraph (a) may be inserted in **[ships]** a ship in which an inert gas system is fitted.

(4) (a) In the case of a **[ship]**vessel in which the tanks are gas-freed, a certificate, issued by an **[authorized]**authorised agency, shall be produced at the commencement of the lay-up and thereafter at intervals not exceeding two months.

(b) Gas-free tests shall be conducted weekly.

(5) (a) Anchoring or mooring arrangements shall be carried out to the satisfaction of the principal officer concerned.

(b) A spare or second anchor shall be held ready for immediate use.

(6) The position of the **[ship]**vessel shall be checked daily and anchors and chain cable shall be inspected **[regularly]**at least twice during a watch and more frequently during inclement weather.

This gazette is also available free online at **www.gpwonline.co.za**

(7) Fire fighting equipment shall be maintained in good order and shall be tested at intervals not exceeding one week.

(8) Anchor and radio telephone watches shall be kept at all times.

(9) The **[ship]**vessel shall display the correct navigation lights and shapes and make the required sound signals in accordance with international practice.

(10) The permission of the principal officer concerned shall be obtained at all times when any repair work, requiring the use of hot welding or cutting equipment, is to be undertaken outside the port limits.

(11) **[No]**Any article or matter of any kind, other than effluent from water closets, latrines and washplaces that has passed through the approved treatment plant, shall not be discharged into the sea.".

Amendment of regulation 13 of the Regulations

12. Regulation 13 of the Regulations is hereby amended—

(a) by the substitution for the heading of regulation 13 of the following heading:

"**Application to stop or anchor a [ship]vessel for repairs**";

(b) by the substitution for subregulations (1) and (2) of the following subregulations:

"**13.** (1) A person desiring a **[ship]**vessel to be stopped or anchored for repairs in the territorial or internal waters outside a harbour or fishing harbour shall without delay apply for the **[Minister's]**Authority's permission for such stopping or anchoring and shall direct such an application to the principal officer at the harbour nearest to the proposed location of stopping or anchoring.

This gazette is also available free online at **www.gpwonline.co.za**

(2) When applying in terms of subregulation (1) the applicant shall furnish the following information in regard to the **[ship]**vessel in question:

(a) **[The]**the name, official number, port of registry, type and gross tonnage of the **[ship.]**vessel;

(b) **[The]**the name and address of the owner of the **[ship]**vessel and of the owner's agent in the Republic**[.]**;

(c) **[The]**the nature of the cargo aboard the **[ship]**vessel, including fuel and lubricating oil**[.]**;

(d) **[The]**the reason for the proposed stopping or anchoring of the **[ship.]**vessel;

(e) **[The]**the proposed location of such stopping or anchoring**[.]**;

(f) **[The]**the anticipated duration of such stopping or anchoring**[.]**; and

(g) **[Prevailing]**prevailing weather conditions.".

Amendment of regulation 14 of the Regulations

13. Regulation 14 of the Regulations is hereby amended—

(a) by the substitution for the heading of regulation 14 of the following heading:

"**Conditions for stopping or anchoring of a [ship]vessel**";

(b) by the substitution for subregulations (1) and (2) of the following subregulations:

"**14.** (1) **[The]**A person who has been granted permission in terms of regulation 13, shall comply with such measures specified by the principal officer concerned as **[he]**the principal officer may reasonably deem necessary for minimising the risk of stranding, for the safety of the **[ship]**vessel, its crew, passengers or cargo, for preventing pollution of the sea or for maintaining the peace good order or security of the Republic.

This gazette is also available free online at **www.gpwonline.co.za**

(2) The **[said]** measures referred to in subregulation (1) shall be carried out at the expense of the owner of the **[ship]**vessel."

Amendment of regulation 15 of the Regulations

14. Regulation 15 of the Regulations is hereby amended—

(a) by the substitution for the heading of regulation 15 of the following heading:

"**Notification of departure of [ship]vessel**";

(b) by the substitution for regulation 15 of the following regulation:

"**15. [The]**A person who has been granted permission in terms of regulation 13, shall cause the **[ship]**vessel to proceed on its normal course immediately after the reason for the stopping or anchoring has ceased to exist and **[he]** shall forthwith notify the principal officer concerned of the departure of the **[ship]**vessel.".

Substitution of regulation 17 of the Regulations

15. Regulation 17 of the Regulations is hereby substituted for the following regulation:

"CHAPTER VI

PLACES OF DEPARTURE AND ARRIVAL ALONG THE SHORE

17. (1) **[No ship]**A vessel shall not be launched or otherwise proceed to sea from, or **[shall]** be landed, beached, moored, or berthed at, any place along the shore other than a harbour, fishing harbour or launching site.

This gazette is also available free online at **www.gpwonline.co.za**

(2) Any person who contravenes the provisions of subregulation (1) shall be guilty of an offence and shall on conviction be liable to a fine not exceeding **[R200]**R40 000.00 or imprisonment of one year.".

Substitution of regulation 18 of the Regulations

16. Regulation 18 of the Regulations is hereby substituted for the following regulations:

"**CHAPTER VII**

DETENTION OF [SHIPS]VESSELS, CARGOES OR PART THEREOF

Notice of detention of [ship]vessel or cargo

18. When a **[ship]**vessel and its cargo or **[pert]**part thereof or a **[ship]**vessel or its cargo or part thereof is to be detained under section 9(3) of the Act a principal officer shall sign and issue a Notice of Detention in the form of Annexure A **[(hereinafter in this Chapter referred to as a "Notice")]**, setting forth the grounds and conditions of detention.".

Substitution of regulation 19 of the Regulations

17. The following regulation is hereby substituted for regulation 19 of the Regulations:

"**Service of Notice**

19. (1) Subject to the provisions of subregulation (2) a Notice shall be served upon the master of the **[ship]**vessel in question by **[an authorized person (hereinafter in this Chapter referred to as a "detention officer")]**a duly authorised

This gazette is also available free online at **www.gpwonline.co.za**

detention officer who shall exhibit the original Notice to such master and deliver a copy thereof to **[him]**the master, and return the original Notice to the principal officer.

(2) If the master of the **[ship]**vessel in question refuses or fails to accept service of the Notice, or if for any other reason service of the Notice cannot be effected, the detention officer shall leave a copy of the Notice in a conspicuous place on such **[ship]**vessel, which action shall then be deemed to be proper service.".

Substitution of regulation 20 of the Regulations

18. Regulation 20 of the Regulations is hereby substituted for the following regulation:

"**Return of service**

20. (1) **[The]**A detention officer who has served a Notice in terms of regulation 19, shall forthwith complete and sign a declaration in the form of Annexure B **[(hereinafter in this Chapter referred to as a "return of service")]**.

(2) The detention officer in subregulation (1) shall thereupon forthwith deliver the original of the Notice served by **[him]**the detention officer, together with the return of service, to the principal officer who issued the Notice and a copy thereof to each of the following persons:

(a) **[The]**the consular representative in the Republic, if any, of the state in which the **[ship]**vessel is registered;

(b) the **[ship's]**vessel's agent in the Republic, if any;

(c) the Commissioner for Customs and Excise or other proper officer of customs at the harbour where the **[ship]**vessel is anchored, moored or berthed; and

(d) the harbour authority or other authority, if any, who has jurisdiction or control over the sea where the **[ship]**vessel is anchored, moored or berthed.".

This gazette is also available free online at **www.gpwonline.co.za**

Substitution of regulation 21 of the Regulations

19. Regulation 21 of the Regulations is hereby substituted for the following regulations:

"**Clearance outward may be refused**

21. (1) The officer referred to in regulation 20(2)(c) shall refuse to give the master of a **[ship]**vessel to which the Notice and the return of service relate or which was seized in terms of section 9(4)(b) of the Act, clearance outward until **[he]**the officer has received the Notice of Release contemplated in regulation 22(1).

(2) If the detained or seized **[ship]**vessel is not in a harbour or a fishing harbour the **[Minister]**Authority may take such steps or make such arrangements as **[he]**the Authority may deem necessary to prevent such **[ship]**vessel from leaving the internal waters or the territorial waters.".

Substitution of regulation 22 of the Regulations

20. Regulation 22 of the Regulations is hereby substituted for the following regulations:

"**Release from detention**

22. (1) When a **[ship]**vessel or cargo or part thereof which has been detained, is released from such detention as contemplated in section 9(4)(a) of the Act, the principal officer shall forthwith sign and issue a notice of release from detention substantially in the form of Annexure C.

This gazette is also available free online at **www.gpwonline.co.za**

(2) The original notice of release from detention referred to in subregulation (1) shall be retained by the principal officer who shall forthwith cause a copy thereof to be delivered by a detention officer to the master of the **[ship]**vessel in question and to every person referred to in regulation 20(2)(a) to (d) to whom a copy of the relevant Notice and its accompanying Return of Service have been delivered by the detention officer.

(3) The detention officer shall in writing advise the principal officer of the date and time on which **[he]**the detention officer has delivered the notice of release from detention to every person referred to in regulation 20(2)(a) to (d).".

Short title and commencement

21. These Regulations are called the Marine Traffic Amendment Regulations, 2026 and come into operation on the date of final publication.

This gazette is also available free online at **www.gpwonline.co.za**

UMTHETHO OLAWULA IINQANAWE, KA-1981 (UMTHETHO NO. 2 KA-1981)

IZIHLOMELO ZEMIQATHANGO YOMTHETHO OLAWULA IINQANAWE, KA-2026

UMphathiswa weZothutho ngaphantsi kwesolotya 14 loMthetho oLawula iiNqanawe, ka-1981 (uMthetho No 2 ka-1981) uye wenza imiqathango nethe yadakacwa kwiShedyuli.

NKSZN BD CREECY, Ilungu LePalamente
UMPHATHISWA WEZOTHUTHO
UMHLA: 11/6/26 .

This gazette is also available free online at **www.gpwonline.co.za**

SHEDYULI

INGCACISO ETHE GABALALA

[ ] Amagama agqamileyo ebiyelwe ngezibiyeli ezizikwere abonisa amagama atshintshiweyo kwiqathango ekhoyo.

_____ Amagama akrwelelwe umgca ngaphantsi ngomgca ongqindilili abonisa into efakelweyo kwimiqathango ekhoyo.

Iingcaciso

1. Kule Shedyuli "Imiqathango" ibhekisa kwiMiqathango yoLawulo lweeNqanawe, ka-1985 neyapapashwa ngaphantsi kweSaziso sikaRhulumente No. R. 194 kwiGazethi kaRhulumente No. 9575 yomhla woku-01 kweyoMdumba 1985.

Ukuhlonyelwa komqathango 1 weMiqathango

2. Umqathango 1 weMiqathango uye wahlonyelwa ke ngoko—

(a) ngokufakelwa, emva kwengcaciso "ye-arhente egunyazisiweyo" yengcaciso ilandelayo:

This gazette is also available free online at www.gpwonline.co.za

"'**igosa lokubamba**' ngenxa yeSahluko VII, libhekisa kumntu ogunyaziswe ziziPhathamandla ngokwemimiselo yemigathango 19, 20 kunye 22;";

(b) ngokufakela emva kwengcaciso "yoMthetho wokuHanjiswa kweMithwalo" kule ngcaciso ilandelayo:

"'**Isaziso**' ngenxa yeSahluko VII, sibhekisa kwiSaziso soKubanjwa esikhutshwe ngokwemimiselo yomgathango 18;";

(c) ngokufakelwa into ethi "yegosa eliphetheyo" emva kwale ngcaciso ilandelayo:

"'**ukubuyiswa kwenkonzo**' ngenxa yeSahluko VII, kubhekisa kwisibhengezo esikhutshwe ngokwemimiselo yomgathango 20;";

(d) ngokutshintshela ingcaciso ethi "yaseMzantsi Afrika" yengcaciso elandelayo:

"'**yaseMzantsi Afrika**', xa lisetyenziselwa ukucacisa nayiphi na inqanawe, inqanawe yangaphantsi kwamanzi okanye nayo nayiphi na inqwelo yangaphantsi kwamanzi, ibhekisa kwinqanawe, kwinqanawe yangaphantsi kwamanzi okanye ezinye iinqwelo zangaphantsi kwamanzi—

(a) ezibhalisiweyo okanye ekufuneka ukuba zibhaliswe ngokwemimiselo yoMthetho wokuHanjiswa kweMithwalo;

(b) ezineempepha okanye ekufuneka zibe neempepha ngokwemimiselo yoMthetho wokuHanjiswa kweMithwalo; okanye

(c) ezingenamfuneko yeempepha ngokwemimiselo yoMthetho wokuHanjiswa kweMithwalo, kodwa—

(i) ingqokelela iyonke ibe iyeyabantu abagunyazisiweyo ngokwemimiselo yoMthetho wokuHanjiswa kweMithwalo yokuba ngumnini wenqanawe yaseMzantsi Afrika; **[kwaye]**okanye

This gazette is also available free online at **www.gpwonline.co.za**

(ii) ubuninzi babanini nalapho, mhlawumbi ngokwamanani okanye ngokomyinge wobunini, ingabantu abakwiRiphabliki;";

Ukutshintshelwa komqathango 3 weMiqathango

3. Umqathango 3 weMiqathango uye watshintshelwa ke ngoko kulo mqathango ulandelayo:

"**3.** Ngenxa yale **[miqathango]**Miqathango uphicotho ngendlela enyanzeliswa ziinkqubo zesiqhelo **[zabo]**zenqwelo yamanzi zizo eziza kuba "ngumhlahla-ndlela" nanjengoko kucacisiwe kwisolotya 1 loMthetho kwimeko yezi zilandelayo **[iinqanawe]**iinqwelo zamanzi:".

Ukutshintshwa komqathango 4 kwiMiqathago

4. Umqathango 4 weMiqathango uye watshintshelwa kule miqathango ilandelayo:

"**4.** Ezi **[nqanawe]**nqwelo zamanzi zilandelayo okanye amabakala **[eenqanawe]**eenqwelo zamanzi athe abekelwa bucala okanye awachatshazelwa zizindululo zesolotya 4(1) loMthetho ngeli xesha **[zii]**iinqwelo zamanzi ziqhubeka nemisebenzi yazo yesiqhelo:

(a) **[amaphenyane]**iinqwelo zamanzi zaseMzantsi Afrika zokuloba;

(b) Iinqwelo zamanzi ezincinci zaseMzantsi Afrika eziyinxalenye yemicimbi yemidlalo okanye eyobugcisa;

(c) iinqwelo zamanzi ezincinci zamanye amazwe eziyinxalenye yemicimbi yemidlalo okanye eyobugcisa, phofu ezo nqwelo zamanzi zibe ziyinxalenye yaloo micimbi ngaphantsi kweliso elibukhali leziphathamandla zeli okanye iziphathamandla zabanye ooRhulumente, okanye i-arhente **[egunyazisiweyo]**egunyazisiweyo;

This gazette is also available free online at **www.gpwonline.co.za**

(d) **[iinqanawe]**iinqwelo zamanzi zemithwalo zaseMzantsi Afrika; kwakunye

(e) **[namaphenyane]**neenqwelo zamanzi zokuloba zamanye amazwe eziye zayalelwa okanye ezinesivumelelwano okanye eziye **[zagunyaziswa]**zagunyaziswa ngokuhambelana nemithetho yeRiphabliki yokusebenza kumanzi angaphakathi.".

Ukuhlonyelwa komqathango 5 kwiMiqathango

5. Umqathango 5 weMiqathango uthe wahlonyelwa—

(a) ngokutshintshelwa kwemiqathangwana (1) kunye (2) kule miqathangwana ilandelayo:

"(1) Umphathi wayo nayiphi na **[inqanawe]**inqwelo yamanzi, ngaphandle **[kwenqanawe]**kwenqwelo yamanzi edakacwe kumqathango 16(1) okanye ebekelwe bucala ngokwemimiselo yoMthetho okanye umqathango 4, ngaphambili kwexesha loo **[nqanawe]**nqwelo yamanzi iza kuba neenjongo zokungena ngalo echwebeni okanye kwichweba lokuloba, iza kutyumba i-arhente yenqwelo yamanzi ize ifake isicelo ngeeyure zokusebenza kwigosa eliphezulu kwichweba elikufutshane ukuze lifumane imvume yoko kungeniswa, isiphelo, umzila kunye nexesha eliza kuhlalwa **[yinqanawe]**yinqwelo yamanzi kwelo chweba.";

"(2) Igosa eliphezulu ekwenziwe kulo isicelo ngokwemimiselo yemiqathangwana (1), linako—

(a) ukuvumela loo **[nqanawe]**nqwelo yamanzi kwichweba;

(b) ukusika ixesha elivakalayo eliza kuhlalwa **[yinqanawe]**yinqwelo yamanzi echwebeni;

(c) ukucacisa indawo nalapho **[inqanawe]**inqwelo yamanzi iza kuhlala kuyo okanye iza kwehlisa kuyo ii-ankile zayo;

This gazette is also available free online at **www.gpwonline.co.za**

(d) ukuyalela okanye ukuvumela loo **[nqanawe]**nqwelo yamanzi ukuba ifuduke kwelo chweba;

(e) ukuyalela loo **[nqanawe]**nqwelo yamanzi ukuba ingene okanye ifuduke ngomzila oza kube uqingqwe **[nguye]**ligosa eliphezulu; okanye

(f) ukuyalela ukuba umbandela omnye okanye ngaphezulu kwedakacwe kumqathango 12 kumele ithotyelwe.".

(b) ngokufakelwa komqathangwana (2) kule miqathangwana ilandelayo:

"(3) Inqwelo yamanzi ekubhekiswa kuyo kumqathangwana (1) kumele ihlawule iindleko zerhafu kwakunye nazo naziphi na iindleko ezibekwa ngaBasemagunyeni.

(4) Nabani na othe wophula izindululo zomqathangwana (1) uza kuba netyala lokwaphula umthetho kwaye xa ethe wabaniwa kuza kufuneka ahlawule umdliwo wama-R80 000.00 okanye ahlale entolongweni iminyaka emibini.".

Ukutshintshwa komqathango 6 weMiqathango

6. Umqathango 6 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"**6.** Nayiphi na **[inqanawe]**inqwelo yamanzi ebotshelelwe kwintsika ayichatshazelwa zizindululo zesolotya 5 loMthetho.".

Ukutshintshwa komqathango 7 weMiqathango

7. Umqathango 7 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"**Isicelo sokumisa**

7. (1) Nabani na ofuna imvume **[yoMphathiswa]**yeSiphathamandla ngokwemimiselo yesolotya 5(1) loMthetho yokumisa **[inqanawe]**inqwelo yamanzi kumele abhekise isicelo esibhaliweyo sokufumana imvume enjalo kwigosa eliphezulu

This gazette is also available free online at **www.gpwonline.co.za**

kwichweba elikufutshane nale ndawo afuna ukumisa kuyo, zingadlulanga iintsuku **[ezingama-30]**ezili-10 ngaphambili kwexesha ekuqikelelwa ukuba iza kufika ngalo loo **[nqanawe]**nqwelo yamanzi okanye, ukuba kuza kumiswa **[iinqanawe]**iinqwelo zamanzi ezimbini nangaphezulu, kumele zingadluli iintsuku **[ezingama-30]**ezili-10 ngaphambili kwexesha lokufika **[kwenqanawe]**kwenqwelo yamanzi yokuqala.

(2) Isicelo ekubhekiswa kuso kumqathangwana (1) kumele siqulathe ezi nkcukacha zilandelayo ngokumayelana **[nenqanawe okanye neenqanawe]**inqwelo yamanzi okanye neenqwelo zamanzi ekubhekiswa kuzo:

(a) **[Igama]**igama, inombolo esebenzayo, ichweba ebhaliswe kulo kunye nomyinge womthwalo **[wenqanawe]**wenqwelo yamanzi, igama nedilesi yomnini **[wenqanawa]**wenqwelo yamanzi kwakunye nezearhente yomnini kwiRiphabliki**[.]**;

(b) **[Uhlobo]**uhlobo **[lwenqanawe]**lwenqwelo yamanzi kwakunye nohlobo lwemithwalo eluthweleyo, ukuba lukhona, quka namafutha kwakunye nee-oli zokuthambisa**[.]**;

(c) **[Indawo]**indawo ecetywayo yokumiswa nokwehliswa kwee-ankile kwakunye namalungiselelo okungeniswa**[.]**;

(d) **[Ubunzulu]**ubunzulu **[benqanawe]**benqwelo yamanzi ekubhekiswa kuyo ngexesha lokumiswa kwayo**[.]**;

(e) **[Inani]**inani lamagosa kwakunye nabasebenzi abaza kuhlala kule **[nqanawe]**nqwelo yamanzi ngexesha imisiwe**[.]**; kunye

(f) **[Nexesha]**nexesha eliqikelelwayo lokuma.".

Ukuhlonyelwa komqathango 8 weMiqathango

8. Umqathango 8 weMiqathango uye wahlonyelwa—

(a) ngokutshintshwa kwesihloko somqathango 8 wesi sihloko silandelayo:

This gazette is also available free online at **www.gpwonline.co.za**

"**Igaranti yelahleko okanye umonakalo onokwenzeka xa imiswa [inqanawe]**inqwelo yamanzi"; kwaye

(b) ngokutshintshwa komqathango 8 kulo mqathango ulandelayo:

"**8.** (1) **[Umntu]**Umntu onqwenela ukumisa [inqanawe]inqwelo yamanzi, kumele ekunye nesicelo **[sakhe]**ekubhekiswa kuso kumqathango 7, anelise **[uMphathiswa]**iziPhathamandla ngokuba **[yena]**umntu lowo unawo omandla okuhlawula naziphi na iindleko zomonakalo okanye zelahleko eyenzeke mhlawumbi kuRhulumente weRiphabliki okanye ngomntu wesithathu ngexesha inqwelo yamanzi imile.

(2) Ubungqina **[boko]**bamandla emali ekubhekiswa kuwo kumqathangwana (1) kumele buboniswe ngesiqinisekiso sebhanki okanye ngezinye iindlela zokhuseleko ezamkelekileyo **[kuMphathiswa; ezifana negaranti okanye ezinye iindlela zokhuseleko]**kwiZiphathamandla, abe enanziwe namalungiselelo e-inshorensi nathe umnini **[wenqanawe]**wenqwelo yamanzi wayithatha ukukhusela **[oko]**ezo ndleko ekubhekiswa kuzo kumqathangwana (1).".

Ukuhlonyelwa komqathango 10 weMiqathango

9. Umqathango 10 weMiqathango uye wahlonyelwa ke ngoko—

(a) ngokutshintshwa kwemiqathangwana (1), (2) kwakunye (3) kwimiqathangwana:

"(1) Ixesha lokumiswa akumelanga kudlule kwiinyanga ezintandathu ngaphandle kokuba **[uMphathiswa]**iSiphathamandla siye salongeza ixesha kwisicelo esibhaliweyo esenziwe **[*mutatis mutandis*]** ngotshintsho oluyimfuneko, nangendlela edakaciweyo kumqathango 7(1) ngaphambili kokuba liphele ixesha elisikiweyo leenyanga ezintandathu.";

This gazette is also available free online at **www.gpwonline.co.za**

"(2) Ixesha lokumiswa liqalisa xa **[inqanawe]**inqwelo yamanzi ifika kwindawo eza kumiswa kuyo."; kwaye

"(3) Ixesha lokumiswa liphela—

(a) xa **[inqanawe]**inqwelo yamanzi ihamba kuloo ndawo ibimiswe kuyo; **[okanye]**

(b) emva kwenyanga enye yokunikwa isaziso **[nguMphathiswa]**siSiphathamandla, erhoxisa **[yakhe]**imvume yokumisa; okanye

(c) kanye nje emva kokufumana isaziso **[soMphathiswa]**seSiphathamandla, sokurhoxisa **[yakhe]**imvume yokumisa ngaphantsi kweemeko apho ukumisa kuyingozi okanye kuphazamisa uxolo, ukulunga okanye ukhuseleko lweRiphabliki.".

Ukuhlonyelwa komqathango 11 weMiqathango

10. Umqathango 11 weMiqathango uye wahlonyelwa ke ngoko—

(a) ngokutshintshwa kwesihloko somqathango 11 wesi sihloko silandelayo

"Uhlolo [lwenqanawe]lwenqwelo yamanzi emisiweyo";

(b) ngokutshintshwa komqathango 11 kulo mqathango ulandelayo:

"**11.** Umntu **[ogunyazisiweyo]**ogunyazisiweyo kumele nanini na akwazi ukungena ukuze ahlole **[inqanawe]**inqwelo yamanzi emisiweyo, umthwalo wayo, oovimba, oomatshini abasetyenziswayo kwakunye nezatifiketi nanjengoko kungayimfuneko oko ngokwemimiselo yemithetho yeRiphabliki ekumele iqhutywe ngaphakathi **[kwenqanawe]**kwenqwelo yamanzi.".

This gazette is also available free online at **www.gpwonline.co.za**

Ukutshintshwa komqathango 12 weMiqathango

11. Umqathango 12 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"**Imibandela yokumisa**

12. [UMphathiswa]IsiPhathamandla sinako ukuyalela nabani na ogunyazisiweyo ukumisa **[inqanawe]**inqwelo yamanzi, ukuba athobele umbandela omnye okanye nangaphezulu kule mibandela ilandelayo ngokumayelana **[nenqanawe]**nenqwelo yamanzi ngexesha imile:

(1) (a) Nayiphi na **[inqanawe]**inqwelo yamanzi emileyo kumele ihlale kwiKlasi **[. lgama]**kwaye umntu onqwenela ukumisa **[inqanawe okanye iinqanawe]**inqwelo yamanzi okanye iinqwelo zamanzi kumele anike igosa eliphezulu kwichweba elikufuphi kunale ndawo afuna ukumisa kuyo la maxwebhu alandelayo zingaphelanga iintsuku ezili-14 ngaphambili kokufika **[kwenqanawe]**kwenqwelo yamanzi okanye eyokuqala **[kwiinqanawe]**kwiinqwelo zamanzi:

(i) **[Ikopi]**ikopi yesatifiketi seklasi; okanye

(ii) ikopi yengxelo yokumisa okanye yemibandela yokumisa nanjengoko kubhaliwe kwizindululo zombutho weklasi okanye ngumbutho owaziwayo **[nguMphathiswa]**siSiphathamandla onobunako bokukhupha isatifiketi esinjalo; kwakunye

(iii) nesiqinisekiso se-inshorensi efanelekileyo yokukhuselo loo nqwelo yamanzi.

(b) Izatifiketi ekubhekiswa kuzo kwimihlathana (i) kwakunye (ii) yomhlathi (a) kumele zigcinwe ngaphakathi **[kwenqanawe]**kwenqwelo yamanzi.

(2) **[Iitanki ezingenanto]**Itanki elingenanto kumele lilungelelaniswe ngobunzima obungekho ngaphantsi kweephesenti ezingama-35 ngexesha **[iinqanawe]**iinqwelo zamanzi ngaphandle [kweetanki]kweetanki ekumele zizinziswe ngokupheleleyo.

This gazette is also available free online at **www.gpwonline.co.za**

(3) (a) Umthwalo weetanki ze-oli, imibhobho kwakunye nesitya senqwelo yamanzi kumele zingabinanto, zicocwe izinto ezimdaka kwaye zigabinazigesi.

(b) Iitanki**[ezi]** ekubhekiswa kuzo kumhlathi (a) zingafakwa **[kwiinqanawe]** kwinqanawe nalapho inkqubo ye-inert gas ihluzwayo.

(4) (a) Kwimeko apho iitanki **[zenqanawe]**zenqwelo yamanzi zingenarhasi, isatifiketi, esikhutshwe yi-arhente **[egunyazisayo]**egunyazisayo, kumele sivezwe xa kuqala ukumiswa kwaye nakumatyeli angegqithanga kwiinyanga ezimbini.

(b) Iimvamvanyo ezingenarhasi ziza kuqhutywa zonke iiveki.

(5) (a) Amalungiselelo okubotshelelwa okanye okuzinziswa aza kwenziwa ngendlela eyanelisa igosa eliphezulu elichaphazelekayo.

(b) I-ankile yesibini iza kuhlala iphethwe ukuze ikwazi ukusetyenziswa ngokukhawuleza.

(6) Isikhundla **[senqanawe]**senqwelo yamanzi siza kujongwa yonke imihla kunye nee-ankile kwakunye namakhamandela okubopha aza kuhlolwa **[rhoqo]**nokuba kukabini ngexesha kujongiwe kwaye nangakumbi xa imozulu imbi.

(7) Izixhobo zokucima umlilo kumele zihlale zigcinwe zisemgangathweni kwaye kumele zivavanywe ngamaxesha angadlulanga kwityeli elinye ngeveki.

(8) I-ankile kwakunye nomnxeba wokuthetha kumele zihlale elugcinweni ngamaxesha onke.

(9) **[Inqanawe]**inqwelo yamanzi kumele ibonise ekuhleni izibane zokufumaneka apho ime khona kwakunye neemilo kwaye yenze isandi esifunekayo ngokuhambelana nokwenziwa kumazwe ngamazwe.

This gazette is also available free online at **www.gpwonline.co.za**

(10) Imvume yegosa eliphezulu elichaphazelekayo ingafumaneka onke amaxesha xa kunemfuneko yokulungiswa, okufuna kusetyenziswe izixhobo zokungciba ezitshisayo okanye zokusika, nekumele zenzelwe ngaphandle kwemida yechweba.

(11) **[Akukho]**Nantoni na okanye nawo nawuphi na umba, ngaphandle kwamanzi amdaka asuka ngasese, kwizigcini-lindle nakwimibhobho yelindle agqithe kwinkqubo egunyazisiweyo yonyango, akumelanga achithelwe elwandle.

Ukuhlonyelwa komqathango 13 weMiqathango

12. Umqathango 13 weMiqathango uye wahlonyelwa ke ngoko—

(a) ngokutshintshwa kwesihloko somqathango 13 wesi sihloko silandelayo

"Isicelo sokumisa okanye sokumilisela [inqanawe]inqwelo yamanzi ukuze ilungiswe";

(b) ngokutshintshelwa kwemiqathangwana (1) kunye (2) kule miqathangwana ilandelayo:

"**13.** (1) Umntu onqwenela ukumisa okanye ukumilisela **[inqanawe]**inqwelo yamanzi kwimida okanye kumanzi akumda ongaphandle kwechweba kufuneka ngaphandle kokuphozisa amaseko acele imvume **[yoMphathiswa]**yeSiphathamandla yokumisa okanye yokumilisela kwaye eso sicelo asibhekise kwigosa eliphezulu sechweba elikufutshane naloo ndawo aceba ukumisa okanye ukumilisela kuyo.

(2) Xa efaka isicelo ngokwemimiselo yomqathangwana (1) umfaki-sicelo kumele adibanise nolu lwazi lulandelayo ngokumayelana **[nenqanawe]**nenqwelo yamanzi ekubhekiswa kuyo:

This gazette is also available free online at **www.gpwonline.co.za**

(a) **[Igama]**igama, inombolo esebenzayo, ichweba ebhaliswe kulo kunye nomyinge womthwalo **[wenqanawe]**wenqwelo yamanzi;

(b) **[Igama]**igama nedilesi yomnini **[nqanawa]**wenqwelo yamanzi kwakunye neze-arhente yomnini kwiRiphabliki**[.]**;

(c) **[Uhlobo]**uhlobo lothwalo othwelwe **[yinqanawe]**yinqwelo yamanzi, nkqu namafutha kwakunye nee-oli zokuthambisa**[.]**;

(d) **[Isizathu]**isizathu sokumisa okanye somilisela **[inqanawe.]**inqwelo yamanzi;

(e) **[Indawo]**indawo ecetywayo yokumisa okanye yokumilisela okunjalo**[.]**;

(f) **[Ixesha]**ixesha eliqikelelekayo lokumisa okanye lokumilisela okunjalo**[.]**; kwakunye

(g) nemiba yemozulu **[Evelayo]**evelayo.".

Ukuhlonyelwa komqathango 14 weMiqathango

13. Umqathango 14 weMiqathango uye wahlonyelwa ke ngoko—

(a) ngokutshintshwa kwesihloko somqathango 14 wesi sihloko silandelayo:

"Imibandela yokumisa okanye yokumilisela [inqanawe]inqwelo yamanzi";

(b) ngokutshintshelwa kwemiqathangwana (1) kunye (2) kule miqathangwana ilandelayo:

"**14.** (1) **[Umntu]**Umntu onikwe imvume ngokwemimiselo yomqathango 13, kumele athobele izindululo ezidandalaziswe ligosa eliphezulu elichaphazelekayo nanjengoko **[yena]**igosa eliphezulu lingabona kufanelekile ukucutha ubungozi bokushiya izinto, ngenxa yokhuseleko **[lwenqanawe]lwenqwelo yamanzi**, abasebenzi, abakhweli okanye umthwalo, ngokuzama ukuphepha ungcoliseko lolwandle okanye ugcino loxolo ngobume okanye ukhuseleko lweRiphabliki.

This gazette is also available free online at www.gpwonline.co.za

(2) Ezo zindululo **[ekuthethwa]** kubhekiswa kuzo kumqathangwana (1) kumele zibe yinxalenye yeendleko zomnini **[wenqanawe]**wenqwelo yamanzi.".

Ukuhlonyelwa komqathango 15 weMiqathango

14. Umqathango 15 weMiqathango uye wahlonyelwa ke ngoko—

(a) ngokutshintshwa kwesihloko somqathango 15 wesi sihloko silandelayo:

"Isaziso sokunduluka [kwenqanawe]kwenqwelo yamanzi";

(b) ngokutshintshwa komqathango 15 kulo mqathango ulandelayo:

"**15. [Umntu]**Umntu onikwe imvume ngokwemimiselo yomqathango 13, kumele enze **[inqanawe]**inqwelo yamanzi iqhubeke kuhambo lwayo lwesiqhelo ngokukhawuleza emva kokuba isizathu sokumisa okanye sokumilisela siye saphela kwaye **[yena]** kumele azise igosa eliphezulu ngokunduluka **[kwenqanawe]**kwenqwelo yamanzi.".

Ukutshintshwa komqathango 17 weMiqathango

15. Umqathango 17 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"ISAHLUKO VI

IINDAWO ZOKUNDULUKELA NEZOKUFIKELA EZIGUGUTH' UNXWEME

17. (1) **[Akukho nqanawe]**inqwelo yamanzi ayisayi kukhutshelwe okanye iphumele elwandle, okanye **[kumele]** eya kumiswa, ihlaliswe, itsalelwe, okanye

This gazette is also available free online at **www.gpwonline.co.za**

iqhutyelwe, kuyo nayiphi na indawo ngakunxweme ngaphandle kwechweba, indawo yokuloba okanye indawo yokhuphela.

(2) Nabani na owaphula izindululo zomqathangwana (1) uza kufumaneka enetyala lokwaphula umthetho kwaye xa ebenjiwe kuza kufuneka ahlawule umdliwo ongadlulanga **[kwi-R200]**kwi-R40 000.00 okanye avalelwe unyaka ejele.".

Ukutshintshwa komqathango 18 weMiqathango

16. Umqathango 18 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"ISAHLUKO VII

UKUBANJWA [KWEENQANAWE]KWEENQWELO ZAMANZI, KWEMITHWALO OKANYE KWENXALENYE YAWO

Isaziso sokubanjwa [kwenqanawe]kwenqwelo yamanzi okanye komthwalo

18. Xa **[inqanawe]**inqwelo yamanzi kwakunye nomthwalo wayo okanye **[pert]**inxalenye yawo okanye **[inqanawe]**inqwelo yamanzi okanye umthwalo wayo okanye inxalenye yawo uthe wabanjwa ngaphantsi kwesolotya 9(3) loMthetho igosa eliphezulu kumele lityikitye lize likhuphe iSaziso sokuBanjwa kwifom yeSihlomelo A **[(kolu xwebhu lwesi Sahluko ekubhekiswa kulo "njengeSaziso")]**, kuhlakulela imiqathango nemibandela yokubanjwa.".

Ukutshintshwa komqathango 19 weMiqathango

17. Lo mqathango ulandelayo uye watshintshelwa kulo mqathango 19 weMiqathango:

This gazette is also available free online at www.gpwonline.co.za

"**Ukukhutshwa kweSaziso**

19. (1) Ngokwezindululo zomqathangwana (2) iSaziso kumele **sinikwe** umphathi **[wenqanawe]**wenqwelo yamanzi ekubhekiswa kuyo **[ngomntu ogunyazisiweyo (kolu xwebhu lwesi Sahluko ekubhekiswa kulo "njengegosa lokubamba")]**ligosa lokubamba eligunyazisiweyo neliza kukhuphela iSaziso soqobo umphathi lize lihambise ikopi **[kuye]**kumphathi, lize libuyisele iSaziso soqobo kwigosa eliphezulu.

(2) Ukuba umphathi **[wenqanawe]**wenqwelo yamanzi ekubhekiswa kuyo akafuni okanye uyasilela ukwamkela iSaziso, okanye ngesinye isizathu esithile iSaziso singamkelwa, igosa lokubamba kumele lishiye ikopi yeSaziso kwindawo ecacileyo kuloo **[nqanawe]**nqwelo yamanzi, eso senzo siza kuthathwa njengokwenziwa komsebenzi.".

Ukutshintshwa komqathango 20 weMiqathango

18. Umqathango 20 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"**Ubungqina bokwenziwa komsebenzi**

20. (1) **[Igosa]**Igosa lokubamba eliye lasihambisa iSaziso ngokwemimiselo yomqathango 19, liza kuthi ke ngoko ligcwalise lize lityikitye isibhengezo kwifom yeSihlomelo B **[(kolu xwebhu lwesi Sahluko ekubhekiswa kuso "njengobungqina bokwenziwa komsebenzi")]**.

(2) Igosa lokubamba kumqathangwana (1) liya kuthi ke ngoko lihambise uqobo lweSaziso **[ngokwalo]** esihanjiswe ligosa lokubamba, kunye nobungqina bokwenziwa komsebenzi, kwigosa eliphezulu ebelikhuphe iSaziso kwakunye nekopi kumntu ngamnye kwaba balandelayo:

(a) **[Unozakuzaku]**unozakuzaku kwiRiphabliki, ukuba ukhona, owesizwe apho **[inqanawe]**inqwelo yamanzi ibhaliswe kuso;

(b) i-arhente **[yenqanawe]**yenqwelo yamanzi ekwiRiphabliki, ukuba ikhona;

This gazette is also available free online at **www.gpwonline.co.za**

(c) Umkomishinala wakwaCustoms and Excise okanye amanye amagosa akwacustoms echwebeni apho **[inqanawe]inqwelo yamanzi** izinze, imiswe okanye itsalelwe khona; kunye

(d) nesiphathamandla sechweba okanye esinye isiphathamandla, esinelungelo lokulawula okanye lokuyalela apho **[inqanawe]**inqwelo yamanzi ingamiliselwa, ingamiswa okanye ingatsalelwe khona.".

Ukutshintshwa komqathango 21 weMiqathango

19. Umqathango 21 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

"**Ingaliwa imvume yangaphandle**

21. (1) Igosa ekubhekiswa kulo kumqathango 20(2)(c) kumele lingafuni ukunika umphathi **[wenqanawe]**wenqwelo yamanzi noSaziso kunye nobungqina bomsebenzi ziye zathathwa ngokwemimiselo yesolotya 9(4)(b) loMthetho, imvume yangaphandle de **[yena]**igosa libe lifumene iSaziso soKukhulula esidakacwe kumqathango 22(1).

(2) Ukuba **[inqanawe]**inqwelo yamanzi ebanjiweyo okanye evalelweyo ayikho sechwebeni okanye kwichweba lokuloba **[uMphathiswa]**iSiphathamandla singathatha amanyathelo okanye singenza amalungiselelo nanjengoko **[yena]**iSiphathamandla singabona kunyanzelekile ukuthintela loo **[nqanawe]**nqwelo yamanzi ukuba induluke kwimida yonxweme.".

Ukutshintshwa komqathango 22 weMiqathango

20. Umqathango 22 weMiqathango uye watshintshelwa kulo mqathango ulandelayo:

This gazette is also available free online at **www.gpwonline.co.za**

"Ukukhululwa ekubanjweni

22. (1) Xa **[inqanawe]**inqwelo yamanzi okanye umthwalo okanye inxalenye yawo ububanjiwe, yaze yakhululwa kuloo meko yokubanjwa nanjengoko idakaciwe kwisolotya 9(4)(a) loMthetho, igosa eliphezulu liza kutsho lityikitye lize likhuphe isaziso sokukhululwa eluvalelweni ngendlela kwifom yeSihlomelo C.

(2) Isaziso sokukhululwa soqobo ekubhekiswa kuso kumqathangwana (1) kumele sigcinwe ligosa eliphezulu neliza kuthi lenze ikopi eza kuhanjiswa ligosa lokubamba kumphathi **[wenqanawe]**wenqwelo yamanzi ekubhekiswa kuyo kunye nakuye nabani na ekubhekiswa kuye kumqathango 20(2)(a) ukuya (d) nothe wafumana ikopi emayelana naye yeSazio kwakunye noBungqina bokwenziwa koMsebenzi ezinikwa ligosa lokubamba.

(3) Igosa lokubamba liza kuthi ke ngoko ngokubhala phantsi lazise igosa eliphezulu ngomhla kwakunye nexesha nalapho **[yena]**igosa lokubamba eliza kusisa ngalo isaziso sokukhululwa kubo bonke abantu ekubhekiswa kubo kumqathango 20(2)(a) ukuya (d).".

Isihloko esifutshane kunye nexesha lokuqalisa

21. Le Miqathango ibizwa ngokuba ziZihlomelo zeMiqathango yoMthetho oLawula iiNqanawe, ka-2026 kwaye uza kuqalisa ukusebenza ngomhla wopapasho lokugqibela.

This gazette is also available free online at **www.gpwonline.co.za**

DEPARTMENT OF TRANSPORT

NOTICE 4133 OF 2025

I, Barbara Creecy, Minister of Transport, in terms of section 356*bis*(2) of the Merchant Shipping Act, 1951 (Act No. 57 of 1951), hereby amend the Second Schedule to that Act as set out in the Annexure,

MS BD CREECY, MP
MINISTER OF TRANSPORT
DATE: 23/06/2026

ANNEXURE

GENERAL EXPLANATORY NOTE

[ ] Words in bold type in square brackets indicate omissions from existing enactments.

Words underlined with a solid line indicate insertions in existing enactments.

Second Schedule

Consolidated text of the International Convention for the Safety of Life at Sea, 1974

2

Contents

Articles of the International Convention for the Safety of Life at Sea, 1974..... 6

[Protocol of 1988 relating to the International Convention for the Safety of Life at Sea, 1974..... 14]

Chapter I - General Provisions..... 21

Chapter II-1 - Construction - Structure, Subdivision and Stability, Machinery and Electrical Installations 43

Chapter II-2 - Construction - Fire Protection, Fire Detection, And Fire Extinction 150

Chapter III - Life-Saving Appliances and Arrangements.....303

Chapter IV - Radiocommunications.....347

Chapter V - Safety of Navigation 371

Chapter VI - Carriage of Cargoes and Oil Fuels 418

Chapter VII - Carriage of Dangerous Goods.....428

Chapter VIII - Nuclear ships 443

Chapter IX - Management for the safe operation of ships.....448

Chapter X - Special measures for high-speed craft 453

Chapter XI-2 - Special measures to enhance maritime safety.....457

Chapter XI-2 - Special measures to enhance maritime security 467

Chapter XII - Additional safety measures for bulk carriers 480

Chapter XIII - Verification of compliance 491

Chapter XIV - Safety measures for ships operating in polar waters.....495

Chapter XV - Safety measures for ships carrying industrial personnel.....500

This gazette is also available free online at **www.gpwonline.co.za**

Articles of the International Convention for the Safety of Life at Sea, 1974

4

Contents

Articles of the International Convention for the Safety of Life at Sea, 1974 6

Article I General obligations under the Convention 6
Article II Application 6
Article III Laws, regulations 6
Article IV Cases of force majeure 7
Article V Carriage of persons in emergency 7
Article VI Prior treaties and conventions 7
Article VII Special rules drawn up by Agreement 8
Article VIII Amendments 8
Article IX Signature, Ratification, Acceptance, Approval and Accession 11
Article X Entry into force 11
Article XI Denunciation 11
Article XII Deposit and Registration 12
Article XIII Languages 12

[Protocol of 1988 relating to the International Convention for the Safety of Life at Sea, 1974 14

Article I General Obligations 14
Article II Prior treaties 14
Article III Communication of information 15
Article IV Signature, ratification, acceptance, approval and accession 15
Article V Entry into force 16
Article VI Amendments 16
Article VII Denunciation 17
Article VIII Depositary 17
Article IX Languages 18

This gazette is also available free online at **www.gpwonline.co.za**

Articles of the International Convention for the Safety of Life at Sea, 1974

The Contracting Governments

Being desirous of promoting safety of life at sea by establishing in a common agreement uniform principles and rules directed thereto,

Considering that this end may best be achieved by the conclusion of a Convention to replace the International Convention for the Safety of Life at Sea, 1960, taking account of developments since that Convention was concluded,

Have agreed as follows:

Article I
General obligations under the Convention

(a) The Contracting Governments undertake to give effect to the provisions of the present Convention and the Annex thereto, which shall constitute an integral part of the present Convention. Every reference to the present Convention constitutes at the same time a reference to the Annex.

(b) The Contracting Governments undertake to promulgate all laws, decrees, orders and regulations and to take all other steps which may be necessary to give the present Convention full and complete effect, so as to ensure that, from the point of view of safety of life, a ship is fit for the service for which it is intended.

Article II
Application[*]

The present Convention shall apply to ships entitled to fly the flag of States the Governments of which are Contracting Governments.

Article III
Laws, regulations[†]

The Contracting Governments undertake to communicate to and deposit with the Secretary-General of the Inter-Governmental Maritime Consultative Organization[‡] (hereinafter referred to as "the Organization"):

[*] Refer to Transfer of ships between States (MSC/Circ.1140-MEPC/Circ.424).

[† Refer to Article III of the 1988 SOLAS Protocol; *Notification and circulation through the Global Integrated Shipping Information System (GISIS)* (resolution A.1074(28)).]

[‡] The name of the Organization was changed to "International Maritime Organization" (IMO) by virtue of amendments to the Organization's Convention which entered into force on 22 May 1982.

This gazette is also available free online at **www.gpwonline.co.za**

(a) a list of non-governmental agencies which are authorized to act in their behalf in the administration of measures for safety of life at sea for circulation to the Contracting Governments for the information of their officers;

(b) the text of laws, decrees, orders and regulations which shall have been promulgated on the various matters within the scope of the present Convention;

(c) a sufficient number of specimens of their certificates issued under the provisions of the present Convention for circulation to the Contracting Governments for the information of their officers.

Article IV
Cases of force majeure

(a) A ship, which is not subject to the provisions of the present Convention at the time of its departure on any voyage, shall not become subject to the provisions of the present Convention on account of any deviation from its intended voyage due to stress of weather or any other case of force majeure.

(b) Persons who are on board a ship by reason of force majeure or in consequence of the obligation laid upon the master to carry shipwrecked or other persons shall not be taken into account for the purpose of ascertaining the application to a ship of any provisions of the present Convention.

Article V
Carriage of persons in emergency

(a) For the purpose of evacuating persons in order to avoid a threat to the security of their lives a Contracting Government may permit the carriage of a larger number of persons in its ships than is otherwise permissible under the present Convention.

(b) Such permission shall not deprive other Contracting Governments of any right of control under the present Convention over such ships which come within their ports.

(c) Notice of any such permission, together with a statement of the circumstances, shall be sent to the Secretary-General of the Organization by the Contracting Government granting such permission.

Article VI
Prior treaties and conventions

(a) As between the Contracting Governments, the present Convention replaces and abrogates the International Convention for the Safety of Life at Sea which was signed in London on 17 June 1960.

(b) All other treaties, conventions and arrangements relating to safety of life at sea, or matters appertaining thereto, at present in force between Governments parties to

This gazette is also available free online at **www.gpwonline.co.za**

the present Convention shall continue to have full and complete effect during the terms thereof as regards:

(i) ships to which the present Convention does not apply;

(ii) ships to which the present Convention applies, in respect of matters for which it has not expressly provided.

(c) To the extent, however, that such treaties, conventions or arrangements conflict with the provisions of the present Convention, the provisions of the present Convention shall prevail.

(d) All matters which are not expressly provided for in the present Convention remain subject to the legislation of the Contracting Governments.

Article VII

Special rules drawn up by Agreement

When in accordance with the present Convention special rules are drawn up by agreement between all or some of the Contracting Governments, such rules shall be communicated to the Secretary-General of the Organization for circulation to all Contracting Governments.

Article VIII

*Amendments**

(a) The present Convention may be amended by either of the procedures specified in the following paragraphs.

(b) Amendments after consideration within the Organization:

(i) Any amendment proposed by a Contracting Government shall be submitted to the Secretary- General of the Organization, who shall then circulate it to all Members of the Organization and all Contracting Governments at least six months prior to its consideration.

(ii) Any amendment proposed and circulated as above shall be referred to the Maritime Safety Committee of the Organization for consideration.

(iii) Contracting Governments of States, whether or not Members of the Organization, shall be entitled to participate in the proceedings of the Maritime Safety Committee for the consideration and adoption of amendments.

* Refer to *Guidance on entry into force of amendments to the 1974 SOLAS Convention and related mandatory instruments* (MSC.1/Circ.1481) and *Guidance on drafting of amendments to the 1974 SOLAS Convention and related mandatory instruments* (MSC.1/Circ.1500/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

(iv) Amendments shall be adopted by a two-thirds majority of the Contracting Governments present and voting in the Maritime Safety Committee expanded as provided for in subparagraph (iii) of this paragraph (hereinafter referred to as "the expanded Maritime Safety Committee") on condition that at least one third of the Contracting Governments shall be present at the time of voting.

(v) Amendments adopted in accordance with subparagraph (iv) of this paragraph shall be communicated by the Secretary-General of the Organization to all Contracting Governments for acceptance.

(vi) (1) An amendment to an Article of the Convention or to Chapter I of the Annex shall be deemed to have been accepted on the date on which it is accepted by two thirds of the Contracting Governments.

(2) An amendment to the Annex other than Chapter I shall be deemed to have been accepted

(aa) at the end of two years from the date on which it is communicated to Contracting Governments for acceptance; or

(bb) at the end of a different period, which shall not be less than one year, if so determined at the time of its adoption by a two-thirds majority of the Contracting Governments present and voting in the expanded Maritime Safety Committee.

However, if within the specified period either more than one third of Contracting Governments, or Contracting Governments the combined merchant fleets of which constitute not less than fifty per cent of the gross tonnage of the world's merchant fleet, notify the Secretary-General of the Organization that they object to the amendment, it shall be deemed not to have been accepted.

(vii) (1) An amendment to an Article of the Convention or to Chapter I of the annex shall enter into force with respect to those Contracting Governments which have accepted it, six months after the date on which it is deemed to have been accepted, and with respect to each Contracting Government which accepts it after that date, six months after the date of that Contracting Government's acceptance.

(2) An amendment to the Annex other than Chapter I shall enter into force with respect to all Contracting Governments, except those which have objected to the amendment under sub-paragraph (vi)(2) of this paragraph and which have not withdrawn such objections, six months after the date on which it is deemed to have been accepted. However, before the date set for entry into force, any Contracting Government may give notice to the Secretary-General of the Organization that it exempts itself from giving effect to that amendment for a period not longer than one year from the date of its entry into force, or for such longer period as may be determined by a two-thirds majority of the

This gazette is also available free online at **www.gpwonline.co.za**

Contracting Governments present and voting in the expanded Maritime Safety Committee at the time of the adoption of the amendment.

(c) Amendment by a Conference:

(i) Upon the request of a Contracting Government concurred in by at least one-third of the Contracting Governments, the Organization shall convene a Conference of Contracting Governments to consider amendments to the present Convention.

(ii) Every amendment adopted by such a Conference by a two-thirds majority of the Contracting Governments present and voting shall be communicated by the Secretary-General of the Organization to all Contracting Governments for acceptance.

(iii) Unless the Conference decides otherwise, the amendment shall be deemed to have been accepted and shall enter into force in accordance with the procedures specified in sub-paragraphs (b)(vi) and (b)(vii) respectively of this Article, provided that references in these paragraphs to the expanded Maritime Safety Committee shall be taken to mean references to the Conference.

(d) (i) A Contracting Government which has accepted an amendment to the Annex which has entered into force shall not be obliged to extend the benefit of the present Convention in respect of the certificates issued to a ship entitled to fly the flag of a State the Government of which, pursuant to the provisions of sub-paragraph (b)(vi)(2) of this article, has objected to the amendment and has not withdrawn such an objection, but only to the extent that such certificates relate to matters covered by the amendment in question.

(ii) A Contracting Government which has accepted an amendment to the Annex which has entered into force shall extend the benefit of the present Convention in respect of the certificates issued to a ship entitled to fly the flag of a State the Government of which, pursuant to the provisions of sub-paragraph (b)(vii)(2) of this article, has notified the Secretary-General of the Organization that it exempts itself from giving effect to the amendment.

(e) Unless expressly provided otherwise, any amendment to the present Convention made under this Article, which relates to the structure of a ship, shall apply only to ships the keels of which are laid or which are at a similar stage of construction, on or after the date on which the amendment enters into force.

(f) Any declaration of acceptance of, or objection to, an amendment or any notice given under subparagraph (b)(vii)(2) of this Article shall be submitted in writing to the Secretary-General of the Organization, who shall inform all Contracting Governments of any such submission and the date of its receipt.

10

(g) The Secretary-General of the Organization shall inform all Contracting Governments of any amendments which enter into force under this article, together with the date on which each such amendment enters into force.

Article IX
Signature, Ratification, Acceptance, Approval and Accession

1 The present Convention shall remain open for signature at the Headquarters of the Organization from 1 November 1974 until 1 July 1975 and shall thereafter remain open for accession. States may become parties to the present Convention by:

(i) signature without reservation as to ratification, acceptance or approval; or

(ii) signature subject to ratification, acceptance or approval, followed by ratification, acceptance or approval; or

(iii) accession.

2 Ratification, acceptance, approval or accession shall be effected by the deposit of an instrument to that effect with the Secretary-General of the Organization.

3 The Secretary-General of the Organization shall inform the Governments of all States which have signed the present Convention or acceded to it of any signature or of the deposit of any instrument of ratification, acceptance, approval or accession and the date of its deposit.

Article X
Entry into force

(a) The present Convention shall enter into force twelve months after the date on which not less than twenty-five States, the combined merchant fleets of which constitute not less than fifty per cent of the gross tonnage of the world's merchant shipping, have become parties to it in accordance with Article IX.

(b) Any instrument of ratification, acceptance, approval or accession deposited after the date on which the present Convention enters into force shall take effect three months after the date of deposit.

(c) After the date on which an amendment to the present Convention is deemed to have been accepted under article VIII, any instrument of ratification, acceptance, approval or accession deposited shall apply to the Convention as amended.

Article XI
Denunciation

This gazette is also available free online at **www.gpwonline.co.za**

(a) The present Convention may be denounced by any Contracting Government at any time after the expiry of five years from the date on which the Convention enters into force for that Government.

(b) Denunciation shall be effected by the deposit of an instrument of denunciation with the Secretary- General of the Organization who shall notify all the other Contracting Governments of any instrument of denunciation received and of the date of its receipt as well as the date on which such denunciation takes effect.

(c) A denunciation shall take effect one year, or such longer period as may be specified in the instrument of denunciation, after its receipt by the Secretary-General of the Organization.

Article XII
Deposit and Registration

(a) The present Convention shall be deposited with the Secretary-General of the Organization who shall transmit certified true copies thereof to the Governments of all States which have signed the present Convention or acceded to it.

(b) As soon as the present Convention enters into force, the text shall be transmitted by the Secretary- General of the Organization to the Secretary-General of the United Nations for registration and publication, in accordance with Article 102 of the Charter of the United Nations.

Article XIII
Languages

The present Convention is established in a single copy in the Chinese, English, French, Russian and Spanish languages, each text being equally authentic. Official translations in the Arabic, German and Italian languages shall be prepared and deposited with the signed original.

IN WITNESS WHEREOF the undersigned,* being duly authorized by their respective Governments for that purpose, have signed the present Convention.

Done at London this first day of November one thousand nine hundred and seventy-four.

* Signatures omitted.

12

[**Protocol of 1988 relating to the International Convention for the Safety of Life at Sea, 1974**

This gazette is also available free online at **www.gpwonline.co.za**

[Protocol of 1988 relating to the International Convention for the Safety of Life at Sea, 1974

THE PARTIES TO THE PRESENT PROTOCOL,

BEING PARTIES to the International Convention for the Safety of Life at Sea, 1974, done at London on 1 November 1974,

RECOGNIZING the need for the introduction into the above-mentioned Convention of provisions for survey and certification harmonized with corresponding provisions in other international instruments,

CONSIDERING that this need may best be met by the conclusion of a Protocol relating to the International Convention for the Safety of Life at Sea, 1974,

HAVE AGREED as follows:

Article I
General Obligations

1 The Parties to the present Protocol undertake to give effect to the provisions of the present Protocol and the Annex hereto, which shall constitute an integral part of the present Protocol. Every reference to the present Protocol constitutes at the same time a reference to the annex hereto.

2 As between the Parties to the present Protocol, the provisions of the International Convention for the Safety of Life at Sea, 1974, as amended, (hereinafter referred to as "the Convention") shall apply subject to the modifications and additions set out in the present Protocol.

3 With respect to ships entitled to fly the flag of a State which is not a Party to the Convention and the present Protocol, the Parties to the present Protocol shall apply the requirements of the Convention and the present Protocol as may be necessary to ensure that no more favourable treatment is given to such ships.

Article II
Prior treaties

1 As between the Parties to the present Protocol, the present Protocol replaces and abrogates the Protocol of 1978 relating to the Convention.

2 Notwithstanding any other provisions of the present Protocol, any certificate issued under, and in accordance with, the provisions of the Convention and any supplement to such certificate issued under, and in accordance with, the provisions of the Protocol of 1978 relating to the Convention which is current when the present Protocol enters into force in

This gazette is also available free online at **www.gpwonline.co.za**

respect of the Party by which the certificate or supplement was issued, shall remain valid until it expires under the terms of the Convention or the Protocol of 1978 relating to the Convention, as the case may be

3 A Party to the present Protocol shall not issue certificates under, and in accordance with, the provisions of the International Convention for the Safety of Life at Sea, 1974, as adopted on 1 November 1974.

Article III

Communication of information*

The Parties to the present Protocol undertake to communicate to, and deposit with, the Secretary-General of the International Maritime Organization (hereinafter referred to as "the Organization"):

(a) the text of laws, decrees, orders and regulations and other instruments which have been promulgated on the various matters within the scope of the present Protocol;

(b) a list of nominated surveyors or recognized organizations which are authorized to act on their behalf in the administration of measures for safety of life at sea for circulation to the Parties for information of their officers, and a notification of the specific responsibilities and conditions of the authority delegated to those nominated surveyors or recognized organizations; and

(c) a sufficient number of specimens of their certificates issued under the provision of the present Protocol.

Article IV

Signature, ratification, acceptance, approval and accession

1 The present Protocol shall be open for signature at the Headquarters of the Organization from 1 March 1989 to 28 February 1990 and shall thereafter remain open for accession. Subject to the provisions of paragraph 3, States may express their consent to be bound by the present Protocol by:

(a) signature without reservation as to ratification, acceptance or approval; or

(b) signature subject to ratification, acceptance or approval, followed by ratification, acceptance or approval; or

(c) accession.

* Refer to Notification and circulation through the Global Integrated Shipping Information System (GISIS) (resolution A.1074(28)).

This gazette is also available free online at **www.gpwonline.co.za**

2 Ratification, acceptance, approval or accession shall be effected by the deposit of an instrument to that effect with the Secretary-General of the Organization.

3 The present Protocol may be signed without reservation, ratified, accepted, approved or acceded to only by States which have signed without reservation, ratified, accepted, approved or acceded to the Convention.

Article V
Entry into force

1 The present Protocol shall enter into force twelve months after the date on which both the following conditions have been met:

(a) not less than fifteen States, the combined merchant fleets of which constitute not less than fifty per cent of the gross tonnage of the world's merchant shipping, have expressed their consent to be bound by it in accordance with article IV, and

(b) the conditions for the entry into force of the Protocol of 1988 relating to the International Convention on Load Lines, 1966, have been met,

provided that the present Protocol shall not enter into force before 1 February 1992.

2 For States which have deposited an instrument of ratification, acceptance, approval or accession in respect of the present Protocol after the conditions for entry into force thereof have been met but prior to the date of entry into force, the ratification, acceptance, approval or accession shall take effect on the date of entry into force of the present Protocol or three months after the date of deposit of the instrument, whichever is the later date.

3 Any instrument of ratification, acceptance, approval or accession deposited after the date on which the present Protocol enters into force shall take effect three months after the date of deposit.

4 After the date on which an amendment to the present Protocol is deemed to have been accepted under article VI, any instrument of ratification, acceptance, approval or accession deposited shall apply to the present Protocol as amended.

Article VI
Amendments*

* Refer to *Guidance on entry into force of amendments to the 1974 SOLAS Convention and related mandatory instruments* (MSC.1/Circ.1481) and *Interim guidance on drafting of amendments to the 1974 SOLAS Convention and related mandatory instruments* (MSC.1/Circ.1500/Rev.2).

This gazette is also available free online at **www.gpwonline.co.za**

The procedures set out in article VIII of the Convention shall apply to amendments to the present Protocol, provided that:

(a) references in that article to the Convention and to Contracting Governments shall be taken to mean references to the present Protocol and to the Parties to the present Protocol respectively;

(b) amendments to the articles of the present Protocol and to the annex thereto shall be adopted and brought into force in accordance with the procedure applicable to amendments to the articles of the Convention or to chapter I of the Annex thereto; and

(c) amendments to the appendix to the Annex to the present Protocol may be adopted and brought into force in accordance with the procedure applicable to amendments to the annex to the Convention other than chapter I.

Article VII
Denunciation

1 The present Protocol may be denounced by any Party at any time after the expiry of five years from the date on which the present Protocol enters into force for that Party.

2 Denunciation shall be effected by the deposit of an instrument of denunciation with the Secretary- General of the Organization.

3 A denunciation shall take effect one year, or such longer period as may be specified in the instrument of denunciation, after its receipt by the Secretary-General of the Organization.

4 A denunciation of the Convention by a Party shall be deemed to be a denunciation of the present Protocol by that Party. Such denunciation shall take effect on the same date as denunciation of the Convention takes effect according to paragraph (c) of article XI of the Convention.

Article VIII
Depositary

1 The present Protocol shall be deposited with the Secretary-General of the Organization (hereinafter referred to as "the depositary").

2 The depositary shall:

(a) inform the Governments of all States which have signed the present Protocol or acceded thereto of:

This gazette is also available free online at **www.gpwonline.co.za**

(i) each new signature or deposit of an instrument of ratification, acceptance, approval or accession, together with the date thereof;

(ii) the date of entry into force of the present Protocol;

(iii) the deposit of any instrument of denunciation of the present Protocol together with the date on which it was received and the date on which the denunciation takes effect;

(b) transmit certified true copies of the present Protocol to the Governments of all States which have signed the present Protocol or acceded thereto.

3 As soon as the present Protocol enters into force, a certified true copy thereof shall be transmitted by the depositary to the Secretariat of the United Nations for registration and publication in accordance with Article 102 of the Charter of the United Nations.

Article IX
Languages

The present Protocol is established in a single original in the Arabic, Chinese, English, French, Russian and Spanish languages, each text being equally authentic. An official translation into the Italian language shall be prepared and deposited with the signed original.

DONE AT LONDON this eleventh day of November one thousand nine hundred and eighty-eight.

IN WITNESS WHEREOF the undersigned,* being duly authorized by their respective Governments for that purpose, have signed the present Protocol.

* Signatures omitted

This gazette is also available free online at **www.gpwonline.co.za**

Chapter I

General provisions

This gazette is also available free online at **www.gpwonline.co.za**

Contents

Chapter I - General Provisions 21
Part A - Application, Definitions, etc 21
Regulation 1 Application 21
Regulation 2 Definitions 21
Regulation 3 Exceptions 22
Regulation 4 Exemptions 22
Regulation 5 Equivalents 23
Part B - Surveys And Certificates 24
Regulation 6 Inspection and survey 24
Regulation 7 Surveys of Passenger Ships 25
Regulation 8 Surveys of Life-Saving Appliances and other Equipment of Cargo ships 26
Regulation 9 Surveys of Radio Installations of Cargo Ships 27
Regulation 10 Surveys of Structure, Machinery and Equipment of Cargo Ships 28
Regulation 11 Maintenance of Conditions after Survey 30
Regulation 12 Issue or endorsement of Certificates 30
Regulation 13 Issue or Endorsement of Certificate by another Government 32
Regulation 14 Duration and validity of Certificates 32
Regulation 15 Forms of Certificates and Records of Equipment 34
Regulation 16 Availability of Certificates 35
Regulation 17 Acceptance of Certificates 35
Regulation 18 Qualification of Certificates 35
Regulation 19 Control 35
Regulation 20 Privileges 36
Part C - Casualties 37
Regulation 21 Casualties 37

This gazette is also available free online at **www.gpwonline.co.za**

Chapter I - General Provisions

Part A - Application, Definitions, etc.

Regulation 1
Application [1]

(a) Unless expressly provided otherwise, the present Regulations apply only to ships engaged on international voyages.

(b) The classes of ships to which each Chapter applies are more precisely defined, and the extent of the application is shown, in each Chapter.

Regulation 2
Definitions

For the purpose of the present Regulations, unless expressly provided otherwise:

(a) *Regulations* means the Regulations contained in the Annex to the present Convention.

(b) *Administration* means the Government of the State whose flag the ship is entitled to fly.

(c) *Approved* means approved by the Administration.

(d) *International voyage* means a voyage from a country to which the present Convention applies to a port outside such country, or conversely.

(e) A *passenger* is every person other than:

(i) the master and the members of the crew or other persons employed or engaged in any capacity on board a ship on the business of that ship; and

(ii) a child under one year of age.

(f) A *passenger ship* is a ship which carries more than twelve passengers.

(g) A *cargo ship* is any ship which is not a passenger ship.

[1] For some specific type of ships, refer to other IMO instruments, such as the *Code of safety for special purpose ships, 2008* (resolution MSC.266(84)), as amended (2008 SPS Code); the *Code for the construction and equipment of mobile offshore drilling unit, 2009* (resolution A.1023(26)), as amended (2009 MODU Code); the *Code for the transport and handling of hazardous and noxious liquid substances in bulk on offshore support vessels* (resolution A.1122(30)) (OSV Chemical Code); the *Code of safety for diving systems, 1995* (resolution A.831(19)) (Diving Code, 1995) and so on.

This gazette is also available free online at **www.gpwonline.co.za**

(h) A tanker is a cargo ship constructed or adapted for the carriage in bulk of liquid cargoes of an inflammable [2] nature.

(i) A *fishing vessel* is a vessel used for catching fish, whales, seals, walrus or other living resources of the sea.

(j) A *nuclear ship* is a ship provided with a nuclear power plant.

(k) *New ship* means a ship the keel of which is laid or which is at a similar stage of construction on or after 25 May 1980.

(l) *Existing ship* means a ship which is not a new ship.

(m) A *mile* is 1,852 metres or 6,080 feet.

(n) *Anniversary date* means the day and the month of each year which will correspond to the date of expiry of the relevant certificate.

Regulation 3
Exceptions

(a) The present Regulations, unless expressly provided otherwise, do not apply to:

(i) Ships of war and troopships.

(ii) Cargo ships of less than 500 gross tonnage.

(iii) Ships not propelled by mechanical means.

(iv) Wooden ships of primitive build.

(v) Pleasure yachts not engaged in trade.

(vi) Fishing vessels.

(b) Except as expressly provided in Chapter V, nothing herein shall apply to ships solely navigating the Great Lakes of North America and the River St. Lawrence as far east as a straight line drawn from Cap des Rosiers to West Point, Anticosti Island and, on the north side of Anticosti Island, the 63rd Meridian.

Regulation 4
Exemptions [3]

[2] "Inflammable" has the same meaning as "flammable".

[3] Refer to *Issue of Exemption Certificates under the 1974 SOLAS Convention and Amendments thereto*, as amended (SLS.14/Circ.115); *Port State concurrence with SOLAS exemptions* (MSC/Circ.606) and *Notification and circulation through the Global Integrated Shipping Information System (GISIS)* (resolution A.1074(28)).

This gazette is also available free online at **www.gpwonline.co.za**

(a) A ship which is not normally engaged on international voyages but which, in exceptional circumstances, is required to undertake a single international voyage may be exempted by the Administration from any of the requirements of the present Regulations provided that it complies with safety requirements which are adequate in the opinion of the Administration for the voyage which is to be undertaken by the ship.

(b) The Administration may exempt any ship which embodies features of a novel kind from any of the provisions of Chapters II-1, II-2, III and IV of these Regulations the application of which might seriously impede research into the development of such features and their incorporation in ships engaged on international voyages. Any such ship shall, however, comply with safety requirements which, in the opinion of that Administration, are adequate for the service for which it is intended and are such as to ensure the overall safety of the ship and which are acceptable to the Governments of the States to be visited by the ship. The Administration which allows any such exemption shall communicate to the Organization particulars of same and the reasons therefore which the Organization shall circulate to the Contracting Governments for their information.

Regulation 5
Equivalents [4]

(a) Where the present Regulations require that a particular fitting, material, appliance or apparatus, or type thereof, shall be fitted or carried in a ship, or that any particular provision shall be made, the Administration may allow any other fitting, material, appliance or apparatus, or type thereof, to be fitted or carried, or any other provision to be made in that ship, if it is satisfied by trial thereof or otherwise that such fitting, material, appliance or apparatus, or type thereof, or provision, is at least as effective as that required by the present Regulations.

(b) Any Administration which so allows, in substitution, a fitting, material, appliance or apparatus, or type thereof, or provision, shall communicate to the Organization particulars thereof together with a report on any trials made and the Organization shall circulate such particulars to other Contracting Governments for the information of their officers.

[4] Refer to *Guidelines for the approval of alternatives and equivalents as provided for in various IMO instruments* (MSC.1/Circ.1455) and *Notification and circulation through the Global Integrated Shipping Information System (GISIS)* (resolution A.1074(28))

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Surveys And Certificates [5]

Regulation 6
Inspection and survey

(a) The inspection and survey of ships, so far as regards the enforcement of the provisions of the present regulations and the granting of exemptions therefrom, shall be carried out by officers of the Administration. The Administration may, however, entrust the inspections and surveys either to surveyors nominated for the purpose or to organizations recognized by it.

(b) An Administration nominating surveyors or recognizing organizations to conduct inspections and surveys as set forth in paragraph (a) shall as a minimum empower any nominated surveyor or recognized organization to:

- **(i) require repairs to a ship;**
- **(ii) carry out inspections and surveys if requested by the appropriate authorities of a port State.**

The Administration shall notify the Organization of the specific responsibilities and conditions of the authority delegated to nominated surveyors or recognized organizations [6].

(c) When a nominated surveyor or recognized organization determines that the condition of the ship or its equipment does not correspond substantially with the particulars of the certificate or is such that the ship is not fit to proceed to sea without danger to the ship, or persons on board, such surveyor or organization shall immediately ensure that corrective action is taken and shall in due course notify the Administration. If such corrective action is not taken the relevant certificate should be withdrawn and the Administration shall be notified immediately; and, if the ship is in the port of another Party, the appropriate authorities of the port State shall also be notified immediately. When an officer of the Administration, a nominated surveyor or a recognized organization has notified the appropriate authorities of the port State, the Government of the port State concerned shall give such officer, surveyor or organization any necessary assistance to carry out their obligations under this regulation. When applicable, the Government of the port State concerned shall ensure that the ship shall not sail until it can proceed to sea, or leave port for the purpose of proceeding to the appropriate repair yard, without danger to the ship or persons on board.

---

[5] Refer to *Global and uniform implementation of the harmonized system of survey and certification (HSSC)* (resolution A.883(21)), *Survey Guidelines under the Harmonized System of Survey and Certification (HSSC), 2019* (resolution A.1140(31), as may be amended), *Guidelines for pre-planning of surveys in dry dock of ships which are not subject to the enhanced programme of inspections* (MSC.1/Circ.1223), *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290) and *Guidelines for Administrations to ensure the adequacy of transfer of class-related matters between recognized organizations (ROs)* (MSC-MEPC.5/Circ.2).

[6] Refer to the *Code for Recognized Organizations (RO Code)* (MSC.349(92) and MEPC.237(65)); *Communication of information on the authorization of recognized organizations (ROs)* (MSC/Circ.1010-MEPC/Circ.382) and *Notification and circulation through the Global Integrated Shipping Information System (GISIS)* (resolution A.1074(28)).

This gazette is also available free online at **www.gpwonline.co.za**

(d) In every case, the Administration shall fully guarantee the completeness and efficiency of the inspection and survey, and shall undertake to ensure the necessary arrangements to satisfy this obligation.

Regulation 7
Surveys of Passenger Ships [7]

(a) A passenger ship shall be subject to the surveys specified below:

(i) an initial survey before the ship is put in service;

(ii) a renewal survey once every 12 months, except where regulation 14(b), (e), (f) and (g) is applicable;

(iii) additional surveys, as occasion arises.

(b) The surveys referred to above shall be carried out as follows:

(i) The initial survey shall include a complete inspection of the ship' s structure, machinery and equipment, including the outside of the ship' s bottom and the inside and outside of the boilers. This survey shall be such as to ensure that the arrangements, materials and scantlings of the structure, boilers and other pressure vessels and their appurtenances, main and auxiliary machinery, electrical installation, radio installations including those used in life-saving appliances, fire protection, fire safety systems and appliances, life- saving appliances and arrangements, shipborne navigational equipment, nautical publications, means of embarkation for pilots and other equipment fully comply with the requirements of the present regulations, and of the laws, decrees, orders and regulations promulgated as a result thereof by the Administration for ships of the service for which it is intended. The survey shall also be such as to ensure that the workmanship of all parts of the ship and its equipment is in all respects satisfactory, and that the ship is provided with the lights, shapes, means of making sound signals and distress signals as required by the provisions of the present regulations and the International Regulations for Preventing Collisions at Sea in force;

(ii) the renewal survey shall include an inspection of the structure, boilers and other pressure vessels, machinery and equipment, including the outside of the ship' s bottom. The survey shall be such as to ensure that the ship, as regards the structure, boilers and other pressure vessels and their appurtenances, main and auxiliary machinery, electrical installation, radio installations including those used in life-saving appliances, fire protection, fire protection, fire safety systems and appliances, life-saving appliances and arrangements, shipborne navigational equipment, nautical publications, means of embarkation

[7] Refer to *Surveys and inspections of ro-ro passenger ships* (resolution A.794(19)), *Guidelines for unscheduled inspections of ro-ro passenger ships by flag States* (MSC/Circ.956) and *Guidelines for the assessment of technical provisions for the performance of an in-water survey in lieu of bottom inspection in dry-dock to permit one dry-dock examination in any five-year period for passenger ships other than ro-ro passenger ships* (MSC.1/Circ.1348).

This gazette is also available free online at **www.gpwonline.co.za**

for pilots and other equipment is in satisfactory condition and is fit for the service for which it is intended, and that it complies with the requirements of the present regulations and of the laws, decrees, orders and regulations promulgated as a result thereof by the Administration. The lights, shapes, means of making sound signals and distress signals carried by the ship shall also be subject to the above-mentioned survey for the purpose of ensuring that they comply with the requirements of the present regulations and of the International Regulations for Preventing Collisions at Sea in force;

(iii) an additional survey either general or partial, according to the circumstances, shall be made after a repair resulting from investigations prescribed in regulation 11, or whenever any important repairs or renewals are made. The survey shall be such as to ensure that the necessary repairs or renewals have been effectively made, that the material and workmanship of such repairs or renewals are in all respects satisfactory, and that the ship complies in all respects with the provisions of the present regulations and of the International Regulations for Preventing Collisions at Sea in force, and of the laws, decrees, orders and regulations promulgated as a result thereof by the Administration;

(c) (i) the laws, decrees, orders and regulations referred to in paragraph (b) of this regulation shall be in all respects such as to ensure that, from the point of view of safety of life, the ship is fit for service for which it is intended;

(ii) they shall among other things prescribe the requirements to be observed as to the initial and subsequent hydraulic or other acceptable alternative tests to which the main and auxiliary boilers, connections, steam pipes, high pressure receivers and fuel tanks for internal combustion engines are to be submitted including the test procedures to be followed and the intervals between two consecutive tests.

Regulation 8
Surveys of Life-Saving Appliances and other Equipment of Cargo ships [8]

(a) The life-saving appliances and other equipment of cargo ships of 500 gross tonnage and upwards as referred to in paragraph (b)(i) shall be subject to the surveys specified below:

(i) an initial survey before the ship is put in service;

[8] Refer to *Guidelines for construction, installation, maintenance and inspection/survey of means of embarkation and disembarkation* (MSC.1/Circ.1331); *Servicing of life-saving appliances and radiocommunication equipment under the Harmonized System of Survey and Certification* (HSSC) (MSC/Circ.955); *Guidelines for the performance and testing criteria and surveys of high-expansion foam concentrates for fixed-extinguishing systems* (MSC/Circ.670); *Guidelines for performance and testing criteria and surveys of medium expansion from concentrates for fixed fire-extinguishing systems* (MSC/Circ.798) and *Guidance on the survey and certification of compliance of ships with the requirement to transmit LRIT information* (MSC.1/Circ.1307).

This gazette is also available free online at **www.gpwonline.co.za**

(ii) a renewal survey at intervals specified by the Administration but not exceeding 5 years, except where regulation 14(b), (e), (f) and (g) is applicable;

(iii) a periodical survey within three months before or after the second anniversary date or within three months before or after the third anniversary date of the Cargo Ship Safety Equipment Certificate which shall take the place of one of the annual surveys specified in paragraph (a)(iv);

(iv) an annual survey within 3 months before or after each anniversary date of the Cargo Ship Safety Equipment Certificate;

(v) an additional survey as prescribed for passenger ships in regulation 7(b)(iii).

(b) The surveys referred to in paragraph (a) shall be carried out as follows:

(i) the initial survey shall include a complete inspection of the fire safety systems and appliances, life-saving appliances and arrangements except radio installations, the shipborne navigational equipment, means of embarkation for pilots and other equipment to which chapter II-1, II-2, III and V apply to ensure that they comply with the requirements of the present regulations, are in satisfactory condition and are fit for the service for which the ship is intended. The fire control plans, nautical publications, lights, shapes, means of making sound signals and distress signals shall also be subject to the above-mentioned survey for the purpose of ensuring that they comply with the requirements of the present regulations and, where applicable, the International Regulations for Preventing Collisions at Sea in force; [9] the renewal and periodical surveys shall include an inspection of the equipment referred to in paragraph (b)(i) to ensure that it complies with the relevant requirements of the present regulations and the International Regulations for Preventing Collisions at Sea in force is in satisfactory condition and is fit for the service for which the ship is intended;

(ii) the annual survey shall include a general inspection of the equipment referred to in paragraph (b)(i) to ensure that it has been maintained in accordance with regulation 11(a) and that it remains satisfactory for the service for which the ship is intended.

(c) The periodical and annual surveys referred to in paragraphs (a)(iii) and (a)(iv) shall be endorsed on the Cargo Ship Safety Equipment Certificate.

Regulation 9
Surveys of Radio Installations of Cargo Ships [10]

[9] Refer to the Record of approved cargo ship safety equipment (SLS.14/Circ.1).

[10] Refer to *Servicing of life-saving appliances and radiocommunication equipment under the Harmonized System of Survey and Certification* (HSSC) (MSC/Circ.955).

This gazette is also available free online at **www.gpwonline.co.za**

(a) The radio installations, including those used in life-saving appliances, of cargo ships to which chapter III and IV apply shall be subject to the surveys specified below:

(i) an initial survey before the ship is put in service;

(ii) a renewal survey at intervals specified by the Administration but not exceeding five years, except where regulation 14(b), (e), (f) and (g) is applicable;

(iii) a periodical survey within three months before or after each anniversary date of the Cargo Ship Safety Radio Certificate;

(iv) an additional survey as prescribed for passenger ships in regulation 7(b)(iii).

(b) The surveys referred to in paragraph (a) shall be carried out as follows:

(i) the initial survey shall include a complete inspection of the radio installations of cargo ships, including those used in life-saving appliances, to ensure that they comply with the requirements of the present regulations;

(ii) the renewal and periodical survey shall include an inspection of the radio installations of cargo ships, including those used in life-saving appliances, to ensure that they comply with the requirements of the present regulations.

(c) The periodical surveys referred to in paragraph (a)(iii) shall be endorsed on the Cargo Ship Safety Radio Certificate.

Regulation 10
Surveys of Structure, Machinery and Equipment of Cargo Ships [11]

(a) The structure, machinery and equipment (other than items in respect of which a Cargo Ship Safety Equipment Certificate and a Cargo Ship Safety Radio Certificate are issued) of a cargo ship as referred to in paragraph (b)(i) shall be subject to the surveys and inspections specified below:

(i) an initial survey including an inspection of the outside of the ship's bottom before the ship is put in service;

(ii) a renewal survey at intervals specified by the Administration but not exceeding 5 years, except where regulation 14(b), (e), (f) and (g) is applicable;

(iii) an intermediate survey within three months before or after the second anniversary date or within three months before or after the third anniversary date of the Cargo Ship Safety Construction Certificate,

[11] Refer to *Guidance for planning the enhanced programme of inspections during surveys of bulk carriers and oil tankers* (MSC/Circ.655); *Guidelines for pre-planning of surveys in dry-dock of ships which are not subject to the Enhanced programme of inspections* (MSC.1/Circ.1223) and *Guidelines for bulk carrier hatch cover surveys and owner's inspections and maintenance* (MSC/Circ.1071).

This gazette is also available free online at **www.gpwonline.co.za**

which shall take the place of one of the annual surveys specified in paragraph (a)(iv);

(iv) an annual survey within 3 months before or after each anniversary date of the Cargo Ship Safety Construction Certificate;

(v) a minimum of two inspections of the outside of the ship's bottom during the five-year period of validity of the Cargo Ship Safety Construction Certificate or the Cargo Ship Safety Certificate, except where regulation 14(e) or 14(f) is applicable. Where regulation 14(e) or 14(f) is applicable, this five-year period may be extended to coincide with the extended period of validity of the certificate. In all cases the interval between any two such inspections shall not exceed 36 months;

(vi) an additional survey as prescribed for passenger ships in regulation 7(b)(iii).

(b) The surveys and inspections referred to in paragraph (a) shall be carried out as follows:

(i) the initial survey shall include a complete inspection of the structure, machinery and equipment. This survey shall be such as to ensure that the arrangements, materials, scantlings and workmanship of the structure, boilers and other pressure vessels, their appurtenances, main and auxiliary machinery including steering gear and associated control systems, electrical installation and other equipment comply with the requirements of the present regulations, are in satisfactory condition and are fit for the service for which the ship is intended and that the required stability information is provided. In the case of tankers such a survey shall also include an inspection of the pump-rooms, cargo, bunker and ventilation piping systems and associated safety devices;

(ii) the renewal survey shall include an inspection of the structure, machinery and equipment as referred to in paragraph (b)(i) to ensure that they comply with the requirements of the present regulations, are in satisfactory condition and are fit for the service for which the ship is intended;

(iii) the intermediate survey shall include an inspection of the structure, boilers and other pressure vessels, machinery and equipment, the steering gear and the associated control systems and electrical installations to ensure that they remain satisfactory for the service for which the ship is intended. In the case of tankers, the survey shall also include an inspection of the pump-rooms, cargo, bunker and ventilation piping systems and associated safety devices and the testing of insulation resistance of electrical installations in dangerous zones;

(iv) the annual survey shall include a general inspection of the structure, machinery and equipment referred to in paragraph (b)(i), to ensure that they have been maintained in accordance with regulation 11(a) and

This gazette is also available free online at **www.gpwonline.co.za**

that they remain satisfactory for the service for which the ship is intended;

(v) the inspection of the outside of the ship's bottom and the survey of related items inspected at the same time shall be such as to ensure that they remain satisfactory for the service for which the ship is intended.

(c) The intermediate and annual surveys and the inspections of the outside of the ship's bottom referred to in paragraphs (a)(iii), (a)(iv) and (a)(v) shall be endorsed on the Cargo Ship Safety Construction Certificate.

Regulation 11
Maintenance of Conditions after Survey [12]

(a) The condition of the ship and its equipment shall be maintained to conform with the provisions of the present regulations to ensure that the ship in all respects will remain fit to proceed to sea without danger to the ship or persons on board.

(b) After any survey of the ship under Regulations 7, 8, 9 or 10 has been completed, no change shall be made in the structural arrangements, machinery, equipment and other items covered by the survey, without the sanction of the Administration.

(c) Whenever an accident occurs to a ship or a defect is discovered, either of which affects the safety of the ship or the efficiency or completeness of its life-saving appliances or other equipment, the master or owner of the ship shall report at the earliest opportunity to the Administration, the nominated surveyor or recognized organization responsible for issuing the relevant certificate, who shall cause investigations to be initiated to determine whether a survey, as required by regulations 7, 8, 9 or 10, is necessary. If the ship is in a port of another Contracting Government, the master or owner shall also report immediately to the appropriate authorities of the port State and the nominated surveyor or recognized organization shall ascertain that such a report has been made.

Regulation 12
Issue or endorsement of Certificates [13]

[12] Refer to *Ship design, construction, repair and maintenance* (MSC/Circ.1070); *Shipboard technical operating and maintenance manuals* (MSC.1/Circ.1253) and the relevant instruments as referred to in the footnotes of other chapters.

[13] Refer to *Recommendation on the use of national tonnage in applying international conventions* (resolution A.1073(28)); *Guidelines for the use of Electronic Certificates* (FAL.5/Circ.39/Rev.2); *Guidance on the timing of replacement of existing certificates by the certificates issued after the entry into force of amendments to certificates in IMO instruments* (MSC-MEPC.5/Circ.6); *Unified interpretation on the expiration date of statutory certificates* (MSC-MEPC.5/Circ.13) and *Unified interpretation of the date of completion of the survey and verification on which the certificates are based* (MSC-MEPC.5/Circ.3).

This gazette is also available free online at **www.gpwonline.co.za**

(a) (i) a certificate called a Passenger Ship Safety Certificate shall be issued after an initial or renewal survey to a passenger ship which complies with the relevant requirements of chapters II-1, II-2, III, IV and V and any other relevant requirements of the present regulations;

(ii) a certificate called a Cargo Ship Safety Construction Certificate shall be issued after an initial or renewal survey to a cargo ship which complies with the relevant requirements of chapters II-1 and II-2 (other than those relating to fire safety systems and appliances and fire control plans) and any other relevant requirements of the present regulations;

(iii) a certificate called a Cargo Ship Safety Equipment Certificate shall be issued after an initial or renewal survey to a cargo ship which complies with the relevant requirements of chapter II-1, II-2, III and V and any other relevant requirements of the present regulations;

(iv) a certificate called a Cargo Ship Safety Radio Certificate shall be issued after an initial or renewal survey to a cargo ship which complies with the relevant requirements of chapter IV and any other relevant requirements of the present regulations;

(v) (1) a certificate called a Cargo Ship Safety Certificate may be issued after an initial or renewal survey to a cargo ship which complies with the relevant requirements of chapter II-1, II-2, III, IV and V and any other relevant requirements of the present regulations, as an alternative to the certificates referred to in paragraph (a)(ii), (a)(iii) and (a)(iv);

(2) whenever in this chapter reference is made to a Cargo Ship Safety Construction Certificate, Cargo Ship Safety Equipment Certificate or Cargo Ship Safety Radio Certificate, it shall apply to a Cargo Ship Safety Certificate, if it is used as an alternative to these certificates.

(vi) the Passenger Ship Safety Certificate, the Cargo Ship Safety Equipment Certificate, the Cargo Ship Safety Radio Certificate and the Cargo Ship Safety Certificate, referred to in subparagraphs (i), (iii), (iv) and (v), shall be supplemented by a Record of Equipment;

(vii) when an exemption is granted to a ship under and in accordance with the provisions of the present regulations, a certificate called an Exemption Certificate shall be issued in addition to the certificates prescribed in this paragraph;

(viii) the certificates referred to in this regulation shall be issued or endorsed either by the Administration or by any person or organization authorized by it. In every case, that Administration assumes full responsibility for the certificates.

(b) A Contracting Government shall not issue certificates under, and in accordance with, the provisions of the International Convention for the Safety of Life at Sea, 1960, 1948 or 1929, after the date on which acceptance of the present Convention by the Government takes effect.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 13
Issue or Endorsement of Certificate by another Government

A Contracting Government may, at the request of the Administration, cause a ship to be surveyed and, if satisfied that the requirements of the present regulations are complied with, shall issue or authorize the issue of certificates to the ship and, where appropriate, endorse or authorize the endorsement of certificates on the ship in accordance with the present regulations. Any certificate so issued shall contain a statement to the effect that it has been issued at the request of the Government of the State the flag of which the ship is entitled to fly, and it shall have the same force and receive the same recognition as a certificate issued under Regulation 12.

Regulation 14
Duration and validity of Certificates [14]

(a) A Passenger Ship Safety Certificate shall be issued for a period not exceeding 12 months. A Cargo Ship Safety Construction Certificate, Cargo Ship Safety Equipment Certificate and Cargo Ship Safety Radio Certificate shall be issued for a period specified by the Administration which shall not exceed five years. An Exemption Certificate shall not be valid for longer than the period of the certificate to which it refers.

(b) (i) notwithstanding the requirements of paragraph (a), when the renewal survey is completed within three months before the expiry date of the existing certificate, the new certificate shall be valid from the date of completion of the renewal survey to:

(1) for a passenger ship, a date not exceeding 12 months from the date of expiry of the existing certificate;

(2) for a cargo ship, a date not exceeding five years from the date of expiry of the existing certificate;

(ii) when the renewal survey is completed after the expiry date of the existing certificate, the new certificate shall be valid from the date of completion of the renewal survey to:

(1) for a passenger ship, a date not exceeding 12 months from the date of expire of the existing certificate;

(2) for a cargo ship, a date not exceeding five years from the date of expiry of the existing certificate;

[14] Refer to *Recommended conditions for the period of a certificate* (MSC-MEPC.5/Circ.1); *Guidance on the timing of replacement of existing certificates by the certificates issued after the entry into force of amendments to certificates in IMO instruments* (MSC-MEPC.5/Circ.6); *Guidelines for the use of Electronic Certificate* (FAL.5/Circ.39/Rev.2); *Unified interpretation on the expiration date of statutory certificates* (MSC-MEPC.5/Circ.13) and *Unified interpretation of the date of completion of the survey and verification are based* (MSC-MEPC.5/Circ.3).

This gazette is also available free online at **www.gpwonline.co.za**

(iii) when the renewal survey is completed more than three months before the expiry date of the existing certificate, the new certificate shall be valid from the date of completion of the renewal survey to:

(1) for a passenger ship, a date not exceeding 12 months from the date of completion of the renewal survey;

(2) for a cargo ship, a date not exceeding five years from the date of completion of the renewal survey.

(c) If a certificate other than a Passenger Ship Safety Certificate is issued for a period of less than five years, the Administration may extend the validity of the certificate beyond the expire date to the maximum period specified in paragraph (a), provided that the surveys referred to in regulations 8, 9 and 10 applicable when a certificate is issued for a period of 5 years are carried out as appropriate.

(d) If a renewal survey has been completed and a new certificate cannot be issued or placed on board the ship before the expire date of the existing certificate, the person or organisation authorised by the Administration may endorse the existing certificate and such a certificate shall be accepted as valid for a further period which shall not exceed 5 months from the expire date.

(e) If a ship at the time when a certificate expires is not in a port in which it is to, be surveyed, the Administration may extend the period of validity of the certificate but this extension shall be granted only for the purpose of allowing the ship to complete its voyage to the port in which it is to be surveyed, and then only in cases where it appears proper and reasonable to do so. No certificate shall be extended for a period longer than three months, and a ship to which an extension is granted shall not, on its arrival in the port in which it is to be surveyed, be entitled by virtue of such extension to leave that port without having a new certificate. When the renewal survey is completed, the new certificate shall be valid to:

(i) for a passenger ship, a date not exceeding 12 months from the date of expiry of the existing certificate before the extension was granted;

(ii) for a cargo ship, a date not exceeding 5 years from the date of expiry of the existing certificate before the extension was granted.

(f) A certificate issued to a ship engaged on short voyages which has not been extended under the foregoing provisions of this regulation may be extended by the Administration for a period of grace of up to one month from the date of expiry stated on it. When the renewal survey is completed, the new certificate shall be valid to :

(i) for a passenger ship, a date not exceeding 12 months from the date of expiry of the existing certificate before the extension was granted;

(ii) for a cargo ship, a date not exceeding 5 years from the date of expiry of the existing certificate before the extension was granted.

(g) In special circumstances, as determined by the Administration, a new certificate need not be dated from the date of expiry of the existing certificate as

This gazette is also available free online at **www.gpwonline.co.za**

required by paragraphs (b)(ii), (e) or (f) In these special circumstances, the new certificate shall be valid to :

(i) for a passenger ship, a date not exceeding 12 months from the date of completion of the renewal survey;

(ii) the subsequent annual, intermediate or periodical survey required by the relevant regulations shall be completed at the intervals prescribed by these regulations using the new anniversary date;

(h) If an annual, intermediate or periodical survey is completed before the period specified in the relevant regulations then :

(i) the anniversary date shown on the relevant certificate shall be amended by endorsement to a date which shall not be more than three months later than the date on which the survey was completed;

(ii) the subsequent annual, intermediate or periodical survey required by the relevant regulations shall be completed at the intervals prescribed by these regulations using the new anniversary date;

(iii) the expiry date may remain unchanged provided one or more annual, intermediate or periodical surveys, as appropriate, are carried out so that the maximum intervals between the surveys prescribed by the relevant regulations are not exceeded.

(i) A certificate issued under regulation 12 or 13 shall cease to be valid in any of the following case:

(i) if the relevant surveys and inspections are not completed within the periods specified under regulations 7(a), 8(a), 9(a) and 10(a);

(ii) if the certificate is not endorsed in accordance with the present regulations;

(iii) upon transfer of the ship to the flag of another State. A new certificate shall only be issued when the Government issuing the new certificate is fully satisfied that the ship is in compliance with the requirements of regulation 11(a) and (b). In the case of a transfer between Contracting Governments, if requested within three months after the transfer has taken place, the Government of the State whose flag the ship was formerly entitled to fly shall, as soon as possible, transmit to the Administration copies of the certificates carried by the ship before the transfer and, if available, copies of the relevant survey reports.

Regulation 15
Forms of Certificates and Records of Equipment [15]

The certificates and records of equipment shall be drawn up in the form corresponding to the models given in the appendix to the Annex to the present

[15] Refer to *Guidelines for the use of Electronic Certificate* (FAL.5/Circ.39/Rev.2) and the information collected via the Global Integrated Shipping Information System (GISIS).

This gazette is also available free online at **www.gpwonline.co.za**

Convention. If the language used is neither English nor French, the text shall include a translation into one of these languages.[16]

Regulation 16
Availability of Certificates **[17]**

The certificates issued under regulations 12 and 13 shall be readily available on board for examination at all times.

Regulation 17
Acceptance of Certificates

Certificates issued under the authority of a Contracting Government shall be accepted by the other Contracting Governments for all purposes covered by the present Convention. They shall be regarded by the other Contracting Governments as having the same force as certificates issued by them.

Regulation 18
Qualification of Certificates

(a) If in the course of a particular voyage a ship has on board a number of persons less than the total number stated in the Passenger Ship Safety Certificate and is in consequence, in accordance with the provisions of the present Regulations, free to carry a smaller number of lifeboats and other life-saving appliances than that stated in the Certificate, an annex may be issued by the Government, person or organization referred to in Reg. 12 or 13 of this Chapter.

(b) This annex shall state that in the circumstances there is no infringement of the provisions of the present Regulations. It shall be annexed to the Certificate and shall be substituted for it in so far as the life-saving appliances are concerned. It shall be valid only for the particular voyage for which it is issued.

Regulation 19
Control **[18]**

[16] Refer to *Translation of the text of certificates* (resolution A.561(14)).

[17] Refer to *Retention of original records/documents on board ships* (MSC-MEPC.4/Circ.1) and *Guidance on the timing of replacement of existing certificates by the certificates issued after the entry into force of amendments to certificates in IMO instruments* (MSC-MEPC.5/Circ.6).

[18] Refer to *Procedures for port State control, 2019* (resolution A.1138(31)); *IMO Instruments Implementation Code* (III Code) (resolution A.1070(28)); *Guidance to port State control officers on the non-security related elements of the 2002 SOLAS amendments* (MSC/Circ.1113); *Measures to improve port State control procedures* (MSC/Circ.11011-MEPC/Circ.383); *Code of good practice for port State control officers* (MSC-MEPC.4/Circ.2); *National contact points*

This gazette is also available free online at **www.gpwonline.co.za**

(a) Every ship when in a port of another Contracting Government is subject to control by officers duly authorised by such Government in so far as this control is directed towards verifying that the certificates issued under regulation 12 or regulation 13 are valid.

(b) Such certificates, if valid, shall be accepted unless there are clear grounds for believing that the condition of the ship or of its equipment does not correspond substantially with the particulars of any of the certificates or that the ship and its equipment are not in compliance with the provisions of regulation 11(a) and (b).

(c) In the circumstances given in paragraph (b) or where a certificate has expired or ceased to be valid, the officer carrying out the control shall take steps to ensure that the ship shall not sail until it can proceed to sea or leave the port for the purpose of proceeding to the appropriate repair yard without danger to the ship or persons on board.

(d) In the event of this control giving rise to an intervention of any kind, the officer carrying out the control shall forthwith inform, in writing, the Consul or, in his absence the nearest diplomatic representative of the State whose flag the ship is entitled to fly of all the circumstances in which intervention was deemed necessary. In addition, nominated surveyors or recognised organisations responsible for the issue of the certificates shall also be notified. The facts concerning the intervention shall be reported to the Organisation.

(e) The port State authority concerned shall notify all relevant information about the ship to the authorities of the next port of call, in addition to parties mentioned in paragraph (d), if it is unable to take action as specified in paragraphs (c) and (d) or if the ship has been allowed to proceed to the next port of call.

(f) When exercising control under this regulation all possible efforts shall be made to avoid a ship being unduly detained or delayed. If a ship is thereby unduly detained or delayed it shall be entitled to compensation for any loss or damage suffered.

Regulation 20
Privileges

The privileges of the present Convention may not be claimed in favour of any ship unless it holds appropriate valid certificates.

for safety and pollution prevention and response (MSC-MEPC.6/Circ.18, as may be amended), and the information collected via the Global Integrated Shipping Information System (GISIS).

This gazette is also available free online at **www.gpwonline.co.za**

Part C - Casualties

Regulation 21
Casualties [19]

(a) Each Administration undertakes to conduct an investigation of any casualty occurring to any of its ships subject to the provisions of the present Convention when it judges that such an investigation may assist in determining what changes in the present Regulations might be desirable.

(b) Each Contracting Government undertakes to supply the Organization with pertinent information concerning the findings of such investigations. No reports or recommendations of the Organization based upon such information shall disclose the identity or nationality of the ships concerned or in any manner fix or imply responsibility upon any ship or person.]

[19] See additional requirements for the investigation of marine casualties and incidents in regulation XI-1/6.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter II-1

Construction – structure, subdivision and stability, machinery and electrical installations

This gazette is also available free online at **www.gpwonline.co.za**

Contents

Chapter II-1 - Construction - Structure, Subdivision and Stability, Machinery and Electrical Installations 43

Part A - General 43

Regulation 1 Application 43
Regulation 2 Definitions 45
Regulation 3 Definitions relating to Parts C, D and E 48

Part A-1 - Structure Of Ships 51

Regulation 3-1 Structural, mechanical and electrical requirements for ships 51
Regulation 3-2 Protective coatings of dedicated seawater ballast tanks in all types of ships and double-side skin spaces of bulk carriers 51
Regulation 3-3 Safe access to tanker bows 52
Regulation 3-4 Emergency towing arrangements and procedures 52
Regulation 3-5 New installation of materials containing asbestos 53
Regulation 3-6 Access to and within spaces in, and forward of, the cargo area of oil tankers and bulk carriers 53
Regulation 3-7 Construction drawings maintained on board and ashore 56
Regulation 3-8 Towing and mooring equipment 56
Regulation 3-9 Means of embarkation on and disembarkation from ships 57
Regulation 3-10 . Goal-based ship construction standards for bulk carriers and oil tankers 57
Regulation 3-11 .....Corrosion protection of cargo oil tanks of crude oil tankers 59
Regulation 3-12 .....Protection against noise 60

Part B - Subdivision And Stability 62

Regulation 4 General 62

Part B-1 - Stability 64

Regulation 5 Intact stability 64
Regulation 5-1 Stability information to be supplied to the master 65
Regulation 6 Required subdivision index R 66
Regulation 7 Attained subdivision index A 66
Regulation 7-1 Calculation of the factor p_i 68
Regulation 7-2 Calculation of the factor s_i 71
Regulation 7-3 Permeability 77

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 8 Special requirements concerning passenger ship stability 77
Regulation 8-1 System capabilities and operational information after a flooding casualty on passenger ships 78
Part B-2 - Subdivision, Watertight And Weathertight Integrity 80
Regulation 9 Double bottoms in passenger ships and cargo ships other than tankers 80
Regulation 10 Construction of watertight bulkheads 81
Regulation 11 Initial testing of watertight bulkheads, etc. 82
Regulation 12 Peak and machinery space bulkheads, shaft tunnels, etc. 82
Regulation 13 Openings in watertight boundaries below the bulkhead deck in passenger ships 85
Regulation 13-1 ..... Openings in watertight bulkheads and internal decks in cargo ships 90
Regulation 14 Passenger ships carrying goods vehicles and accompanying personnel 91
Regulation 15 Openings in the shell plating below the bulkhead deck of passenger ships and the freeboard deck of cargo ships 91
Regulation 15-1 ..... External openings in cargo ships 93
Regulation 16 Construction and initial tests of watertight closures 93
Regulation 16-1 ..... Construction and initial tests of watertight decks, trunks, etc. 94
Regulation 17 Internal watertight integrity of passenger ships above the bulkhead deck 95
Regulation 17-1 .. Integrity of the hull and superstructure, damage prevention and control on ro-ro passenger ships 96
Part B-3 - Subdivision Load Line Assignment For Passenger Ships 97
Regulation 18 Assigning, marking and recording of subdivision load lines for passenger ships 97
Part B-4 - Stability Management 98
Regulation 19 Damage control information 98
Regulation 19-1 ..... Damage control drills for passenger ships 98
Regulation 20 Loading of ships 99
Regulation 21 Periodical operation and inspection of watertight doors, etc. in passenger ships 100
Regulation 22 Prevention and control of water ingress, etc. 100
Regulation 22-1 .... Flooding detection systems for passenger ships carrying 36 or more persons 103

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 23 Special requirements for ro-ro passenger ships 103
Regulation 24 Additional requirements for prevention and control of water ingress, etc.in cargo ships 104
Regulation 25 Water level detectors on single hold cargo ships other than bulk carriers 104
Regulation 25-1 .....Water level detectors on multiple hold cargo ships other than bulk carriers 105
Part C - Machinery Installations 106
Regulation 26 General 106
Regulation 27 Machinery 107
Regulation 28 Means of going astern 108
Regulation 29 Steering gear 109
Regulation 30 Additional requirements for electric and electrohydraulic steering gear 115
Regulation 31 Machinery Controls 116
Regulation 32 Steam boilers and boiler feed systems 117
Regulation 33 Steam pipe systems 118
Regulation 34 Air pressure systems 118
Regulation 35 Ventilating systems in machinery spaces 119
Regulation 35-1 ..... Bilge pumping arrangements 119
Regulation 36 --- 124
Regulation 37 Communication between navigating bridge and machinery space 124
Regulation 38 Engineer's alarm 124
Regulation 39 Location of emergency installations in passenger ships 124
Part D - Electrical Installations 125
Regulation 40 General 125
Regulation 41 Main source of electrical power and lighting systems 125
Regulation 42 Emergency source of electrical power in passenger ships 127
Regulation 42-1 ..... Supplementary emergency lighting for ro-ro passenger ships 131
Regulation 43 Emergency source of electrical power in cargo ships 131
Regulation 44 Starting arrangements for emergency generating sets 135
Regulation 45 Precautions against shock, fire and other hazards of electrical origin 136

This gazette is also available free online at **www.gpwonline.co.za**

Part E - Additional Requirements For Periodically Unattended Machinery Spaces 140
Regulation 46 General 140
Regulation 47 Fire precautions 140
Regulation 48 Protection against flooding 140
Regulation 49 Control of propulsion machinery from the navigating bridge 141
Regulation 50 Communication 142
Regulation 51 Alarm system 142
Regulation 52 Safety systems 143
Regulation 53 Special requirements for machinery, boiler and electrical installations 143
Regulation 54 Special consideration in respect of passenger ships 144
Part F - Alternative Design And Arrangements 145
Regulation 55 Alternative design and arrangements 145
Part G - Ships Using Low-Flashpoint Fuels 147
Regulation 56 Application 147
Regulation 57 Requirements for ships using low-flashpoint fuels 147

This gazette is also available free online at **www.gpwonline.co.za**

Chapter II-1 - Construction - Structure, Subdivision and Stability, Machinery and Electrical Installations

Part A - General

Regulation 1
Application [20]

1.1 Unless expressly provided otherwise, this chapter shall apply to ships the keels of which are laid or which are at a similar stage of construction on or after 1 January 2009.

1.1.1 Unless expressly provided otherwise, parts B, B-1, B-2 and B-4 of this chapter shall only apply to ships:

.1 for which the building contract is placed on or after 1 January 2020; or

.2 in the absence of a building contract, the keel of which is laid or which are at a similar stage of construction on or after 1 July 2020; or

.3 the delivery of which is on or after 1 January 2024.

1.1.2 Unless expressly provided otherwise, for ships not subject to the provisions of paragraph 1.1.1 but constructed on or after 1 January 2009, the Administration shall:

.1 ensure that the requirements for parts B, B-1, B-2 and B-4 which are applicable under chapter II-1 of the International Convention for the Safety of Life at Sea, 1974, as amended by resolutions MSC.216(82), MSC.269(85) and MSC.325(90) are complied with; and

.2 ensure that the requirements of regulations 8-1.3 and regulation 19-1 are complied with.

1.2 For the purpose of this chapter, the term a similar stage of construction means the stage at which:

.1 construction identifiable with a specific ship begins; and

.2 assembly of that ship has commenced comprising at least 50 tonnes or one per cent of the estimated mass of all structural material, whichever is less.

1.3 For the purpose of this chapter:

.1 the expression ships constructed means ships the keels of which are laid or which are at a similar stage of construction;

.2 the expression ships constructed on or after 1 January 2024 means ships:

.1 for which the building contract is placed on or after 1 January 2024; or

[20] Refer to *Unified interpretation of the application of regulations governed by the building contract date, the keel laying date and the delivery date for the requirements of the SOLAS and MARPOL Conventions* (MSC-MEPC.5/Circ.8).

This gazette is also available free online at **www.gpwonline.co.za**

.2 in the absence of a building contract, the keel of which is laid or which are at a similar stage of construction on or after 1 July 2024; or

.3 the delivery of which is on or after 1 January 2028.

.3 the expression all ships means ships constructed before, on or after 1 January 2009;

.4 a cargo ship, whenever built, which is converted to a passenger ship shall be treated as a passenger ship constructed on the date on which such a conversion commences.

2 Unless expressly provided otherwise, for ships constructed before 1 January 2009, the Administration shall ensure that;

.1 the requirements which are applicable under chapter II-1 of the International Convention for the Safety of Life at Sea, 1974, as amended by resolutions MSC.1(XLV), MSC.6(48), MSC.11(55), MSC.12(56), MSC.13(57), MSC.19(58), MSC.26(60), MSC.27(61), Resolution 1 of the 1995 SOLAS Conference, MSC.47(66), MSC.57(67), MSC.65(68), MSC.69(69), MSC.99(73), MSC.134(76), MSC.151(78) and MSC.170(79) are complied with; and

.2 ensure that the requirements of regulations 8-1.3 and regulation 19-1 are complied with.

3 All ships which undergo repairs, alterations, modifications and outfitting related thereto shall continue to comply with at least the requirements previously applicable to these ships. Such ships, if constructed before the date on which any relevant amendments enter into force, shall, as a rule, comply with the requirements for ships constructed on or after that date to at least the same extent as they did before undergoing such repairs, alterations, modifications or outfitting. Repairs, alterations and modifications of a major character and outfitting related thereto shall meet the requirements for ships constructed on or after the date on which any relevant amendments enter into force, in so far as the Administration deems reasonable and practicable. [21]

4 The Administration of a State may, if it considers that the sheltered nature and conditions of the voyage are such as to render the application of any specific requirements of this chapter unreasonable or unnecessary, exempt from those requirements individual ships or classes of ships entitled to fly the flag of that State which, in the course of their voyage, do not proceed more than 20 miles from the nearest land.

5 In the case of passenger ships which are employed in special trades for the carriage of large numbers of special trade passengers, such as the pilgrim trade, the Administration of the State whose flag such ships are entitled to fly, if satisfied that it is impracticable to enforce compliance with the requirements of this chapter, may exempt such ships from those requirements, provided that they comply fully with the provisions of:

[21] Refer to *Interpretation of alterations and modifications of a major character* (MSC.1/Circ.1246).

This gazette is also available free online at **www.gpwonline.co.za**

.1 the rules annexed to the Special Trade Passenger Ships Agreement, 1971; and

.2 the rules annexed to the Protocol on Space Requirements for Special Trade Passenger Ships, 1973.

Regulation 2
Definitions

For the purpose of this chapter, unless expressly provided otherwise:
1 *Subdivision length (Ls) of the ship* is the greatest projected moulded length of that part of the ship at or below deck or decks limiting the vertical extent of flooding with the ship at the deepest subdivision draught.

2 *Amidships* is at the middle of the length (L).

3 *Aft terminal* is the aft limit of the subdivision length.

4 *Forward terminal* is the forward limit of the subdivision length.

5 *Length (L)* is the length as defined in the International Convention on Load Lines in force.

6 *Freeboard deck* is the deck as defined in the International Convention on Load Lines in force.

7 *Forward perpendicular* is the forward perpendicular as defined in the International Convention on Load Lines in force.

8 *Breadth (B)* is the greatest moulded breadth of the ship at or below the deepest subdivision draught.

9 *Draught (d)* is the vertical distance from the keel line at:

.1 amidships, for ships subject to the provisions of regulation II-1/1.1.1.1; and

.2 the mid-point of the subdivision length (Ls), for ships not subject to the provisions of regulation II-1/1.1.1.1 but constructed on or after 1 January 2009;

to the waterline in question.

10 *Deepest subdivision draught (ds)* is the summer load line draught of the ship.

11 *Light service draught (d_l)* is the service draught corresponding to the lightest anticipated loading and associated tankage, including, however, such ballast as may be necessary for stability and/or immersion. Passenger ships should include the full complement of passengers and crew on board.

12 *Partial subdivision draught (d_p)* is the light service draught plus 60% of the difference between the light service draught and the deepest subdivision draught.

This gazette is also available free online at **www.gpwonline.co.za**

13 *Trim* is the difference between the draught forward and the draught aft, where the draughts are measured at the forward and aft:

.1 perpendiculars respectively, as defined in the International Convention on Load Lines in force, for ships subject to the provisions of regulation II-1/1.1.1.1; and

.2 terminals respectively, for ships not subject to the provisions of regulation II-1/1.1.1.1 but constructed on or after 1 January 2009;

disregarding any rake of keel.

14 *Permeability (μ)* of a space is the proportion of the immersed volume of that space which can be occupied by water.

15 *Machinery spaces* are spaces between the watertight boundaries of a space containing the main and auxiliary propulsion machinery, including boilers, generators and electric motors primarily intended for propulsion. In the case of unusual arrangements, the Administration may define the limits of the machinery spaces.

16 *Weathertight* means that in any sea conditions water will not penetrate into the ship.

17 *Watertight* means having scantlings and arrangements capable of preventing the passage of water in any direction under the head of water likely to occur in intact and damaged conditions. In the damaged condition, the head of water is to be considered in the worst situation at equilibrium, including intermediate stages of flooding.

18 *Design pressure* means the hydrostatic pressure for which each structure or appliance assumed watertight in the intact and damage stability calculations is designed to withstand.

19 *Bulkhead deck* in a passenger ship means the uppermost deck:

.1 to which the main bulkheads and the ship's shell are carried watertight, for ships subject to the provisions of regulation II-1/1.1.1.1; and

.2 at any point in the subdivision length (Ls) to which the main bulkheads and the ship's shell are carried watertight and the lowermost deck from which passenger and crew evacuation will not be impeded by water in any stage of flooding for damage cases defined in regulation 8 and in part B-2 of this chapter, for ships not subject to the provisions of regulation II-1/1.1.1.1 but constructed on or after 1 January 2009.

The bulkhead deck may be a stepped deck. In a cargo ship not subject to the provisions of regulation II-1/1.1.1.1 but constructed on or after 1 January 2009, the freeboard deck may be taken as the bulkhead deck.

20 *Deadweight* is the difference in tonnes between the displacement of a ship in water of a specific gravity of 1.025 at the draught corresponding to the assigned summer freeboard and the lightweight of the ship.

This gazette is also available free online at **www.gpwonline.co.za**

21 *Lightweight* is the displacement of a ship in tonnes without cargo, fuel, lubricating oil, ballast water, fresh water and feedwater in tanks, consumable stores, and passengers and crew and their effects.

22 *Oil tanker* is the oil tanker defined in regulation 1 of Annex 1 of the Protocol of 1978 relating to the International Convention for the Prevention of Pollution from Ships, 1973.

23 *Ro-ro passenger ship* means a passenger ship with ro-ro spaces or special category spaces as defined in regulation II-2/3.42.

24 *Bulk carrier* means a bulk carrier as defined in regulation XII/1.1.

25 *Keel line* is a line parallel to the slope of the keel passing amidships through:

.1 the top of the keel at centreline or line of intersection of the inside of shell plating with the keel if a bar keel extends below that line, on a ship with a metal shell; or

.2 in wood and composite ships, the distance is measured from the lower edge of the keel rabbet. When the form at the lower part of the midship section is of a hollow character, or where thick garboards are fitted, the distance is measured from the point where the line of the flat of the bottom continued inward intersects the centreline amidships.

26 *2008 IS Code* means the International Code on Intact Stability, 2008, consisting of an introduction, part A (the provisions of which shall be treated as mandatory) and part B (the provisions of which shall be treated as recommendatory), as adopted by resolution MSC.267(85), provided that:

.1 amendments to the introduction and part A of the Code are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I thereof; and

.2 amendments to part B of the Code are adopted by the Maritime Safety Committee in accordance with its Rules of Procedure.

27 *Goal-based Ship Construction Standards for Bulk Carriers and Oil Tankers* means the International Goal-Based Ship Construction Standards for Bulk Carriers and Oil Tankers, adopted by the Maritime Safety Committee by resolution MSC.287(87), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I thereof.

28 *IGF Code* means the International Code of safety for ships using gases or other low-flashpoint fuels as adopted by the Maritime Safety Committee of the Organization by resolution MSC.391(95), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

This gazette is also available free online at **www.gpwonline.co.za**

29 *Low-flashpoint fuel* means gaseous or liquid fuel having a flashpoint lower than otherwise permitted under regulation II-2/4.2.1.1.

Regulation 3
Definitions relating to Parts C, D and E

For the purpose of parts C, D and E, unless expressly provided otherwise:

1 Steering gear control system is the equipment by which orders are transmitted from the navigating bridge to the steering gear power units. Steering gear control systems comprise transmitters, receivers, hydraulic control pumps and their associated motors, motor controllers, piping and cables.

2 Main steering gear is the machinery, rudder actuators, steering gear, power units, if any, and ancillary equipment and the means of applying torque to the rudder stock (e.g. tiller or quadrant) necessary for effecting movement of the rudder for the purpose of steering the ship under normal service conditions.

3 Steering gear power unit is:

.1 in the case of electric steering gear, an electric motor and its associated electrical equipment;

.2 in the case of electrohydraulic steering gear, an electric motor and its associated electrical equipment and connected pump; or

.3 in the case of other hydraulic steering gear, a driving engine and connected pump.

4 Auxiliary steering gear is the equipment other than any part of the main steering gear necessary to steer the ship in the event of failure of the main steering gear but not including the tiller, quadrant or components serving the same purpose.

5 Normal operational and habitable condition is a condition under which the ship as a whole, the machinery, services, means and aids ensuring propulsion, ability to steer, safe navigation, fire and flooding safety, internal and external communications and signals, means of escape, and emergency boat winches, as well as the designed comfortable conditions of habitability are in working order and functioning normally.

6 Emergency condition is a condition under which any services needed for normal operational and habitable conditions are not in working order due to failure of the main source of electrical power.

7 Main source of electrical power is a source intended to supply electrical power to the main switchboard for distribution to all services necessary for maintaining the ship in normal operational and habitable conditions.

This gazette is also available free online at **www.gpwonline.co.za**

8 Dead ship condition is the condition under which the main propulsion plant, boilers and auxiliaries are not in operation due to the absence of power.

9 Main generating station is the space in which the main source of electrical power is situated.

10 Main switchboard is a switchboard which is directly supplied by the main source of electrical power and is intended to distribute electrical energy to the ship' s services.

11 Emergency switchboard is a switchboard which in the event of failure of the main electrical power supply system is directly supplied by the emergency source of electrical power or the transitional source of emergency power and is intended to distribute electrical energy to the emergency services.

12 Emergency source of electrical power is a source of electrical power, intended to supply the emergency switchboard in the event of a failure of the supply from the main source of electrical power.

13 Power actuating system is the hydraulic equipment provided for supplying power to turn the rudder stock, comprising a steering gear power unit or units, together with the associated pipes and fittings, and a rudder actuator. The power actuating systems may share common mechanical components (i.e. tiller, quadrant and rudder stock) or components serving the same purpose.

14 Maximum ahead service speed is the greatest speed which the ship is designed to maintain in service at sea at the deepest sea-going draught.

15 Maximum astern speed is the speed which it is estimated the ship can attain at the designed maximum astern power at the deepest sea-going draught.

16 Machinery spaces are all machinery spaces of category A and all other spaces containing propelling machinery, boilers, oil fuel units, steam and internal combustion engines, generators and major electrical machinery, oil filling stations, refrigerating, stabilizing, ventilation and air conditioning machinery, and similar spaces, and trunks to such spaces.

17 Machinery spaces of category A are those spaces and trunks to such spaces which contain:

.1 internal combustion machinery used for main propulsion;

.2 internal combustion machinery used for purposes other than main propulsion where such machinery has in the aggregate a total power output of not less than 375 kW; or

.3 any oil-fired boiler or oil fuel unit.

18 Control stations are those spaces in which the ship' s radio or main navigating equipment or the emergency source of power is located or where the fire recording or fire control equipment is centralized.

This gazette is also available free online at **www.gpwonline.co.za**

19 Chemical tanker is a cargo ship constructed or adapted and used for the carriage in bulk of any liquid product listed in either:

.1 chapter 17 of the International Code for the Construction and Equipment of Ships Carrying Dangerous Chemicals in Bulk adopted by the Maritime Safety Committee by resolution MSC.4(48), hereinafter referred to as "the International Bulk Chemical Code", as may be amended by the Organization; or

.2 chapter VI of the Code for the Construction and Equipment of Ships Carrying Dangerous Chemicals in Bulk adopted by the Assembly of the Organization by resolution A.212(VII), hereinafter referred to as "the Bulk Chemical Code", as has been or may be amended by the Organization,

whichever is applicable.

20 Gas carrier is a cargo ship constructed or adapted and used for the carriage in bulk of any liquefied gas or other products listed in either:

.1 chapter 19 of the International Code for the Construction and Equipment of Ships Carrying Liquefied Gases in Bulk adopted by the Maritime Safety Committee by resolution MSC.5(48), hereinafter referred to as "the International Gas Carrier Code", as may be amended by the Organization; or

.2 chapter XIX of the Code for the Construction and Equipment of Ships Carrying Liquefied Gases in Bulk adopted by the Organization by resolution A.328(IX), hereinafter referred to as "the Gas Carrier Code", as has been or may be amended by the Organization,

whichever is applicable.

This gazette is also available free online at **www.gpwonline.co.za**

Part A-1 - Structure of Ships

Regulation 3-1

Structural, mechanical and electrical requirements for ships

In addition to the requirements contained elsewhere in the present regulations, ships shall be designed, constructed and maintained in compliance with the structural, mechanical and electrical requirements of a classification society which is recognized by the Administration in accordance with the provisions of regulation XI-1/1, or with applicable national standards of the Administration which provide an equivalent level of safety.

Regulation 3-2

Protective coatings of dedicated seawater ballast tanks in all types of ships and double-side skin spaces of bulk carriers [22]

1 Paragraphs 2 and 4 of this regulation shall apply to ships of not less than 500 gross tonnage:

.1 for which the building contract is placed on or after 1 July 2008; or

.2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 January 2009; or

.3 the delivery of which is on or after 1 July 2012. [23]

2 All dedicated seawater ballast tanks arranged in ships and double-side skin spaces arranged in bulk carriers of 150 m in length and upwards shall be coated during construction in accordance with the Performance standard for protective coatings for dedicated seawater ballast tanks in all types of ships and double-side skin spaces of bulk carriers, adopted by the Maritime Safety Committee by resolution MSC.215(82), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I.

3 All dedicated seawater ballast tanks arranged in oil tankers and bulk carriers constructed on or after 1 July 1998, for which paragraph 2 is not applicable, shall comply with the requirements of regulation II-1/3-2 adopted by resolution MSC.47(66).

4 Maintenance of the protective coating system shall be included in the overall ship's maintenance scheme. The effectiveness of the protective coating system shall be verified during the life of a ship by the Administration or an organization recognized by the Administration, based on the guidelines developed by the Organization.[24]

[22] Refer to *Guidelines for the selection, application and maintenance of corrosion prevention systems of dedicated seawater ballast tanks* (resolution A.798(19)).

[23] Refer to *Unified interpretation of "unforeseen delay in delivery of ships"* (MSC.1/Circ.1247).

[24] Refer to *Guidelines for maintenance and repair of protective coatings* (MSC.1/Circ.1330).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 3-3
Safe access to tanker bows

1 For the purpose of this regulation and regulation 3-4, tankers include oil tankers as defined in regulation 2, chemical tankers as defined in regulation VII/8.2 and gas carriers as defined in regulation VII/11.2.

2 Every tanker shall be provided with the means to enable the crew to gain safe access to the bow even in severe weather conditions. Such means of access shall be approved by the Administration based on the guidelines developed by the Organization. [25]

Regulation 3-4
Emergency towing arrangements and procedures

1 Emergency towing arrangements on tankers

1.1 Emergency towing arrangements shall be fitted at both ends on board every tanker of not less than 20,000 tonnes deadweight.

1.2 For tankers constructed on or after 1 July 2002:

.1 the arrangements shall, at all times, be capable of rapid deployment in the absence of main power on the ship to be towed and easy connection to the towing ship. At least one of the emergency towing arrangements shall be pre-rigged ready for rapid deployment; and

.2 emergency towing arrangements at both ends shall be of adequate strength taking into account the size and deadweight of the ship, and the expected forces during bad weather conditions. The design and construction and prototype testing of emergency towing arrangements shall be approved by the Administration, based on the Guidelines developed by the Organization [26].

1.3 For tankers constructed before 1 July 2002, the design and construction of emergency towing arrangements shall be approved by the Administration, based on the Guidelines developed by the Organization [26].

2 Emergency towing procedures on ships

2.1 This paragraph applies to:

.1 all passenger ships, not later than 1 January 2010;

.2 cargo ships constructed on or after 1 January 2010; and

[25] Refer to *Revised guidelines for safe access to tanker bows* (resolution MSC.62(67)/Rev.1).

[26] Refer to *Guidelines on emergency towing arrangements for tankers* (resolution MSC.35(63), as amended) and LL.3/Circ.130, section 5.

This gazette is also available free online at **www.gpwonline.co.za**

.3 cargo ships constructed before 1 January 2010, not later than 1 January 2012.

2.2 Ships shall be provided with a ship-specific emergency towing procedure. Such a procedure shall be carried aboard the ship for use in emergency situations and shall be based on existing arrangements and equipment available on board the ship.

2.3 The procedure [27] shall include:

.1 drawings of fore and aft deck showing possible emergency towing arrangements;

.2 inventory of equipment on board that can be used for emergency towing;

.3 means and methods of communication; and

.4 sample procedures to facilitate the preparation for and conducting of emergency towing operations.

Regulation 3-5

New installation of materials containing asbestos [28]

1 This regulation shall apply to materials used for the structure, machinery, electrical installations and equipment covered by the present Convention.

2 From 1 January 2011, for all ships, new installation of materials which contain asbestos shall be prohibited.

Regulation 3-6

Access to and within spaces in, and forward of, the cargo area of oil tankers and bulk carriers

1 Application

1.1 Except as provided for in paragraph 1.2, this regulation applies to oil tankers of 500 gross tonnage and over and bulk carriers, as defined in regulation IX/1, of 20,000 gross tonnage and over, constructed on or after 1 January 2006.

1.2 Oil tankers of 500 gross tonnage and over constructed on or after 1 October 1994 but before 1 January 2005 shall comply with the provisions of regulation II-1/12-2 adopted by resolution MSC.27(61).

2 Means of access to cargo and other spaces

2.1 Each space shall be provided with means of access to enable, throughout the life of a ship, overall and close-up inspections and thickness measurements of the ship' s structures to be carried out by the Administration, the company, as defined in regulation IX/1, and the ship' s personnel and others as necessary. Such means of access shall

[27] Refer to *Guidelines for owners/operators on preparing emergency towing procedures* (MSC.1/Circ.1255).

[28] Refer to *Information on prohibiting the use of asbestos on board ships* (MSC.1/Circ.1374/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

comply with the requirements of paragraph 5 and with the Technical provisions for means of access for inspections, adopted by the Maritime Safety Committee by resolution MSC.133(76) [29], as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I.

2.2 Where a permanent means of access may be susceptible to damage during normal cargo loading and unloading operations or where it is impracticable to fit permanent means of access, the Administration may allow, in lieu thereof, the provision of movable or portable means of access, as specified in the Technical provisions, provided that the means of attaching, rigging, suspending or supporting the portable means of access forms a permanent part of the ship' s structure. All portable equipment shall be capable of being readily erected or deployed by ship' s personnel.

2.3 The construction and materials of all means of access and their attachment to the ship' s structure shall be to the satisfaction of the Administration. The means of access shall be subject to survey prior to, or in conjunction with, its use in carrying out surveys in accordance with regulation I/10.

3 Safe access to cargo holds, cargo tanks, ballast tanks and other spaces

3.1 Safe access [30] to cargo holds, cofferdams, ballast tanks, cargo tanks and other spaces in the cargo area shall be direct from the open deck and such as to ensure their complete inspection. Safe access * to double bottom spaces or to forward ballast tanks may be from a pump-room, deep cofferdam, pipe tunnel, cargo hold, double hull space or similar compartment not intended for the carriage of oil or hazardous cargoes.

3.2 Tanks, and subdivisions of tanks, having a length of 35 m or more, shall be fitted with at least two access hatchways and ladders, as far apart as practicable. Tanks less than 35 m in length shall be served by at least one access hatchway and ladder. When a tank is subdivided by one or more swash bulkheads or similar obstructions which do not allow ready means of access to the other parts of the tank, at least two hatchways and ladders shall be fitted.

3.3 Each cargo hold shall be provided with at least two means of access as far apart as practicable. In general, these accesses should be arranged diagonally, for example one access near the forward bulkhead on the port side, the other one near the aft bulkhead on the starboard side.

4 Ship structure access manual

4.1 A ship' s means of access to carry out overall and close-up inspections and thickness measurements shall be described in a Ship structure access manual approved by the Administration, an updated copy of which shall be kept on board. The Ship structure access manual shall include the following for each space:

[29] Amended by resolution MSC.158(78).

[30] Refer to *Revised Recommendations for entering enclosed spaces aboard ships* (resolution A.1050(27)).

This gazette is also available free online at **www.gpwonline.co.za**

.1 plans showing the means of access to the space, with appropriate technical specifications and dimensions;

.2 plans showing the means of access within each space to enable an overall inspection to be carried out, with appropriate technical specifications and dimensions. The plans shall indicate from where each area in the space can be inspected;

.3 plans showing the means of access within the space to enable close-up inspections to be carried out, with appropriate technical specifications and dimensions. The plans shall indicate the positions of critical structural areas, whether the means of access is permanent or portable and from where each area can be inspected;

.4 instructions for inspecting and maintaining the structural strength of all means of access and means of attachment, taking into account any corrosive atmosphere that may be within the space;

.5 instructions for safety guidance when rafting is used for close-up inspections and thickness measurements;

.6 instructions for the rigging and use of any portable means of access in a safe manner;

.7 an inventory of all portable means of access; and

.8 records of periodical inspections and maintenance of the ship' s means of access.

4.2 For the purpose of this regulation "critical structural areas" are locations which have been identified from calculations to require monitoring or from the service history of similar or sister ships to be sensitive to cracking, buckling, deformation or corrosion which would impair the structural integrity of the ship.

5 General technical specifications

5.1 For access through horizontal openings, hatches or manholes, the dimensions shall be sufficient to allow a person wearing a self-contained air-breathing apparatus and protective equipment to ascend or descend any ladder without obstruction and also provide a clear opening to facilitate the hoisting of an injured person from the bottom of the space. The minimum clear opening shall not be less than 600 mm x 600 mm. When access to a cargo hold is arranged through the cargo hatch, the top of the ladder shall be placed as close as possible to the hatch coaming. Access hatch coamings having a height greater than 900 mm shall also have steps on the outside in conjunction with the ladder.

5.2 For access through vertical openings, or manholes, in swash bulkheads, floors, girders and web frames providing passage through the length and breadth of the space, the minimum opening shall be not less than 600 mm x 800 mm at a height of not more than 600 mm from the bottom shell plating unless gratings or other foot holds are provided.

5.3 For oil tankers of less than 5,000 tonnes deadweight, the Administration may approve, in special circumstances, smaller dimensions for the openings referred to in

This gazette is also available free online at **www.gpwonline.co.za**

paragraphs 5.1 and 5.2, if the ability to traverse such openings or to remove an injured person can be proved to the satisfaction of the Administration.

Regulation 3-7
Construction drawings maintained on board and ashore

1 A set of as-built construction drawings [31] and other plans showing any subsequent structural alterations shall be kept on board a ship constructed on or after 1 January 2007.

2 An additional set of such drawings shall be kept ashore by the Company, as defined in regulation IX/1.2.

Regulation 3-8
Towing and mooring equipment

1 Paragraphs 4 to 6 of this regulation apply to ships constructed on or after 1 January 2007.

2 Paragraphs 7 and 8 of this regulation only apply to ships:

.1 for which the building contract is placed on or after 1 January 2024; or

.2 in the absence of a building contract, the keel of which is laid or which is at a similar stage of construction on or after 1 July 2024; or

.3 the delivery of which is on or after 1 January 2027.

3 This regulation does not apply to towing arrangements provided in accordance with regulation 3-4.

4 Ships shall be provided with arrangements, equipment and fittings of sufficient safe working load to enable the safe conduct of all towing and mooring operations associated with the normal operation of the ship.

5 Arrangements, equipment and fittings provided in accordance with paragraph 4 above shall meet the appropriate requirements of the Administration or an organization recognized by the Administration under regulation I/6. [32]

6 Each fitting or item of equipment provided under this regulation shall be clearly marked with any limitations associated with its safe operation, taking into account the strength of the supporting ship's structure and its attachment to it.

7 For ships of 3,000 gross tonnage and above, the mooring arrangement shall be designed, and the mooring equipment including lines shall be selected, in order to

[31] Refer to *As-built construction drawings to be maintained on board the ship and ashore* (MSC/Circ.1135).

[32] Refer to the *Guidance on shipboard towing and mooring equipment* (MSC.1/Circ.1175) for ships constructed on or after 1 January 2007 but before 1 January 2024 and the *Guidance on shipboard towing and mooring equipment* (MSC.1/Circ.1175/Rev.1) for ships constructed on or after 1 January 2024.

This gazette is also available free online at **www.gpwonline.co.za**

ensure occupational safety and safe mooring of the ship, based on the guidelines developed by the Organization.[33] Ship-specific information shall be provided and kept on board.[34]

8 Ships of less than 3,000 gross tonnage should comply with the requirement in paragraph 7 above as far as reasonably practicable, or with applicable national standards of the Administration.

9 For all ships, mooring equipment, including lines, shall be inspected and maintained in a suitable condition for their intended purposes. [35]

Regulation 3-9

Means of embarkation on and disembarkation from ships

1 Ships constructed on or after 1 January 2010 shall be provided with means of embarkation on and disembarkation from ships for use in port and in port related operations, such as gangways and accommodation ladders, in accordance with paragraph 2, unless the Administration deems that compliance with a particular provision is unreasonable or impractical [36].

2 The means of embarkation and disembarkation required in paragraph 1 shall be constructed and installed based on the guidelines developed by the Organization [37].

3 For all ships the means of embarkation and disembarkation shall be inspected and maintained [37] in suitable condition for their intended purpose, taking into account any restrictions related to safe loading. All wires used to support the means of embarkation and disembarkation shall be maintained as specified in regulation III/20.4.

Regulation 3-10

Goal-based ship construction standards for bulk carriers and oil tankers

1 This regulation shall apply to oil tankers of 150 m in length and above and to bulk carriers of 150 m in length and above, constructed with single deck, top-side tanks and hopper side tanks in cargo spaces, excluding ore carriers and combination carriers:

.1 for which the building contract is placed on or after 1 July 2016; or

---

[33] Refer to the *Guidelines on the design of mooring arrangements and the selection of appropriate mooring equipment and fittings for safe mooring* (MSC.1/Circ.1619).

[34] Refer to towing and mooring arrangement plan in the *Guidelines on the design of mooring arrangements and the selection of appropriate mooring equipment and fittings for safe mooring* (MSC.1/Circ.1619).

[35] Refer to the *Guidelines for inspection and maintenance of mooring equipment including lines* (MSC.1/Circ.1620).

[36] Circumstances where compliance may be deemed unreasonable or impractical may include where the ship:

.1 has small freeboards and is provided with boarding ramps; or

.2 is engaged in voyages between designated ports where appropriate shore accommodation/embarkation ladders (platforms) are provided.

[37] Refer to *Guidelines for construction, installation, maintenance and inspection/survey of means of embarkation and disembarkation* (MSC.1/Circ.1331).

This gazette is also available free online at **www.gpwonline.co.za**

.2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 July 2017; or

.3 the delivery of which is on or after 1 July 2020.

2 Ships shall be designed and constructed for a specified design life to be safe and environmentally friendly, when properly operated and maintained under the specified operating and environmental conditions, in intact and specified damage conditions, throughout their life.

2.1 Safe and environmentally friendly means the ship shall have adequate strength, integrity and stability to minimize the risk of loss of the ship or pollution to the marine environment due to structural failure, including collapse, resulting in flooding or loss of watertight integrity.

2.2 Environmentally friendly also includes the ship being constructed of materials for environmentally acceptable recycling.

2.3 Safety also includes the ship's structure, fittings and arrangements providing for safe access, escape, inspection and proper maintenance and facilitating safe operation.

2.4 Specified operating and environmental conditions are defined by the intended operating area for the ship throughout its life and cover the conditions, including intermediate conditions, arising from cargo and ballast operations in port, waterways and at sea.

2.5 Specified design life is the nominal period that the ship is assumed to be exposed to operating and/or environmental conditions and/or the corrosive environment and is used for selecting appropriate ship design parameters. However, the ship's actual service life may be longer or shorter depending on the actual operating conditions and maintenance of the ship throughout its life cycle.

3 The requirements of paragraphs 2 to 2.5 shall be achieved through satisfying applicable structural requirements of an organization which is recognized by the Administration in accordance with the provisions of regulation XI-1/1, or national standards of the Administration, conforming to the functional requirements of the Goal-based Ship Construction Standards for Bulk Carriers and Oil Tankers. [38]

4 A Ship Construction File with specific information on how the functional requirements of the Goal-based Ship Construction Standards for Bulk Carriers and Oil Tankers have been applied in the ship design and construction shall be provided upon delivery of a new ship, and kept on board the ship and/or ashore [39] and updated as appropriate throughout the ship's service. The contents of the Ship Construction File shall, at least, conform to the guidelines developed by the Organization. [39]

---

[38] The *International goal-based ship construction standards for bulk carriers and oil tankers* were adopted by resolution MSC.287(87) and their verification should be carried out in accordance with the *Revised guidelines for verification of conformity with goal-based ship construction standards for bulk carriers and oil tankers* (resolution MSC.454(100)).

[39] Refer to the *Guidelines for the information to be included in a Ship Construction File* (MSC.1/Circ.1343).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 3-11

Corrosion protection of cargo oil tanks of crude oil tankers

1 Paragraph 3 shall apply to crude oil tankers [40], as defined in regulation 1 of Annex I to the International Convention for the Prevention of Pollution from Ships, 1973, as modified by the Protocol of 1978 relating thereto, of 5000 tonnes deadweight and above:

.1 for which the building contract is placed on or after 1 January 2013; or

.2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 July 2013; or

.3 the delivery of which is on or after 1 January 2016.

2 Paragraph 3 shall not apply to combination carriers or chemical tankers as defined in regulations 1 of Annexes I and II, respectively, to the International Convention for the Prevention of Pollution from Ships, 1973, as modified by the Protocol of 1978 relating thereto. For the purpose of this regulation, chemical tankers also include chemical tankers certified to carry oil.

3 All cargo oil tanks of crude oil tankers shall be:

.1 coated during the construction of the ship in accordance with the Performance standard for protective coatings for cargo oil tanks of crude oil tankers, adopted by the Maritime Safety Committee by resolutionMSC.288(87), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I; or

.2 protected by alternative means of corrosion protection or utilization of corrosion resistance material to maintain required structural integrity for 25 years in accordance with the Performance standard for alternative means of corrosion protection for cargo oil tanks of crude oil tankers, adopted by the Maritime Safety Committee by resolution MSC.289(87), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I.

4 The Administration may exempt a crude oil tanker from the requirements of paragraph 3 to allow the use of novel prototype alternatives to the coating system specified in paragraph 3.1, for testing, provided they are subject to suitable controls, regular assessment and acknowledgement of the need for immediate remedial action if the system fails or is shown to be failing. Such exemption shall be recorded on an exemption certificate.

5 The Administration may exempt a crude oil tanker from the requirements of paragraph 3 if the ship is built to be engaged solely in the carriage of cargoes and

[40] Refer to items 1.11.1 or 1.11.4 of the Supplement to the International Oil Pollution Prevention Certificate (Form B).

This gazette is also available free online at **www.gpwonline.co.za**

cargo handling operations not causing corrosion [41]. Such exemption and conditions for which it is granted shall be recorded on an exemption certificate.

Regulation 3-12

Protection against noise

1 This regulation shall apply to ships of 1,600 gross tonnage and above:

.1 for which the building contract is placed on or after 1 July 2014; or

.2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 January 2015; or

.3 the delivery of which is on or after 1 July 2018,

unless the Administration deems that compliance with a particular provision is unreasonable or impractical.

2 On ships delivered before 1 July 2018 and:

.1 contracted for construction before 1 July 2014 and the keels of which are laid or which are at a similar stage of construction on or after 1 January 2009; or

.2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 January 2009 but before 1 January 2015,

measures [42] shall be taken to reduce machinery noise in machinery spaces to acceptable levels as determined by the Administration [43]. If this noise cannot be sufficiently reduced the source of excessive noise shall be suitably insulated or isolated or a refuge from noise shall be provided if the space is required to be manned. Ear protectors shall be provided for personnel required to enter such spaces, if necessary.

3 Ships shall be constructed to reduce onboard noise and to protect personnel from the noise in accordance with the Code on noise levels on board ships, adopted by the Maritime Safety Committee by resolution MSC.337(91), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of Article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I. For the purpose of this regulation, although the Code on noise levels on board ships is treated as a mandatory instrument, recommendatory parts as specified in chapter I of the Code shall be treated as non-mandatory, provided that amendments to such recommendatory parts are adopted by the Maritime Safety Committee in accordance with its Rules of Procedure.

---

[41] Refer to *Guidelines on procedures for in-service maintenance and repair of coating systems for cargo oil tanks of crude oil tankers* (MSC.1/Circ.1399) and *Guidelines on exemptions for crude oil tankers solely engaged in the carriage of cargoes and cargo-handling operations not causing corrosion* (MSC.1/Circ.1421).

[42] Refer to the Code on Noise levels on board ships (resolution A.468(XII)).

[43] Refer to Revised guidelines for the reduction of underwater radiated noise from shipping to address adverse impacts on marine life (MEPC.1/Circ.906).

This gazette is also available free online at **www.gpwonline.co.za**

4 Notwithstanding the requirements of paragraph 1, this regulation does not apply to types of ships listed in paragraph 1.3.4 of the Code on noise levels on board ships.

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Subdivision and Stability

Regulation 4
General

1 Unless expressly provided otherwise, the requirements in parts B-1 to B-4 shall apply to passenger ships.

2 For cargo ships, the requirements in parts B-1 to B-4 shall apply as follows:

2.1 In part B-1:

.1 Unless expressly provided otherwise, regulation 5 shall apply to cargo ships and regulation 5-1 shall apply to cargo ships other than tankers, as defined in regulation I/2(h);

.2 Regulation 6 to regulation 7-3 shall apply to cargo ships having a length (L) of 80 m and upwards, but may exclude those ships subject to the following instruments and shown to comply with the subdivision and damage stability requirements of that instrument:

.1 Annex I to MARPOL, except that combination carriers (as defined in SOLAS regulation II-2/3.14) with type B freeboards shall be in compliance with regulation 6 to regulation 7-3 [44]; or

.2 the International Code for the Construction and Equipment of Ships Carrying Dangerous Chemicals in Bulk (IBC Code) [44]; or

.3 the International Code for the Construction and Equipment of Ships Carrying Liquefied Gases in Bulk (IGC Code) [44]; or

.4 the damage stability requirements of regulation 27 of the 1966 Load Lines Convention as applied in compliance with resolutions A.320(IX) and A.514(13), provided that in the case of cargo ships to which regulation 27(9) applies, main transverse watertight bulkheads, to be considered effective, are spaced according to paragraph (12)(f) of resolution A.320(IX), except that ships intended for the carriage of deck cargo shall be in compliance with regulation 6 to regulation 7-3; or

.5 the damage stability requirements of regulation 27 of the 1988 Load Lines Protocol, except that ships intended for the carriage of deck cargo shall be in compliance with regulation 6 to regulation 7-3; or

.6 the subdivision and damage stability standards in other instruments [45] developed by the Organization.

---

[44] Refer to *Guidelines for verification of damage stability requirements for tankers* (MSC.1/Circ.1461).

[45] .1 For offshore supply vessels of not more than 100 m in length (L), the *Guidelines for the design and construction of offshore supply vessels, 2006* (resolution MSC.235(82), as amended by resolution MSC.335(90)); or

.2 For special purpose ships, the *Code of safety for special purpose ships, 2008* (resolution MSC.266(84), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

2.2 Unless expressly provided otherwise, the requirements in parts B-2 and B-4 shall apply to cargo ships.

3 The Administration may, for a particular ship or group of ships, accept alternative methodologies if it is satisfied that at least the same degree of safety as represented by these regulations is achieved. Any Administration which allows such alternative methodologies shall communicate to the Organization particulars thereof.

4 Ships shall be as efficiently subdivided as is possible having regard to the nature of the service for which they are intended. The degree of subdivision shall vary with the subdivision length (Ls) of the ship and with the service, in such manner that the highest degree of subdivision corresponds with the ships of greatest subdivision length (Ls), primarily engaged in the carriage of passengers.

5 Where it is proposed to fit decks, inner skins or longitudinal bulkheads of sufficient tightness to seriously restrict the flow of water, the Administration shall be satisfied that proper consideration is given to beneficial or adverse effects of such structures in the calculations.

This gazette is also available free online at **www.gpwonline.co.za**

Part B-1 - Stability

Regulation 5

Intact stability

1 Every passenger ship regardless of size and every cargo ship having a length (*L*) of 24 m and upwards, shall be inclined upon its completion. The lightship displacement and the longitudinal, transverse and vertical position of its centre of gravity shall be determined. In addition to any other applicable requirements of the present regulations, ships having a length of 24 m and upwards shall as a minimum comply with the requirements of part A of the2008 IS Code.

2 The Administration may allow the inclining test of an individual cargo ship to be dispensed with provided basic stability data are available from the inclining test of a sister ship and it is shown to the satisfaction of the Administration that reliable stability information for the exempted ship can be obtained from such basic data, as required by regulation 5-1. A lightweight survey shall be carried out upon completion and the ship shall be inclined whenever in comparison with the data derived from the sister ship, a deviation from the lightship displacement exceeding 1% for ships of 160 m or more in length and 2% for ships of 50 m or less in length and as determined by linear interpolation for intermediate lengths or a deviation from the lightship longitudinal centre of gravity exceeding 0.5% of *L* is found.

3 The Administration may also allow the inclining test of an individual ship or class of ships especially designed for the carriage of liquids or ore in bulk to be dispensed with when reference to existing data for similar ships clearly indicates that due to the ship's proportions and arrangements more than sufficient metacentric height will be available in all probable loading conditions.

4 Where any alterations are made to a ship so as to materially affect the stability information supplied to the master, amended stability information shall be provided. If necessary the ship shall be re-inclined. The ship shall be re-inclined if anticipated deviations exceed one of the values specified in paragraph 5.

5 At periodical intervals not exceeding five years, a lightweight survey shall be carried out on all passenger ships to verify any changes in lightship displacement and longitudinal centre of gravity. The ship shall be re-inclined whenever, in comparison with the approved stability information, a deviation from the lightship displacement exceeding 2% or a deviation of the longitudinal centre of gravity exceeding 1% of *L* is found or anticipated.

6 Every ship shall have scales of draughts marked clearly at the bow and stern. In the case where the draught marks are not located where they are easily readable, or operational constraints for a particular trade make it difficult to read the draught marks, then the ship shall also be fitted with a reliable draught indicating system by which the bow and stern draughts can be determined.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 5-1

Stability information to be supplied to the master [46]

1 The master shall be supplied with such information to the satisfaction of the Administration as is necessary to enable him by rapid and simple processes to obtain accurate guidance as to the stability of the ship under varying conditions of service. A copy of the stability information shall be furnished to the Administration.

2 The information should include:

.1 curves or tables of minimum operational metacentric height (GM) and maximum permissible trim versus draught which assures compliance with the intact and damage stability requirements where applicable, alternatively corresponding curves or tables of the maximum allowable vertical centre of gravity (KG) and maximum permissible trim versus draught, or with the equivalents of either of these curves or tables;

.2 instructions concerning the operation of cross-flooding arrangements; and

.3 all other data and aids which might be necessary to maintain the required intact stability and stability after damage.

3 The intact and damage stability information required by regulation 5-1.2 shall be presented as consolidated data and encompass the full operating range of draught and trim [47]. Applied trim values shall coincide in all stability information intended for use on board. Information not required for determination of stability and trim limits should be excluded from this information.

4 If the damage stability is calculated in accordance with regulation 6 to regulation 7-3 and, if applicable, with regulations 8 and 9.8, a stability limit curve is to be determined using linear interpolation between the minimum required GM assumed for each of the three draughts d_s, d_p and d_l. When additional subdivision indices are calculated for different trims, a single envelope curve based on the minimum values from these calculations shall be presented. When it is intended to develop curves of maximum permissible KG it shall be ensured that the resulting maximum KG curves correspond with a linear variation of GM.

5 As an alternative to a single envelope curve, the calculations for additional trims may be carried out with one common GM for all of the trims assumed at each subdivision draught. The lowest values of each partial index A_s, A_p and A_l across these trims shall then be used in the summation of the attained subdivision index A according to regulation 7.1. This will result in one GM limit curve based on the GM used at each draught. A trim limit diagram showing the assumed trim range shall be developed.

6 When curves or tables of minimum operational metacentric height (GM) or maximum allowable KG versus draught are not provided, the master shall ensure that the operating condition does not deviate from approved loading conditions, or verify by calculation that the stability requirements are satisfied for this loading condition.

[46] Refer also to the *Guidelines for the preparation of intact stability information (MSC/Circ.456) and the Revised guidance to the master for avoiding dangerous situations in adverse weather and sea conditions* (MSC.1/Circ.1228).

[47] Refer to *Guidelines for verification of damage stability requirements for tankers* (MSC.1/Circ.1461).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 6
Required subdivision index R [48]

1 The subdivision of a ship is considered sufficient if the attained subdivision index *A*, determined in accordance with regulation 7, is not less than the required subdivision index *R* calculated in accordance with this regulation and if, in addition, the partial indices A_s, A_p and A_l are not less than 0.9*R* for passenger ships and 0.5*R* for cargo ships.

2 For ships to which the damage stability requirements of this part apply, the degree of subdivision to be provided shall be determined by the required subdivision index *R*, as follows:

1 In the case of cargo ships greater than 100 m in length (L_s):

$$R = 1 - \frac{128}{L_s + 152}$$

2 In the case of cargo ships not less than 80 m in length (L_s) and not greater than 100 m in length (L_s):

$$R = 1 - \left[\frac{1}{\left(1 + \frac{L_S}{100} \times \frac{R_o}{1 - R_o}\right)}\right]$$

where R_o is the value *R* as calculated in accordance with the formula in subparagraph .1.

3 In the case of passenger ships:

Persons on board	**R**
$N < 400$	$R = 0.722$
$400 \leq N \leq 1{,}350$	$R = \frac{N}{7{,}580} + 0.66923$
$1{,}350 < N \leq 6{,}000$	$R = 0.0369 \times L_n (N + 89.048) + 0.579$
$N > 6{,}000$	$R = 1 - \frac{852.5 + 0.03875 \times N}{N + 5{,}000}$

Where:

N = total number of persons on board.

Regulation 7
Attained subdivision index A

[48] The Maritime Safety Committee, in adopting the regulations contained in parts B to B-4, invited Administrations to note that the regulations should be applied in conjunction with the explanatory notes developed by the Organization in order to ensure their uniform application.

This gazette is also available free online at **www.gpwonline.co.za**

1 An attained subdivision index *A* is obtained by the summation of the partial indices A_s, A_p and A_l, weighted as shown and calculated for the draughts d_s, d_p and d_l defined in regulation 2 in accordance with the following formula:

$$A = 0.4A_s + 0.4A_p + 0.2A_l$$

Each partial index is a summation of contributions from all damage cases taken in consideration, using the following formula:

$$A = \Sigma(p_i s_i)$$

where:

i represents each compartment or group of compartments under consideration,

p_i accounts for the probability that only the compartment or group of compartments under consideration may be flooded, disregarding any horizontal subdivision, as defined in regulation 7-1,

s_i accounts for the probability of survival after flooding the compartment or group of compartments under consideration, and includes the effect of any horizontal subdivision, as defined in regulation 7-2.

2 As a minimum, the calculation of *A* shall be carried out at the level trim for the deepest subdivision draught d_s and the partial subdivision draught d_p. The estimated service trim may be used for the light service draught d_l. If, in any anticipated service condition within the draught range from d_s to d_l, the trim variation in comparison with the calculated trims is greater than 0.5% of *L*, one or more additional calculations of *A* are to be performed for the same draughts but including sufficient trims to ensure that, for all intended service conditions, the difference in trim in comparison with the reference trim used for one calculation will be not more than 0.5% of *L*. Each additional calculation of *A* shall comply with regulation 6.1.

3 When determining the positive righting lever (GZ) of the residual stability curve in the intermediate and final equilibrium stages of flooding, the displacement used should be that of the intact loading condition. All calculations should be done with the ship freely trimming.

4 The summation indicated by the above formula shall be taken over the ship's subdivision length (L_s) for all cases of flooding in which a single compartment or two or more adjacent compartments are involved. In the case of unsymmetrical arrangements, the calculated *A* value should be the mean value obtained from calculations involving both sides. Alternatively, it should be taken as that corresponding to the side which evidently gives the least favourable result.

5 Wherever wing compartments are fitted, contribution to the summation indicated by the formula shall be taken for all cases of flooding in which wing compartments are involved. Additionally, cases of simultaneous flooding of a wing compartment or group of compartments and the adjacent inboard compartment or group of compartments, but excluding damage of transverse extent greater than one half of the ship breadth *B*, may be added. For the purpose of this regulation, transverse extent is measured inboard from ship's side, at right angle to the centreline at the level of the deepest subdivision draught.

This gazette is also available free online at **www.gpwonline.co.za**

6 In the flooding calculations carried out according to the regulations, only one breach of the hull and only one free surface need to be assumed. The assumed vertical extent of damage is to extend from the baseline upwards to any watertight horizontal subdivision above the waterline or higher. However, if a lesser extent of damage will give a more severe result, such extent is to be assumed.

7 If pipes, ducts or tunnels are situated within the assumed extent of damage, arrangements are to be made to ensure that progressive flooding cannot thereby extend to compartments other than those assumed flooded. However, the Administration may permit minor progressive flooding if it is demonstrated that its effects can be easily controlled and the safety of the ship is not impaired.

Regulation 7-1

Calculation of the factor p_i

1 The factor p_i for a compartment or group of compartments shall be calculated in accordance with paragraphs 1.1 and 1.2 using the following notations:

j = the aftmost damage zone number involved in the damage starting with No.1 at the stern;

n = the number of adjacent damage zones involved in the damage;

k = is the number of a particular longitudinal bulkhead as barrier for transverse penetration in a damage zone counted from shell towards the centre line. The shell has $k = 0$;

$x1$ = the distance from the aft terminal of L_s to the aft end of the zone in question;

$x2$ = the distance from the aft terminal of L_s to the forward end of the zone in question;

b = the mean transverse distance in metres measured at right angles to the centreline at the deepest subdivision draught between the shell and an assumed vertical plane extended between the longitudinal limits used in calculating the factor p_i and which is a tangent to, or common with, all or part of the outermost portion of the longitudinal bulkhead under consideration. This vertical plane shall be so orientated that the mean transverse distance to the shell is a maximum, but not more than twice the least distance between the plane and the shell. If the upper part of a longitudinal bulkhead is below the deepest subdivision draught the vertical plane used for determination of b is assumed to extend upwards to the deepest subdivision waterline. In any case, b is not to be taken greater than $B/2$.

If the damage involves a single zone only:

$$p_i = p(x1_j, x2_j) \cdot [r(x1_j, x2_j, b_k) - r(x1_j, x2_j, b_{k-1})]$$

If the damage involves two adjacent zones:

$$p_i = p(x1_j, x2_{j+1}) \cdot [r(x1_j, x2_{j+1}, b_k) - r(x1_j, x2_{j+1}, b_{k-1})]$$

This gazette is also available free online at **www.gpwonline.co.za**

$- p(x1_j, x2_j) \cdot [r(x1_j, x2_j, b_k) - r(x1_j, x2_j, b_{k-1})]$

$- p(x1_{j+1}, x2_{j+1}) \cdot [r(x1_{j+1}, x2_{j+1}, b_k) - r(x1_{j+1}, x2_{j+1}, b_{k-1})]$

If the damage involves three or more adjacent zones:

$$p_i = p(x1_j, x2_{j+n-1}) \cdot [r(x1_j, x2_{j+n-1}, b_k) - r(x1_j, x2_{j+n-1}, b_{k-1})]$$
$$- p(x1_j, x2_{j+n-2}) \cdot [r(x1_j, x2_{j+n-2}, b_k) - r(x1_j, x2_{j+n-2}, b_{k-1})]$$
$$- p(x1_{j+1}, x2_{j+n-1}) \cdot [r(x1_{j+1}, x2_{j+n-1}, b_k) - r(x1_{j+1}, x2_{j+n-1}, b_{k-1})]$$
$$+ p(x1_{j+1}, x2_{j+n-2}) \cdot [r(x1_{j+1}, x2_{j+n-2}, b_k) - r(x1_{j+1}, x2_{j+n-2}, b_{k-1})]$$

and where $r(x1, x2, b_0) = 0$

The factor $p(x1, x2)$ is to be calculated according to the following formulae:

Overall normalized max damage length: $J_{max} = 10/33$

Knuckle point in the distribution: $J_{kn} = 5/33$

Cumulative probability at J_{kn}: $p_k = 11/12$

Maximum absolute damage length: $l_{max} = 60$ m

Length where normalized distribution ends: $L^* = 260$ m

Probability density at $J = 0$:

$$b_0 = 2\left(\frac{p_k}{J_{kn}} - \frac{1 - p_k}{J_{max} - J_{kn}}\right)$$

When $L_s \leq L^*$:

$$J_m = \min\left\{J_{max}, \frac{l_{max}}{L_s}\right\}$$

$$J_k = \frac{J_m}{2} + \frac{1 - \sqrt{1 + (1 - 2p_k)b_0 J_m + \frac{1}{4}b_0^2 J_m^2}}{b_0}$$

$$b_{12} = b_0$$

When $L_s > L^*$:

$$J_m^* = \min\left\{J_{max}, \frac{l_{max}}{L^*}\right\}$$

$$J_k^* = \frac{J_m^*}{2} + \frac{1 - \sqrt{1 + (1 - 2p_k)b_0 J_m^* + \frac{1}{4}b_0^2 J_m^{*2}}}{b_0}$$

$J_m =$

69

2 $\frac{J_m^* \cdot L^{\flat 0}}{L_s}$

70

$$J_k = \frac{J_k^* \cdot L^*}{L_s}$$

$$b_{12} = 2\left(\frac{p_k}{J_k} - \frac{1 - p_k}{J_m - J_k}\right)$$

$$b_{11} = 4\frac{1 - p_k}{(J_m - J_k)J_k} - 2\frac{p_k}{J_k^2}$$

$$b_{21} = -2\frac{1 - p_k}{(J_m - J_k)^2}$$

$$b_{22} = -b_{21}J_m$$

The non-dimensional damage length:

$$J = \frac{(x2 - x1)}{L_s}$$

The normalized length of a compartment or group of compartments:

J_n is to be taken as the lesser of J and J_m

Where neither limit of the compartment or group of compartments under consideration coincides with the aft or forward terminals:

$J \leq J_k$:

$$p(x1, x2) = p_1 = \frac{1}{6} J^2(b_{11}J + 3b_{12})$$

$J > J_k$:

$$p(x1, x2) = p_2 = -\frac{1}{3}b_{11}J_k^3 + \frac{1}{2}(b_{11}J - b_{12})J_k^2 + b_{12}JJ_k$$
$$-\frac{1}{3}b_{21}(J_n^3 - J_k^3) + \frac{1}{2}(b_{21}J - b_{22})(J_n^2 - J_k^2)$$
$$+b_{22}J(J_n - J_k)$$

Where the aft limit of the compartment or group of compartments under consideration coincides with the aft terminal or the forward limit of the compartment or group of compartments under consideration coincides with the forward terminal:

This gazette is also available free online at **www.gpwonline.co.za**

$J \leq J_K$:

$$p(x1, x2) = \frac{1}{2}(p_1 + J)$$

This gazette is also available free online at **www.gpwonline.co.za**

$J > J_k$:

$$p(x1, x2) = \frac{1}{2}(p_2 + J)$$

Where the compartment or groups of compartments considered extends over the entire subdivision length (L_s):

$$p(x1, x2) = 1$$

The factor $r(x1, x2, b)$ shall be determined by the following formulae:

$$r(x1, x2, b) = 1 - (1 - C) \cdot (1 - \frac{G}{p(x1, x2)})$$

where:

$$C = 12 \cdot J_b \cdot (-45 \cdot J_b + 4), \text{ where}$$

$$J_b = \frac{b}{15 \cdot B}$$

Where the compartment or groups of compartments considered extends over the entire subdivision length (L_s):

$$G = G_1 = \frac{1}{2} b_{11} J_b^2 + b_{12} J_b$$

Where the compartment or groups of compartments considered extends over the entire subdivision length (L_s):

$$G = G_2 = -\frac{1}{3} b_{11} J_0^3 + \frac{1}{2}(b_{11} J - b_{12}) J_0^2 + b_{12} J J_0,$$

where $J_0 = \min(J, J_b)$

Where the aft limit of the compartment or group of compartments under consideration coincides with the aft terminal or the forward limit of the compartment or group of compartments under consideration coincides with the forward terminal:

$$G = \frac{1}{2}(G_2 + G_1 \cdot J)$$

Regulation 7-2

Calculation of the factor s_i

1 The factor s_i shall be determined for each case of assumed flooding, involving a compartment or group of compartments, in accordance with the following notations and

73

the provisions in this regulation.

This gazette is also available free online at **www.gpwonline.co.za**

θ_e is the equilibrium heel angle in any stage of flooding, in degrees;

θ_v is the angle, in any stage of flooding, where the righting lever becomes negative, or the angle at which an opening incapable of being closed weathertight becomes submerged;

GZ_{max} is the maximum positive righting lever, in metres, up to the angle θ_v;

Range is the range of positive righting levers, in degrees, measured from the angle θ_e. The positive range is to be taken up to the angle θ_v;

Flooding stage is any discrete step during the flooding process, including the stage before equalization (if any), until final equilibrium has been reached.

1.1 The factor s_i, for any damage case at any initial loading condition, di, shall be obtained from the formula:

$$s_i = \text{minimum}\ (\ s_{intermediate,i}\ \text{or}\ s_{final,i} \cdot s_{mom,i}\ )$$

where:

$s_{intermediate,i}$ is the probability to survive all intermediate flooding stages until the final equilibrium stage, and is calculated in accordance with paragraph 2;

$s_{final,i}$ is the probability to survive in the final equilibrium stage of flooding. It is calculated in accordance with paragraph 3;

$s_{mom,i}$ is the probability to survive heeling moments, and is calculated in accordance with paragraph 4.

2 For passenger ships, and cargo ships fitted with cross-flooding devices, the factor $s_{intermediate,i}$ is taken as the least of the s-factors obtained from all flooding stages including the stage before equalization, if any, and is to be calculated as follows:

$$s_{intermediate,i} = \left(\frac{GZ_{max}}{0.05} \cdot \frac{Range}{7}\right)^{\frac{1}{4}}$$

where GZ_{max} is not to be taken as more than 0.05 m and *Range* as not more than 7° · $s_{intermediate,i}$ = 0, if the intermediate heel angle exceeds 15° for passenger ships and 30° for cargo ships.

For cargo ships not fitted with cross-flooding devices the factor $s_{intermediate,i}$ is taken as unity, except if the Administration considers that the stability in intermediate stages of flooding may be insufficient, it should require further investigation thereof.

For passenger and cargo ships, where cross-flooding devices are fitted, the time for equalization shall not exceed 10 min.

3 The factor $s_{final,i}$ shall be obtained from the formula:

$$s_{final,i} = K \cdot \left(\frac{GZ_{max}}{TGZ_{max}} \cdot \frac{Range}{TRange}\right)^{\frac{1}{4}}$$

where:

This gazette is also available free online at **www.gpwonline.co.za**

GZ_{max} is not to be taken as more than TGZ_{max};

This gazette is also available free online at **www.gpwonline.co.za**

Range is not to be taken as more than *TRange*;

TGZ_{max} = 0.20 m, for ro-ro passenger ships each damage case that involves a ro-ro space,

TGZ_{max} = 0.12 m, otherwise;

TRange = 20°, for ro-ro passenger ships each damage case that involves a ro-ro space,

TRange = 16°, otherwise;

$K = 1$ if $\theta_e \leq \theta_{min}$,

$K = 0$ if $\theta_e \geq \theta_{max}$,

$$K = \sqrt{\frac{\theta_{max} - \theta_e}{\theta_{max} - \theta_{min}}}$$

where:

θ_{min} is 7° for passenger ships and 25° for cargo ships; and

θ_{max} is 15° for passenger ships and 30° for cargo ships.

4 The factor $s_{mom,i}$ is applicable only to passenger ships (for cargo ships $s_{mom,i}$ shall be taken as unity) and shall be calculated at the final equilibrium from the formula:

$$s_{mom,i} = \frac{(GZ_{max} - 0.04) \cdot Displacement}{M_{heel}}$$

where:

Displacement is the intact displacement at the respective draught (d_s, d_p or d_l);

M_{heel} is the maximum assumed heeling moment as calculated in accordance with sub-paragraph 4.1; and

$s_{mom,i} \leq 1$

5.1 The heeling moment M_{heel} is to be calculated as follows:

M_{heel} = maximum ($M_{passenger}$ or M_{wind} or $M_{survivalcraft}$)

4.1.1 $M_{passenger}$ is the maximum assumed heeling moment resulting from movement of passengers, and is to be obtained as follows:

$M_{passenger} = (0.075 \cdot N_p) \cdot (0.45 \cdot B)$ (t · m)

where:

N_p is the maximum number of passengers permitted to be on board in the service condition corresponding to the deepest subdivision draught under consideration; and

B is the breadth of the ship as defined in regulation 2.8.

Alternatively, the heeling moment may be calculated assuming the passengers are distributed with 4 persons per square metre on available deck areas towards one side

77

of the ship on the decks where muster stations are located and in such a way that they produce the most adverse heeling moment. In doing so, a weight of 75 kg per passenger is to be assumed.

4.1.2 M_{wind} is the maximum assumed wind moment acting in a damage situation:

$$M_{wind} = \frac{(P \cdot A \cdot Z)}{9{,}806} \quad (t \cdot m)$$

where:

P = 120 N/m^2;

A = projected lateral area above waterline;

Z = distance from centre of lateral projected area above waterline to $T/2$; and

T = respective draught (d_s, d_p or d_l).

4.1.3 $M_{survivalcraft}$ is the maximum assumed heeling moment due to the launching of all fully loaded davit-launched survival craft on one side of the ship. It shall be calculated using the following assumptions:

.1 all lifeboats and rescue boats fitted on the side to which the ship has heeled after having sustained damage shall be assumed to be swung out fully loaded and ready for lowering;

.2 for lifeboats which are arranged to be launched fully loaded from the stowed position, the maximum heeling moment during launching shall be taken;

.3 a fully loaded davit-launched liferaft attached to each davit on the side to which the ship has heeled after having sustained damage shall be assumed to be swung out ready for lowering;

.4 persons not in the life-saving appliances which are swung out shall not provide either additional heeling or righting moment; and

.5 life-saving appliances on the side of the ship opposite to the side to which the ship has heeled shall be assumed to be in a stowed position.

5 Unsymmetrical flooding is to be kept to a minimum consistent with the efficient arrangements. Where it is necessary to correct large angles of heel, the means adopted shall, where practicable, be self-acting, but in any case, where controls to equalization devices are provided they shall be operable from above the bulkhead deck of passenger ships and the freeboard deck of cargo ships. These fittings together with their controls shall be acceptable to the Administration.[49] Suitable information concerning the use of equalization devices shall be supplied to the master of the ship.

5.1 Tanks and compartments taking part in such equalization shall be fitted with air pipes or equivalent means of sufficient cross-section to ensure that the flow of water into the equalization compartments is not delayed.

[49] Reference is made to the *Revised recommendation on a standard method for evaluating cross-flooding arrangements*, adopted by the Organization by resolution MSC.362(92), as may be amended.

This gazette is also available free online at **www.gpwonline.co.za**

5.2 The factor s_i is to be taken as zero in those cases where the final waterline, taking into account sinkage, heel and trim, immerses:

.1 for cargo ships, the lower edge of openings through which progressive flooding may take place and such flooding is not accounted for in the calculation of factor s_i. Such openings shall include air pipes, ventilators and openings which are closed by means of weathertight doors or hatch covers;

.2 any part of the bulkhead deck in passenger ships considered a horizontal evacuation route for compliance with chapter II-2; and

.3 for passenger ships subject to the provisions of regulation 1.1.1.1 and constructed before 1 January 2024, the lower edge of openings through which progressive flooding may take place and such flooding is not accounted for in the calculation of factor s_i. Such openings shall include air pipes, ventilators and openings which are closed by means of weathertight doors or hatch covers.

5.3 The factor s_i is to be taken as zero if, taking into account sinkage, heel and trim, any of the following occur in any intermediate stage or in the final stage of flooding:

.1 immersion of any vertical escape hatch in the bulkhead deck of passenger ships and the freeboard deck of cargo ships intended for compliance with chapter II-2;

.2 any controls intended for the operation of watertight doors, equalization devices, valves on piping or on ventilation ducts intended to maintain the integrity of watertight bulkheads from above the bulkhead deck of passenger ships and the freeboard deck of cargo ships become inaccessible or inoperable; and

.3 immersion of any part of piping or ventilation ducts located within the assumed extent of damage and carried through a watertight boundary if this can lead to the progressive flooding of compartments not assumed as flooded; and

.4 for passenger ships constructed on or after 1 January 2024, immersion of the lower edge of openings through which progressive flooding may take place and such flooding is not accounted for in the calculation of factor s_i. Such openings shall include air pipes, ventilators and openings which are closed by means of weathertight doors or hatch covers.

5.4 However, where compartments assumed flooded due to progressive flooding are taken into account in the damage stability calculations, multiple values of $s_{\text{intermediate},i}$ may be calculated, assuming equalization in additional flooding phases.

5.5 Except as provided in paragraph 5.3.1, openings closed by means of watertight manhole covers and flush scuttles, remotely operated sliding watertight doors, side scuttles of the non-opening type as well as watertight access doors and watertight hatch covers required to be kept closed during navigation in accordance with regulations 22 to 24 need not be considered.

6 Where horizontal watertight boundaries are fitted above the waterline under consideration, the *s*-value calculated for the lower compartment or group of

This gazette is also available free online at **www.gpwonline.co.za**

compartments shall be obtained by multiplying the value as determined in paragraph 1.1 by the reduction factor v_m according to paragraph 6.1, which represents the probability that the spaces above the horizontal subdivision will not be flooded.

6.1 The factor v_m shall be obtained from the formula:

$$v_m = v(H_{j,n,m}, d) - v(H_{j,n,m-1}, d)$$

where:

$H_{j,n,m}$ is the least height above the baseline, in metres, within the longitudinal range of $x_{1(j)} \ldots x_{2(j+n-1)}$ of the mth horizontal boundary which is assumed to limit the vertical extent of flooding for the damaged compartments under consideration;

$H_{j,n,m-1}$ is the least height above the baseline, in metres, within the longitudinal range of $x_{1(j)} \ldots x_{2(j+n-1)}$ of the $(m-1)^{th}$ horizontal boundary which is assumed to limit the vertical extent of flooding for the damaged compartments under consideration;

j signifies the aft terminal of the damaged compartments under consideration;

m represents each horizontal boundary counted upwards from the waterline under consideration;

d is the draught in question as defined in regulation 2; and

x_1 and x_2 represent the terminals of the compartment or group of compartments considered in regulation 7-1.

6.1.1 The factors $v(H_{j,n,m}, d)$ and $v(H_{j,n,m-1}, d)$ shall be obtained from the formulae:

$$v(H, d) = 0.8\ \frac{(H - d)}{7.8}, \text{ if } (H_m - d) \text{ is less than, or equal to, 7.8 m;}$$

$$v(H, d) = 0.8 + 0.2\left(\frac{(H - d) - 7.8}{4.7}\right) \text{ in all other cases,}$$

where

$v(H_{j,n,m}, d)$ is to be taken as 1, if H_m coincides with the uppermost watertight boundary of the ship within the range $(x_{1(j)} \ldots x_{2(j+n-1)})$, and

$v(H_{j,n,0}, d)$ is to be taken as 0.

In no case is v_m to be taken as less than zero or more than 1.

6.2 In general, each contribution dA to the index A in the case of horizontal subdivisions is obtained from the formula:

$$dA = p_i \cdot [v_1 \cdot s_{min1} + (v_2 - v_1) \cdot s_{min2} + \ldots + (1 - v_{m-1}) \cdot s_{minm}]$$

where:

v_m = the v-value calculated in accordance with paragraph 6.1;

s_{min} = the least s-factor for all combinations of damages obtained when the assumed damage extends from the assumed damage height H_m downwards.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 7-3
Permeability

1 For the purpose of the subdivision and damage stability calculations of the regulations, the permeability of each general compartment or part of a compartment shall be as follows:

Spaces	**Permeability**
Appropriated to stores	0.60
Occupied by accommodation	0.95
Occupied by machinery	0.85
Void spaces	0.95
Intended for liquids	0 or 0.95 [50]

2 For the purpose of the subdivision and damage stability calculations of the regulations, the permeability of each cargo compartment or part of a compartment shall be as follows:

Spaces	**Permeability at draught d_s**	**Permeability at draught d_p**	**Permeability at draught d_l**
Dry cargo spaces	0.70	0.80	0.95
Container spaces	0.70	0.80	0.95
Ro-ro spaces	0.90	0.90	0.95
Cargo liquids	0.70	0.80	0.95

3 Other figures for permeability may be used if substantiated by calculations.

Regulation 8
Special requirements concerning passenger ship stability

1 A passenger ship intended to carry 400 or more persons shall have watertight subdivision abaft the collision bulkhead so that s_i = 1 for a damage involving all the compartments within 0.08*L* measured from the forward perpendicular for the three loading conditions used to calculate the attained subdivision index *A*. If the attained subdivision index *A* is calculated for different trims, this requirement shall also be satisfied for those loading conditions.

2 A passenger ship intended to carry 36 or more persons is to be capable of withstanding damage along the side shell to an extent specified in paragraph 3. Compliance with this regulation is to be achieved by demonstrating that s_i, as defined in regulation 7-2, is not less than 0.9 for the three loading conditions used to calculate

[50] Whichever results in the more severe requirement.

This gazette is also available free online at **www.gpwonline.co.za**

the attained subdivision index *A*. If the attained subdivision index *A* is calculated for different trims, this requirement shall also be satisfied for those loading conditions.

3 The damage extent [51] to be assumed when demonstrating compliance with paragraph 2 is to be dependent on the total number of persons carried, and *L*, such that:

.1 the vertical extent of damage is to extend from the ship's moulded baseline to a position up to 12.5 m above the position of the deepest subdivision draught as defined in regulation 2, unless a lesser vertical extent of damage were to give a lower value of s_i, in which case this reduced extent is to be used;

.2 where 400 or more persons are to be carried, a damage length of 0.03*L*, but not less than 3 m is to be assumed at any position along the side shell, in conjunction with a penetration inboard of 0.1*B* but not less than 0.75 m measured inboard from the ship side, at right angles to the centreline at the level of the deepest subdivision draught;

.3 where less than 400 persons are carried, damage length is to be assumed at any position along the shell side between transverse watertight bulkheads provided that the distance between two adjacent transverse watertight bulkheads is not less than the assumed damage length. If the distance between adjacent transverse watertight bulkheads is less than the assumed damage length, only one of these bulkheads shall be considered effective for the purpose of demonstrating compliance with paragraph 2;

.4 where 36 persons are carried, a damage length of 0.015L but not less than 3 m is to be assumed, in conjunction with a penetration inboard of 0.05B but not less than 0.75 m; and

.5 where more than 36, but fewer than 400, persons are carried the values of damage length and penetration inboard, used in the determination of the assumed extent of damage, are to be obtained by linear interpolation between the values of damage length and penetration which apply for ships carrying 36 persons and 400 persons as specified in subparagraphs .4 and .2.

Regulation 8-1

System capabilities and operational information after a flooding casualty on passenger ships

1 Application

Passenger ships having length, as defined in regulation II-1/2.5, of 120 m or more or having three or more main vertical zones shall comply with the provisions of this regulation.

[51] Refer to the appendix of the *Revised guidance for watertight doors on passenger ships which may be opened during navigation* (MSC.1/Circ.1564).

This gazette is also available free online at **www.gpwonline.co.za**

2 Availability of essential systems in case of flooding damage [52]

A passenger ship shall be designed so that the systems specified in regulation II-2/21.4 remain operational when the ship is subject to flooding of any single watertight compartment.

3 Operational information after a flooding casualty

3.1 For the purpose of providing operational information to the master for safe return to port after a flooding casualty, passenger ships, as specified in paragraph 1, shall have:

.1 an onboard stability computer; or

.2 shore-based support,

based on the guidelines developed by the Organization.[53]

3.2 Passenger ships constructed before 1 January 2014 shall comply with the provisions in paragraph 3.1 not later than the first renewal survey after 1 January 2025.

[52] Refer to the *Interim Explanatory Notes for the assessment of passenger ship systems' capabilities after a fire or flooding casualty* (MSC.1/Circ.1369 and MSC.1/Circ.1369/Add.1).

[53] Refer to the *Guidelines on operational information for masters of passenger ships for safe return to port by own power or under tow* (MSC.1/Circ.1400) for ships constructed on or after 1 January 2014 but before 13 May 2016, or the *Revised guidelines on operational information for masters of passenger ships for safe return to port* (MSC.1/Circ.1532/Rev.1) for ships constructed on or after 13 May 2016, or the *Guidelines on operational information for masters in case of flooding* for passenger ships constructed before 1 January 2014 (MSC.1/Circ.1589).

This gazette is also available free online at **www.gpwonline.co.za**

Part B-2 - Subdivision, Watertight And Weathertight Integrity

Regulation 9

Double bottoms in passenger ships and cargo ships other than tankers

1 A double bottom shall be fitted extending from the collision bulkhead to the afterpeak bulkhead, as far as this is practicable and compatible with the design and proper working of the ship.

2 Where a double bottom is required to be fitted, the inner bottom shall be continued out to the ship's sides in such a manner as to protect the bottom to the turn of the bilge. Such protection will be deemed satisfactory if the inner bottom is not lower at any part than a plane parallel with the keel line and which is located not less than a vertical distance h measured from the keel line, as calculated by the formula:

$h = B/20$

However, in no case is the value of h to be less than 760 mm, and need not be taken as more than 2,000 mm.

3.1 Small wells constructed in the double bottom in connection with drainage arrangements shall not extend downward more than necessary. The vertical distance from the bottom of such a well to a plane coinciding with the keel line shall not be less than $h/2$ or 500 mm, whichever is greater, or compliance with paragraph 8 of this regulation shall be shown for that part of the ship.

3.2 Other wells (e.g. for lubricating oil under main engines) may be permitted by the Administration if satisfied that the arrangements give protection equivalent to that afforded by a double bottom complying with this regulation.

3.2.1 For a cargo ship of 80 m in length and upwards or for a passenger ship, proof of equivalent protection is to be shown by demonstrating that the ship is capable of withstanding bottom damages as specified in paragraph 8. Alternatively, wells for lubricating oil below main engines may protrude into the double bottom below the boundary line defined by the distance *h* provided that the vertical distance between the well bottom and a plane coinciding with the keel line is not less than $h/2$ or 500 mm, whichever is greater.

3.2.2 For cargo ships of less than 80 m in length the arrangements shall provide a level of safety to the satisfaction of the Administration.

4 A double bottom need not be fitted in way of watertight tanks, including dry tanks of moderate size, provided the safety of the ship is not impaired in the event of bottom or side damage.

5 In the case of passenger ships to which the provisions of regulation 1.5 apply and which are engaged on regular service within the limits of a short international voyage as defined in regulation III/3.22, the Administration may permit a double bottom to be dispensed with if satisfied that the fitting of a double bottom in that part would not be compatible with the design and proper working of the ship.

This gazette is also available free online at **www.gpwonline.co.za**

6 Any part of a cargo ship of 80 m in length and upwards or of a passenger ship that is not fitted with a double bottom in accordance with paragraphs 1, 4 or 5, as specified in paragraph 2, shall be capable of withstanding bottom damages, as specified in paragraph 8, in that part of the ship. For cargo ships of less than 80 m in length the alternative arrangements shall provide a level of safety to the satisfaction of the Administration.

7 In the case of unusual bottom arrangements in a cargo ship of 80 m in length and upwards or a passenger ship, it shall be demonstrated that the ship is capable of withstanding bottom damages as specified in paragraph 8. For cargo ships of less than 80 m in length the alternative arrangements shall provide a level of safety to the satisfaction of the Administration.

8 Compliance with paragraphs 3.1, 3.2.1, 6 or 7 is to be achieved by demonstrating that s_i, when calculated in accordance with regulation 7-2, is not less than 1 for all service conditions when subject to bottom damage with an extent specified in sub-paragraph .2 below for any position in the affected part of the ship:

.1 Flooding of such spaces shall not render emergency power and lighting, internal communication, signals or other emergency devices inoperable in other parts of the ship.

.2 Assumed extent of damage shall be as follows:

	For 0.3*L* from the forward Perpendicular of the ship	**Any other part of the ship**
Longitudinal extent	$1/3L^{2/3}$ or 14.5 m, whichever is less	$1/3L^{2/3}$ or 14.5 m, whichever is less
Transverse extent	*B*/6 or 10 m, whichever is less	*B*/6 or 5 m, whichever is less
Vertical extent, measured from the keel line	*B*/20, to be taken not less than 0.76 m and not more than 2 m	*B*/20, to be taken not less than 0.76 m and not more than 2 m

.3 If any damage of a lesser extent than the maximum damage specified in .2 would result in a more severe condition, such damage should be considered.

9 In case of large lower holds in passenger ships, the Administration may require an increased double-bottom height of not more than B/10 or 3 m, whichever is less, measured from the keel line. Alternatively, bottom damages may be calculated for these areas, in accordance with paragraph 8, but assuming an increased vertical extent.

Regulation 10

Construction of watertight bulkheads

This gazette is also available free online at **www.gpwonline.co.za**

1 Each watertight subdivision bulkhead, whether transverse or longitudinal, shall be constructed having scantlings as specified in regulation 2.17. In all cases, watertight subdivision bulkheads shall be capable of supporting at least the pressure due to a head of water up to the bulkhead deck of passenger ships and the freeboard deck of cargo ships.

2 Steps and recesses in watertight bulkheads shall be as strong as the bulkhead at the place where each occurs.

Regulation 11

Initial testing of watertight bulkheads, etc.

1 Testing watertight spaces not intended to hold liquids and cargo holds intended to hold ballast by filling them with water is not compulsory. When testing by filling with water is not carried out, a hose test shall be carried out where practicable. This test shall be carried out in the most advanced stage of the fitting out of the ship. Where a hose test is not practicable because of possible damage to machinery, electrical equipment insulation or outfitting items, it may be replaced by a careful visual examination of welded connections, supported where deemed necessary by means such as a dye penetrant test or an ultrasonic leak test or an equivalent test. In any case a thorough inspection of the watertight bulkheads shall be carried out.

2 The forepeak, double bottom (including duct keels) and inner skins shall be tested with water to a head corresponding to the requirements of regulation 10.1.

3 Tanks which are intended to hold liquids, and which form part of the watertight subdivision of the ship, shall be tested for tightness and structural strength with water to a head corresponding to its design pressure. The water head is in no case to be less than the top of the air pipes or to a level of 2.4 m above the top of the tank, whichever is the greater.

4 The tests referred to in paragraphs 2 and 3 are for the purpose of ensuring that the subdivision structural arrangements are watertight and are not to be regarded as a test of the fitness of any compartment for the storage of oil fuel or for other special purposes for which a test of a superior character may be required, depending on the height to which the liquid has access in the tank or its connections.

Regulation 12

Peak and machinery space bulkheads, shaft tunnels, etc.

1 A collision bulkhead shall be fitted which shall be watertight up to the bulkhead deck of passenger ships and the freeboard deck of cargo ships. This bulkhead shall be located at a distance from the forward perpendicular of not less than 0.05*L* or 10 m, whichever is less, and, except as may be permitted by the Administration, not more than 0.08*L* or 0.05*L* + 3 m, whichever is the greater.

This gazette is also available free online at **www.gpwonline.co.za**

2 The ship shall be so designed that s_i calculated in accordance with regulation 7-2 will not be less than 1 at the deepest subdivision draught loading condition, level trim or any forward trim loading conditions, if any part of the ship forward of the collision bulkhead is flooded without vertical limits.

3 Where any part of the ship below the waterline extends forward of the forward perpendicular, e.g. a bulbous bow, the distances stipulated in paragraph 1 shall be measured from a point either:

.1 at the mid-length of such extension;

.2 at a distance 0.015L forward of the forward perpendicular; or

.3 at a distance 3 m forward of the forward perpendicular,

whichever gives the smallest measurement.

4 The bulkhead may have steps or recesses provided they are within the limits prescribed in paragraph 1 or 3.

5 No doors, manholes, access openings, ventilation ducts or any other openings shall be fitted in the collision bulkhead below the bulkhead deck of passenger ships and the freeboard deck of cargo ships.

6.1 For ships subject to the provisions of regulation 1.1.1.1 and constructed before 1 January 2024, except as provided in paragraph 6.3, the collision bulkhead may be pierced below the bulkhead deck of passenger ships and the freeboard deck of cargo ships by not more than one pipe for dealing with fluid in the forepeak tank, provided that the pipe is fitted with a screw-down valve capable of being operated from above the bulkhead deck of passenger ships and the freeboard deck of cargo ships, the valve being located inside the forepeak at the collision bulkhead. The Administration may, however, authorize the fitting of this valve on the after side of the collision bulkhead provided that the valve is readily accessible under all service conditions and the space in which it is located is not a cargo space. Alternatively, for cargo ships, the pipe may be fitted with a butterfly valve suitably supported by a seat or flanges and capable of being operated from above the freeboard deck. All valves shall be of steel, bronze or other approved ductile material. Valves of ordinary cast iron or similar material are not acceptable.

6.2 For ships constructed on or after 1 January 2024, except as provided in paragraph 6.3, the collision bulkhead may be pierced below the bulkhead deck of passenger ships and the freeboard deck of cargo ships by not more than one pipe for dealing with fluid in the forepeak tank, provided that the pipe is fitted with a remotely controlled valve capable of being operated from above the bulkhead deck of passenger ships and the freeboard deck of cargo ships. The valve shall be normally closed. If the remote control system should fail during operation of the valve, the valve shall close automatically or be capable of being closed manually from a position above the bulkhead deck of passenger ships and the freeboard deck of cargo ships. The valve shall be located at the collision bulkhead on either the forward or aft side, provided the space on the aft side is not a cargo space. The valve shall be of steel, bronze or other approved ductile material. Valves of ordinary cast iron or similar material are not acceptable.

This gazette is also available free online at **www.gpwonline.co.za**

6.3 If the forepeak is divided to hold two different kinds of liquids the Administration may allow the collision bulkhead to be pierced below the bulkhead deck of passenger ships and the freeboard deck of cargo ships by two pipes, each of which is fitted as required by paragraph 6.1 or 6.2, provided the Administration is satisfied that there is no practical alternative to the fitting of such a second pipe and that, having regard to the additional subdivision provided in the forepeak, the safety of the ship is maintained.

7 Where a long forward superstructure is fitted, the collision bulkhead shall be extended weathertight to the deck next above the bulkhead deck of passenger ships and the freeboard deck of cargo ships. The extension need not be fitted directly above the bulkhead below provided that all parts of the extension, including any part of the ramp attached to it, are located within the limits prescribed in paragraph 1 or 3, with the exception permitted by paragraph 8, and that the part of the deck which forms the step is made effectively weathertight. The extension shall be so arranged as to preclude the possibility of the bow door or ramp, where fitted, causing damage to it in the case of damage to, or detachment of, a bow door or any part of the ramp.

8 Where bow doors are fitted and a sloping loading ramp forms part of the extension of the collision bulkhead above the bulkhead deck of passenger ships and the freeboard deck of cargo ships, the ramp shall be weathertight over its complete length. In cargo ships, the part of the ramp which is more than 2.3 m above the freeboard deck may extend forward of the limit specified in paragraph 1 or 3. Ramps not meeting the above requirements shall be disregarded as an extension of the collision bulkhead.

9 The number of openings in the extension of the collision bulkhead above the freeboard deck shall be restricted to the minimum compatible with the design and normal operation of the ship. All such openings shall be capable of being closed weathertight.

10 Bulkheads shall be fitted separating the machinery space from cargo and accommodation spaces forward and aft and made watertight up to the bulkhead deck of passenger ships and the freeboard deck of cargo ships. An afterpeak bulkhead shall also be fitted and made watertight up to the bulkhead deck or the freeboard deck. The afterpeak bulkhead may, however, be stepped below the bulkhead deck or the freeboard deck, provided the degree of safety of the ship as regards subdivision is not thereby diminished.

11 In all cases stern tubes shall be enclosed in watertight spaces of moderate volume. In passenger ships the stern gland shall be situated in a watertight shaft tunnel or other watertight space separate from the stern tube compartment and of such volume that, if flooded by leakage through the stern gland, the bulkhead deck will not be immersed. In cargo ships other measures to minimize the danger of water penetrating into the ship in case of damage to stern tube arrangements may be taken at the discretion of the Administration.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 13

Openings in watertight boundaries below the bulkhead deck in passenger ships [54]

1 The number of openings in watertight boundaries shall be reduced to the minimum compatible with the design and proper working of the ship; satisfactory means shall be provided for closing these openings.

2.1 Where pipes, scuppers, electric cables, etc., are carried through watertight boundaries, arrangements shall be made to ensure the watertight integrity of the boundaries.

2.2 Valves not forming part of a piping system shall not be permitted in watertight boundaries.

2.3 Lead or other heat sensitive materials shall not be used in systems which penetrate watertight boundaries, where deterioration of such systems in the event of fire would impair the watertight integrity of the boundaries.

3 No doors, manholes or access openings are permitted in watertight transverse bulkheads dividing a cargo space from an adjoining cargo space, except as provided in paragraph 8.1 and in regulation 14.

4 Subject to paragraph 9, not more than one door, apart from the doors to shaft tunnels, may be fitted in each watertight bulkhead within spaces containing the main and auxiliary propulsion machinery including boilers serving the needs of propulsion. Where two or more shafts are fitted, the tunnels shall be connected by an intercommunicating passage. There shall be only one door between the machinery space and the tunnel spaces where two shafts are fitted and only two doors where there are more than two shafts. All these doors shall be of the sliding type and shall be so located as to have their sills as high as practicable. The hand gear for operating these doors from above the bulkhead deck shall be situated outside the spaces containing the machinery.

5.1 Watertight doors, except as provided in paragraph 8.1 or regulation 14, shall be power-operated sliding doors complying with the requirements of paragraph 6.

5.2 The means of operation whether by power or by hand of any power-operated sliding watertight door shall be capable of closing the door with the ship listed to 15° either way. Consideration shall also be given to the forces which may act on either side of the door as may be experienced when water is flowing through the opening applying a static head equivalent to a water height of at least 1 m above the sill on the centreline of the door.

5.3 Watertight door controls, including hydraulic piping and electric cables, shall be kept as close as practicable to the bulkhead in which the doors are fitted, in order to minimize the likelihood of them being involved in any damage which the ship may sustain. The positioning of watertight doors and their controls shall be such that if the ship sustains damage within one fifth of the breadth of the ship, as defined in regulation

[54] Refer to *Revised guidance for watertight doors on passenger ships which may be opened during navigation* (MSC.1/Circ.1564).

This gazette is also available free online at **www.gpwonline.co.za**

2, such distance being measured at right angles to the centreline at the level of the deepest subdivision draught, the operation of the watertight doors clear of the damaged portion of the ship is not impaired.

6.1 Each power-operated sliding watertight door:

.1 shall have a vertical or horizontal motion;

.2 shall, subject to paragraph 9, be normally limited to a maximum clear opening width of 1.2 m. The Administration may permit larger doors only to the extent considered necessary for the effective operation of the ship provided that other safety measures, including the following, are taken into consideration:

.1 special consideration shall be given to the strength of the door and its closing appliances in order to prevent leakages; and

.2 the door shall be located inboard the damage zone B/5;

.3 shall be fitted with the necessary equipment to open and close the door using electric power, hydraulic power or any other form of power that is acceptable to the Administration;

.4 shall be provided with an individual hand-operated mechanism. It shall be possible to open and close the door by hand at the door itself from either side and, in addition, close the door from an accessible position above the bulkhead deck with an all-round crank motion or some other movement providing the same degree of safety acceptable to the Administration. Direction of rotation or other movement is to be clearly indicated at all operating positions. The time necessary for the complete closure of the door, when operating by hand gear, shall not exceed 90 s with the ship in the upright position. Visual indicators to show whether the door is open or closed shall be provided at the accessible position above the bulkhead deck;

.5 shall be provided with controls for opening and closing the door by power from both sides of the door and also for closing the door by power from the central operating console(s) required by paragraph 7.1;

.6 shall be provided with an audible alarm, distinct from any other alarm in the area, which will sound whenever the door is closed remotely by power and which shall sound for at least 5 s but no more than 10 s before the door begins to move and shall continue sounding until the door is completely closed. In the case of remote hand operation, it is sufficient for the audible alarm to sound only when the door is moving. Additionally, in passenger areas and areas of high ambient noise the Administration may require the audible alarm to be supplemented by an intermittent visual signal at the door; and

.7 shall have an approximately uniform rate of closure under power. The closure time, from the time the door begins to move to the time it reaches the completely closed position, shall in no case be less than 20 s or more than 40 s with the ship in the upright position.

This gazette is also available free online at **www.gpwonline.co.za**

6.2 The electrical power required for power-operated sliding watertight doors shall be supplied from the emergency switchboard either directly or by a dedicated distribution board situated above the bulkhead deck. The associated control, indication and alarm circuits shall be supplied from the emergency switchboard either directly or by a dedicated distribution board situated above the bulkhead deck and be capable of being automatically supplied by the transitional source of emergency electrical power required by regulation 42.3.1.3 in the event of failure of either the main or emergency source of electrical power.

6.3 Power-operated sliding watertight doors shall have either:

.1 a centralized hydraulic system with two independent power sources each consisting of a motor and pump capable of simultaneously closing all doors. In addition, there shall be for the whole installation hydraulic accumulators of sufficient capacity to operate all the doors at least three times, i.e. closed-open-closed, against an adverse list of 15º. This operating cycle shall be capable of being carried out when the accumulator is at the pump cut-in pressure. The fluid used shall be chosen considering the temperatures liable to be encountered by the installation during its service. The power-operating system shall be designed to minimize the possibility of having a single failure in the hydraulic piping adversely affect the operation of more than one door. The hydraulic system shall be provided with a low-level alarm for hydraulic fluid reservoirs serving the power-operated system and a low gas pressure alarm or other effective means of monitoring loss of stored energy in hydraulic accumulators. These alarms are to be audible and visual and shall be situated on the central operating console(s) required by paragraph 7.1; or

.2 an independent hydraulic system for each door with each power source consisting of a motor and pump capable of opening and closing the door. In addition, there shall be a hydraulic accumulator of sufficient capacity to operate the door at least three times, i.e. closed-open-closed, against an adverse list of 15°. This operating cycle shall be capable of being carried out when the accumulator is at the pump cut-in pressure. The fluid used shall be chosen considering the temperatures liable to be encountered by the installation during its service. A low gas pressure group alarm or other effective means of monitoring loss of stored energy in hydraulic accumulators shall be provided at the central operating console(s) required by paragraph 7.1. Loss of stored energy indication at each local operating position shall also be provided; or

.3 an independent electrical system and motor for each door with each power source consisting of a motor capable of opening and closing the door. The power source shall be capable of being automatically supplied by the transitional source of emergency electrical power as required by regulation 42.4.2 - in the event of failure of either the main or emergency source of electrical power and with sufficient capacity to operate the door at least three times, i.e. closed-open-closed, against an adverse list of 15°.

For the systems specified in paragraphs 6.3.1, 6.3.2 and 6.3.3, provision should be made as follows: Power systems for power-operated sliding watertight doors shall be separate from any other power system. A single failure in the electric or hydraulic

This gazette is also available free online at **www.gpwonline.co.za**

power-operated systems excluding the hydraulic actuator shall not prevent the hand operation of any door.

6.4 Control handles shall be provided at each side of the bulkhead at a minimum height of 1.6 m above the floor and shall be so arranged as to enable persons passing through the doorway to hold both handles in the open position without being able to set the power closing mechanism in operation accidentally. The direction of movement of the handles in opening and closing the door shall be in the direction of door movement and shall be clearly indicated.

6.5 As far as practicable, electrical equipment and components for watertight doors shall be situated above the bulkhead deck and outside hazardous areas and spaces.

6.6 The enclosures of electrical components necessarily situated below the bulkhead deck shall provide suitable protection against the ingress of water.[55*]

Other arrangements for the enclosures of electrical components may be fitted provided the Administration is satisfied that an equivalent protection is achieved. The water pressure IPX 8 shall be based on the pressure that may occur at the location of the component during flooding for a period of 36 h.

6.7 Electric power, control, indication and alarm circuits shall be protected against fault in such a way that a failure in one door circuit will not cause a failure in any other door circuit. Short circuits or other faults in the alarm or indicator circuits of a door shall not result in a loss of power operation of that door. Arrangements shall be such that leakage of water into the electrical equipment located below the bulkhead deck will not cause the door to open.

6.8 A single electrical failure in the power operating or control system of a power-operated sliding watertight door shall not result in a closed door opening. Availability of the power supply should be continuously monitored at a point in the electrical circuit as near as practicable to each of the motors required by paragraph 6.3. Loss of any such power supply should activate an audible and visual alarm at the central operating console(s) required by paragraph 7.1.

7.1 A central operating console for all power-operated sliding watertight doors shall be located in the safety centre in accordance with regulation II-2/23. If the safety centre is located in a separate space adjacent to the navigation bridge, a central operating console shall also be located on the navigation bridge. The central operating console(s) shall have a "master mode" switch with two modes of control: a "local control" mode, which shall allow any door to be locally opened and locally closed after use without automatic closure, and a "doors closed" mode, which shall automatically close any door that is open in not more than 60 s with the ship in an upright position. The "doors closed" mode shall permit doors to be opened locally and shall automatically re-close the doors upon release of the local control mechanism. The "master mode" switch shall normally be in the "local control" mode. The "doors closed" mode shall only be used in an emergency or for testing purposes.

[55] Refer to the following publication IEC 60529:1989:

.1 electrical motors, associated circuits and control components; protected to IPX 7 standard;

.2 door position indicators and associated circuit components; protected to IPX 8 standard; and

.3 door movement warning signals; protected to IPX 6 standard.

This gazette is also available free online at **www.gpwonline.co.za**

7.2 For ships subject to the provisions of regulation 1.1.1.1 and constructed before 1 January 2024, the central operating console at the navigation bridge shall be provided with a diagram showing the location of each door, with visual indicators to show whether each door is open or closed. A red light shall indicate a door is fully open and a green light shall indicate a door is fully closed. When the door is closed remotely the red light shall indicate the intermediate position by flashing. The indicating circuit shall be independent of the control circuit for each door.

7.3 For ships constructed on or after 1 January 2024, the central operating console(s) shall be provided with a diagram showing the location of each power-operated sliding watertight door, with visual indicators to show whether each door is open or closed. A red light shall indicate a door is fully open and a green light shall indicate a door is fully closed. When the door is closed remotely the red light shall indicate the intermediate position by flashing. The indicating circuit shall be independent of the control circuit for each door. Indication shall also be provided to the onboard stability computer, if installed in accordance with regulation II-1/8-1.3.1.

7.4 It shall not be possible to remotely open any door from the central operating console.

8.1 If the Administration is satisfied that such doors are essential, watertight doors of satisfactory construction may be fitted in watertight bulkheads dividing cargo spaces on 'tween decks. Such doors may be hinged, rolling or sliding doors but shall not be remotely controlled. They shall be fitted at the highest level and as far from the shell plating as practicable, but in no case shall the outboard vertical edges be situated at a distance from the shell plating which is less than one fifth of the breadth of the ship, as defined in regulation 2, such distance being measured at right angles to the centreline at the level of the deepest subdivision draught.

8.2 Should any such doors be accessible during the voyage, they shall be fitted with a device which prevents unauthorized opening. When it is proposed to fit such doors, the number and arrangements shall receive the special consideration of the Administration.

9 Portable plates on bulkheads shall not be permitted except in machinery spaces. The Administration may permit not more than one power-operated sliding watertight door larger than those specified in paragraph 6.1.2 to be substituted for these portable plates in each watertight bulkhead, provided these doors are intended to remain closed during navigation except in case of urgent necessity at the discretion of the master. These doors need not meet the requirements of paragraph 6.1.4 regarding complete closure by hand-operated gear in 90 s.

10.1 Where trunkways or tunnels for access from crew accommodation to the machinery spaces, for piping, or for any other purpose are carried through watertight bulkheads, they shall be watertight and in accordance with the requirements of regulation 16-1. The access to at least one end of each such tunnel or trunkway, if used as a passage at sea, shall be through a trunk extending watertight to a height sufficient to permit access above the bulkhead deck. The access to the other end of the trunkway or tunnel may be through a watertight door. Such trunkways or tunnels shall not extend through the first subdivision bulkhead abaft the collision bulkhead.

This gazette is also available free online at **www.gpwonline.co.za**

10.2 Where it is proposed to fit tunnels piercing watertight bulkheads, these shall receive the special consideration of the Administration.

10.3 Where trunkways in connection with refrigerated cargo and ventilation or forced draught trunks are carried through more than one watertight bulkhead, the means of closure at such openings shall be operated by power and be capable of being closed from a central position situated above the bulkhead deck.

Regulation 13-1
Openings in watertight bulkheads and internal decks in cargo ships

1 The number of openings in watertight subdivisions is to be kept to a minimum compatible with the design and proper working of the ship. Where penetrations of watertight bulkheads and internal decks are necessary for access, piping, ventilation, electrical cables, etc., arrangements are to be made to maintain the watertight integrity. The Administration may permit relaxation in the watertightness of openings above the freeboard deck, provided that it is demonstrated that any progressive flooding can be easily controlled and that the safety of the ship is not impaired.

2 Doors provided to ensure the watertight integrity of internal openings which are used while at sea are to be sliding watertight doors capable of being remotely closed from the bridge and are also to be operable locally from each side of the bulkhead. Indicators are to be provided at the control position showing whether the doors are open or closed, and an audible alarm is to be provided at the door closure. The power, control and indicators are to be operable in the event of main power failure. Particular attention is to be paid to minimizing the effect of control system failure. Each power-operated sliding watertight door shall be provided with an individual hand-operated mechanism. It shall be possible to open and close the door by hand at the door itself from both sides.

3 Access doors and access hatch covers normally closed at sea, intended to ensure the watertight integrity of internal openings, shall be provided with means of indication locally and on the bridge showing whether these doors or hatch covers are open or closed. A notice is to be affixed to each such door or hatch cover to the effect that it is not to be left open.

4 Watertight doors or ramps of satisfactory construction may be fitted to internally subdivide large cargo spaces, provided that the Administration is satisfied that such doors or ramps are essential. These doors or ramps may be hinged, rolling or sliding doors or ramps, but shall not be remotely controlled. [56]* Should any of the doors or ramps be accessible during the voyage, they shall be fitted with a device which prevents unauthorized opening.

5 Other closing appliances which are kept permanently closed at sea to ensure the watertight integrity of internal openings shall be provided with a notice which is to be

[56] Refer to Interpretations of regulations of part B-1 of SOLAS chapter II-1 (MSC/Circ.651).

This gazette is also available free online at **www.gpwonline.co.za**

affixed to each such closing appliance to the effect that it is to be kept closed. Manholes fitted with closely bolted covers need not be so marked.

Regulation 14

Passenger ships carrying goods vehicles and accompanying personnel

1 This regulation applies to passenger ships designed or adapted for the carriage of goods vehicles and accompanying personnel.

2 If in such a ship the total number of passengers which include personnel accompanying vehicles does not exceed 12 + Ad/25, where Ad = total deck area (square metres) of spaces available for the stowage of goods vehicles and where the clear height at the stowage position and at the entrance to such spaces is not less than 4 m, the provisions of regulations 13.9.1 and 13.9.2 in respect of watertight doors apply except that the doors may be fitted at any level in watertight bulkheads dividing cargo spaces. Additionally, indicators are required on the navigation bridge to show automatically when each door is closed and all door fastenings are secured.

3 The ship may not be certified for a higher number of passengers than assumed in paragraph 2, if a watertight door has been fitted in accordance with this regulation.

Regulation 15

Openings in the shell plating below the bulkhead deck of passenger ships and the freeboard deck of cargo ships

1 The number of openings in the shell plating shall be reduced to the minimum compatible with the design and proper working of the ship.

2 The arrangement and efficiency of the means for closing any opening in the shell plating shall be consistent with its intended purpose and the position in which it is fitted and generally to the satisfaction of the Administration.

3.1 Subject to the requirements of the International Convention on Load Lines in force, no sidescuttle shall be fitted in such a position that its sill is below a line drawn parallel to the bulkhead deck at side and having its lowest point 2.5% of the breadth of the ship above the deepest subdivision draught, or 500 mm, whichever is the greater.

3.2 All sidescuttles the sills of which are below the bulkhead deck of passenger ships and the freeboard deck of cargo ships, as permitted by paragraph 3.1, shall be of such construction as will effectively prevent any person opening them without the consent of the master of the ship.

4 Efficient hinged inside deadlights so arranged that they can be easily and effectively closed and secured watertight, shall be fitted to all sidescuttles except that abaft one eighth of the ship's length from the forward perpendicular and above a line drawn parallel to the bulkhead deck at side and having its lowest point at a height of 3.7 m plus 2.5% of the breadth of the ship above the deepest subdivision draught, the

This gazette is also available free online at **www.gpwonline.co.za**

deadlights may be portable in passenger accommodation other than that for steerage passengers, unless the deadlights are required by the International Convention on Load Lines in force to be permanently attached in their proper positions. Such portable deadlights shall be stowed adjacent to the sidescuttles they serve.

5.1 No sidescuttles shall be fitted in any spaces which are appropriated exclusively to the carriage of cargo or coal.

5.2 Sidescuttles may, however, be fitted in spaces appropriated alternatively to the carriage of cargo or passengers, but they shall be of such construction as will effectively prevent any person opening them or their deadlights without the consent of the master.

6 Automatic ventilating sidescuttles shall not be fitted in the shell plating below the bulkhead deck of passenger ships and the freeboard deck of cargo ships without the special sanction of the Administration.

7 The number of scuppers, sanitary discharges and other similar openings in the shell plating shall be reduced to the minimum either by making each discharge serve for as many as possible of the sanitary and other pipes, or in any other satisfactory manner.

8.1 All inlets and discharges in the shell plating shall be fitted with efficient and accessible arrangements for preventing the accidental admission of water into the ship.

8.2.1 Subject to the requirements of the International Convention on Load Lines in force, and except as provided in paragraph 8.3, each separate discharge led through the shell plating from spaces below the bulkhead deck of passenger ships and the freeboard deck of cargo ships shall be provided with either one automatic non-return valve fitted with a positive means of closing it from above the bulkhead deck of passenger ships and the freeboard deck of cargo ships or with two automatic non-return valves without positive means of closing, provided that the inboard valve is situated above the deepest subdivision draught and is always accessible for examination under service conditions. Where a valve with positive means of closing is fitted, the operating position above the bulkhead deck of passenger ships and the freeboard deck of cargo ships shall always be readily accessible and means shall be provided for indicating whether the valve is open or closed.

8.2.2 The requirements of the International Convention on Load Lines in force shall apply to discharges led through the shell plating from spaces above the bulkhead deck of passenger ships and the freeboard deck of cargo ships.

8.3 Machinery space, main and auxiliary sea inlets and discharges in connection with the operation of machinery shall be fitted with readily accessible valves between the pipes and the shell plating or between the pipes and fabricated boxes attached to the shell plating. In manned machinery spaces the valves may be controlled locally and shall be provided with indicators showing whether they are open or closed.

8.4 Moving parts penetrating the shell plating below the deepest subdivision draught shall be fitted with a watertight sealing arrangement acceptable to the Administration.

This gazette is also available free online at **www.gpwonline.co.za**

The inboard gland shall be located within a watertight space of such volume that, if flooded, the bulkhead deck of passenger ships and the freeboard deck of cargo ships will not be submerged. The Administration may require that if such compartment is flooded, essential or emergency power and lighting, internal communication, signals or other emergency devices must remain available in other parts of the ship.

8.5 All shell fittings and valves required by this regulation shall be of steel, bronze or other approved ductile material. Valves of ordinary cast iron or similar material are not acceptable. All pipes to which this regulation refers shall be of steel or other equivalent material to the satisfaction of the Administration.

9 For ships subject to the provisions of regulation 1.1.1.1 and constructed before 1 January 2024, gangway, cargo and fuelling ports fitted below the bulkhead deck of passenger ships and the freeboard deck of cargo ships shall be watertight and in no case be so fitted as to have their lowest point below the deepest subdivision draught.

10 For ships constructed on or after 1 January 2024, cargo ports and other similar openings (e.g. gangway and fuelling ports) in the side of ships below the bulkhead deck of passenger ships and the freeboard deck of cargo ships shall be fitted with doors so designed as to ensure the same watertightness and structural integrity as the surrounding shell plating. Unless otherwise granted by the Administration, these openings shall open outwards. The number of such openings shall be the minimum compatible with the design and proper working of the ship. In no case shall these openings be so fitted as to have their lowest point below the deepest subdivision draught.

Regulation 15-1
External openings in cargo ships

1 All external openings leading to compartments assumed intact in the damage analysis, which are below the final damage waterline, are required to be watertight.

2 External openings required to be watertight in accordance with paragraph 1 shall, except for cargo hatch covers, be fitted with indicators on the bridge.

3 Openings in the shell plating below the deck limiting the vertical extent of damage shall be fitted with a device that prevents unauthorized opening if they are accessible during the voyage.

4 Other closing appliances which are kept permanently closed at sea to ensure the watertight integrity of external openings shall be provided with a notice affixed to each appliance to the effect that it is to be kept closed. Manholes fitted with closely bolted covers need not be so marked.

Regulation 16
Construction and initial tests of watertight closures

This gazette is also available free online at **www.gpwonline.co.za**

CONTINUES ON PAGE 258 OF BOOK 3

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**



Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 3 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845

9 771682 584003 55299

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

1.1 The design, materials and construction of all watertight closures such as doors, hatches, sidescuttles, gangway and cargo ports, valves and pipes referred to in these regulations shall be to the satisfaction of the Administration.

1.2 Such valves, doors, hatches and mechanisms shall be suitably marked to ensure that they may be properly used to provide maximum safety.

1.3 The frames of vertical watertight doors shall have no groove at the bottom in which dirt might lodge and prevent the door closing properly.

2 Watertight doors and hatches shall be tested by water pressure to the maximum head of water they might sustain in a final or intermediate stage of flooding. For cargo ships not covered by damage stability requirements, watertight doors and hatches shall be tested by water pressure to a head of water measured from the lower edge of the opening to one metre above the freeboard deck. Where testing of individual doors and hatches is not carried out because of possible damage to insulation or outfitting items, testing of individual doors and hatches may be replaced by a prototype pressure test of each type and size of door or hatch with a test pressure corresponding at least to the head required for the individual location. The prototype test shall be carried out before the door or hatch is fitted. The installation method and procedure for fitting the door or hatch on board shall correspond to that of the prototype test. When fitted on board, each door or hatch shall be checked for proper seating between the bulkhead, the frame and the door or between deck, the coaming and the hatch.

Regulation 16-1

Construction and initial tests of watertight decks, trunks, etc.

1 Watertight decks, trunks, tunnels, duct keels and ventilators shall be of the same strength as watertight bulkheads at corresponding levels. The means used for making them watertight, and the arrangements adopted for closing openings in them, shall be to the satisfaction of the Administration. Watertight ventilators and trunks shall be carried at least up to the bulkhead deck in passenger ships and up to the freeboard deck in cargo ships.

2 In passenger ships, where a ventilation trunk passing through a structure penetrates a watertight area of the bulkhead deck, the trunk shall be capable of withstanding the water pressure that may be present within the trunk, after having taken into account the maximum heel angle during flooding, in accordance with regulation 7-2.

3 In ro-ro passenger ships, where all or part of the penetration of the bulkhead deck is on the main ro-ro deck, the trunk shall be capable of withstanding impact pressure due to internal water motions (sloshing) of water trapped on the ro-ro deck.

4 After completion, a hose or flooding test shall be applied to watertight decks and a hose test to watertight trunks, tunnels and ventilators.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 17

Internal watertight integrity of passenger ships above the bulkhead deck

1 For passenger ships subject to the provisions of regulation 1.1.1.1 and constructed before 1 January 2024, the Administration may require that all reasonable and practicable measures shall be taken to limit the entry and spread of water above the bulkhead deck. Such measures may include partial bulkheads or webs. When partial watertight bulkheads and webs are fitted on the bulkhead deck, above or in the immediate vicinity of watertight bulkheads, they shall have watertight shell and bulkhead deck connections so as to restrict the flow of water along the deck when the ship is in a heeled damaged condition. Where the partial watertight bulkhead does not line up with the bulkhead below, the bulkhead deck between shall be made effectively watertight. Where openings, pipes, scuppers, electric cables etc. are carried through the partial watertight bulkheads or decks within the immersed part of the bulkhead deck, arrangements shall be made to ensure the watertight integrity of the structure above the bulkhead deck.[57]

2 For ships constructed on or after 1 January 2024, the internal watertight subdivision arrangements to limit the entry and spread of water above the bulkhead deck shall be in accordance with the design arrangements necessary for compliance with the stability requirements in part B-1, and part B-2 if applicable. Where pipes, scuppers, electric cables, etc. are carried through internal watertight boundaries that are immersed at any intermediate or final stage of flooding in damage cases that contribute to the attained subdivision index A, arrangements shall be made to ensure their watertight integrity.

3 For ships constructed on or after 1 January 2024, doors in internal watertight subdivision arrangements above the bulkhead deck, and also above the worst intermediate or final stage of flooding waterlines, shall be capable of preventing the passage of water when immersed in the required range of positive stability for any damage cases contributing to the attained subdivision index A. These doors may remain open provided they can be remotely closed from the navigation bridge. They shall always be ready to be immediately closed.

4 All openings in the exposed weather deck shall have coamings of ample height and strength and shall be provided with efficient means for expeditiously closing them weathertight. Freeing ports, open rails and scuppers shall be fitted as necessary for rapidly clearing the weather deck of water under all weather conditions.

5 Air pipes terminating within a superstructure which are not fitted with watertight means of closure shall be considered as unprotected openings when applying regulation 7-2.6.1.1.

6 Sidescuttles, gangway, cargo and fuelling ports and other means for closing openings in the shell plating above the bulkhead deck shall be of efficient design and

[57] Refer to the Guidance notes on the integrity of flooding boundaries above the bulkhead deck of passenger ships for proper application of regulations II-1/8 and 20, paragraph 1, of SOLAS 1974, as amended (MSC/Circ.541, as may be amended).

This gazette is also available free online at **www.gpwonline.co.za**

construction and of sufficient strength having regard to the spaces in which they are fitted and their positions relative to the deepest subdivision draught. [58]

7 Efficient inside deadlights, so arranged that they can be easily and effectively closed and secured watertight, shall be provided for all sidescuttles to spaces below the first deck above the bulkhead deck.

Regulation 17-1

Integrity of the hull and superstructure, damage prevention and control on ro-ro passenger ships

1.1 All access from the ro-ro deck that leads to spaces below the bulkhead deck shall have a lowest point which is not less than 2.5 m above the bulkhead deck, unless the access is covered by the provisions of paragraphs 1.2 or 1.3.

1.2 Where vehicle ramps are installed to give access to spaces below the bulkhead deck, their openings shall be able to be closed weathertight to prevent ingress of water below and fitted with alarms and open/close indicators on the navigation bridge. The means of closure shall be watertight if the deck is intended as a watertight horizontal boundary under regulation 7-2.6.

1.3 Subject to regulations 23.3 and 23.6, the Administration may permit the fitting of particular accesses to spaces below the bulkhead deck provided they are necessary for the essential working of the ship, e.g. the movement of machinery and stores, and subject to such accesses being made watertight, fitted with alarms and open/close indicators on the navigation bridge.

2 Indicators shall be provided on the navigation bridge for all shell doors, loading doors and other closing appliances which, if left open or not properly secured, could, in the opinion of the Administration, lead to flooding of a special category space or ro-ro space. The indicator system shall be designed on the fail-safe principle and shall show by visual alarms if the door is not fully closed or if any of the securing arrangements are not in place and fully locked and by audible alarms if such door or closing appliances become open or the securing arrangements become unsecured. The indicator panel on the navigation bridge shall be equipped with a mode selection function "harbour/sea voyage" so arranged that an audible alarm is given on the navigation bridge if the ship leaves harbour with the bow doors, inner doors, stern ramp or any other side shell doors not closed or any closing device not in the correct position. The power supply for the indicator system shall be independent of the power supply for operating and securing the doors.

3 Television surveillance and a water leakage detection system shall be arranged to provide an indication to the navigation bridge and to the engine control station of any leakage through inner and outer bow doors, stern doors or any other shell doors which could lead to flooding of special category spaces or ro-ro spaces.

[58] Refer to the Recommendation on strength and security and locking arrangements of shell doors on ro-ro passenger ships, adopted by the Organization by resolution A.793(19).

This gazette is also available free online at **www.gpwonline.co.za**

Part B-3 - Subdivision Load Line Assignment For Passenger Ships

Regulation 18

Assigning, marking and recording of subdivision load lines for passenger ships

1 In order that the required degree of subdivision shall be maintained, a load line corresponding to the approved subdivision draught shall be assigned and marked on the ship's sides. A ship intended for alternating modes of operation may, if the owners desire, have one or more additional load lines assigned and marked to correspond with the subdivision draughts which the Administration may approve for the alternative service configurations. Each service configuration so approved shall comply with part B-1 of this chapter independently of the results obtained for other modes of operation.

2 The subdivision load lines assigned and marked shall be recorded in the Passenger Ship Safety Certificate, and shall be distinguished by the notation P1 for the principal passenger service configuration, and P2, P3, etc., for the alternative configurations. The principal passenger configuration shall be taken as the mode of operation in which the required subdivision index R will have the highest value.

3 The freeboard corresponding to each of these load lines shall be measured at the same position and from the same deck line as the freeboards determined in accordance with the International Convention on Load Lines in force.

4 The freeboard corresponding to each approved subdivision load line and the service configuration, for which it is approved, shall be clearly indicated on the Passenger Ship Safety Certificate.

5 In no case shall any subdivision load line mark be placed above the deepest load line in salt water as determined by the strength of the ship or the International Convention on Load Lines in force.

6 Whatever may be the position of the subdivision load line marks, a ship shall in no case be loaded so as to submerge the load line mark appropriate to the season and locality as determined in accordance with the International Convention on Load Lines in force.

7 A ship shall in no case be so loaded that when it is in salt water the subdivision load line mark appropriate to the particular voyage and service configuration is submerged.

This gazette is also available free online at **www.gpwonline.co.za**

Part B-4 - Stability Management

Regulation 19
Damage control information [59]

1 There shall be permanently exhibited, or readily available on the navigation bridge, for the guidance of the officer in charge of the ship, plans showing clearly for each deck and hold the boundaries of the watertight compartments, the openings therein with the means of closure and position of any controls thereof, and the arrangements for the correction of any list due to flooding. In addition, booklets containing the aforementioned information shall be made available to the officers of the ship.

2 General precautions to be included shall consist of a listing of equipment, conditions, and operational procedures, considered by the Administration to be necessary to maintain watertight integrity under normal ship operations.

3 Specific precautions to be included shall consist of a listing of elements (i.e. closures, security of cargo, sounding of alarms, etc.) considered by the Administration to be vital to the survival of the ship, passengers and crew.

4 In case of ships to which damage stability requirements of part B-1 apply, damage stability information shall provide the master a simple and easily understandable way of assessing the ship's survivability in all damage cases involving a compartment or group of compartments.

5 For passenger ships constructed on or after 1 January 2024, and to which regulation 8-1.3 applies, the damage control information shall include a reference to activation of damage stability support from the onboard stability computer, if installed, and to shore-based support when provided.

Regulation 19-1
Damage control drills for passenger ships

1 This regulation applies to passenger ships constructed before, on or after 1 January 2020.

2 A damage control drill shall take place at least every three months. The entire crew need not participate in every drill, but only those crew members with damage control responsibilities.

3 The damage control drill scenarios shall vary each drill so that emergency conditions are simulated for different damage conditions and shall, as far as practicable, be conducted as if there were an actual emergency.

[59] Refer to the *Guidelines for damage control plans and information to the master* (MSC.1/Circ.1245) as amended by MSC.1/Circ.1570) and to the *Guidelines for verification of damage stability requirements for tankers* (MSC.1/Circ.1461).

This gazette is also available free online at **www.gpwonline.co.za**

4 Each damage control drill shall include:

.1 for crew members with damage control responsibilities, reporting to stations and preparing for the duties described in the muster list required by regulation III/8;

.2 use of the damage control information and the on board damage stability computer, if fitted, to conduct stability assessments for the simulated damage conditions;

.3 establishment of the communications link between the ship and shore-based support, if provided;

.4 operation of watertight doors and other watertight closures;

.5 demonstrating proficiency in the use of the flooding detection system, if fitted, in accordance with muster list duties;

.6 demonstrating proficiency in the use of cross-flooding and equalization systems, if fitted, in accordance with muster list duties;

.7 operation of bilge pumps and checking of bilge alarms and automatic bilge pump starting systems; and

.8 instruction in damage survey and use of the ship's damage control systems.

5 At least one damage control drill each year shall include activation of the shore-based support, if provided in compliance with regulation II-1/8-1.3, to conduct stability assessments for the simulated damage conditions.

6 Every crew member with assigned damage control responsibilities shall be familiarized with their duties and about the damage control information before the voyage begins.

7 A record of each damage control drill shall be maintained in the same manner as prescribed for the other drills in regulation III/19.5.

Regulation 20

Loading of ships

1 On completion of loading of the ship and prior to its departure, the master shall determine the ship's trim and stability and also ascertain and record that the ship is upright and in compliance with stability criteria in relevant regulations. The determination of the ship's stability shall always be made by calculation or by ensuring that the ship is loaded according to one of the precalculated loading conditions within the approved stability information. The Administration may accept the use of an electronic loading and stability computer or equivalent means for this purpose.

2 Water ballast should not in general be carried in tanks intended for oil fuel. In ships in which it is not practicable to avoid putting water in oil fuel tanks, oily-water separating equipment to the satisfaction of the Administration shall be fitted, or other alternative means, such as discharge to shore facilities, acceptable to the Administration shall be provided for disposing of the oily-water ballast.

This gazette is also available free online at **www.gpwonline.co.za**

3 The provisions of this regulation are without prejudice to the provisions of the International Convention for the Prevention of Pollution from Ships in force.

Regulation 21

Periodical operation and inspection of watertight doors, etc. in passenger ships

1 Operational tests of watertight doors, sidescuttles, valves and closing mechanisms of scuppers shall take place weekly. In ships in which the voyage exceeds one week in duration a complete set of operational tests shall be held before the voyage commences, and others thereafter at least once a week during the voyage.

2 All watertight doors, both hinged and power operated, in watertight bulkheads, in use at sea, shall be operated daily.

3 The watertight doors and all mechanisms and indicators connected therewith, all valves, the closing of which is necessary to make a compartment watertight, and all valves the operation of which is necessary for damage control cross connections shall be periodically inspected at sea at least once a week.

4 A record of all operational tests and inspections required by this regulation shall be recorded in the logbook with an explicit record of any defects which may be disclosed.

Regulation 22

Prevention and control of water ingress, etc.

1 All watertight doors shall be kept closed during navigation except that they may be opened during navigation as specified in paragraph 3. Watertight doors of a width of more than 1.2 m in machinery spaces as permitted by regulation 13.9 may only be opened in the circumstances detailed in that regulation. Any door which is opened in accordance with this paragraph shall be ready to be immediately closed.

2 Watertight doors located below the bulkhead deck of passenger ships and the freeboard deck of cargo ships having a maximum clear opening width of more than 1.2 m shall be kept closed during navigation, except for limited periods when absolutely necessary as determined by the Administration.

3 A watertight door may be opened during navigation to permit the passage of passengers or crew, or when work in the immediate vicinity of the door necessitates it being opened. The door must be immediately closed when transit through the door is complete or when the task which necessitated it being open is finished. The Administration shall authorize that such a watertight door may be opened during navigation only after careful consideration of the impact on ship operations and survivability taking into account guidance issued by the Organization [60]. A watertight

[60] Refer to the *Revised guidance for watertight doors on passenger ships which may be opened during navigation* (MSC.1/Circ.1564).

This gazette is also available free online at **www.gpwonline.co.za**

door permitted to be opened during navigation shall be clearly indicated in the ship's stability information and shall always be ready to be immediately closed.

4 Portable plates on bulkheads shall always be in place before the voyage commences, and shall not be removed during navigation except in case of urgent necessity at the discretion of the master. The necessary precautions shall be taken in replacing them to ensure that the joints are watertight. Power-operated sliding watertight doors permitted in machinery spaces in accordance with regulation 13.9 shall be closed before the voyage commences and shall remain closed during navigation except in case of urgent necessity at the discretion of the master.

5 Watertight doors fitted in watertight bulkheads dividing cargo spaces on tween decks in accordance with regulation 13.8.1 shall be closed before the voyage commences and shall be kept closed during navigation. The time at which such doors are opened or closed shall be recorded in such logbook as may be prescribed by the Administration.

6 For ships subject to the provisions of regulation 1.1.1.1 and constructed before 1 January 2024, gangway, cargo and fuelling ports fitted below the bulkhead deck of passenger ships and the freeboard deck of cargo ships shall be effectively closed and secured watertight before the voyage commences, and shall be kept closed during navigation.

7 For ships constructed on or after 1 January 2024, gangway, cargo and fuelling ports fitted below the bulkhead deck of passenger ships and the freeboard deck of cargo ships and all watertight hatches shall be effectively closed and secured watertight before the voyage commences, and shall be kept closed during navigation. However, the master may permit a watertight hatch to be opened during navigation for a limited period of time sufficient to permit passage or for access. It shall then be closed.

8 The following doors, located above the bulkhead deck of passenger ships and the freeboard deck of cargo ships, shall be closed and locked before the voyage commences and shall remain closed and locked until the ship is at its next berth:

.1 cargo loading doors in the shell or the boundaries of enclosed superstructures;

.2 bow visors fitted in positions as indicated in paragraph 8.1;

.3 cargo loading doors in the collision bulkhead; and

.4 ramps forming an alternative closure to those defined in paragraphs 8.1 to 8.3 inclusive.

9 Provided that where a door cannot be opened or closed while the ship is at the berth such a door may be opened or left open while the ship approaches or draws away from the berth, but only so far as may be necessary to enable the door to be immediately operated. In any case, the inner bow door must be kept closed.

10 Notwithstanding the requirements of paragraphs 8.1 and 8.4, the Administration may authorize that particular doors can be opened at the discretion of the master, if

This gazette is also available free online at **www.gpwonline.co.za**

necessary for the operation of the ship or the embarking and disembarking of passengers when the ship is at safe anchorage and provided that the safety of the ship is not impaired.

11 The master shall ensure that an effective system of supervision and reporting of the closing and opening of the doors referred to in paragraph 8 is implemented.

12 The master shall ensure, before any voyage commences, that an entry in such log-book as may be prescribed by the Administration is made of the time the doors specified in paragraph 13 are closed and the time at which particular doors are opened in accordance with paragraph 14.

13 Hinged doors, portable plates, sidescuttles, gangway, cargo and bunkering ports and other openings, which are required by these regulations to be kept closed during navigation, shall be closed before the voyage commences. The time at which such doors are opened and closed (if permissible under these regulations) shall be recorded in such log-book as may be prescribed by the Administration.

14 Where in a between-deck, the sills of any of the sidescuttles referred to in regulation 15.3.2 are below a line drawn parallel to the bulkhead deck at side of passenger ships and the freeboard deck at side of cargo ships, and having its lowest point 1.4 m plus 2.5% of the breadth of the ship above the water when the voyage commences, all the sidescuttles in that between-deck shall be closed watertight and locked before the voyage commences, and they shall not be opened before the ship arrives at the next port. In the application of this paragraph the appropriate allowance for fresh water may be made when applicable.

.1 The time at which such sidescuttles are opened in port and closed and locked before the voyage commences shall be recorded in such log-book as may be prescribed by the Administration.

.2 For any ship that has one or more sidescuttles so placed that the requirements of paragraph 14 would apply when it was floating at its deepest subdivision draught, the Administration may indicate the limiting mean draught at which these sidescuttles will have their sills above the line drawn parallel to the bulkhead deck at side of passenger ships and the freeboard deck at side of cargo ships, and having its lowest point 1.4 m plus 2.5% of the breadth of the ship above the waterline corresponding to the limiting mean draught, and at which it will therefore be permissible for the voyage to commence without them being closed and locked and to be opened during navigation on the responsibility of the master. In tropical zones as defined in the International Convention on Load Lines, 1966, this limiting draught may be increased by 0.3 m.

15 Sidescuttles and their deadlights which will not be accessible during navigation shall be closed and secured before the voyage commences.

16 If cargo is carried in spaces referred to in regulation 15.5.2, the sidescuttles and their deadlights shall be closed watertight and locked before the cargo is shipped and the time at which such scuttles and deadlights are closed and locked shall be recorded in such log-book as may be prescribed by the Administration.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 22-1
Flooding detection systems for passenger ships carrying 36 or more persons

A flooding detection system for watertight spaces below the bulkhead deck shall be provided based on the guidelines developed by the Organization.[61]

Regulation 23
Special requirements for ro-ro passenger ships

1 Special category spaces and ro-ro spaces shall be continuously patrolled or monitored by effective means, such as television surveillance, so that any movement of vehicles in adverse weather conditions and unauthorized access by passengers thereto can be detected during navigation.

2 Documented operating procedures for closing and securing all shell doors, loading doors and other closing appliances which, if left open or not properly secured, could, in the opinion of the Administration, lead to flooding of a special category space or ro-ro space, shall be kept on board and posted at an appropriate place.

3 All accesses from the ro-ro deck and vehicle ramps that lead to spaces below the bulkhead deck shall be closed before the voyage commences and shall remain closed until the ship is at its next berth.

4 The master shall ensure that an effective system of supervision and reporting of the closing and opening of such accesses referred to in paragraph 3 is implemented.

5 The master shall ensure, before the voyage commences, that an entry in the log-book, as required by regulation 22.13, is made of the time of the last closing of the accesses referred to in paragraph 3.

6 Notwithstanding the requirements of paragraph 3, the Administration may permit some accesses to be opened during the voyage, but only for a period sufficient to permit through passage and, if required, for the essential working of the ship.

7 All transverse or longitudinal bulkheads which are taken into account as effective to confine the seawater accumulated on the ro-ro deck shall be in place and secured before the voyage commences and remain in place and secured until the ship is at its next berth.

8 Notwithstanding the requirements of paragraph 7, the Administration may permit some accesses within such bulkheads to be opened during the voyage but only for sufficient time to permit through passage and, if required, for the essential working of the ship.

[61] Refer to *Guidelines for flooding detection systems on passenger ships* (MSC.1/Circ.1291).

This gazette is also available free online at **www.gpwonline.co.za**

9 In all ro-ro passenger ships, the master or the designated officer shall ensure that, without the expressed consent of the master or the designated officer, no passengers are allowed access to an enclosed ro-ro deck during navigation.

Regulation 24

Additional requirements for prevention and control of water ingress, etc.in cargo ships

1 Openings in the shell plating below the deck limiting the vertical extent of damage shall be kept permanently closed during navigation.

2 Notwithstanding the requirements of paragraph 3, the Administration may authorize that particular doors may be opened at the discretion of the master, if necessary for the operation of the ship and provided that the safety of the ship is not impaired.

3 Watertight doors or ramps fitted to internally subdivide large cargo spaces shall be closed before the voyage commences and shall be kept closed during navigation. The time at which such doors are opened or closed shall be recorded in such log-book as may be prescribed by the Administration.

4 The use of access doors and hatch covers intended to ensure the watertight integrity of internal openings shall be authorized by the officer of the watch.

Regulation 25

Water level detectors on single hold cargo ships other than bulk carriers

1 Single hold cargo ships other than bulk carriers constructed before 1 January 2007 shall comply with the requirements of this regulation not later than 31 December 2009.

2 Ships having a length (L) of less than 80 m, or 100 m if constructed before 1 July 1998, and a single cargo hold below the freeboard deck or cargo holds below the freeboard deck which are not separated by at least one bulkhead made watertight up to that deck, shall be fitted in such space or spaces with water level detectors [62].

3 The water level detectors required by paragraph 2 shall:

.1 give an audible and visual alarm at the navigation bridge when the water level above the inner bottom in the cargo hold reaches a height of not less than 0.3 m, and another when such level reaches not more than 15% of the mean depth of the cargo hold; and

.2 be fitted at the aft end of the hold, or above its lowest part where the inner bottom is not parallel to the designed waterline. Where webs or partial

[62] Refer to the Performance standards for water level detectors on bulk carriers and single hold cargo ships other than bulk carriers (resolution MSC.188(79)) (IMO-Vega; see IMO-Vega Guide)

This gazette is also available free online at **www.gpwonline.co.za**

watertight bulkheads are fitted above the inner bottom, Administrations may require the fitting of additional detectors.

4 The water level detectors required by paragraph 2 need not be fitted in ships complying with regulation XII/12, or in ships having watertight side compartments each side of the cargo hold length extending vertically at least from inner bottom to freeboard deck.

Regulation 25-1
Water level detectors on multiple hold cargo ships other than bulk carriers

1 Multiple hold cargo ships other than bulk carriers and tankers constructed on or after 1 January 2024 shall be fitted with water level detectors [63] in each cargo hold intended for dry cargoes. Water level detectors are not required for cargo holds located entirely above the freeboard deck.

2 The water level detectors required by paragraph 1 shall:

.1 give audible and visual alarms at the navigation bridge, one when the water level above the bottom of the cargo hold reaches a height of not less than 0.3 m, and another at a height not less than 15% of the depth of the cargo hold but not more than 2 m; and

.2 be fitted at the aft end of the cargo holds. For cargo holds which are occasionally used for water ballast, an alarm overriding device may be installed. The visual alarms shall clearly discriminate between the two different water levels detected in each hold.

3 As an alternative to the water level detector at a height of not less than 0.3 m as per sub-paragraph 2.1, a bilge level sensor [63] serving the bilge pumping arrangements required by regulation 35-1 and installed in the cargo hold bilge wells or other suitable location is considered acceptable, subject to:

.1 the fitting of the bilge level sensor at a height of not less than 0.3 m at the aft end of the cargo hold; and

.2 the bilge level sensor giving audible and visual alarm at the navigation bridge which is clearly distinctive from the alarm given by the other water level detector fitted in the cargo hold.

[63] Refer to the *Performance standards for water level detectors on bulk carriers and single hold cargo ships other than bulk carriers* (resolution MSC.188(79)), as may be amended.

This gazette is also available free online at **www.gpwonline.co.za**

Part C - Machinery Installations

Regulation 26
General

1 The machinery, boilers and other pressure vessels, associated piping systems and fittings shall be of a design and construction adequate for the service for which they are intended and shall be so installed and protected as to reduce to a minimum any danger to persons on board, due regard being paid to moving parts, hot surfaces and other hazards. The design shall have regard to materials used in construction, the purpose for which the equipment is intended, the working conditions to which it will be subjected and the environmental conditions on board. [64]

2 The Administration shall give special consideration to the reliability of single essential propulsion components and may require a separate source of propulsion power sufficient to give the ship a navigable speed, especially in the case of unconventional arrangements.

3 Means shall be provided whereby normal operation of propulsion machinery can be sustained or restored even though one of the essential auxiliaries becomes inoperative. Special consideration shall be given to the malfunctioning of:

.1 a generating set which serves as a main source of electrical power;

.2 the sources of steam supply;

.3 the boiler feed water systems;

.4 the fuel oil supply systems for boilers or engines; [65]

.5 the sources of lubricating oil pressure;

.6 the sources of water pressure;

.7 a condensate pump and the arrangements to maintain vacuum in condensers;

.8 the mechanical air supply for boilers;

.9 an air compressor and receiver for starting or control purposes;

.10 the hydraulic, pneumatic or electrical means for control in main propulsion machinery including controllable pitch propellers.

However, the Administration, having regard to overall safety considerations, may accept a partial reduction in propulsion capability from normal operation.

4 Means shall be provided to ensure that the machinery can be brought into operation from the dead ship condition without external aid.

[64] Refer to *Guidelines for engine-room lay-out, design and arrangement* (MSC/Circ. 834).

[65] Refer to *Guidelines to minimize leakage from flammable liquid systems* (MSC/Circ.647) and *Guidelines on engine-room oil fuel systems* (MSC/Circ. 851).

This gazette is also available free online at **www.gpwonline.co.za**

5 All boilers, all parts of machinery, all steam, hydraulic, pneumatic and other systems and their associated fittings which are under internal pressure shall be subjected to appropriate tests including a pressure test before being put into service for the first time.

6 Main propulsion machinery and all auxiliary machinery essential to the propulsion and the safety of the ship shall, as fitted in the ship, be designed to operate when the ship is upright and when inclined at any angle of list up to and including 15º either way under static conditions and 22.5º under dynamic conditions (rolling) either way and simultaneously inclined dynamically (pitching) 7.5º by bow or stern. The Administration may permit deviation from these angles, taking into consideration the type, size and service conditions of the ship.

7 Provision shall be made to facilitate cleaning, inspection and maintenance of main propulsion and auxiliary machinery including boilers and pressure vessels.

8 Special consideration shall be given to the design, construction and installation of propulsion machinery systems so that any mode of their vibrations shall not cause undue stresses in this machinery in the normal operating ranges.

9 Non-metallic expansion joints in piping systems, if located in a system which penetrates the ship' s side and both the penetration and the non-metallic expansion joint are located below the deepest load waterline, shall be inspected as part of the surveys prescribed in regulation I/10(a) and replaced as necessary, or at an interval recommended by the manufacturer.

10 Operating and maintenance instructions and engineering drawings for ship machinery and equipment essential to the safe operation of the ship shall be written in a language understandable by those officers and crew members who are required to understand such information in the performance of their duties.

11 Location and arrangement of vent pipes for fuel oil service, settling and lubrication oil tanks shall be such that in the event of a broken vent pipe this shall not directly lead to the risk of ingress of seawater splashes or rainwater. Two fuel oil service tanks for each type of fuel used on board necessary for propulsion and vital systems or equivalent arrangements shall be provided on each new ship, with a capacity of at least 8 h at maximum continuous rating of the propulsion plant and normal operating load at sea of the generator plant.[66] This paragraph applies only to ships constructed on or after 1 July 1998.

Regulation 27
Machinery

1 Where risk from overspeeding of machinery exists, means shall be provided to ensure that the safe speed is not exceeded.

[66] Refer to regulation II-2/4.2, *Arrangements for oil fuel, lubricating oil and other flammable oils*.

This gazette is also available free online at **www.gpwonline.co.za**

2 Where main or auxiliary machinery including pressure vessels or any parts of such machinery are subject to internal pressure and may be subject to dangerous overpressure, means shall be provided where practicable to protect against such excessive pressure.

3 All gearing and every shaft and coupling used for transmission of power to machinery essential for the propulsion and safety of the ship or for the safety of persons on board shall be so designed and constructed that they will withstand the maximum working stresses to which they may be subjected in all service conditions, and due consideration shall be given to the type of engines by which they are driven or of which they form part.

4 Internal combustion engines of a cylinder diameter of 200 mm or a crankcase volume of 0.6 m3 and above shall be provided with crankcase explosion relief valves of a suitable type with sufficient relief area. The relief valves shall be arranged or provided with means to ensure that discharge from them is so directed as to minimize the possibility of injury to personnel.

5 Main turbine propulsion machinery and, where applicable, main internal combustion propulsion machinery and auxiliary machinery shall be provided with automatic shut-off arrangements in the case of failures such as lubricating oil supply failure which could lead rapidly to complete break-down, serious damage or explosion. The Administration may permit provisions for overriding automatic shut-off devices.

Regulation 28
Means of going astern [67]

1 Sufficient power for going astern shall be provided to secure proper control of the ship in all normal circumstances.

2 The ability of the machinery to reverse the direction of thrust of the propeller in sufficient time, and so to bring the ship to rest within a reasonable distance from maximum ahead service speed, shall be demonstrated and recorded.

3 The stopping times, ship headings and distances recorded on trials, together with the results of trials to determine the ability of ships having multiple propellers to navigate and manoeuvre with one or more propellers inoperative, shall be available on board for the use of the master or designated personnel.

4 Where the ship is provided with supplementary means for manoeuvring or stopping, the effectiveness of such means shall be demonstrated and recorded as referred to in paragraphs 2 and 3.

[67] Refer to *Provision and the display of manoeuvring information on board ships (resolution A.601(15)), Standards for ship manoeuvrability* (resolution MSC.137(76)), and *Explanatory notes to the standards for ship manoeuvrability* (MSC/Circ.1053).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 29
Steering gear [68]

1 Unless expressly provided otherwise, every ship shall be provided with a main steering gear and an auxiliary steering gear to the satisfaction of the Administration. The main steering gear and the auxiliary steering gear shall be so arranged that the failure of one of them will not render the other one inoperative.

2.1 All the steering gear components and the rudder stock shall be of sound and reliable construction to the satisfaction of the Administration. Special consideration shall be given to the suitability of any essential component which is not duplicated. Any such essential component shall, where appropriate, utilize anti-friction bearings such as ball bearings, roller bearings or sleeve bearings which shall be permanently lubricated or provided with lubrication fittings.

2.2 The design pressure for calculations to determine the scantlings of piping and other steering gear components subjected to internal hydraulic pressure shall be at least 1.25 times the maximum working pressure to be expected under the operational conditions specified in paragraph 3.2, taking into account any pressure which may exist in the low pressure side of the system. At the discretion of the Administration, fatigue criteria shall be applied for the design of piping and components, taking into account pulsating pressures due to dynamic loads.

2.3 Relief valves shall be fitted to any part of the hydraulic system which can be isolated and in which pressure can be generated from the power source or from external forces. The setting of the relief valves shall not exceed the design pressure. The valves shall be of adequate size and so arranged as to avoid an undue rise in pressure above the design pressure.

3 The main steering gear and rudder stock shall be:

.1 of adequate strength and capable of steering the ship at maximum ahead service speed which shall be demonstrated;

.2 capable of putting the rudder over from 35 degrees on one side to 35 degrees on the other side with the ship at its deepest seagoing draught and running ahead at maximum ahead service speed and, under the same conditions, from 35 degrees on either side to 30 degrees on the other side in not more than 28 seconds;

where it is impractical to demonstrate compliance with this requirement during sea trials with the ship at its deepest seagoing draught and running ahead at the speed corresponding to the number of maximum continuous revolutions of the main engine and maximum design pitch, ships regardless of date of construction may demonstrate compliance with this requirement by one of the following methods:

.1 during sea trials the ship is at even keel and the rudder fully submerged whilst running ahead at the speed corresponding to the

[68] Refer to Improved steering gear standards for passenger and cargo ships (resolution A.415(XI)) and Examination of steering gears on existing tankers (resolution A.416(XI)).

This gazette is also available free online at **www.gpwonline.co.za**

number of maximum continuous revolutions of the main engine and maximum design pitch; or

.2 where full rudder immersion during sea trials cannot be achieved, an appropriate ahead speed shall be calculated using the submerged rudder blade area in the proposed sea trial loading condition. The calculated ahead speed shall result in a force and torque applied to the main steering gear which is at least as great as if it was being tested with the ship at its deepest seagoing draught and running ahead at the speed corresponding to the number of maximum continuous revolutions of the main engine and maximum design pitch; or

.3 the rudder force and torque at the sea trial loading condition have been reliably predicted and extrapolated to the full load condition. The speed of the ship shall correspond to the number of maximum continuous revolutions of the main engine and maximum design pitch of the propeller;

.3 operated by power where necessary to meet the requirements of paragraph 3.2 and in any case when the Administration requires a rudder stock of over 120 mm diameter in way of the tiller, excluding strengthening for navigation in ice; and

.4 so designed that they will not be damaged at maximum astern speed; however, this design requirement need not be proved by trials at maximum astern speed and maximum rudder angle.

4 The auxiliary steering gear shall be:

.1 of adequate strength and capable of steering the ship at navigable speed and of being brought speedily into action in an emergency,

.2 capable of putting the rudder over from 15 degrees on one side to 15 degrees on the other side in not more than 60 seconds with the ship at its deepest seagoing draught and running ahead at one half of the maximum ahead service speed or 7 knots, whichever is the greater;

where it is impractical to demonstrate compliance with this requirement during sea trials with the ship at its deepest seagoing draught and running ahead at one half of the speed corresponding to the number of maximum continuous revolutions of the main engine and maximum design pitch or 7 knots, whichever is greater, ships regardless of date of construction, including those constructed before 1 January 2009, may demonstrate compliance with this requirement by one of the following methods:

.1 during sea trials the ship is at even keel and the rudder fully submerged whilst running ahead at one half of the speed corresponding to the number of maximum continuous revolutions of the main engine and maximum design pitch or 7 knots, whichever is greater; or

.2 where full rudder immersion during sea trials cannot be achieved, an appropriate ahead speed shall be calculated using the submerged rudder blade area in the proposed sea trial loading condition. The calculated ahead speed shall result in a force and torque applied to

This gazette is also available free online at **www.gpwonline.co.za**

the auxiliary steering gear which is at least as great as if it was being tested with the ship at its deepest seagoing draught and running ahead at one half of the speed corresponding to the number of maximum continuous revolutions of the main engine and maximum design pitch or 7 knots, whichever is greater; or

.3 the rudder force and torque at the sea trial loading condition have been reliably predicted and extrapolated to the full load condition; and

.3 operated by power where necessary to meet the requirements of paragraph 4.2 and in any case when the Administration requires a rudder stock of over 230 mm diameter in way of the tiller, excluding strengthening for navigation in ice.

5 Main and auxiliary steering gear power units shall be:

.1 arranged to re-start automatically when power is restored after a power failure; and

.2 capable of being brought into operation from a position on the navigating bridge. In the event of a power failure to any one of the steering gear power units, an audible and visual alarm shall be given on the navigating bridge.

6.1 Where the main steering gear comprises two or more identical power units, an auxiliary steering gear need not be fitted, provided that:

.1 in a passenger ship, the main steering gear is capable of operating the rudder as required by paragraph 3.2 while any one of the power units is out of operation;

.2 in a cargo ship, the main steering gear is capable of operating the rudder as required by paragraph 3.2 while operating with all power units;

.3 the main steering gear is so arranged that after a single failure in its piping system or in one of the power units the defect can be isolated so that steering capability can be maintained or speedily regained.

6.2 The Administration may, until 1 September 1986, accept the fitting of a steering gear which has a proven record of reliability but does not comply with the requirements of paragraph 6.1.3 for a hydraulic system.

6.3 Steering gears, other than of the hydraulic type, shall achieve standards equivalent to the requirements of this paragraph to the satisfaction of the Administration.

7 Steering gear control shall be provided:

.1 for the main steering gear, both on the navigating bridge and in the steering gear compartment;

.2 where the main steering gear is arranged in accordance with paragraph 6, by two independent control systems, both operable from the navigating bridge. This does not require duplication of the steering wheel or steering lever. Where the control system consists of an hydraulic telemotor, a second

This gazette is also available free online at **www.gpwonline.co.za**

independent system need not be fitted, except in a tanker, chemical tanker or gas carrier of 10,000 gross tonnage and upwards;

.3 for the auxiliary steering gear, in the steering gear compartment and, if power operated, it shall also be operable from the navigating bridge and shall be independent of the control system for the main steering gear.

8 Any main and auxiliary steering gear control system operable from the navigating bridge shall comply with the following:

.1 if electric, it shall be served by its own separate circuit supplied from a steering gear power circuit from a point within the steering gear compartment, or directly from switchboard busbars supplying that steering gear power circuit at a point on the switchboard adjacent to the supply to the steering gear power circuit;

.2 means shall be provided in the steering gear compartment for disconnecting any control system operable from the navigating bridge from the steering gear it serves,

.3 the system shall be capable of being brought into operation from a position on the navigating bridge;

.4 in the event of a failure of electrical power supply to the control system, an audible and visual alarm shall be given on the navigating bridge, and

.5 short circuit protection only shall be provided for steering gear control supply circuits

9 The electric power circuits and the steering gear control systems with their associated components, cables and pipes required by this regulation and by regulation 30 shall be separated as far as is practicable throughout their length.

10 A means of communication shall be provided between the navigating bridge and the steering gear compartment.

11 The angular position of the rudder shall:

.1 if the main steering gear is power operated, be indicated on the navigating bridge. The rudder angle indication shall be independent of the steering gear control system;

.2 be recognizable in the steering gear compartment.

12 Hydraulic power-operated steering gear shall be provided with the following:

.1 arrangements to maintain the cleanliness of the hydraulic fluid taking into consideration the type and design of the hydraulic system;

.2 a low level alarm for each hydraulic fluid reservoir to give the earliest practicable indication of hydraulic fluid leakage. Audible and visual alarms shall be given on the navigating bridge and in the machinery space where they can be readily observed; and

.3 a fixed storage tank having sufficient capacity to recharge at least one power actuating system including the reservoir, where the main steering

This gazette is also available free online at **www.gpwonline.co.za**

gear is required to be power operated. The storage tank shall be permanently connected by piping in such a manner that the hydraulic systems can be readily recharged from a position within the steering gear compartment and shall be provided with a contents gauge.

13 The steering gear compartment shall be:

.1 readily accessible and, as far as practicable, separated from machinery spaces; and

.2 provided with suitable arrangements to ensure working access to steering gear machinery and controls. These arrangements shall include handrails and gratings or other non-slip surfaces to ensure suitable working conditions in the event of hydraulic fluid leakage.

14 Where the rudder stock is required to be over 230 mm diameter in way of the tiller, excluding strengthening for navigation in ice, an alternative power supply, sufficient at least to supply the steering gear power unit which complies with the requirements of paragraph 4.2 and also its associated control system and the rudder angle indicator, shall be provided automatically, within 45 seconds, either from the emergency source of electrical power or from an independent source of power located in the steering gear compartment. This independent source of power shall be used only for this purpose. In every ship of 10,000 gross tonnage and upwards, the alternative power supply shall have a capacity for at least 30 minutes of continuous operation and in any other ship for at least 10 minutes.

15 In every tanker, chemical tanker or gas carrier of 10,000 gross tonnage and upwards and in every other ship of 70,000 gross tonnage and upwards, the main steering gear shall comprise two or more identical power units complying with the provisions of paragraph 6.

16 Every tanker, chemical tanker or gas carrier of 10,000 gross tonnage and upwards shall, subject to paragraph 17, comply with the following:

.1 the main steering gear shall be so arranged that in the event of loss of steering capability due to a single failure in any part of one of the power actuating systems of the main steering gear, excluding the tiller, quadrant or components serving the same purpose, or seizure of the rudder actuators, steering capability shall be regained in not more than 45 seconds after the loss of one power actuating system;

.2 the main steering gear shall comprise either:

.1 two independent and separate power actuating systems, each capable of meeting the requirements of paragraph 3.2; or

.2 at least two identical power actuating systems which, acting simultaneously in normal operation, shall be capable of meeting the requirements of paragraph 3.2. Where necessary to comply with this requirement, inter-connexion of hydraulic power actuating systems shall be provided. Loss of hydraulic fluid from one system shall be capable of being detected and the defective system automatically isolated so that the other actuating system or systems shall remain fully operational;

This gazette is also available free online at **www.gpwonline.co.za**

.3 steering gears other than of the hydraulic type shall achieve equivalent standards.

17 For tankers, chemical tankers or gas carriers of 10,000 gross tonnage and upwards, but of less than 100,000 tonnes deadweight, solutions other than those set out in paragraph 16, which need not apply the single failure criterion to the rudder actuator or actuators, may be permitted provided that an equivalent safety standard is achieved and that:

.1 following loss of steering capability due to a single failure of any part of the piping system or in one of the power units, steering capability shall be regained within 45 seconds; and

.2 where the steering gear includes only a single rudder actuator, special consideration is given to stress analysis for the design including fatigue analysis and fracture mechanics analysis, as appropriate, to the material used, to the installation of sealing arrangements and to testing and inspection and to the provision of effective maintenance. In consideration of the foregoing, the Administration shall adopt regulations which include the provisions of the Guidelines for Acceptance of Non-Duplicated Rudder Actuators for Tankers, Chemical Tankers and Gas Carriers of 10,000 Gross Tonnage and Above but Less than 100,000 Tonnes Deadweight, adopted by the Organization [69]

18 For a tanker, chemical tanker or gas carrier of 10,000 gross tonnage and upwards, but less than 70,000 tonnes deadweight, the Administration may, until 1 September 1986, accept a steering gear system with a proven record of reliability which does not comply with the single failure criterion required for a hydraulic system in paragraph 16.

19 Every tanker, chemical tanker or gas carrier of 10,000 gross tonnage and upwards, constructed before 1 September 1984, shall comply, not later than 1 September 1986, with the following:

.1 the requirements of paragraphs 7.1, 8.2, 8.4, 10, 11, 12.2, 12.3 and 13.2;

.2 two independent steering gear control systems shall be provided each of which can be operated from the navigating bridge. This does not require duplication of the steering wheel or steering lever;

.3 if the steering gear control system in operation fails, the second system shall be capable of being brought into immediate operation from the navigating bridge; and

.4 each steering gear control system, if electric, shall be served by its own separate circuit supplied from the steering gear power circuit or directly from switchboard busbars supplying that steering gear power circuit at a point on the switchboard adjacent to the supply to the steering gear power circuit.

20 In addition to the requirements of paragraph 19, in every tanker, chemical tanker or gas carrier of 40,000 gross tonnage and upwards, constructed before 1 September

[69] Refer to Guidelines for acceptance of non-duplicated rudder actuators for tankers, chemical tankers and gas carriers of 10,000 tons gross tonnage and above but less than 100,000 tons deadweight (resolution A.467(XII)).

This gazette is also available free online at **www.gpwonline.co.za**

1984, the steering gear shall, not later than 1 September 1988, be so arranged that, in the event of a single failure of the piping or of one of the power units, steering capability can be maintained or the rudder movement can be limited so that steering capability can be speedily regained. This shall be achieved by:

.1 an independent means of restraining the rudder; or

.2 fast acting valves which may be manually operated to isolate the actuator or actuators from the external hydraulic piping together with a means of directly refilling the actuators by a fixed independent power-operated pump and piping system, or

.3 an arrangement such that, where hydraulic power systems are interconnected, loss of hydraulic fluid from one system shall be detected and the defective system isolated either automatically or from the navigating bridge so that the other system remains fully operational.

Regulation 30

Additional requirements for electric and electrohydraulic steering gear

1 Means for indicating that the motors of electric and electrohydraulic steering gear are running shall be installed on the navigating bridge and at a suitable main machinery control position.

2 Each electric or electrohydraulic steering gear comprising one or more power units shall be served by at least two exclusive circuits fed directly from the main switchboard; however, one of the circuits may be supplied through the emergency switchboard. An auxiliary electric or electrohydraulic steering gear associated with a main electric or electrohydraulic steering gear may be connected to one of the circuits supplying this main steering gear. The circuits supplying an electric or electrohydraulic steering gear shall have adequate rating for supplying all motors which can be simultaneously connected to them and may be required to operate simultaneously.

3 Short circuit protection and an overload alarm shall be provided for such circuits and motors. Protection against excess current, including starting current, if provided, shall be for not less than twice the full load current of the motor or circuit so protected, and shall be arranged to permit the passage of the appropriate starting currents. Where a three-phase supply is used an alarm shall be provided that will indicate failure of any one of the supply phases. The alarms required in this paragraph shall be both audible and visual and shall be situated in a conspicuous position in the main machinery space or control room from which the main machinery is normally controlled and as may be required by regulation 51.

4 When in a ship of less than 1,600 gross tonnage an auxiliary steering gear which is required by regulation 29.4.3 to be operated by power is not electrically powered or is powered by an electric motor primarily intended for other services, the main steering gear may be fed by one circuit from the main switchboard. Where such an electric motor primarily intended for other services is arranged to power such an auxiliary steering gear, the requirement of paragraph 3 may be waived by the Administration if satisfied with the protection arrangement together with the requirements of regulation 29.5.1 and.2 and 29.7.3 applicable to auxiliary steering gear.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 31
Machinery Controls

1 Main and auxiliary machinery essential for the propulsion, control and safety of the ship shall be provided with effective means for its operation and control. All control systems essential for the propulsion, control and safety of the ship shall be independent or designed such that failure of one system does not degrade the performance of another system.

2 Where remote control of propulsion machinery from the navigating bridge is provided, the following shall apply:

.1 the speed, direction of thrust and, if applicable, the pitch of the propeller shall be fully controllable from the navigating bridge under all sailing conditions, including manoeuvring;

.2 the control shall be performed by a single control device for each independent propeller, with automatic performance of all associated services, including, where necessary, means of preventing overload of the propulsion machinery. Where multiple propellers are designed to operate simultaneously, they may be controlled by one control device;

.3 the main propulsion machinery shall be provided with an emergency stopping device on the navigating bridge which shall be independent of the navigating bridge control system;

.4 propulsion machinery orders from the navigation bridge shall be indicated in the main machinery control room and at the manoeuvring platform;

.5 remote control of the propulsion machinery shall be possible only from one location at a time, at such locations interconnected control positions are permitted. At each location there shall be an indicator showing which location is in control of the propulsion machinery. The transfer of control between the navigating bridge and machinery spaces shall be possible only in the main machinery space or the main machinery control room. This system shall include means to prevent the propelling thrust from altering significantly when transferring control from one location to another;

.6 it shall be possible to control the propulsion machinery locally, even in the case of failure in any part of the remote control system. It shall also be possible to control the auxiliary machinery, essential for the propulsion and safety of the ship, at or near the machinery concerned;

.7 the design of the remote control system shall be such that in case of its failure an alarm will be given. Unless the Administration considers it impracticable the preset speed and direction of thrust of the propeller shall be maintained until local control is in operation;

.8 indicators shall be fitted on the navigation bridge, the main machinery control room and at the manoeuvring platform, for:

.1 propeller speed and direction of rotation in the case of fixed pitch propellers; and

This gazette is also available free online at **www.gpwonline.co.za**

.2 propeller speed and pitch position in the case of controllable pitch propellers;

.9 an alarm shall be provided on the navigating bridge and in the machinery space to indicate low starting air pressure which shall be set at a level to permit further main engine starting operations. If the remote control system of the propulsion machinery is designed for automatic starting, the number of automatic consecutive attempts which fail to produce a start shall be limited in order to safeguard sufficient starting air pressure for starting locally.

.10 automation systems shall be designed in a manner which ensures that threshold warning of impending or imminent slowdown or shutdown of the propulsion system is given to the officer in charge of the navigational watch in time to assess navigational circumstances in an emergency. In particular, the systems shall control, monitor, report, alert and take safety action to slow down or stop propulsion while providing the officer in charge of the navigational watch an opportunity to manually intervene, except for those cases where manual intervention will result in total failure of the engine and/or propulsion equipment within a short time, for example in the case of overspeed.

3 Where the main propulsion and associated machinery, including sources of main electrical supply, are provided with various degrees of automatic or remote control and are under continuous manual supervision from a control room the arrangements and controls shall be so designed, equipped and installed that the machinery operation will be as safe and effective as if it were under direct supervision; for this purpose Regulations 46 to 50 shall apply as appropriate. Particular consideration shall be given to protect such spaces against fire and flooding.

4 In general, automatic starting, operational and control systems shall include provisions for manually overriding the automatic controls. Failure of any part of such systems shall not prevent the use of the manual override.

5 Ships constructed on or after 1 July 1998 shall comply with the requirements of paragraphs 1 to 4, as amended.

6 Ships constructed on or after 1 July 2004 shall comply with the requirements of paragraphs 1 to 5, as amended.

Regulation 32

Steam boilers and boiler feed systems

1 Every steam boiler and every unfired steam generator shall be provided with not less than two safety valves of adequate capacity. However, having regard to the output or any other features of any boiler or unfired steam generator, the Administration may permit only one safety valve to be fitted if it is satisfied that adequate protection against overpressure is thereby provided.

This gazette is also available free online at **www.gpwonline.co.za**

2 Each oil-fired boiler which is intended to operate without manual supervision shall have safety arrangements which shut off the fuel supply and give an alarm in the case of low water level, air supply failure or flame failure.

3 Water tube boilers serving turbine propulsion machinery shall be fitted with a high-water-level alarm.

4 Every steam generating system which provides services essential for the safety of the ship, or which could be rendered dangerous by the failure of its feed water supply, shall be provided with not less than two separate feed water systems from and including the feed pumps, noting that a single penetration of the steam drum is acceptable. Unless overpressure is prevented by the pump characteristics means shall be provided which will prevent overpressure in any part of the systems.

5 Boilers shall be provided with means to supervise and control the quality of the feed water. Suitable arrangements shall be provided to preclude, as far as practicable, the entry of oil or other contaminants which may adversely affect the boiler.

6 Every boiler essential for the safety of the ship and designed to contain water at a specified level shall be provided with at least two means for indicating its water level, at least one of which shall be a direct reading gauge glass.

Regulation 33

Steam pipe systems

1 Every steam pipe and every fitting connected thereto through which steam may pass shall be so designed, constructed and installed as to withstand the maximum working stresses to which it may be subjected.

2 Means shall be provided for draining every steam pipe in which dangerous water hammer action might otherwise occur.

3 If a steam pipe or fitting may receive steam from any source at a higher pressure than that for which it is designed a suitable reducing valve, relief valve and pressure gauge shall be fitted.

Regulation 34

Air pressure systems

1 In every ship means shall be provided to prevent overpressure in any part of compressed air systems and wherever water jackets or casings of air compressors and coolers might be subjected to dangerous overpressure due to leakage into them from air pressure parts. Suitable pressure relief arrangements shall be provided for all systems.

2 The main starting air arrangements for main propulsion internal combustion engines shall be adequately protected against the effects of backfiring and internal explosion in the starting air pipes.

This gazette is also available free online at **www.gpwonline.co.za**

3 All discharge pipes from starting air compressors shall lead directly to the starting air receivers, and all starting pipes from the air receivers to main or auxiliary engines shall be entirely separate from the compressor discharge pipe system.

4 Provision shall be made to reduce to a minimum the entry of oil into the air pressure systems and to drain these systems.

Regulation 35
Ventilating systems in machinery spaces

Machinery spaces of category A shall be adequately ventilated so as to ensure that when machinery or boilers therein are operating at full power in all weather conditions including heavy weather, an adequate supply of air is maintained to the spaces for the safety and comfort of personnel and the operation of the machinery. Any other machinery space shall be adequately ventilated appropriate for the purpose of that machinery space.

Regulation 35-1
Bilge pumping arrangements

1 This regulation applies to ships constructed on or after 1 January 2009.

2 Passenger ships and cargo ships

2.1 An efficient bilge pumping system shall be provided, capable of pumping from and draining any watertight compartment other than a space permanently appropriated for the carriage of fresh water, water ballast, oil fuel or liquid cargo and for which other efficient means of pumping are provided, under all practical conditions. Efficient means shall be provided for draining water from insulated holds.

2.2 Sanitary, ballast and general service pumps may be accepted as independent power bilge pumps if fitted with the necessary connections to the bilge pumping system.

2.3 All bilge pipes used in or under coal bunkers or fuel storage tanks or in boiler or machinery spaces, including spaces in which oil-settling tanks or oil fuel pumping units are situated, shall be of steel or other suitable material.

2.4 The arrangement of the bilge and ballast pumping system shall be such as to prevent the possibility of water passing from the sea and from water ballast spaces into the cargo and machinery spaces, or from one compartment to another. Provision shall be made to prevent any deep tank having bilge and ballast connections being inadvertently flooded from the sea when containing cargo, or being discharged through a bilge pump when containing water ballast.

This gazette is also available free online at **www.gpwonline.co.za**

2.5 All distribution boxes and manually operated valves in connection with the bilge pumping arrangements shall be in positions which are accessible under ordinary circumstances.

2.6 Provision shall be made for the drainage of enclosed cargo spaces situated on the bulkhead deck of a passenger ship and on the freeboard deck of a cargo ship, provided that the Administration may permit the means of drainage to be dispensed with in any particular compartment of any ship or class of ship if it is satisfied that by reason of size or internal subdivision of those spaces the safety of the ship is not thereby impaired. For ships subject to the provisions of regulation II-1/1.1.1.1, for the special hazards associated with loss of stability when fitted with fixed pressure water-spraying fire-extinguishing systems refer to regulation II-2/20.6.1.4.

2.6.1 Where the freeboard to the bulkhead deck or the freeboard deck, respectively, is such that the deck edge is immersed when the ship heels more than 5°, the drainage shall be by means of a sufficient number of scuppers of suitable size discharging directly overboard, fitted in accordance with the requirements of regulation 15 in the case of a passenger ship and the requirements for scuppers, inlets and discharges of the International Convention on Load Lines in force in the case of a cargo ship.

2.6.2 Where the freeboard is such that the edge of the bulkhead deck or the edge of the freeboard deck, respectively, is immersed when the ship heels 5° or less, the drainage of the enclosed cargo spaces on the bulkhead deck or on the freeboard deck, respectively, shall be led to a suitable space, or spaces, of adequate capacity, having a high water level alarm and provided with suitable arrangements for discharge overboard. In addition it shall be ensured that:

.1 the number, size and disposition of the scuppers are such as to prevent unreasonable accumulation of free water;

.2 the pumping arrangements required by this regulation for passenger ships or cargo ships, as applicable, take account of the requirements for any fixed pressure water-spraying fire extinguishing system;

.3 water contaminated with petrol or other dangerous substances is not drained to machinery spaces or other spaces where sources of ignition may be present; and

.4 where the enclosed cargo space is protected by a carbon dioxide fire extinguishing system the deck scuppers are fitted with means to prevent the escape of the smothering gas.

2.6.3 Provisions for the drainage of closed vehicle and ro-ro spaces and special category spaces shall also comply with regulations II-2/20.6.1.4 and II-2/20.6.1.5.

3 Passenger ships

3.1 The bilge pumping system required by paragraph 2.1 shall be capable of operation under all practicable conditions after a casualty whether the ship is upright or listed. For this purpose wing suctions shall generally be fitted except in narrow compartments at the end of the ship where one suction may be sufficient. In compartments of unusual form, additional suctions may be required. Arrangements

This gazette is also available free online at **www.gpwonline.co.za**

shall be made whereby water in the compartment may find its way to the suction pipes. Where, for particular compartments, the Administration is satisfied that the provision of drainage may be undesirable, it may allow such provision to be dispensed with if calculations made in accordance with the conditions laid down in regulations 7 and 8 show that the survival capability of the ship will not be impaired.

3.2 At least three power pumps shall be fitted connected to the bilge main, one of which may be driven by the propulsion machinery. Where the bilge pump numeral is 30 or more, one additional independent power pump shall be provided.

The bilge pump numeral shall be calculated as follows:

when P_1 is greater than P:

$$\text{bilge pump numeral} = 72 \times \left(\frac{M + 2P_1}{V + P_1 - P}\right)$$

in other cases:

$$\text{bilge pump numeral} = 72 \times \left(\frac{M + 2P}{V}\right)$$

where:

L = the length of the ship (metres), as defined in regulation 2;

M = the volume of the machinery space (cubic metres), as defined in regulation 2, that is below the bulkhead deck; with the addition thereto of the volume of any permanent oil fuel bunkers which may be situated above the inner bottom and forward of, or abaft, the machinery space;

P = the whole volume of the passenger and crew spaces below the bulkhead deck (cubic metres), which are provided for the accommodation and use of passengers and crew, excluding baggage, store and provision rooms;

V = the whole volume of the ship below the bulkhead deck (cubic metres);

P_1 = KN,

where:

N = the number of passengers for which the ship is to be certified; and

K = 0.056L

However, where the value of KN is greater than the sum of P and the whole volume of the actual passenger spaces above the bulkhead deck, the figure to be taken as P_1 is that sum or two-thirds KN, whichever is the greater.

3.3 Where practicable, the power bilge pumps shall be placed in separate watertight compartments and so arranged or situated that these compartments will not be flooded by the same damage. If the main propulsion machinery, auxiliary machinery and boilers are in two or more watertight compartments, the pumps available for bilge service shall be distributed as far as is possible throughout these compartments.

3.4 On a ship of 91.5 m in length L and upwards or having a bilge pump numeral, calculated in accordance with paragraph 3.2, of 30 or more, the arrangements shall be such that at least one power bilge pump shall be available for use in all flooding

This gazette is also available free online at **www.gpwonline.co.za**

conditions which the ship is required to withstand, and, for ships subject to the provisions of regulation II-1/1.1.1.1, in all flooding conditions derived from consideration of minor damages as specified in regulation 8 as follows:

.1 one of the required bilge pumps shall be an emergency pump of a reliable submersible type having a source of power situated above the bulkhead deck; or

.2 the bilge pumps and their sources of power shall be so distributed throughout the length of the ship that at least one pump in an undamaged compartment will be available.

3.5 With the exception of additional pumps which may be provided for peak compartments only, each required bilge pump shall be so arranged as to draw water from any space required to be drained by paragraph 2.1.

3.6 Each power bilge pump shall be capable of pumping water through the required main bilge pipe at a speed of not less than 2 m/s. Independent power bilge pumps situated in machinery spaces shall have direct suctions from these spaces, except that not more than two such suctions shall be required in any one space. Where two or more such suctions are provided, there shall be at least one on each side of the ship. The Administration may require independent power bilge pumps situated in other spaces to have separate direct suctions. Direct suctions shall be suitably arranged and those in a machinery space shall be of a diameter not less than that required for the bilge main.

3.7.1 In addition to the direct bilge suction or suctions required by paragraph 3.6, a direct suction from the main circulating pump leading to the drainage level of the machinery space and fitted with a non-return valve shall be provided in the machinery space. The diameter of this direct suction pipe shall be at least two thirds of the diameter of the pump inlet in the case of steamships, and of the same diameter as the pump inlet in the case of motorships.

3.7.2 Where in the opinion of the Administration the main circulating pump is not suitable for this purpose, a direct emergency bilge suction shall be led from the largest available independent power driven pump to the drainage level of the machinery space; the suction shall be of the same diameter as the main inlet of the pump used. The capacity of the pump so connected shall exceed that of a required bilge pump by an amount deemed satisfactory by the Administration.

3.7.3 The spindles of the sea inlet and direct suction valves shall extend well above the engine-room platform.

3.8 All bilge suction piping up to the connection to the pumps shall be independent of other piping.

3.9 The diameter d of the bilge main shall be calculated according to the following formula. However, the actual internal diameter of the bilge main may be rounded off to the nearest standard size acceptable to the Administration:

$$d=25+1.68\sqrt{L(B+D)}$$

126

where:

d is the internal diameter of the bilge main (millimetres);

L and B are the length and the breadth of the ship (metres) as defined in regulation 2; and

D is the moulded depth of the ship to the bulkhead deck (metres) provided that, in a ship having an enclosed cargo space on the bulkhead deck which is internally drained in accordance with the requirements of paragraph 2.6.2 and which extends for the full length of the ship, D shall be measured to the next deck above the bulkhead deck. Where the enclosed cargo spaces cover a lesser length, D shall be taken as the moulded depth to the bulkhead deck plus lh/L where l and h are the aggregate length and height respectively of the enclosed cargo spaces (metres). The diameter of the bilge branch pipes shall meet the requirements of the Administration.

3.10 Provision shall be made to prevent the compartment served by any bilge suction pipe being flooded in the event of the pipe being severed or otherwise damaged by collision or grounding in any other compartment. For this purpose, where the pipe is at any part situated nearer the side of the ship than one fifth of the breadth of the ship (as defined in regulation 2 and measured at right angles to the centreline at the level of the deepest subdivision load line), or is in a duct keel, a non-return valve shall be fitted to the pipe in the compartment containing the open end. For ships subject to the provisions of regulation II-1/1.1.1.1, the deepest subdivision load line shall be taken as the deepest subdivision draught.

3.11 Distribution boxes, cocks and valves in connection with the bilge pumping system shall be so arranged that, in the event of flooding, one of the bilge pumps may be operative on any compartment; in addition, damage to a pump or its pipe connecting to the bilge main outboard of a line drawn at one fifth of the breadth of the ship shall not put the bilge system out of action. If there is only one system of pipes common to all the pumps, the necessary valves for controlling the bilge suctions must be capable of being operated from above the bulkhead deck. Where in addition to the main bilge pumping system an emergency bilge pumping system is provided, it shall be independent of the main system and so arranged that a pump is capable of operating on any compartment under flooding condition as specified in paragraph 3.1; in that case only the valves necessary for the operation of the emergency system need be capable of being operated from above the bulkhead deck.

3.12 All cocks and valves referred to in paragraph 3.11 which can be operated from above the bulkhead deck shall have their controls at their place of operation clearly marked and shall be provided with means to indicate whether they are open or closed.

4 Cargo ships

At least two power pumps connected to the main bilge system shall be provided, one of which may be driven by the propulsion machinery. If the Administration is satisfied that the safety of the ship is not impaired, bilge pumping arrangements may be dispensed with in particular compartments.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 36

This regulation is deliberately left blank.

Regulation 37

Communication between navigating bridge and machinery space

1 At least two independent means shall be provided for communicating orders from the navigating bridge to the position in the machinery space or in the control room from which the engines are normally controlled; one of these shall be an engine room telegraph which provides visual indication of the orders and responses both in the machinery space and on the navigating bridge. Appropriate means of communication shall be provided to any other positions from which the engines may be controlled.

2 For ships constructed on or after 1 October 1994 the following requirements apply in lieu of the provisions of paragraph 1:

At least two independent means shall be provided for communicating orders from the navigating bridge to the position in the machinery space or in the control room from which the speed and direction of thrust of the propellers are normally controlled: one of these shall be an engine-room telegraph which provides visual indication of the orders and responses both in the machinery spaces and on the navigating bridge. Appropriate means of communication shall be provided from the navigating bridge and the engine-room to any other position from which the speed or direction of thrust of the propellers may be controlled.

Regulation 38

Engineer's alarm

An engineer' s alarm shall be provided to be operated from the engine control room or at the manoeuvring platform as appropriate, and shall be clearly audible in the engineers' accommodation.

Regulation 39

Location of emergency installations in passenger ships

Emergency sources of electrical power, fire pumps, bilge pumps except those specifically serving the spaces forward of the collision bulkhead, any fixed fire-extinguishing system required by Chapter II-2, and other emergency installations which are essential for the safety of the ship, except anchor windlasses, shall not be installed forward of the collision bulkhead.

This gazette is also available free online at **www.gpwonline.co.za**

Part D - Electrical Installations

Regulation 40
General

1 Electrical installations shall be such that:

.1 all electrical auxiliary services necessary for maintaining the ship in normal operational and habitable conditions will be ensured without recourse to the emergency source of electrical power;

.2 electrical services essential for safety will be ensured under various emergency conditions; and

.3 the safety of passengers, crew and ship from electrical hazards will be ensured.

2 The Administration shall take appropriate steps to ensure uniformity in the implementation and application of the provisions of this Part in respect of electrical installations [70]

Regulation 41
Main source of electrical power and lighting systems

1.1 A main source of electrical power of sufficient capacity to supply all those services mentioned in regulation 40.1.1 shall be provided. This main source of electrical power shall consist of at least two generating sets.

1.2 The capacity of these generating sets shall be such that in the event of any one generating set being stopped it will still be possible to supply those services necessary to provide normal operational conditions of propulsion and safety. Minimum comfortable conditions of habitability shall also be ensured which include at least adequate services for cooking, heating, domestic refrigeration, mechanical ventilation, sanitary and fresh water.

1.3 The arrangements of the ship' s main source of electrical power shall be such that the services referred to in regulation 40.1.1 can be maintained regardless of the speed and direction of rotation of the propulsion machinery or shafting.

1.4 In addition, the generating sets shall be such as to ensure that with any one generator or its primary source of power out of operation, the remaining generating sets shall be capable of providing the electrical services necessary to start the main propulsion plant from a dead ship condition. The emergency source of electrical power may be used for the purpose of starting from a dead ship condition if its capability either alone or combined with that of any other source of electrical power is sufficient to

[70] Refer to the recommendations published by the International Electrotechnical Commission and, in particular, publication IEC 60092, *Electrical Installations in Ships*.

This gazette is also available free online at **www.gpwonline.co.za**

provide at the same time those services required to be supplied by Regulations 42.2.1 to 42.2.3 for passenger ships and 43.2.1 to 43.2.4 for cargo ships.

1.5 Where transformers constitute an essential part of the electrical supply system required by this paragraph, the system shall be so arranged as to ensure the same continuity of the supply as is stated in this paragraph.

2.1 A main electric lighting system which shall provide illumination throughout those parts of the ship normally accessible to and used by passengers or crew shall be supplied from the main source of electrical power.

2.2 The arrangement of the main electric lighting system shall be such that a fire or other casualty in spaces containing the main source of electrical power, associated transforming equipment, if any, the main switchboard and the main lighting switchboard, will not render the emergency electric lighting system required by Regulations 42.2.1 and 42.2.2 for Passenger Ships and 43.2.1 and 43.2.2 for Cargo Ships inoperative.

2.3 The arrangement of the emergency electric lighting system shall be such that a fire or other casualty in spaces containing the emergency source of electrical power, associated transforming equipment, if any, the emergency switchboard and the emergency lighting switchboard will not render the main electric lighting system required by this regulation inoperative.

3 The main switchboard shall be so placed relative to one main generating station that, as far as is practicable, the integrity of the normal electrical supply may be affected only by a fire or other casualty in one space. An environmental enclosure for the main switchboard, such as may be provided by a machinery control room situated within the main boundaries of the space, is not to be considered as separating the switchboards from the generators.

4 Where the total installed electrical power of the main generating sets is in excess of 3 MW, the main busbars shall be subdivided into at least two parts which shall normally be connected by removable links or other approved means; so far as is practicable, the connexion of generating sets and any other duplicated equipment shall be equally divided between the parts. Equivalent arrangements may be permitted to the satisfaction of the Administration.

5 Ships constructed on or after 1 July 1998:

.1 in addition to paragraphs 1 to 3, shall comply with the following:

.1 where the main source of electrical power is necessary for propulsion and steering of the ship, the system shall be so arranged that the electrical supply to equipment necessary for propulsion and steering and to ensure safety of the ship will be maintained or immediately restored in the case of loss of any one of the generators in service;

.2 load shedding or other equivalent arrangements shall be provided to protect the generators required by this regulation against sustained overload;

This gazette is also available free online at **www.gpwonline.co.za**

.3 where the main source of electrical power is necessary for propulsion of the ship, the main busbar shall be subdivided into at least two parts which shall normally be connected by circuit breakers or other approved means; so far as is practicable, the connection of generating sets and other duplicated equipment shall be equally divided between the parts; and

.2 need not comply with paragraph 4.

6 In passenger ships constructed on or after 1 July 2010, supplementary lighting shall be provided in all cabins to clearly indicate the exit so that occupants will be able to find their way to the door. Such lighting, which may be connected to an emergency source of power or have a self-contained source of electrical power in each cabin, shall automatically illuminate when power to the normal cabin lighting is lost and remain on for a minimum of 30 min.

Regulation 42
Emergency source of electrical power in passenger ships

1.1 A self-contained emergency source of electrical power shall be provided.

1.2 The emergency source of electrical power, associated transforming equipment, if any, transitional source of emergency power, emergency switchboard and emergency lighting switchboard shall be located above the uppermost continuous deck and shall be readily accessible from the open deck. They shall not be located forward of the collision bulkhead.

1.3 The location of the emergency source of electrical power and associated transforming equipment, if any, the transitional source of emergency power, the emergency switchboard and the emergency electric lighting switchboards in relation to the main source of electrical power, associated transforming equipment, if any, and the main switchboard shall be such as to ensure to the satisfaction of the Administration that a fire or other casualty in spaces containing the main source of electrical power, associated transforming equipment, if any, and the main switchboard or in any machinery space of category A will not interfere with the supply, control and distribution of emergency electrical power, associated transforming equipment, if any, the transitional source of emergency electrical power and the emergency switchboard shall not be contiguous to the boundaries of machinery spaces of category A or those spaces containing the main source of electrical power, associated transforming equipment, if any, or the main switchboard.

1.4 Provided that suitable measures are taken for safeguarding independent emergency operation under all circumstances the emergency generator may be used exceptionally, and for short periods, to supply non-emergency circuits.

2 The electrical power available shall be sufficient to supply all those services that are essential for safety in an emergency, due regard being paid to such services as may have to be operated simultaneously. The emergency source of electrical power shall be capable, having regard to starting currents and the transitory nature of certain

This gazette is also available free online at **www.gpwonline.co.za**

loads, of supplying simultaneously at least the following services for the periods specified hereinafter, if they depend upon an electrical source for their operation:

2.1 For a period of 36 hours, emergency lighting:

.1 at every muster and embarkation station and over the sides as required by regulations III/11.4 and III/15.7;

.2 in alleyways, stairways and exits giving access to the muster and embarkation stations, as required by regulation III/11.5;

.3 in all service and accommodation alleyways, stairways, and exits, personnel lift cars;

.4 in the machinery spaces and main generating stations including their control positions;

.5 in all control stations, machinery control rooms, and at each main and emergency switchboard;

.6 at all stowage positions for firemen' s outfits;

.7 at the steering gear; and

.8 at the fire pump, the sprinkler pump and the emergency bilge pump referred to in paragraph 2.4 and at the starting position of their motors.

2.2 For a period of 36 hours:

.1 the navigation lights and other lights required by the International Regulations for Preventing Collisions at Sea in force; and

.2 on ships constructed on or after 1 February 1995, the VHF radio installation required by regulation IV/7.1.1 and IV/7.1.2; and, if applicable:

.1 the MF radio installation required by regulations IV/9.1.1, IV/9.1.2, IV/10.1.2 and IV/10.1.3;

.2 the ship earth station required by regulation IV/10.1.1; and

.3 the MF/HF radio installation required by regulations IV/11.1.1 and IV/11.1.2.

2.3 For a period of 36 hours:

.1 all internal communication equipment required in an emergency;

.2 the shipborne navigational equipment as required by regulation V/19; where such provision is unreasonable or impracticable the Administration may waive this requirement for ships of less than 5,000 gross tonnage;

.3 the fire detection and fire alarm system, and the fire door holding and release system; and

.4 for intermittent operation of the daylight signalling lamp, the ship' s whistle, the manually operated call points and all internal signals that are required in an emergency;

unless such services have an independent supply for the period of 36 hours from an accumulator battery suitably located for use in an emergency.

132

2.4 For a period of 36 hours:

.1 one of the fire pumps required by regulations II-2/10.2.2.2 and II-2/10.2.2.3;

.2 the automatic sprinkler pump, if any; and

.3 the emergency bilge pump and all the equipment essential for the operation of electrically powered remote controlled bilge valves.

2.5 For the period of time required by regulation 29.14 the steering gear if required to be so supplied by that Regulation.

2.6 For a period of half an hour:

.1 any watertight doors required by regulation 13 to be power operated together with their indicators and warning signals.

.2 the emergency arrangements to bring the lift cars to deck level for the escape of persons. The passenger lift cars may be brought to deck level sequentially in an emergency.

2.7 In a ship engaged regularly on voyages of short duration, the Administration if satisfied that an adequate standard of safety would be attained may accept a lesser period than the 36 hour period specified in paragraphs 2.1 to 2.5 but not less than 12 hours.

3 The emergency source of electrical power may be either a generator or an accumulator battery, which shall comply with the following:

3.1 Where the emergency source of electrical power is a generator, it shall be:

.1 driven by a suitable prime-mover with an independent supply of fuel having a flashpoint (closed cup test) of not less than 43 degrees C;

.2 started automatically upon failure of the electrical supply from the main source of electrical power and shall be automatically connected to the emergency switchboard; those services referred to in paragraph 4 shall then be transferred automatically to the emergency generating set. The automatic starting system and the characteristic of the prime-mover shall be such as to permit the emergency generator to carry its full rated load as quickly as is safe and practicable, subject to a maximum of 45 seconds; unless a second independent means of starting the emergency generating set is provided, the single source of stored energy shall be protected to preclude its complete depletion by the automatic starting system; and

.3 provided with a transitional source of emergency electrical power according to paragraph 4.

3.2 Where the emergency source of electrical power is an accumulator battery, it shall be capable of:

.1 carrying the emergency electrical load without recharging while maintaining the voltage of the battery throughout the discharge period within 12 percent above or below its nominal voltage;

This gazette is also available free online at **www.gpwonline.co.za**

.2 automatically connecting to the emergency switchboard in the event of failure of the main source of electrical power; and

.3 immediately supplying at least those services specified in paragraph 4.

3.3 The following provision in paragraph 3.1.2 shall not apply to ships constructed on or after 1 October 1994: Unless a second independent means of starting the emergency generating set is provided, the single source of stored energy shall be protected to preclude its complete depletion by the automatic starting system.

3.4 For ships constructed on or after 1 July 1998, where electrical power is necessary to restore propulsion, the capacity shall be sufficient to restore propulsion to the ship in conjunction with other machinery, as appropriate, from a dead ship condition within 30 min after blackout.

4 The transitional source of emergency electrical power required by paragraph 3.1.3 shall consist of an accumulator battery suitably located for use in an emergency which shall operate without recharging while maintaining the voltage of the battery throughout the discharge period within 12 percent above or below its nominal voltage and be of sufficient capacity and so arranged as to supply automatically in the event of failure of either the main or emergency source of electrical power at least the following services, if they depend upon an electrical source for their operation:

4.1 For half an hour:

.1 the lighting required by paragraphs 2.1 and 2.2.1;

.2 all services required by paragraphs 2.3.1, 2.3.3 and 2.3.4 unless such services have an independent supply for the period specified from an accumulator battery suitably located for use in an emergency.

4.2 Power to operate the watertight doors, as required by regulation 13.6.3.3 , but not necessarily all of them simultaneously, unless an independent temporary source of stored energy is provided. Power to the control, indication and alarm circuits as required by regulation 13.6.2 for half an hour.

5.1 The emergency switchboard shall be installed as near as is practicable to the emergency source of electrical power.

5.2 Where the emergency source of electrical power is a generator, the emergency switchboard shall be located in the same space unless the operation of the emergency switchboard would thereby be impaired.

5.3 No accumulator battery fitted in accordance with this Regulation shall be installed in the same space as the emergency switchboard. An indicator shall be mounted in a suitable place on the main switchboard or in the machinery control room to indicate when the batteries constituting either the emergency source of electrical power or the transitional source of emergency electrical power referred to in paragraph 3.1.3 or 4 are being discharged.

5.4 The emergency switchboard shall be supplied during normal operation from the main switchboard by an interconnector feeder which is to be adequately protected at

This gazette is also available free online at **www.gpwonline.co.za**

the main switchboard against overload and short circuit and which is to be disconnected automatically at the emergency switchboard upon failure of the main source of electrical power. Where the system is arranged for feedback operation, the interconnector feeder is also to be protected at the emergency switchboard at least against short circuit.

5.5 In order to ensure ready availability of the emergency source of electrical power, arrangements shall be made where necessary to disconnect automatically non-emergency circuits from the emergency switchboard to ensure that power shall be available to the emergency circuits.

6 The emergency generator and its prime-mover and any emergency accumulator battery shall be so designed and arranged as to ensure that they will function at full rated power when the ship is upright and when inclined at any angle of list up to 22.5 degrees or when inclined up to 10 degrees either in the fore or aft direction, or is in any combination of angles within those limits.

7 Provision shall be made for the periodic testing of the complete emergency system and shall include the testing of automatic starting arrangements.

Regulation 42-1

Supplementary emergency lighting for ro-ro passenger ships

1 In addition to the emergency lighting required by regulation 42.2, on every passenger ship with ro-ro cargo spaces or special category spaces as defined in regulation II-2/3:

.1 all passenger public spaces and alleyways shall be provided with supplementary electric lighting that can operate for at least three hours when all other sources of electric power have failed and under any condition of heel. The illumination provided shall be such that the approach to the means of escape can be readily seen. The source of power for the supplementary lighting shall consist of accumulator batteries located within the lighting units that are continuously charged, where practicable, from the emergency switchboard. Alternatively, any other means of lighting which is at least as effective may be accepted by the Administration. The supplementary lighting shall be such that any failure of the lamp will be immediately apparent. Any accumulator battery provided shall be replaced at intervals having regard to the specified service life in the ambient conditions that they are subject to in service; and

.2 a portable rechargeable battery operated lamp shall be provided in every crew space alleyway, recreational space and every working space which is normally occupied unless supplementary emergency lighting, as required by subparagraph .1, is provided.

Regulation 43

Emergency source of electrical power in cargo ships

This gazette is also available free online at **www.gpwonline.co.za**

1.1 A self-contained emergency source of electrical power shall be provided.

1.2 The emergency source of electrical power, associated transforming equipment, if any, transitional source of emergency power, emergency switchboard and emergency lighting switchboard shall be located above the uppermost continuous deck and shall be readily accessible from the open deck. They shall not be located forward of the collision bulkhead, except where permitted by the Administration in exceptional circumstances.

1.3 The location of the emergency source of electrical power, associated transforming equipment, if any, the transitional source of emergency power, the emergency switchboard and the emergency lighting switchboard in relation to the main source of electrical power, associated transforming equipment, if any, and the main switchboard shall be such as to ensure to the satisfaction of the Administration that a fire or other casualty in the space containing the main source of electrical power, associated transforming equipment, if any, and the main switchboard, or in any machinery space of category A will not interfere with the supply, control and distribution of emergency electrical power. As far as practicable the space containing the emergency source of electrical power, associated transforming equipment, if any, the transitional source of emergency electrical power and the emergency switchboard shall not be contiguous to the boundaries of machinery spaces of category A or those spaces containing the main source of electrical power, associated transforming equipment, if any, and the main switchboard.

1.4 Provided that suitable measures are taken for safeguarding independent emergency operation under all circumstances, the emergency generator may be used, exceptionally, and for short periods, to supply non-emergency circuits.

2 The electrical power available shall be sufficient to supply all those services that are essential for safety in an emergency, due regard being paid to such services as may have to be operated simultaneously. The emergency source of electrical power shall be capable, having regard to starting currents and the transitory nature of certain loads, of supplying simultaneously at least the following services for the periods specified hereinafter, if they depend upon an electrical source for their operation:

2.1 For a period of 3 h, emergency lighting at every muster and embarkation station and over the sides as required by regulations III/11.4 and III/15.7.

2.2 For a period of 18 hours, emergency lighting:

- **.1** in all service and accommodation alleyways, stairways and exits, personnel lift cars and personnel lift trunks;
- **.2** in the machinery spaces and main generating stations including their control positions;
- **.3** in all control stations, machinery control rooms, and at each main and emergency switchboard;
- **.4** at all stowage positions for firemen' s outfits;
- **.5** at the steering gear;

This gazette is also available free online at **www.gpwonline.co.za**

.6 at the fire pump referred to in paragraph 2.5, at the sprinkler pump, if any, and at the emergency bilge pump, if any, and at the starting positions of their motors; and

.7 in all cargo pump-rooms of tankers constructed on or after 1 July 2002.

2.3 For a period of 18 hours:

.1 the navigation lights and other lights required by the International Regulations for Preventing Collisions at Sea in force;

.2 on ships constructed on or after 1 February 1995 the VHF radio installation required by regulation IV/7.1.1 and IV/7.1.2; and, if applicable:

.1 the MF radio installation required by regulations IV/9.1.1, IV/9.1.2, IV/10.1.2, and IV/10.1.3;

.2 the ship earth station required by regulation IV/10.1.1; and

.3 the MF/HF radio installation required by regulations IV/11.1.1 and IV/11.1.2.

2.4 For a period of 18 hours:

.1 all internal communication equipment as required in an emergency;

.2 the shipborne navigational equipment as required by regulation V/19; where such provision is unreasonable or impracticable the Administration may waive this requirement for ships of less than 5,000 gross tonnage;

.3 the fire detection and fire alarm system; and

.4 intermittent operation of the daylight signalling lamp, the ship' s whistle, the manually operated call points, and all internal signals that are required in an emergency;

unless such services have an independent supply for the period of 18 hours from an accumulator battery suitably located for use in an emergency.

2.5 For a period of 18 hours one of the fire pumps required by regulation II-2/10.2.2.2 and II-2/10.2.2.3; if dependent upon the emergency generator for its source of power.

2.6.1 For the period of time required by regulation 29.14 the steering gear where it is required to be so supplied by that Regulation.

2.6.2 In a ship engaged regularly in voyages of short duration, the Administration if satisfied that an adequate standard of safety would be attained may accept a lesser period than the 18 hour period specified in paragraphs 2.2 to 2.5 but not less than 12 hours.

3 The emergency source of electrical power may be either a generator or an accumulator battery, which shall comply with the following:

3.1 Where the emergency source of electrical power is a generator, it shall be:

.1 driven by a suitable prime-mover with an independent supply of fuel, having a flashpoint (closed cup test) of not less than 43ºC;

.2 started automatically upon failure of the main source of electrical power supply unless a transitional source of emergency electrical power in

This gazette is also available free online at **www.gpwonline.co.za**

accordance with paragraph 3.1.3 is provided; where the emergency generator is automatically started, it shall be automatically connected to the emergency switchboard; those services referred to in paragraph 4 shall then be connected automatically to the emergency generator; and unless a second independent means of starting the emergency generating set is provided, the single source of stored energy shall be protected to preclude its complete depletion by the automatic starting system; and

.3 provided with a transitional source of emergency electrical power as specified in paragraph 4 unless an emergency generator is provided capable both of supplying the services mentioned in that paragraph and of being automatically started and supplying the required load as quickly as is safe and practicable subject to a maximum of 45 seconds.

3.2 Where the emergency source of electrical power is an accumulator battery it shall be capable of:

.1 carrying the emergency electrical load without recharging while maintaining the voltage of the battery throughout the discharge period within 12 percent above or below its nominal voltage;

.2 automatically connecting to the emergency switchboard in the event of failure of the main source of electrical power; and

.3 immediately supplying at least those services specified in paragraph 4.

3.3 The following provision in paragraph 3.1.2 shall not apply to ships constructed on or after 1 October 1994:

Unless a second independent means of starting the emergency generating set is provided, the single source of stored energy shall be protected to preclude its complete depletion by the automatic starting system.

3.4 For ships constructed on or after 1 July 1998, where electrical power is necessary to restore propulsion, the capacity shall be sufficient to restore propulsion to the ship in conjunction with other machinery, as appropriate, from a dead ship condition within 30 min after blackout.

4 The transitional source of emergency electrical power where required by paragraph 3.1.3 shall consist of an accumulator battery suitably located for use in an emergency which shall operate without recharging while maintaining the voltage of the battery throughout the discharge period within 12 percent above or below its nominal voltage and be of sufficient capacity and shall be so arranged as to supply automatically in the event of failure of either the main or the emergency source of electrical power for half an hour at least the following services if they depend upon an electrical source for their operation:

.1 the lighting required by paragraphs 2.1, 2.2 and 2.3.1. For this transitional phase, the required emergency electric lighting, in respect of the machinery space and accommodation and service spaces may be provided by permanently fixed, individual, automatically charged, relay operated accumulator lamps; and

This gazette is also available free online at **www.gpwonline.co.za**

.2 all services required by paragraphs 2.4.1, 2.4.3 and 2.4.4 unless such services have an independent supply for the period specified from an accumulator battery suitably located for use in an emergency.

5.1 The emergency switchboard shall be installed as near as is practicable to the emergency source of electrical power.

5.2 Where the emergency source of electrical power is a generator, the emergency switchboard shall be located in the same space unless the operation of the emergency switchboard would thereby be impaired.

5.3 No accumulator battery fitted in accordance with this regulation shall be installed in the same space as the emergency switchboard. An indicator shall be mounted in a suitable place on the main switchboard or in the machinery control room to indicate when the batteries constituting either the energy source of electrical power or the transitional source of electrical power referred to in paragraph 3.2 or 4 are being discharged.

5.4 The emergency switchboard shall be supplied during normal operation from the main switchboard by an interconnector feeder which is to be adequately protected at the main switchboard against overload and short circuit and which is to be disconnected automatically at the emergency switchboard upon failure of the main source of electrical power. Where the system is arranged for feedback operation, the interconnector feeder is also to be protected at the emergency switchboard at least against short circuit.

5.5 In order to ensure ready availability of the emergency source of electrical power, arrangements shall be made where necessary to disconnect automatically non-emergency circuits from the emergency switchboard to ensure that electrical power shall be available automatically to the emergency circuits.

6 The emergency generator and its prime-mover and any emergency accumulator battery shall be so designed and arranged as to ensure that they will function at full rated power when the ship is upright and when inclined at any angle of list up to 22.5 degrees or when inclined up to 10 degrees either in the fore or aft direction, or is in any combination of angles within those limits.

7 Provision shall be made for the periodic testing of the complete emergency system and shall include the testing of automatic starting arrangements.

Regulation 44

Starting arrangements for emergency generating sets

1 Emergency generating sets shall be capable of being readily started in their cold condition at a temperature of 0ºC. If this is impracticable, or if lower temperatures are likely to be encountered, provision acceptable to the Administration shall be made for the maintenance of heating arrangements, to ensure ready starting of the generating sets.

This gazette is also available free online at **www.gpwonline.co.za**

2 Each emergency generating set arranged to be automatically started shall be equipped with starting devices approved by the Administration with a stored energy capability of at least three consecutive starts. A second source of energy shall be provided for an additional three starts within 30 minutes unless manual starting can be demonstrated to be effective.

2.1 Ships constructed on or after 1 October 1994, in lieu of the provision of the second sentence of paragraph 2, shall comply with the following requirements:

The source of stored energy shall be protected to preclude critical depletion by the automatic starting system, unless a second independent means of starting is provided. In addition, a second source of energy shall be provided for an additional three starts within 30 minutes unless manual starting can be demonstrated to be effective.

3 The stored energy shall be maintained at all times, as follows:

.1 electrical and hydraulic starting systems shall be maintained from the emergency switchboard;

.2 compressed air starting systems may be maintained by the main or auxiliary compressed air receivers through a suitable non-return valve or by an emergency air compressor which, if electrically driven, is supplied from the emergency switchboard;

.3 all of these starting, charging and energy storing devices shall be located in the emergency generator space; these devices are not to be used for any purpose other than the operation of the emergency generating set. This does not preclude the supply to the air receiver of the emergency generating set from the main or auxiliary compressed air system through the non-return valve fitted in the emergency generator space.

4.1 Where automatic starting is not required, manual starting is permissible, such as manual cranking, inertia starters, manually charged hydraulic accumulators, or powder charge cartridges, where they can be demonstrated as being effective.

4.2 When manual starting is not practicable, the requirements of paragraphs 2 and 3 shall be complied with except that starting may be manually initiated.

Regulation 45

Precautions against shock, fire and other hazards of electrical origin

1.1 Exposed metal parts of electrical machines or equipment which are not intended to be live but which are liable under fault conditions to become live shall be earthed unless the machines or equipment are:

.1 supplied at a voltage not exceeding 50 V direct current or 50 V, root mean square between conductors; auto-transformers shall not be used for the purpose of achieving this voltage; or

.2 supplied at a voltage not exceeding 250 V by safety isolating transformers supplying only one consuming device; or

.3 constructed in accordance with the principle of double insulation.

This gazette is also available free online at **www.gpwonline.co.za**

1.2 The Administration may require additional precautions for portable electrical equipment for use in confined or exceptionally damp spaces where particular risks due to conductivity may exist.

1.3 All electrical apparatus shall be so constructed and so installed as not to cause injury when handled or touched in the normal manner.

2 Main and emergency switchboards shall be so arranged as to give easy access as may be needed to apparatus and equipment, without danger to personnel. The sides and the rear and, where necessary, the front of the switchboards shall be suitably guarded. Exposed live parts having voltages to earth exceeding a voltage to be specified by the Administration shall not be installed on the front of such switchboards. Where necessary, non-conducting mats or gratings shall be provided at the front and rear of the switchboard.

3.1 The hull return system of distribution shall not be used for any purpose in a tanker, or for power, heating, or lighting in any other ship of 1,600 gross tonnage and upwards.

3.2 The requirement of paragraph 3.1 does not preclude under conditions approved by the Administration the use of:

.1 impressed current cathodic protective systems;

.2 limited and locally earthed systems; or

.3 insulation level monitoring devices provided the circulation current does not exceed 30 mA under the most unfavourable conditions.

3.2-1 For ships constructed on or after 1 October 1994, the requirement of paragraph 3.1 does not preclude the use of limited and locally earthed systems, provided that any possible resulting current does not flow directly through any dangerous spaces.

3.3 Where the hull return system is used, all final subcircuits, i.e. all circuits fitted after the last protective device, shall be two-wire and special precautions shall be taken to the satisfaction of the Administration.

4.1 Earthed distribution systems shall not be used in a tanker. The Administration may exceptionally permit in a tanker the earthing of the neutral for alternating current power networks of 3,000 V (line to line) and over, provided that any possible resulting current does not flow directly through any of the dangerous spaces.

4.2 When a distribution system, whether primary or secondary, for power, heating or lighting, with no connexion to earth is used, a device capable of continuously monitoring the insulation level to earth and of giving an audible or visual indication of abnormally low insulation values shall be provided.

4.3 Ships constructed on or after 1 October 1994, in lieu of the provisions of paragraph 4.1, shall comply with the following requirements:

.1 except as permitted by 4.3.2 earthed distribution systems shall not be used in a tanker.

This gazette is also available free online at **www.gpwonline.co.za**

.2 The requirement of paragraph 4.3.1 does not preclude the use of earthed intrinsically safe circuits and in addition, under conditions approved by the Administration, the use of the following earthed systems:

.1 power supplied, control circuits and instrumentation circuits where technical or safety reasons preclude the use of a system with no connection to earth, provided the current in the hull is limited to not more than 5 amps in both normal and fault conditions, or

.2 limited and locally earthed systems, provided that any possible resulting current does not flow directly through any of the dangerous spaces; or

.3 alternating current power networks of 1,000 V root mean square (line to line) and over, provided that any possible resulting current does not flow directly through any of the dangerous spaces.

5.1 Except as permitted by the Administration in exceptional circumstances, all metal sheaths and armour of cables shall be electrically continuous and shall be earthed.

5.2 All electric cables and wiring external to equipment shall be at least of a flame retardant type and shall be so installed as not to impair their original flame retarding properties. Where necessary for particular applications the Administration may permit the use of special types of cables such as radio frequency cables, which do not comply with the foregoing.

5.3 Cables and wiring servicing essential or emergency power, lighting, internal communications or signals shall so far as practicable be routed clear of galleys, laundries, machinery spaces of category A and their casings and other high fire risk areas. In ro-ro passenger ships, cabling for emergency alarms and public address systems installed on or after 1 July 1998 shall be approved by the Administration having regard to the recommendations developed by the Organization [71]. Cables connecting fire pumps to the emergency switchboard shall be of a fire resistant type where they pass through high fire risk areas. Where practicable all such cables should be run in such a manner as to preclude their being rendered unserviceable by heating of the bulkheads that may be caused by a fire in an adjacent space.

5.4 Where cables which are installed in hazardous areas introduce the risk of fire or explosion in the event of an electrical fault in such areas, special precautions against such risks shall be taken to the satisfaction of the Administration.

5.5 Cables and wiring shall be installed and supported in such a manner as to avoid chafing or other damage.

5.6 Terminations and joints in all conductors shall be so made as to retain the original electrical, mechanical, flame retarding and, where necessary, fire resisting properties of the cable.

[71] Refer to *Recommendation on performance standards for public address systems on passenger ships, including cabling* (MSC/Circ.808).

This gazette is also available free online at **www.gpwonline.co.za**

6.1 Each separate circuit shall be protected against short circuit and against overload, except as permitted in Regulations 29 and 30 or where the Administration may exceptionally otherwise permit.

6.2 The rating or appropriate setting of the overload protective device for each circuit shall be permanently indicated at the location of the protective device.

7 Lighting fittings shall be so arranged as to prevent temperature rises which could damage the cables and wiring, and to prevent surrounding material from becoming excessively hot.

8 All lighting and power circuits terminating in a bunker or cargo space shall be provided with a multiple pole switch outside the space for disconnecting such circuits.

9.1 Accumulator batteries shall be suitably housed, and compartments used primarily for their accommodation shall be properly constructed and efficiently ventilated.

9.2 Electrical or other equipment which may constitute a source of ignition of flammable vapours shall not be permitted in these compartments except as permitted in paragraph 10.

9.3 Accumulator batteries shall not be located in sleeping quarters except where hermetically sealed to the satisfaction of the Administration.

10 No electrical equipment shall be installed in any space where flammable mixtures are liable to collect, e.g. in compartments assigned principally to accumulator batteries, in paint lockers, acetylene stores or similar spaces, unless the Administration is satisfied that such equipment is:

.1 essential for operational purposes;

.2 of a type which will not ignite the mixture concerned;

.3 appropriate to the space concerned; and

.4 appropriately certified for safe usage in the dusts, vapours or gases likely to be encountered.

11 In tankers, electrical equipment, cables and wiring shall not be installed in hazardous locations unless it conforms with standards not inferior to those acceptable to the Organization. [72] However, for locations not covered by such standards, electrical equipment, cables and wiring which do not conform to the standards may be installed in hazardous locations based on a risk assessment to the satisfaction of the Administration, to ensure that an equivalent level of safety is assured.

12 In a passenger ship, distribution systems shall be so arranged that fire in any main vertical zone as is defined in Regulation II-2/3.32 will not interfere with services essential for safety in any other such zone. This requirement will be met if main and emergency feeders passing through any such zone are separated both vertically and horizontally as widely as is practicable.

[72] Refer to the standards published by the International Electrotechnical Commission, and in particular IEC 60092-502:1999 *Electrical installations in ships - Tankers*.

This gazette is also available free online at **www.gpwonline.co.za**

Part E - Additional Requirements For Periodically Unattended Machinery Spaces

(Part E applies for cargo ships except that regulation 54 refers to passenger ships)

Regulation 46
General

1 The arrangements provided shall be such as to ensure that the safety of the ship in all sailing conditions, including manoeuvring, is equivalent to that of a ship having the machinery spaces manned.

2 Measures shall be taken to the satisfaction of the Administration to ensure that the equipment is functioning in a reliable manner and that satisfactory arrangements are made for regular inspections and routine tests to ensure continuous reliable operation.

3 Every ship shall be provided with documentary evidence, to the satisfaction of the Administration, of its fitness to operate with periodically unattended machinery spaces.

Regulation 47
Fire precautions

1 Means shall be provided to detect and give alarms at an early stage in case of fires:

.1 in boiler air supply casings and exhausts (uptakes); and

.2 in scavenging air belts of propulsion machinery, unless the Administration considers this to be unnecessary in a particular case.

2 Internal combustion engines of 2250 kW and above or having cylinders of more than 300 mm bore shall be provided with crankcase oil mist detectors or engine bearing temperature monitors or equivalent devices.

Regulation 48
Protection against flooding

1 Bilge wells in periodically unattended machinery spaces shall be located and monitored in such a way that the accumulation of liquids is detected at normal angles of trim and heel, and shall be large enough to accommodate easily the normal drainage during the unattended period.

2 Where the bilge pumps are capable of being started automatically, means shall be provided to indicate when the influx of liquid is greater than the pump capacity or

This gazette is also available free online at **www.gpwonline.co.za**

when the pump is operating more frequently than would normally be expected. In these cases, smaller bilge wells to cover a reasonable period of time may be permitted. Where automatically controlled bilge pumps are provided, special attention shall be given to oil pollution prevention requirements.

3 The location of the controls of any valve serving a sea inlet, a discharge below the water-line or a bilge injection system shall be so sited as to allow adequate time for operation in case of influx of water to the space, having regard to the time likely to be required in order to reach and operate such controls. If the level to which the space could become flooded with the ship in the fully loaded condition so requires, arrangements shall be made to operate the controls from a position above such level.

Regulation 49

Control of propulsion machinery from the navigating bridge

1 Under all sailing conditions, including manoeuvring, the speed, direction of thrust and, if applicable the pitch of the propeller shall be fully controllable from the navigating bridge.

1.1 Such remote control shall be performed by a single control device for each independent propeller, with automatic performance of all associated services, including where necessary, means of preventing overload of the propulsion machinery.

1.2 The main propulsion machinery shall be provided with an emergency stopping device on the navigating bridge which shall be independent of the navigating bridge control system.

2 Propulsion machinery orders from the navigating bridge shall be indicated in the main machinery control room or at the propulsion machinery control position as appropriate.

3 Remote control of the propulsion machinery shall be possible only from one location at a time; at such locations interconnected control positions are permitted. At each location there shall be an indicator showing which location is in control of the propulsion machinery. The transfer of control between the navigating bridge and machinery space shall be possible only in the main machinery space or in the main machinery control room. The system shall include means to prevent the propelling thrust from altering significantly when transferring control from one location to another.

4 It shall be possible for all machinery essential for the safe operation of the ship to be controlled from a local position, even in the case of failure in any part of the automatic or remote control systems.

5 The design of the remote automatic control system shall be such that in case of its failure an alarm will be given. Unless the Administration considers it impracticable, the present speed and direction of thrust of the propeller shall be maintained until local control is in operation.

6 Indicators shall be fitted on the navigating bridge for:

This gazette is also available free online at **www.gpwonline.co.za**

.1 propeller speed and direction of rotation in the case of fixed pitch propellers; or

.2 propeller speed and pitch position in the case of controllable pitch propellers.

7 The number of consecutive automatic attempts which fail to produce a start shall be limited to safeguard sufficient starting air pressure. An alarm shall be provided to indicate low starting air pressure set at a level which still permits starting operations of the propulsion machinery.

Regulation 50
Communication

A reliable means of vocal communication shall be provided between the main machinery control room or the propulsion machinery control position as appropriate, the navigating bridge and the engineer officers' accommodation.

Regulation 51
Alarm system

1 An alarm system shall be provided indicating any fault requiring attention and shall:

.1 be capable of sounding an audible alarm in the main machinery control room or at the propulsion machinery control position, and indicate visually each separate alarm function at a suitable position;

.2 have a connexion to the engineers' public rooms and to each of the engineers' cabins through a selector switch, to ensure connexion to at least one of those cabins. Administrations may permit equivalent arrangements;

.3 activate an audible and visual alarm on the navigating bridge for any situation which requires action by or attention of the officer on watch;

.4 as far as is practicable be designed on the fail-to-safety principle; and

.5 activate the engineers' alarm required by regulation 38 if an alarm function has not received attention locally within a limited time.

2.1 The alarm system shall be continuously powered and shall have an automatic change-over to a stand-by power supply in case of loss of normal power supply.

2.2 Failure of the normal power supply of the alarm system shall be indicated by an alarm.

3.1 The alarm system shall be able to indicate at the same time more than one fault and the acceptance of any alarm shall not inhibit another alarm.

3.2 Acceptance at the position referred to in paragraph 1 of any alarm condition shall be indicated at the positions where it was shown. Alarms shall be maintained until they

This gazette is also available free online at **www.gpwonline.co.za**

are accepted and the visual indications of individual alarms shall remain until the fault has been corrected, when the alarm system shall automatically reset to the normal operating condition.

Regulation 52
Safety systems

A safety system shall be provided to ensure that serious malfunction in machinery or boiler operations, which present an immediate danger, shall initiate the automatic shut-down of that part of the plant and that an alarm shall be given. Shut-down of the propulsion system shall not be automatically activated except in cases which could lead to serious damage, complete breakdown, or explosion. Where arrangements for overriding the shut-down of the main propelling machinery are fitted, these shall be such as to preclude inadvertent operation. Visual means shall be provided to indicate when the override has been activated.

Regulation 53
Special requirements for machinery, boiler and electrical installations

1 The special requirements for the machinery, boiler and electrical installations shall be to the satisfaction of the Administration and shall include at least the requirements of this regulation.

2 The main source of electrical power shall comply with the following:

.1 Where the electrical power can normally be supplied by one generator, suitable load shedding arrangements shall be provided to ensure the integrity of supplies to services required for propulsion and steering as well as the safety of the ship. In the case of loss of the generator in operation, adequate provisions shall be made for automatic starting and connecting to the main switchboard of a stand-by generator of sufficient capacity to permit propulsion and steering and to ensure the safety of the ship with automatic re-starting of the essential auxiliaries including, where necessary, sequential operations. The Administration may dispense with this requirement for a ship of less than 1,600 gross tonnage, if it is considered impracticable.

.2 If the electrical power is normally supplied by more than one generator simultaneously in parallel operation, provision shall be made, for instance by load shedding, to ensure that, in case of loss of one of these generating sets, the remaining ones are kept in operation without overload to permit propulsion and steering, and to ensure the safety of the ship.

3 Where stand-by machines are required for other auxiliary machinery essential to propulsion, automatic change-over devices shall be provided.

4 Automatic control and alarm system

This gazette is also available free online at **www.gpwonline.co.za**

4.1 The control system shall be such that the service needed for the operation of the main propulsion machinery and its auxiliaries are ensured through the necessary automatic arrangements.

4.2 An alarm shall be given on the automatic change-over.

4.3 An alarm system complying with regulation 51 shall be provided for all important pressures, temperatures and fluid levels and other essential parameters.

4.4 A centralized control position, shall be arranged with the necessary alarm panels and instrumentation indicating any alarm.

5 Means shall be provided to keep the starting air pressure at the required level where internal combustion engines are used for main propulsion.

Regulation 54

Special consideration in respect of passenger ships

Passenger ships shall be specially considered by the Administration as to whether or not their machinery spaces may be periodically unattended and if so whether additional requirements to those stipulated in these Regulations are necessary to achieve equivalent safety to that of normally attended machinery spaces.

This gazette is also available free online at **www.gpwonline.co.za**

Part F - Alternative Design And Arrangements

Regulation 55
Alternative design and arrangements

1 Purpose

The purpose of this regulation is to provide a methodology for alternative design and arrangements for machinery, electrical installations and low-flashpoint fuel storage and distribution systems.

2 General

2.1 Machinery, electrical installations and low-flashpoint fuel storage and distribution systems design and arrangements may deviate from the requirements set out in parts C, D, E or G, provided that the alternative design and arrangements meet the intent of the requirements concerned and provide an equivalent level of safety to this chapter.

2.2 When alternative design or arrangements deviate from the prescriptive requirements of parts C, D, E or G, an engineering analysis, evaluation and approval of the design and arrangements shall be carried out in accordance with this regulation.

3 Engineering analysis

The engineering analysis shall be prepared and submitted to the Administration, based on the guidelines developed by the Organization [73] and shall include, as a minimum, the following elements:

.1 determination of the ship type, machinery, electrical installations, low-flashpoint fuel storage and distribution systems and space(s) concerned;

.2 identification of the prescriptive requirement(s) with which the machinery, electrical installations and low-flashpoint fuel storage and distribution systems will not comply;

.3 identification of the reason the proposed design will not meet the prescriptive requirements supported by compliance with other recognized engineering or industry standards;

.4 determination of the performance criteria for the ship, machinery, electrical installation, low-flashpoint fuel storage and distribution systems or the space(s) concerned addressed by the relevant prescriptive requirement(s):

.1 performance criteria shall provide a level of safety not inferior to the relevant prescriptive requirements contained in parts C, D, E or G; and

.2 performance criteria shall be quantifiable and measurable;

[73] Refer to *Revised Guidelines on alternative design and arrangements for SOLAS chapters II-1 and III* (MSC.1/Circ.1212/Rev.1) and the *Guidelines for the approval of alternatives and equivalents as provided for in various IMO instruments* (MSC.1/Circ.1455).

This gazette is also available free online at **www.gpwonline.co.za**

.5 detailed description of the alternative design and arrangements, including a list of the assumptions used in the design and any proposed operational restrictions or conditions;

.6 technical justification demonstrating that the alternative design and arrangements meet the safety performance criteria; and

.7 risk assessment based on identification of the potential faults and hazards associated with the proposal.

4 Evaluation of the alternative design and arrangements

4.1 The engineering analysis required in paragraph 3 shall be evaluated and approved by the Administration, taking into account the guidelines developed by the Organization.[74]

4.2 A copy of the documentation, as approved by the Administration, indicating that the alternative design and arrangements comply with this regulation, shall be carried on board the ship.

5 Exchange of information

The Administration shall communicate to the Organization pertinent information concerning alternative design and arrangements approved by them for circulation to all Contracting Governments.

6 Re-evaluation due to change of conditions

If the assumptions and operational restrictions that were stipulated in the alternative design and arrangements are changed, the engineering analysis shall be carried out under the changed condition and shall be approved by the Administration.

[74] Refer to *Revised Guidelines on alternative design and arrangements for SOLAS chapters II-1 and III* (MSC.1/Circ.1212/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

Part G - Ships Using Low-Flashpoint Fuels

Regulation 56
Application

1 Except as provided for in paragraphs 4 and 5, this part shall apply to ships using low-flashpoint fuels:

.1 for which the building contract is placed on or after 1 January 2017;

.2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 July 2017; or

.3 the delivery of which is on or after 1 January 2021.

Such ships using low-flashpoint fuels shall comply with the requirements of this part in addition to any other applicable requirements of the present regulations.

2 Except as provided for in paragraphs 4 and 5, a ship, irrespective of the date of construction, including one constructed before 1 January 2009, which converts to using low-flashpoint fuels on or after 1 January 2017 shall be treated as a ship using low-flashpoint fuels on the date on which such conversion commenced.

3 Except as provided for in paragraphs 4 and 5, a ship using low-flashpoint fuels, irrespective of the date of construction, including one constructed before 1 January 2009, which, on or after 1 January 2017, undertakes to use low-flashpoint fuels different from those which it was originally approved to use before 1 January 2017 shall be treated as a ship using low-flashpoint fuels on the date on which such undertaking commenced.

4 This part shall not apply to gas carriers, as defined in regulation VII/11.2:

.1 using their cargoes as fuel and complying with the requirements of the IGC Code, as defined in regulation VII/11.1; or

.2 using other low-flashpoint gaseous fuels provided that the fuel storage and distribution systems design and arrangements for such gaseous fuels comply with the requirements of the IGC Code for gas as a cargo.

5 This part shall not apply to ships owned or operated by a Contracting Government and used, for the time being, only in Government non-commercial service. However, ships owned or operated by a Contracting Government and used, for the time being, only in Government non-commercial service are encouraged to act in a manner consistent, so far as reasonable and practicable, with this part.

Regulation 57
Requirements for ships using low-flashpoint fuels

Except as provided in regulations 56.4 and 56.5, ships using low-flashpoint fuels shall comply with the requirements of the IGF Code.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter II-2

Construction - Fire protection, detection and fire extinction

152

Contents

CHAPTER II-2 CONSTRUCTION – FIRE PROTECTION, FIRE DETECTION, AND FIRE EXTINCTION 150

PART A - GENERAL 150

Regulation 1 Application 150
Regulation 2 Fire safety objectives and functional requirements 155
Regulation 3 Definitions 156

PART B - PREVENTION OF FIRE AND EXPLOSION 164

Regulation 4 Probability of ignition 164
Regulation 5 Fire growth potential 179
Regulation 6 Smoke generation potential and toxicity 183

PART C - SUPPRESSION OF FIRE 184

Regulation 7 Detection and alarm 184
Regulation 8 Control of smoke spread 188
Regulation 9 Containment of fire 189
Regulation 10 Fire fighting 231
Regulation 11 Structural integrity 249

PART D - ESCAPE 252

Regulation 12 Notification of crew and passengers 252
Regulation 13 Means of escape 252

PART E - OPERATIONAL REQUIREMENTS 263

Regulation 14 Operational readiness and maintenance 263
Regulation 15 Instructions, onboard training and drills 264
Regulation 16 Operations 267

PART F - ALTERNATIVE DESIGN AND ARRANGEMENTS 270

Regulation 17 Alternative design and arrangements 270

PART G - SPECIAL REQUIREMENTS 272

Regulation 18 Helicopter facilities 272
Regulation 19 Carriage of dangerous goods 276
Regulation 20 Protection of vehicle, special category and ro-ro spaces 287
Regulation 20-1 ..... Requirements for vehicle carriers carrying motor vehicles with compressed hydrogen or natural gas in their tanks for their own propulsion as cargo 294
Regulation 21 Casualty threshold, safe return to port and safe areas 295

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 22 Design criteria for systems to remain operational after a fire casualty 297
Regulation 23 Safety centre on passenger ships 298

Chapter II-2 - Construction - Fire Protection, Fire Detection, And Fire Extinction

Part A - General

Regulation 1
Application [1]

1 Application

1.4 Unless expressly provided otherwise, this chapter shall apply to ships constructed on or after 1 July 2012.

1.5 For the purpose of this chapter:

.3 the expression "ships constructed" means ships the keels of which are laid or which are at a similar stage of construction;

.4 the expression "all ships" means ships, irrespective of type, constructed before, on or after 1 July 2012; and

.5 a cargo ship, whenever built, which is converted to a passenger ship shall be treated as a passenger ship constructed on the date on which such a conversion commences.

1.6 For the purpose of this chapter, the expression "a similar stage of construction" means the stage at which:

.5 construction identifiable with a specific ship begins; and

.6 assembly of that ship has commenced comprising at least 50 tonnes or one per cent of the estimated mass of all structural material, whichever is less.

2 Applicable requirements to existing ships

2.1 Unless expressly provided otherwise, for ships constructed before 1 July 2012, the Administration shall ensure that the requirements which are applicable under chapter II-2 of the International Convention for the Safety of Life at Sea, 1974, as amended by resolutions MSC.1(XLV), MSC.6(48), MSC.13(57), MSC.22(59), MSC.24(60), MSC.27(61), MSC.31(63), MSC.57(67), MSC.99(73), MSC.134(76),

[1] The application date of 1 July 2012 was introduced by resolution MSC.308(88). However, this resolution amended, under chapter II-2, regulations II-2/3.23 (definition of "Fire Test Procedures Code") and II-2/7.4.1 (new subparagraph .3) only, and all other regulations with the original application date of 1 July 2002 were not amended.

This gazette is also available free online at www.gpwonline.co.za

MSC.194(80), MSC.201(81), MSC.216(82), MSC.256(84), MSC.269(85) and MSC.291(87) are complied with.

2.2 Ships constructed before 1 July 2002 shall also comply with:

.1 paragraphs 3, 6.5 and 6.7 as appropriate;

.2 regulations 13.3.4.2 to 13.3.4.5, 13.4.3 and Part E, except regulations 16.3.2.2 and 16.3.2.3 thereof, as appropriate, not later than the date of the first survey [2] after 1 July 2002;

.3 regulations 10.4.1.3 and 10.6.4 for new installations only

.4 regulation 10.5.6 not later than 1 October 2005 for passenger ships of 2,000 gross tonnage and above;

.5 regulations 5.3.1.3.2 and 5.3.4 to passenger ships not later than the date of the first survey after 1 July 2008, and

.6 regulation 4.5.7.1.

2.3 Ships constructed on or after 1 July 2002 and before 1 July 2010 shall comply with paragraphs 7.1.1, 7.4.4.2, 7.4.4.3 and 7.5.2.1.2 of regulation 9, as adopted by resolution MSC.99(73).

2.4 The following ships, with cargo spaces intended for the carriage of packaged dangerous goods, shall comply with regulation 19.3, except when carrying dangerous goods specified as classes 6.2 and 7 and dangerous goods in limited quantities [3] and excepted quantities [4] in accordance with tables 19.1 and 19.3, not later than the date of the first renewal survey on or after the 1 January 2011:

.1 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 September 1984 but before 1 January 2011; and

.2 cargo ships of less than 500 gross tonnage constructed on or after 1 February 1992 but before 1 January 2011,

and notwithstanding these provisions:

.3 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 September 1984 but before 1 July 1986 need not comply with regulation 19.3.3 provided that they comply with regulation 54.2.3 as adopted by resolution MSC.1(XLV);

.4 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 July 1986 but before 1 February 1992 need not comply with regulation 19.3.3 provided that they comply with regulation 54.2.3 as adopted by resolution MSC.6(48);

.5 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 September 1984 but before 1 July 1998 need not comply with regulations 19.3.10.1 and 19.3.10.2; and

[2] Refer to the *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

[3] Refer to chapter 3.4 of the IMDG Code.

[4] Refer to chapter 3.5 of the IMDG Code.

This gazette is also available free online at **www.gpwonline.co.za**

.6 cargo ships of less than 500 gross tonnage constructed on or after 1 February 1992 but before 1 July 1998 need not comply with regulations 19.3.10.1 and 19.3.10.2.

.7 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 February 1992 but before 1 July 2002 need not comply with regulation 19.3.3 provided that they comply with regulation 54.2.3 as adopted by resolution MSC.13(57); and

.8 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 September 1984 but before 1 July 2002 need not comply with regulations 19.3.1, 19.3.5, 19.3.6, 19.3.9, provided that they comply with regulations 54.2.1, 54.2.5, 54.2.6, 54.2.9 as adopted by resolution MSC.1(XLV).

2.5 Ships constructed before 1 July 2012 shall also comply with regulation 10.10.1.2, as adopted by resolution MSC.338(91).

2.6 Vehicle carriers constructed before 1 January 2016, including those constructed before 1 July 2012, shall comply with paragraph 2.2 of regulation 20-1, as adopted by resolution MSC.365(93).

2.7 Tankers constructed before 1 January 2016, including those constructed before 1 July 2012, shall comply with regulation 16.3.3 except 16.3.3.3.

2.8 Regulations 4.5.5.1.1 and 4.5.5.1.3 apply to ships constructed on or after 1 July 2002 but before 1 January 2016, and regulation 4.5.5.2.1 applies to all ships constructed before 1 January 2016.

2.9 Regulation 10.5.1.2.2, as amended by resolution MSC.409(97), applies to ships constructed before 1 January 2020, including those constructed before 1 July 2012.

3 Repairs, alterations, modifications and outfitting

3.1 All ships which undergo repairs, alterations, modifications and outfitting related thereto shall continue to comply with at least the requirements previously applicable to these ships. Such ships, if constructed before 1 July 2012, shall, as a rule, comply with the requirements for ships constructed on or after that date to at least the same extent as they did before undergoing such repairs, alterations, modifications or outfitting.

3.2 Repairs, alterations and modifications which substantially alter the dimensions of a ship or the passenger accommodation spaces, or substantially increase a ship' s service life and outfitting related thereto shall meet the requirements for ships constructed on or after 1 July 2012 in so far as the Administration deems reasonable and practicable.

4 Exemptions

4.1 The Administration may, if it considers that the sheltered nature and conditions of the voyage are such as to render the application of any specific requirements of this

This gazette is also available free online at **www.gpwonline.co.za**

chapter unreasonable or unnecessary, exempt [5] from those requirements individual ships or classes of ships entitled to fly the flag of its State, provided that such ships, which, in the course of their voyage, do not sail at distances of more than 20 miles from the nearest land.

4.2 In the case of passenger ships which are employed in special trades for the carriage of large numbers of special trade passengers, such as the pilgrim trade, the Administration, if satisfied that it is impracticable to enforce compliance with the requirements of this chapter, may exempt such ships from those requirements, provided that they comply fully with the provisions of:

.1 the rules annexed to the Special Trade Passenger Ships Agreement, 1971; and

.2 the rules annexed to the Protocol on Space Requirements for Special Trade Passenger Ships, 1973.

5 Applicable requirements depending on ship type

Unless expressly provided otherwise:

.1 requirements not referring to a specific ship type shall apply to ships of all types; and

.2 requirements referring to "tankers" shall apply to tankers subject to the requirements specified in paragraph 6 below.

6 Application of requirements for tankers

6.1 Requirements for tankers in this chapter shall apply to tankers carrying crude oil or petroleum products having a flashpoint not exceeding 60ºC (closed cup test), as determined by an approved flashpoint apparatus, and a Reid vapour pressure which is below the atmospheric pressure or other liquid products having a similar fire hazard.

6.2 Where liquid cargoes other than those referred to in paragraph 6.1 or liquefied gases which introduce additional fire hazards are intended to be carried, additional safety measures shall be required, having due regard to the provisions of the International Bulk Chemical Code, as defined in regulation VII/8.1, the Bulk Chemical Code, the International Gas Carrier Code, as defined in regulation VII/11.1, and the Gas Carrier Code, as appropriate.

6.2.1 A liquid cargo with a flashpoint of less than 60ºC for which a regular foam fire-fighting system complying with the Fire Safety Systems Code is not effective, is considered to be a cargo introducing additional fire hazards in this context. The following additional measures are required:

.1 the foam shall be of alcohol resistant type;

[5] Refer to *Port State concurrence with SOLAS exemptions* (MSC/Circ.606).

This gazette is also available free online at **www.gpwonline.co.za**

.2 the type of foam concentrates for use in chemical tankers shall be to the satisfaction of the Administration taking into account the guidelines developed by the Organization; [6]

.3 the capacity and application rates of the foam extinguishing system shall comply with chapter 11 of the International Bulk Chemical Code, except that lower application rates may be accepted based on performance tests. For tankers fitted with inert gas systems, a quantity of foam concentrate sufficient for 20 min of foam generation may be accepted; [7]

6.2.2 For the purpose of this regulation, a liquid cargo with a vapour pressure greater than 1.013 bar absolute at 37.8ºC is considered to be a cargo introducing additional fire hazards. Ships carrying such substances shall comply with paragraph 15.14 of the International Bulk Chemical Code. When ships operate in restricted areas and at restricted times, the Administration concerned may agree to waive the requirements for refrigeration systems in accordance with paragraph 15.14.3 of the International Bulk Chemical Code.

6.3 Liquid cargoes with a flashpoint exceeding 60ºC other than oil products or liquid cargoes subject to the requirements of the International Bulk Chemical Code are considered to constitute a low fire risk, not requiring the protection of a fixed foam extinguishing system.

6.4 Tankers carrying petroleum products with a flashpoint exceeding 60ºC (closed cup test), as determined by an approved flashpoint apparatus, shall comply with the requirements provided in regulations 10.2.1.4.4. and 10.10.2.3 and the requirements for cargo ships other than tankers, except that, in lieu of the fixed fire extinguishing system required in regulation 10.7, they shall be fitted with a fixed deck foam system which shall comply with the provisions of the Fire Safety Systems Code.

6.5 Combination carriers constructed before, on or after 1 July 2002 shall not carry cargoes other than oil unless all cargo spaces are empty of oil and gas-freed or unless the arrangements provided in each case have be approved by the Administration taking into account the guidelines developed by the Organization. [8]

6.6 Chemical tankers and gas carriers shall comply with the requirements for tankers, except where alternative and supplementary arrangements are provided to the satisfaction of the Administration, having due regard to the provisions of the International Bulk Chemical Code and the International Gas Carrier Code, as appropriate.

6.7 The requirements of regulations 4.5.10.1.1 and 4.5.10.1.4, and a system for continuous monitoring of the concentration of hydrocarbon gases shall be fitted on all tankers constructed before 1 July 2002 by the date of the first scheduled dry-docking after 1 July 2002, but not later than 1 July 2005. Sampling points or detector heads

[6] Refer to *Revised Guidelines for the performance and testing criteria, and surveys of foam concentrates for fixed fire-extinguishing systems* (MSC.1/Circ.1312 and Corr.1).

[7] Refer to *Information on flashpoint and recommended fire- fighting media for chemicals to which neither the IBC nor BCH Codes apply* (MSC/Circ.553).

[8] Refer to *Guidelines for inert gas systems* (MSC/Circ.353), as amended by MSC/Circ.387

This gazette is also available free online at **www.gpwonline.co.za**

shall be located in suitable positions in order that potentially dangerous leakages are readily detected. When the hydrocarbon gas concentration reaches a pre-set level which shall not be higher than 10% of the lower flammable limit, a continuous audible and visual alarm signal shall be automatically effected in the pump-room and cargo control room to alert personnel to the potential hazard. However, existing monitoring systems already fitted having a pre-set level not greater than 30% of the lower flammable limit may be accepted.

Regulation 2
Fire safety objectives and functional requirements

1 Fire safety objectives

1.1 The fire safety objectives of this chapter are to:

.1 prevent the occurrence of fire and explosion;

.2 reduce the risk to life caused by fire;

.3 reduce the risk of damage caused by fire to the ship, its cargo and the environment;

.4 contain, control and suppress fire and explosion in the compartment of origin; and

.5 provide adequate and readily accessible means of escape for passengers and crew.

2 Functional requirements

2.1 In order to achieve the fire safety objectives set out in paragraph 1 above, the following functional requirements are embodied in the regulations of this chapter as appropriate:

.1 division of the ship into main vertical and horizontal zones by thermal and structural boundaries;

.2 separation of accommodation spaces from the remainder of the ship by thermal and structural boundaries;

.3 restricted use of combustible materials;

.4 detection of any fire in the zone of origin;

.5 containment and extinction of any fire in the space of origin;

.6 protection of means of escape and access for fire-fighting;

.7 ready availability of fire-extinguishing appliances; and

.8 minimization of possibility of ignition of flammable cargo vapour.

3 Achievement of the fire safety objectives

The fire safety objectives set out in paragraph 1 above shall be achieved by ensuring compliance with the prescriptive requirements specified in parts B, C, D, E or G, or by

This gazette is also available free online at **www.gpwonline.co.za**

alternative design and arrangements which comply with Part F. A ship shall be considered to meet the functional requirements set out in paragraph 2 and to achieve the fire safety objectives set out in paragraph 1 when either:

.1 the ship' s designs and arrangements, as a whole, complies with the relevant prescriptive requirements in parts B, C, D, E or G;

.2 the ship' s designs and arrangements, as a whole, have been reviewed and approved in accordance with part F; or

.3 part(s) of the ship' s designs and arrangements have been reviewed and approved in accordance with part F and the remaining parts of the ship comply with the relevant prescriptive requirements in parts B, C, D, E or G.

Regulation 3
Definitions

For the purpose of this chapter, unless expressly provided otherwise, the following definitions shall apply:

1 *Accommodation spaces* are those spaces used for public spaces, corridors, lavatories, cabins, offices, hospitals, cinemas, game and hobby rooms, barber shops, pantries containing no cooking appliances and similar spaces;

2 *"A" class division* are those divisions formed by bulkheads and decks which comply with the following criteria:

.1 they are constructed of steel or other equivalent material;

.2 they are suitably stiffened;

.3 they are insulated with approved non-combustible materials such that the average temperature of the unexposed side will not rise more than 140ºC above the original temperature, nor will the temperature, at any one point, including any joint, rise more than 180ºC above the original temperature, within the time listed below:

class "A-60"	60 min
class "A-30"	30 min
class "A-15"	15 min
class "A-0"	0 min

.4 they are constructed as to be capable of preventing the passage of smoke and flame to the end of the one-hour standard fire test; and

.5 the Administration has required a test of a prototype bulkhead or deck in accordance with the Fire Test Procedures Code to ensure that it meets the above requirements for integrity and temperature rise.

3 *Atriums* are public spaces within a single main vertical zone spanning three or more open decks.

This gazette is also available free online at **www.gpwonline.co.za**

4 *"B" class divisions* are those divisions formed by bulkheads, decks, ceilings or linings which comply with the following criteria:

.1 they are constructed of approved non-combustible materials and all materials used in the construction and erection of "B" class divisions are non-combustible, with the exception that combustible veneers may be permitted provided they meet other appropriate requirements of this chapter;

.2 they have an insulation value such that the average temperature of the unexposed side will not rise more than 140ºC above the original temperature, nor will the temperature at any one point, including any joint, rise more than 225ºC above the original temperature, within the time listed below:

class "B-15" 15 min

class "B-0" 0 min

.3 they are constructed as to be capable of preventing the passage of flame to the end of the first half hour of the standard fire test; and

.4 the Administration has required a test of a prototype division in accordance with the Fire Test Procedures Code to ensure that it meets the above requirements for integrity and temperature rise.

5 *Bulkhead deck* is the uppermost deck up to which the transverse watertight bulkheads are carried

6 *Cargo area* is that part of the ship that contains cargo holds, cargo tanks, slop tanks and cargo pump-rooms including pump-rooms, cofferdams, ballast and void spaces adjacent to cargo tanks and also deck areas throughout the entire length and breadth of the part of the ship over the above-mentioned spaces.

7 *Cargo ship* is a ship as defined in regulation I/2(g).

8 *Cargo spaces* are spaces used for cargo, cargo oil tanks, tanks for other liquid cargo and trunks to such spaces.

9 *Central control station* is a control station in which the following control and indicator functions are centralized:

.1 fixed fire detection and fire alarm systems;

.2 automatic sprinkler, fire detection and fire alarm systems;

.3 fire door indicator panels;

.4 fire door closure;

.5 watertight door indicator panels;

.6 watertight door closures;

.7 ventilation fans;

.8 general/fire alarms;

.9 communication systems including telephones; and

This gazette is also available free online at **www.gpwonline.co.za**

.10 microphones to public address systems.

10 *"C" class divisions* are divisions constructed of approved non-combustible materials. They need meet neither requirements relative to the passage of smoke and flame nor limitations relative to the temperature rise. Combustible veneers are permitted provided they meet the requirements of this chapter.

11 *Chemical tanker* is a cargo ship constructed or adapted and used for the carriage in bulk of any liquid product of a flammable nature listed in chapter 17 of the International Bulk Chemical Code, as defined in regulation VII/8.1.

12 *Closed ro-ro spaces* are ro-ro spaces which are neither open ro-ro spaces nor weather decks.

13 *Closed vehicle spaces* are vehicle spaces which are neither open vehicle spaces nor weather decks.

14 *Combination carrier* is a cargo ship designed to carry both oil and solid cargoes in bulk.

15 *Combustible material* is any material other than a non- combustible material.

16 *Continuous "B" class ceilings or linings* are those "B" class ceilings or linings which terminate at an "A" or "B" class division.

17 *Continuously manned central control station* is a central control station which is continuously manned by a responsible member of the crew.

18 *Control stations* are those spaces in which the ship's radio or main navigating equipment or the emergency source of power is located or where the fire recording or fire control equipment is centralized. Spaces where the fire recording or fire control equipment is centralized are also considered to be a "fire control station".

19 *Crude oil* is any oil occurring naturally in the earth whether or not treated to render it suitable for transportation and includes crude oil where certain distillate fractions may have been removed from or added to.

20 *Dangerous goods* are those goods referred to in the IMDG Code, as defined in regulation VII/1.1.

21 *Deadweight* is the difference in tonnes between the displacement of a ship in water of a specific gravity of 1.025 at the load waterline corresponding to the assigned summer freeboard and the lightweight of the ship.

22 *Fire Safety Systems Code* means the International Code for Fire Safety Systems as adopted by the Maritime Safety Committee of the Organization by resolution MSC.98(73), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I thereof.

This gazette is also available free online at **www.gpwonline.co.za**

23 *Fire Test Procedures Code* means the International Code for Application of Fire Test Procedures, 2010 (2010 FTP Code) as adopted by the Maritime Safety Committee of the Organization by resolution MSC.307(88) , as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I. [9]

24 *Flashpoint* is the temperature in degrees Celsius (closed cup test) at which a product will give off enough flammable vapour to be ignited, as determined by an approved flashpoint apparatus.

25 *Gas carrier* is a cargo ship constructed or adapted and used for the carriage in bulk of any liquefied gas or other products of a flammable nature listed in chapter 19 of the International Gas Carrier Code, as defined in regulation VII/11.1.

26 *Helideck* is a purpose-built helicopter landing area located on a ship including all structure, fire-fighting appliances and other equipment necessary for the safe operation of helicopters.

27 *Helicopter facility* is a helideck including any refuelling and hangar facilities.

28 *Lightweight* is the displacement of a ship in tonnes without cargo, fuel, lubricating oil, ballast water, fresh water and feedwater in tanks, consumable stores, and passengers and crew and their effects.

29 *Low flame-spread* means that the surface thus described will adequately restrict the spread of flame, this being determined in accordance with the Fire Test Procedures Code.

30 *Machinery spaces* are machinery spaces of category A and other spaces containing propulsion machinery, boilers, oil fuel units, steam and internal combustion engines, generators and major electrical machinery, oil filling stations, refrigerating, stabilizing, ventilation and air conditioning machinery, and similar spaces, and trunks to such spaces.

31 *Machinery spaces of category A* are those spaces and trunks to such spaces which contain either:

.1 internal combustion machinery used for main propulsion;

.2 internal combustion machinery used for purposes other than main propulsion where such machinery has in the aggregate a total power output of not less than 375 kW; or

.3 any oil-fired boiler or oil fuel unit, or any oil-fired equipment other than boilers, such as inert gas generators, incinerators, etc.

[9] The list of laboratories recognized by Administrations which are able to conduct fire tests in acc ordance with the provisions of the 2010 FTP Code are circulated through the Global Integrated Shipping Information System (GISIS) (resolution A.1074(28)) under the module called “Test Laboratories and Halon Facilities”.

This gazette is also available free online at **www.gpwonline.co.za**

32 *Main vertical zones* are those sections into which the hull, superstructure and deckhouses are divided by "A" class divisions, the mean length and width of which on any deck does not in general exceed 40 m.

33 *Non-combustible material* is a material which neither burns nor gives off flammable vapours in sufficient quantity for self-ignition when heated to approximately 750ºC, this being determined in accordance with the Fire Test Procedures Code.

34 *Oil fuel unit* is the equipment used for the preparation of oil fuel for delivery to an oil-fired boiler, or equipment used for the preparation for delivery of heated oil to an internal combustion engine, and includes any oil pressure pumps, filters and heaters dealing with oil at a pressure of more than 0.18 N/mm^2.

35 *Open ro-ro spaces* are those ro-ro spaces that are either open at both ends or have an opening at one end, and are provided with adequate natural ventilation effective over their entire length through permanent openings distributed in the side plating or deckhead or from above, having a total area of at least 10% of the total area of the space sides.

36 *Open vehicle spaces* are those vehicle spaces either open at both ends, or have an opening at one end and are provided with adequate natural ventilation effective over their entire length through permanent openings distributed in the side plating or deckhead or from above, having a total area of at least 10% of the total area of the space sides.

37 *Passenger ship* is a ship as defined in regulation I/2(f).

38 *Prescriptive requirements* means the construction characteristics, limiting dimensions, or fire safety systems specified in parts B, C, D, E or G.

39 *Public spaces* are those portions of the accommodation which are used for halls, dining rooms, lounges and similar permanently enclosed spaces.

40 *Rooms containing furniture and furnishings of restricted fire risk*, for the purpose of regulation 9, are those rooms containing furniture and furnishings of restricted fire risk (whether cabins, public spaces, offices or other types of accommodation) in which:

.1 case furniture such as desks, wardrobes, dressing tables, bureaux, dressers, are constructed entirely of approved non-combustible materials, except that a combustible veneer not exceeding 2 mm may be used on the working surface of such articles;

.2 free-standing furniture such as chairs, sofas, tables, are constructed with frames of non-combustible materials;

.3 draperies, curtains and other suspended textile materials have qualities of resistance to the propagation of flame not inferior to those of wool having a mass of mass 0.8 kg/m^2, this being determined in accordance with the Fire Test Procedures Code;

.4 floor coverings have low flame-spread characteristics;

This gazette is also available free online at **www.gpwonline.co.za**

.5 exposed surfaces of bulkheads, linings and ceilings have low flame-spread characteristics;

.6 upholstered furniture has qualities of resistance to the ignition and propagation of flame, this being determined in accordance with the Fire Test Procedures Code; and

.7 bedding components have qualities of resistance to the ignition and propagation of flame, this being determined in accordance with the Fire Test Procedures Code.

41 *Ro-ro spaces* are spaces not normally subdivided in any way and normally extending to either a substantial length or the entire length of the ship in which motor vehicles with fuel in their tanks for their own propulsion and/or goods (packaged or in bulk, in or on rail or road cars, vehicles (including road or rail tankers), trailers, containers, pallets, demountable tanks or in or on similar stowage units or other receptacles) can be loaded and unloaded normally in a horizontal direction.

42 *Ro-ro passenger ship* means a passenger ship with ro-ro spaces or special category spaces.

43 *Steel or other equivalent material* means any non-combustible material which, by itself or due to insulation provided, has structural and integrity properties equivalent to steel at the end of the applicable exposure to the standard fire test (e.g. aluminium alloy with appropriate insulation).

44 *Sauna* is a hot room with temperatures normally varying between 80 degrees - 120ºC where the heat is provided by a hot surface (e.g. by an electrically-heated oven). The hot room may also include the space where the oven is located and adjacent bathrooms.

45 *Service spaces* are those spaces used for galleys, pantries containing cooking appliances, lockers, mail and specie rooms, storerooms, workshops other than those forming part of the machinery spaces, and similar spaces and trunks to such spaces.

46 *Special category spaces* are those enclosed vehicle spaces above and below the bulkhead deck, into and from which vehicles can be driven and to which passengers have access. Special category spaces may be accommodated on more than one deck provided that the total overall clear height for vehicles does not exceed 10 m.

47 *A standard fire test* is a test in which specimens of the relevant bulkheads or decks are exposed in a test furnace to temperatures corresponding approximately to the standard time- temperature curve in accordance with the test method specified in the Fire Test Procedures Code.

48 *Tanker* is a ship as defined in regulation I/2(h).

49 *Vehicle spaces* are cargo spaces intended for carriage of motor vehicles with fuel in their tanks for their own propulsion.

This gazette is also available free online at **www.gpwonline.co.za**

50 *Weather deck* is a deck which is completely exposed to the weather from above and from at least two sides.

51 *Safe area* in the context of a casualty is, from the perspective of habitability, any area(s) which is not flooded or which is outside the main vertical zone(s) in which a fire has occurred such that it can safely accommodate all persons onboard to protect them from hazards to life or health and provide them with basic services.

52 *Safety centre* is a control station dedicated to the management of emergency situations. Safety systems' operation, control and/or monitoring are an integral part of the safety centre.

53[10] *Cabin balcony* is an open deck space which is provided for the exclusive use of the occupants of a single cabin and has direct access from such a cabin.

54 *Fire damper* is, for the purpose of implementing regulation 9.7 adopted by resolution MSC.365(93), as may be amended, a device installed in a ventilation duct, which under normal conditions remains open allowing flow in the duct, and is closed during a fire, preventing the flow in the duct to restrict the passage of fire. In using the above definition the following terms may be associated:

.1 *automatic fire damper* is a fire damper that closes independently in response to exposure to fire products;

.2 *manual fire damper* is a fire damper that is intended to be opened or closed by the crew by hand at the damper itself; and

.3 *remotely operated fire damper* is a fire damper that is closed by the crew through a control located at a distance away from the controlled damper.

55 *Smoke damper* is, for the purpose of implementing regulation 9.7 adopted by resolution MSC.365(93), as may be amended, a device installed in a ventilation duct, which under normal conditions remains open allowing flow in the duct, and is closed during a fire, preventing the flow in the duct to restrict the passage of smoke and hot gases. A smoke damper is not expected to contribute to the integrity of a fire rated division penetrated by a ventilation duct. In using the above definition the following terms may be associated:

.1 *automatic smoke damper* is a smoke damper that closes independently in response to exposure to smoke or hot gases;

.2 *manual smoke damper* is a smoke damper intended to be opened or closed by the crew by hand at the damper itself; and

.3 *remotely operated smoke damper* is a smoke damper that is closed by the crew through a control located at a distance away from the controlled damper.

56 *Vehicle carrier* means a cargo ship which only carries cargo in ro-ro spaces or vehicle spaces, and which is designed for the carriage of unoccupied motor vehicles without cargo, as cargo.

[10] Regulations II-2/3.51 and II-2/3.52 are expected to enter into force 1 July 2010. Refer to resolution MSC.216(82), annex 3.

This gazette is also available free online at **www.gpwonline.co.za**

57 *Helicopter landing area* is an area on a ship designated for occasional or emergency landing of helicopters but not designed for routine helicopter operations.

58 *Winching area* is a pick-up area provided for the transfer by helicopter of personnel or stores to or from the ship, while the helicopter hovers above the deck.

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Prevention Of Fire And Explosion [11]

Regulation 4
Probability of ignition

1 Purpose

The purpose of this regulation is to prevent the ignition of combustible materials or flammable liquids. For this purpose, the following functional requirements shall be met:

.1 means shall be provided to control leaks of flammable liquids;

.2 means shall be provided to limit the accumulation of flammable vapours;

.3 the ignitability of combustible materials shall be restricted;

.4 ignition sources shall be restricted;

.5 ignition sources shall be separated from combustible materials and flammable liquids; and

.6 the atmosphere in cargo tanks shall be maintained out of the explosive range.

2 Arrangements for oil fuel, lubrication oil and other flammable oils

2.1 Limitations in the use of oils as fuel

The following limitations shall apply to the use of oil as fuel:

.1 except as otherwise permitted by this paragraph, no oil fuel with a flashpoint of less than 60°C shall be used; [12]

.2 in emergency generators oil fuel with a flashpoint of not less than 43°C may be used;

.3 the use of oil fuel having a flashpoint of less than 60°C but not less than 43°C may be permitted (e.g., for feeding the emergency fire pump' s engines and the auxiliary machines which are not located in the machinery spaces of category A) subject to the following:

.1 fuel oil tanks except those arranged in double bottom compartments shall be located outside of machinery spaces of category A;

.2 provisions for the measurement of oil temperature are provided on the suction pipe of the oil fuel pump;

.3 stop valves and/or cocks are provided on the inlet side and outlet side of the oil fuel strainers; and

.4 pipe joints of welded construction or of circular cone type or spherical type union joint are applied as much as possible;

[11] Refer to *Guidelines for measures to prevent fires in engine-rooms and cargo pump-rooms* (MSC.1/Circ.1321).

[12] Refer to *Recommended procedures to prevent the illegal or accidental use of low flashpoint cargo oil as fuel* (resolution A.565(14)).

This gazette is also available free online at **www.gpwonline.co.za**

.4 in cargo ships, to which part G of chapter II-1 is not applicable, the use of oil fuel having a lower flashpoint than otherwise specified in paragraph 2.1.1, for example crude oil, may be permitted provided that such fuel is not stored in any machinery space and subject to the approval by the Administration of the complete installation; and

.5 in ships, to which part G of chapter II-1 is applicable, the use of oil fuel having a lower flashpoint than otherwise specified in paragraph 2.1.1 is permitted.

2.2 Arrangements for oil fuel

In a ship in which oil fuel is used, the arrangements for the storage, distribution and utilization of the oil fuel shall be such as to ensure the safety of the ship and persons on board and shall at least comply with the following provisions.

2.2.1 *Location of oil fuel systems*

As far as practicable, parts of the oil fuel system containing heated oil under pressure exceeding 0.18 N/mm^2 shall not be placed in a concealed position such that defects and leakage cannot readily be observed. The machinery spaces in way of such parts of the oil fuel system shall be adequately illuminated.

2.2.2 *Ventilation of machinery spaces*

The ventilation of machinery spaces shall be sufficient under normal conditions to prevent accumulation of oil vapour.

2.2.3 *Oil fuel tanks*

2.2.3.1 Fuel oil, lubrication oil and other flammable oils shall not be carried in forepeak tanks.

2.2.3.2 As far as practicable, oil fuel tanks shall be part of the ships structure and shall be located outside machinery spaces of category A. Where oil fuel tanks, other than double bottom tanks, are necessarily located adjacent to or within machinery spaces of category A, at least one of their vertical sides shall be contiguous to the machinery space boundaries, and shall preferably have a common boundary with the double bottom tanks, and the area of the tank boundary common with the machinery spaces shall be kept to a minimum. [13] Where such tanks are situated within the boundaries of machinery spaces of category A they shall not contain oil fuel having a flashpoint of less than 60°C. In general, the use of free- standing oil fuel tanks shall be avoided. When such tanks are employed their use shall be prohibited in category A machinery spaces on passenger ships. Where permitted, they shall be placed in an oil- tight spill tray of ample size having a suitable drain pipe leading to a suitably sized spill oil tank.

2.2.3.3 No oil fuel tank shall be situated where spillage or leakage therefrom can constitute a fire or explosion hazard by falling on heated surfaces.

[13] Refer to Unified interpretations of SOLAS chapter II-2 (MSC.1/Circ.1322).

This gazette is also available free online at **www.gpwonline.co.za**

2.2.3.4 Oil fuel pipes, which, if damaged, would allow oil to escape from a storage, settling or daily service tank having a capacity of 500 l and above situated above the double bottom, shall be fitted with a cock or valve directly on the tank capable of being closed from a safe position outside the space concerned in the event of a fire occurring in the space in which such tanks are situated. In the special case of deep tanks situated in any shaft or pipe tunnel or similar space, valves on the tank shall be fitted, but control in the event of fire may be effected by means of an additional valve on the pipe or pipes outside the tunnel or similar space. If such an additional valve is fitted in the machinery space it shall be operated from a position outside this space. The controls for remote operation of the valve for the emergency generator fuel tank shall be in a separate location from the controls for remote operation of other valves for tanks located in machinery spaces.

2.2.3.5 Safe and efficient means of ascertaining the amount of oil fuel contained in any oil fuel tank shall be provided.

2.2.3.5.1 Where sounding pipes are used, they shall not terminate in any space where the risk of ignition of spillage from the sounding pipe might arise. In particular, they shall not terminate in passenger or crew spaces. As a general rule, they shall not terminate in machinery spaces. However, where the Administration considers that these latter requirements are impracticable, it may permit termination of sounding pipes in machinery spaces on condition that all of the following requirements are met:

.1 an oil-level gauge is provided meeting the requirements of paragraph 2.2.3.5.2;

.2 the sounding pipes terminate in locations remote from ignition hazards unless precautions are taken, such as the fitting of effective screens, to prevent the oil fuel in the case of spillage through the terminations of the sounding pipes from coming into contact with a source of ignition; and

.3 the termination of sounding pipes are fitted with self- closing blanking devices and with a small-diameter self- closing control cock located below the blanking device for the purpose of ascertaining before the blanking device is opened that oil fuel is not present. Provisions shall be made so as to ensure that any spillage of oil fuel through the control cock involves no ignition hazard.

2.2.3.5.2 Other oil-level gauges may be used in place of sounding pipes subject to the following conditions:

.1 in passenger ships, such gauges shall not require penetration below the top of the tank and their failure or overfilling of the tanks shall not permit release of fuel; and

.2 in cargo ships, the failure of such gauges or overfilling of the tank shall not permit release of fuel into the space. The use of cylindrical gauge glasses is prohibited. The Administration may permit the use of oil-level gauges with flat glasses and self-closing valves between the gauges and fuel tanks.

2.2.3.5.3 The means prescribed in paragraph 2.2.3.5.2 which are acceptable to the Administration shall be maintained in the proper condition to ensure their continued accurate functioning in service.

This gazette is also available free online at **www.gpwonline.co.za**

2.2.4 *Prevention of overpressure*

Provisions shall be made to prevent overpressure in any oil tank or in any part of the oil fuel system, including the filling pipes served by pumps on board. Air and overflow pipes and relief valves shall discharge to a position where there is no risk of fire or explosion from the emergence of oils and vapour and shall not lead into crew spaces, passenger spaces nor into special category spaces, closed ro-ro cargo spaces, machinery spaces or similar spaces.

2.2.5 *Oil fuel piping*

2.2.5.1 Oil fuel pipes and their valves and fittings shall be of steel or other approved material, except that restricted use of flexible pipes shall be permissible in positions where the Administration is satisfied that they are necessary. [14] Such flexible pipes and end attachments shall be of approved fire-resisting materials of adequate strength and shall be constructed to the satisfaction of the Administration. For valves, fitted to oil fuel tanks and which are under static pressure, steel or spheroidal-graphite cast iron may be accepted. However, ordinary cast iron valves may be used in piping systems where the design pressure is lower than 7 bar and the design temperature is below 60ºC.

2.2.5.2 External high-pressure fuel delivery lines between the high- pressure fuel pumps and fuel injectors shall be protected with a jacketed piping system capable of containing fuel from a high- pressure line failure. A jacketed pipe incorporates an outer pipe into which the high-pressure fuel pipe is placed, forming a permanent assembly. The jacketed piping system shall include a means for collection of leakages and arrangements shall be provided with an alarm in case of a fuel line failure.

2.2.5.3 Oil fuel lines shall not be located immediately above or near units of high temperature including boilers, steam pipelines, exhaust manifolds, silencers or other equipment required to be insulated by paragraph 2.2.6. As far as practicable, oil fuel lines shall be arranged far apart from hot surfaces, electrical installations or other sources of ignition and shall be screened or otherwise suitably protected to avoid oil spray or oil leakage onto the sources of ignition. The number of joints in such piping systems shall be kept to a minimum.

2.2.5.4 Components of a diesel engine fuel system shall be designed considering the maximum peak pressure which will be experienced in service, including any high pressure pulses which are generated and transmitted back into the fuel supply and spill lines by the action of fuel injection pumps. Connections within the fuel supply and spill lines shall be constructed having regard to their ability to prevent pressurized oil fuel leaks while in service and after maintenance.

2.2.5.5 In multi-engine installations which are supplied from the same fuel source, means of isolating the fuel supply and spill piping to individual engines, shall be provided. The means of isolation shall not affect the operation of the other engines and

[14] Refer to recommendations published by the International Organization for Standardization, in particular publications ISO 15540:1999, Fire resistance of hose assemblies – test methods and ISO 15541:1999, Fire resistance of hose assemblies – requirements for the test bench.

This gazette is also available free online at **www.gpwonline.co.za**

shall be operable from a position not rendered inaccessible by a fire on any of the engines.

2.2.5.6 Where the Administration may permit the conveying of oil and combustible liquids through accommodation and service spaces, the pipes conveying oil or combustible liquids shall be of a material approved by the Administration having regard to the fire risk.

2.2.6 *Protection of high temperature surfaces*

2.2.6.1 Surfaces with temperatures above 220ºC which may be impinged as a result of a fuel system failure shall be properly insulated.

2.2.6.2 Precautions shall be taken to prevent any oil that may escape under pressure from any pump, filter or heater from coming into contact with heated surfaces.

2.3 Arrangements for lubricating oil

2.3.1 The arrangements for the storage, distribution and utilization of oil used in pressure lubrication systems shall be such as to ensure the safety of the ship and persons on board. The arrangements made in machinery spaces of category A, and whenever practicable in other machinery spaces, shall at least comply with the provisions of paragraphs 2.2.1, 2.2.3.3, 2.2.3.4, 2.2.3.5, 2.2.4, 2.2.5.1, 2.2.5.3 and 2.2.6, except that:

.1 this does not preclude the use of sight-flow glasses in lubricating systems provided that they are shown by testing to have a suitable degree of fire resistance; and

.2 sounding pipes may be authorized in machinery spaces; however, the requirements of paragraphs 2.2.3.5.1.1 and 2.2.3.5.1.3 need not be applied on condition that the sounding pipes are fitted with appropriate means of closure.

2.3.2 The provisions of paragraph 2.2.3.4 shall also apply to lubricating oil tanks except those having a capacity less than 500 l, storage tanks on which valves are closed during the normal operation mode of the ship, or where it is determined that an unintended operation of a quick closing valve on the oil lubricating tank would endanger the safe operation of the main propulsion and essential auxiliary machinery.

2.4 Arrangements for other flammable oils

The arrangements for the storage, distribution and utilization of other flammable oils employed under pressure in power transmission systems, control and activating systems and heating systems shall be such as to ensure the safety of the ship and persons on board. Suitable oil collecting arrangements for leaks shall be fitted below hydraulic valves and cylinders. In locations where means of ignition are present, such arrangements shall at least comply with the provisions of paragraphs 2.2.3.3, 2.2.3.5, 2.2.5.3 and 2.2.6 and with the provisions of paragraphs 2.2.4 and 2.2.5.1 in respect of strength and construction.

This gazette is also available free online at **www.gpwonline.co.za**

2.5 Arrangements for oil fuel in periodically unattended machinery spaces

In addition to the requirements of paragraphs 2.1 to 2.4, the oil fuel and lubricating oil systems in a periodically unattended machinery space shall comply with the following:

.1 where daily service oil fuel tanks are filled automatically, or by remote control, means shall be provided to prevent overflow spillages. Other equipment which treats flammable liquids automatically (e.g. oil fuel purifiers) which, whenever practicable, shall be installed in a special space reserved for purifiers and their heaters, shall have arrangements to prevent overflow spillages; and

.2 where daily service oil fuel tanks or settling tanks are fitted with heating arrangements, a high temperature alarm shall be provided if the flashpoint of the oil fuel can be exceeded.

3 Arrangements for gaseous fuel for domestic purpose

Gaseous fuel systems used for domestic purposes shall be approved by the Administration. Storage of gas bottles shall be located on the open deck or in a well ventilated space which opens only to the open deck.

4 Miscellaneous items of ignition sources and ignitability

4.1 Electric radiators

Electric radiators, if used, shall be fixed in position and so constructed as to reduce fire risks to a minimum. No such radiators shall be fitted with an element so exposed that clothing, curtains, or other similar materials can be scorched or set on fire by heat from the element.

4.2 Waste receptacles

Waste receptacles shall be constructed of non-combustible materials with no openings in the sides or bottom.

4.3 Insulation surfaces protected against oil penetration

In spaces where penetration of oil products is possible, the surface of insulation shall be impervious to oil or oil vapours.

4.4 Primary deck coverings

Primary deck coverings, if applied within accommodation and service spaces and control stations, or if applied on cabin balconies of passenger ships constructed on or after 1 July 2008, shall be of approved material which will not readily ignite, this being determined in accordance with the Fire Test Procedures Code.

5 Cargo areas of tankers

5.1 Separation of cargo oil tanks

This gazette is also available free online at **www.gpwonline.co.za**

5.1.1 Cargo pump-rooms, cargo tanks, slop tanks and cofferdams shall be positioned forward of machinery spaces. However, oil fuel bunker tanks need not be forward of machinery spaces. Cargo tanks and slop tanks shall be isolated from machinery spaces by cofferdams, cargo pump-rooms, oil bunker tanks or ballast tanks. Pump-rooms containing pumps and their accessories for ballasting those spaces situated adjacent to cargo tanks and slop tanks and pumps for oil fuel transfer, shall be considered as equivalent to a cargo pump-room within the context of this regulation provided that such pump-rooms have the same safety standard as that required for cargo pump-rooms. Pump-rooms intended solely for ballast or oil fuel transfer, however, need not comply with the requirements of regulation 10.9. The lower portion of the pump-room may be recessed into machinery spaces of category A to accommodate pumps, provided that the deck head of the recess is in general not more than one third of the moulded depth above the keel, except that in the case of ships of not more than 25,000 tonnes deadweight, where it can be demonstrated that for reasons of access and satisfactory piping arrangements this is impracticable, the Administration may permit a recess in excess of such height, but not exceeding one half of the moulded depth above the keel.

5.1.2 Main cargo control stations, control stations, accommodation and service spaces (excluding isolated cargo handling gear lockers) shall be positioned aft of cargo tanks, slop tanks, and spaces which isolate cargo or slop tanks from machinery spaces, but not necessarily aft of the oil fuel bunker tanks and ballast tanks, and shall be arranged in such a way that a single failure of a deck or bulkhead shall not permit the entry of gas or fumes from the cargo tanks into an accommodation space, main cargo control stations, control station, or service spaces. A recess provided in accordance with paragraph 5.1.1 need not be taken into account when the position of these spaces is being determined.

5.1.3 However, where deemed necessary, the Administration may permit main cargo control stations, control stations, accommodation and service spaces forward of the cargo tanks, slop tanks and spaces which isolate cargo and slop tanks from machinery spaces, but not necessarily forward of oil fuel bunker tanks or ballast tanks. Machinery spaces, other than those of category A, may be permitted forward of the cargo tanks and slop tanks provided they are isolated from the cargo tanks and slop tanks by cofferdams, cargo pump-rooms, oil fuel bunker tanks or ballast tanks, and have at least one portable fire extinguisher. In cases where they contain internal combustion machinery, one approved foam-type extinguisher of at least 45 l capacity or equivalent shall be arranged in addition to portable fire extinguishers. If operation of a semi-portable fire extinguisher is impracticable, this fire extinguisher may be replaced by two additional portable fire extinguishers. Accommodation spaces, main cargo control spaces, control stations and service spaces shall be arranged in such a way that a single failure of a deck or bulkhead shall not permit the entry of gas or fumes from the cargo tanks into such spaces. In addition, where deemed necessary for the safety or navigation of the ship, the Administration may permit machinery spaces containing internal combustion machinery not being main propulsion machinery having an output greater than 375 kW to be located forward of the cargo area provided the arrangements are in accordance with the provisions of this paragraph.

5.1.4 In combination carriers only:

174

.1 The slop tanks shall be surrounded by cofferdams except where the boundaries of the slop tanks, where slop may be carried on dry cargo voyages, are part of the hull, main cargo deck, cargo pump-room bulkhead or oil fuel bunker tank. These cofferdams shall not be open to a double bottom, pipe tunnel, pump-room or other enclosed space, nor shall they be used for cargo or ballast and shall not be connected to piping systems serving oil cargo or ballast. Means shall be provided for filling the cofferdams with water and for draining them. Where the boundary of a slop tank is part of the cargo pump-room bulkhead, the pump-room shall not be open to the double bottom, pipe tunnel or other enclosed space; however, openings provided with gastight bolted covers may be permitted;

.2 Means shall be provided for isolating the piping connecting the pump-room with the slop tanks referred to in paragraph 5.1.4.1. The means of isolation shall consist of a valve followed by a spectacle flange or a spool piece with appropriate blank flanges. This arrangement shall be located adjacent to the slop tanks, but where this is unreasonable or impracticable, it may be located within the pump-room directly after the piping penetrates the bulkhead. A separate permanently installed pumping and piping arrangement incorporating a manifold, provided with a shut-off valve and a blank flange, shall be provided for discharging the contents of the slop tanks directly to the open deck for disposal to shore reception facilities when the ship is in the dry cargo mode. When the transfer system is used for slop transfer in the dry cargo mode, it shall have no connection to other systems. Separation from other systems by means of removal of spool pieces may be accepted;

.3 Hatches and tank cleaning openings to slop tanks shall only be permitted on the open deck and shall be fitted with closing arrangements. Except where they consist of bolted plates with bolts at watertight spacing, these closing arrangements shall be provided with locking arrangements under the control of the responsible ship' s officer; and

.4 Where cargo wing tanks are provided, cargo oil lines below deck shall be installed inside these tanks. However, the Administration may permit cargo oil lines to be placed in special ducts provided there are capable of being adequately cleaned and ventilated to the satisfaction of the Administration. Where cargo wing tanks are not provided, cargo oil lines below deck shall be placed in special ducts.

5.1.5 Where the fitting of a navigation position above the cargo area is shown to be necessary, it shall be for navigation purposes only and it shall be separated from the cargo tank deck by means of an open space with a height of at least 2 m. The fire protection requirements for such a navigation position shall be that required for control stations, as specified in regulation 9.2.4.2 and other provisions for tankers, as applicable.

5.1.6 Means shall be provided to keep deck spills away from the accommodation and service areas. This may be accomplished by provision of a permanent continuous coaming of a height of at least 300 mm, extending from side to side. Special consideration shall be given to the arrangements associated with stern loading.

This gazette is also available free online at **www.gpwonline.co.za**

5.2 Restriction on boundary openings

5.2.1 Except as permitted in paragraph 5.2.2, access doors, air inlets and openings to accommodation spaces, service spaces, control stations and machinery spaces shall not face the cargo area. They shall be located on the transverse bulkhead not facing the cargo area or on the outboard side of the superstructure or deckhouse at a distance of at least 4% of the length of the ship but not less than 3 m from the end of the superstructure or deckhouse facing the cargo area. This distance need not exceed 5 m.

5.2.2 The Administration may permit access doors in boundary bulkheads facing the cargo area or within the 5 m limits specified in paragraph 5.2.1, to main cargo control stations and to such service spaces used as provision rooms, store-rooms and lockers, provided they do not give access directly or indirectly to any other space containing or providing for accommodation, control stations or service spaces such as galleys, pantries or workshops, or similar spaces containing sources of vapour ignition. The boundary of such a space shall be insulated to "A-60" standard, with the exception of the boundary facing the cargo area. Bolted plates for the removal of machinery may be fitted within the limits specified in paragraph 5.2.1. Wheelhouse doors and windows may be located within the limits specified in paragraph 5.2.1 so long as they are designed to ensure that the wheelhouse can be made rapidly and efficiently gas and vapour tight.

5.2.3 Windows and sidescuttles facing the cargo area and on the sides of the superstructures and deckhouses within the limits specified in paragraph 5.2.1 shall be of the fixed (non-opening) type. Such windows and sidescuttles, except wheelhouse windows, shall be constructed to "A-60" class standard, except that "A-0" class standard is acceptable for windows and sidescuttles outside the limit specified in regulation 9.2.4.2.5.

5.2.4 Where there is permanent access from a pipe tunnel to the main pump-room, a watertight door shall be fitted complying with the requirements of regulation II-1/13-1.2 and, in addition, with the following:

.1 in addition to the bridge operation, the watertight door shall be capable of being manually closed from outside the main pump-room entrance; and

.2 the watertight door shall be kept closed during normal operations of the ship except when access to the pipe tunnel is required.

5.2.5 Permanent approved gastight lighting enclosures for illuminating cargo pump-rooms may be permitted in bulkheads and decks separating cargo pump-rooms and other spaces provided they are of adequate strength and the integrity and gastightness of the bulkhead or deck is maintained.

5.2.6 The arrangement of ventilation inlets and outlets and other deckhouse and superstructure boundary space openings shall be such as to complement the provisions of paragraph 5.3 and regulation 11.6. Such vents, especially for machinery spaces, shall be situated as far aft as practicable. Due consideration in this regard shall be given when the ship is equipped to load or discharge at the stern. Sources of ignition such as electrical equipment shall be so arranged as to avoid an explosion hazard.

This gazette is also available free online at **www.gpwonline.co.za**

5.3 Cargo tank venting

5.3.1 *General requirements*

The venting systems of cargo tanks are to be entirely distinct from the air pipes of the other compartments of the ship. The arrangements and position of openings in the cargo tank deck from which emission of flammable vapours can occur shall be such as to minimize the possibility of flammable vapours being admitted to enclosed spaces containing a source of ignition, or collecting in the vicinity of deck machinery and equipment which may constitute an ignition hazard. In accordance with this general principle, the criteria in paragraphs 5.3.2 to 5.3.5 and regulation 11.6 will apply.

5.3.2 *Venting arrangements*

5.3.2.1 The venting arrangements in each cargo tank may be independent or combined with other cargo tanks and may be incorporated into the inert gas piping.

5.3.2.2 Where the arrangements are combined with other cargo tanks, either stop valves or other acceptable means shall be provided to isolate each cargo tank. Where stop valves are fitted, they shall be provided with locking arrangements which shall be under the control of the responsible ship's officer. There shall be a clear visual indication of the operational status of the valves or other acceptable means. Where tanks have been isolated, it shall be ensured that relevant isolating valves are opened before cargo loading or ballasting or discharging of those tanks is commenced. Any isolation must continue to permit the flow caused by thermal variations in a cargo tank in accordance with regulation 11.6.1.1. For tankers constructed on or after 1 January 2017, any isolation shall also continue to permit the passage of large volumes of vapour, air or inert gas mixtures during cargo loading and ballasting, or during discharging in accordance with regulation 11.6.1.2.

5.3.2.3 If cargo loading and ballasting or discharging of a cargo tank or cargo tank group is intended, which is isolated from a common venting system, that cargo tank or cargo tank group shall be fitted with a means for over-pressure or under-pressure protection as required in regulation 11.6.3.2.

5.3.2.4 The venting arrangements shall be connected to the top of each cargo tank and shall be self-draining to the cargo tanks under all normal conditions of trim and list of the ship. Where it may not be possible to provide self-draining lines, permanent arrangements shall be provided to drain the vent lines to a cargo tank.

5.3.3 *Safety devices in venting systems*

The venting system shall be provided with devices to prevent the passage of flame into the cargo tanks. The design, testing and locating of these devices shall comply with the requirements established by the Administration based on the guidelines developed by the Organization. [15] Ullage openings shall not be used for pressure equalization.

[15] Refer to Revised standards for the design, testing and locating of devices to prevent the passage of flame into cargo tanks in tankers (MSC/Circ.677), as amended and Revised factors to be taken into consideration when designing cargo tank venting and gas-freeing arrangements (MSC/Circ.731).

This gazette is also available free online at **www.gpwonline.co.za**

They shall be provided with self-closing and tightly sealing covers. Flame arresters and screens are not permitted in these openings.

5.3.4 *Vent outlets for cargo handling and ballasting*

5.3.4.1 Vent outlets for cargo loading, discharging and ballasting required by regulation 11.6.1.2 shall:

1.1 permit the free flow of vapour mixtures; or

1.2 permit the throttling of the discharge of the vapour mixtures to achieve a velocity of not less than 30 m/s;

.2 be so arranged that the vapour mixture is discharged vertically upwards;

.3 where the method is by free flow of vapour mixtures, be such that the outlet shall be not less than 6 m above the cargo tank deck or fore and aft gangway if situated within 4 m of the gangway and located not less than 10 m measured horizontally from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery, which may include anchor windlass and chain locker openings, and equipment which may constitute an ignition hazard; and

.4 where the method is by high-velocity discharge, be located at a height not less than 2 m above the cargo tank deck and not less than 10 m measured horizontally from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery, which may include anchor windlass and chain locker openings, and equipment which may constitute an ignition hazard. These outlets shall be provided with high velocity devices of an approved type.

5.3.4.2 The arrangements for the venting of vapours displaced from the cargo tanks during loading and ballasting shall comply with paragraph 5.3 and regulation 11.6 and shall consist of either one or more mast risers, or a number of high-velocity vents. The inert gas supply main may be used for such venting.

5.3.5 *Isolation of slop tanks in combination carriers*

In combination carriers, the arrangements for isolating slop tanks containing oil or oil residues from other cargo tanks shall consist of blank flanges which will remain in position at all times when cargoes other than liquid cargoes referred to in regulation 1.6.1 are carried.

5.4 Ventilation

5.4.1 *Ventilation systems in cargo pump-rooms*

Cargo pump-rooms shall be mechanically ventilated and discharges from the exhaust fans shall be led to a safe place on the open deck. The ventilation of these rooms shall have sufficient capacity to minimize the possibility of accumulation of flammable vapours. The number of air changes shall be at least 20 per hour, based upon the gross volume of the space. The air ducts shall be arranged so that all of the space is

This gazette is also available free online at **www.gpwonline.co.za**

effectively ventilated. The ventilation shall be of the suction type using fans of the non-sparking type.

5.4.2 *Ventilation systems in combination carriers*

In combination carriers, cargo spaces and any enclosed spaces adjacent to cargo spaces shall be capable of being mechanically ventilated. The mechanical ventilation may be provided by portable fans. An approved fixed gas warning system capable of monitoring flammable vapours shall be provided in cargo pump-rooms, pipe ducts and cofferdams, as referred to in paragraph 5.1.4, adjacent to slop tanks. Suitable arrangements shall be made to facilitate measurement of flammable vapours in all other spaces within the cargo area. Such measurements shall be made possible from the open deck or easily accessible positions.

5.5 Inert gas systems

5.5.1 *Application*

5.5.1.1 For tankers of 20,000 tonnes deadweight and upwards constructed on or after 1 July 2002 but before 1 January 2016, the protection of the cargo tanks shall be achieved by a fixed inert gas system in accordance with the requirements of the Fire Safety Systems Code, as adopted by resolution MSC.98(73), except that the Administration may accept other equivalent systems or arrangements, as described in paragraph 5.5.4.

5.5.1.2 For tankers of 8,000 tonnes deadweight and upwards constructed on or after 1 January 2016 when carrying cargoes described in regulation 1.6.1 or 1.6.2, the protection of the cargo tanks shall be achieved by a fixed inert gas system in accordance with the requirements of the Fire Safety Systems Code, except that the Administration may accept other equivalent systems or arrangements, as described in paragraph 5.5.4.

5.5.1.3 Tankers operating with a cargo tank cleaning procedure using crude oil washing shall be fitted with an inert gas system complying with the Fire Safety Systems Code and with fixed tank washing machines. However, inert gas systems fitted on tankers constructed on or after 1 July 2002 but before 1 January 2016 shall comply with the Fire Safety Systems Code, as adopted by resolution MSC.98(73).

5.5.1.4 Tankers required to be fitted with inert gas systems shall comply with the following provisions:

.1 double-hull spaces shall be fitted with suitable connections for the supply of inert gas;

.2 where hull spaces are connected to a permanently fitted inert gas distribution system, means shall be provided to prevent hydrocarbon gases from the cargo tanks entering the double hull spaces through the system; and

.3 where such spaces are not permanently connected to an inert gas distribution system, appropriate means shall be provided to allow connection to the inert gas main.

This gazette is also available free online at **www.gpwonline.co.za**

5.5.2 *Inert gas systems of chemical tankers and gas carriers*

5.5.2.1 The requirements for inert gas systems contained in the Fire Safety Systems Code need not be applied to chemical tankers constructed before 1 January 2016, including those constructed before 1 July 2012, and all gas carriers:

.1 when carrying cargoes described in regulation 1.6.1, provided that they comply with the requirements for inert gas systems on chemical tankers established by the Administration, based on the guidelines developed by the Organization [16]; or

.2 when carrying flammable cargoes other than crude oil or petroleum products such as cargoes listed in chapters 17 and 18 of the International Bulk Chemical Code, provided that the capacity of tanks used for their carriage does not exceed 3,000 m3 and the individual nozzle capacities of tank washing machines do not exceed 17.5 m3/h and the total combined throughput from the number of machines in use in a cargo tank at any one time does not exceed 110 m3/h.

5.5.3 *General requirements for inert gas systems*

5.5.3.1 The inert gas system shall be capable of inerting, purging and gas-freeing empty tanks and maintaining the atmosphere in cargo tanks with the required oxygen content.

5.5.3.2 Tankers fitted with a fixed inert gas system shall be provided with a closed ullage system.

5.5.4 *Requirements for equivalent systems*

5.5.4.1 The Administration may, after having given consideration to the ship's arrangement and equipment, accept other fixed installations, in accordance with regulation I/5 and paragraph 5.5.4.3.

5.5.4.2 For tankers of 8,000 tonnes deadweight and upwards but less than 20,000 tonnes deadweight constructed on or after 1 January 2016, in lieu of fixed installations as required by paragraph 5.5.4.1, the Administration may accept other equivalent arrangements or means of protection in accordance with regulation I/5 and paragraph 5.5.4.3.

5.5.4.3 Equivalent systems or arrangements shall:

.1 be capable of preventing dangerous accumulations of explosive mixtures in intact cargo tanks during normal service throughout the ballast voyage and necessary in-tank operations; and

.2 be so designed as to minimize the risk of ignition from the generation of static electricity by the system itself.

5.6 Inerting, purging and gas-freeing

[16] Refer to the *Regulation for inert gas systems on chemical tankers* (resolution A.567(14) and Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

5.6.1 Arrangements for purging and/or gas-freeing shall be such as to minimize the hazards due to dispersal of flammable vapours in the atmosphere and to flammable mixtures in a cargo tank.

5.6.2 The procedure for cargo tank purging and/or gas freeing shall be carried out in accordance with regulation 16.3.2.

5.6.3 The arrangements for inerting, purging or gas-freeing of empty tanks as required in paragraph 5.5.3.1 shall be to the satisfaction of the Administration and shall be such that the accumulation of hydrocarbon vapours in pockets formed by the internal structural members in a tank is minimized and that:

.1 on individual cargo tanks, the gas outlet pipe, if fitted, shall be positioned as far as practicable from the inert gas/air inlet and in accordance with paragraph 5.3 and regulation 11.6. The inlet of such outlet pipes may be located either at deck level or at not more than 1 m above the bottom of the tank;

.2 the cross-sectional area of such gas outlet pipe referred to in paragraph **5.6.3.1** shall be such that an exit velocity of at least 20 m/s can be maintained when any three tanks are being simultaneously supplied with inert gas. Their outlets shall extend not less than 2 m above deck level; and

.3 each gas outlet referred to in paragraph 5.6.3.2 shall be fitted with suitable blanking arrangements.

5.7 Gas measurement and detection

5.7.1 *Portable instrument*

Tankers shall be equipped with at least one portable instrument for measuring oxygen and one for measuring flammable vapour concentrations, together with a sufficient set of spares. Suitable means shall be provided for the calibration of such instruments.

5.7.2 *Arrangements for gas measurement in double hull spaces and double bottom spaces*

5.7.2.1 Suitable portable instruments for measuring oxygen and flammable vapour concentrations in double-hull spaces and double-bottom spaces shall be provided. In selecting these instruments, due attention shall be given to their use in combination with the fixed gas-sampling-line systems referred to in paragraph 5.7.2.2.

5.7.2.2 Where the atmosphere in double hull spaces cannot be reliably measured using flexible gas sampling hoses, such spaces shall be fitted with permanent gas sampling lines. The configuration of gas sampling lines shall be adapted to the design of such spaces.

5.7.2.3 The materials of construction and dimensions of gas sampling lines shall be such as to prevent restriction. Where plastic materials are used, they shall be electrically conductive.

This gazette is also available free online at **www.gpwonline.co.za**

5.7.3 *Arrangements for fixed hydrocarbon gas detection systems in double hull and double-bottom spaces of oil tankers*

5.7.3.1 In addition to the requirements in paragraphs 5.7.1 and 5.7.2, oil tankers of 20 000 tonnes deadweight and above, constructed on or after 1 January 2012, shall be provided with a fixed hydrocarbon gas detection system complying with the Fire Safety Systems Code for measuring hydrocarbon gas concentrations in all ballast tanks and void spaces of double-hull and double-bottom spaces adjacent to the cargo tanks, including the forepeak tank and any other tanks and spaces under the bulkhead deck adjacent to cargo tanks.

5.7.3.2 Oil tankers provided with constant operative inerting systems for such spaces need not be equipped with fixed hydrocarbon gas detection equipment.

5.7.3.3 Notwithstanding the above, cargo pump-rooms subject to the provisions of paragraph 5.10 need not comply with the requirements of this paragraph.

5.8 Air supply to double hull and double bottom spaces

Double hull and double bottom spaces shall be fitted with suitable connections for the supply of air.

5.9 Protection of cargo area

Drip pans for collecting cargo residues in cargo lines and hoses shall be provided in the area of pipe and hose connections under the manifold area. Cargo hoses and tank washing hoses shall have electrical continuity over their entire lengths including couplings and flanges (except shore connections) and shall be earthed for removal of electrostatic charges.

5.10 Protection of cargo pump-rooms

5.10.1 In tankers:

.1 cargo pumps, ballast pumps and stripping pumps, installed in cargo pump-rooms and driven by shafts passing through pump-room bulkheads shall be fitted with temperature sensing devices for bulkhead shaft glands, bearings and pump casings. A continuous audible and visual alarm signal shall be automatically effected in the cargo control room or the pump control station;

.2 lighting in cargo pump-rooms, except emergency lighting, shall be interlocked with ventilation such that the ventilation shall be in operation when switching on the lighting. Failure of the ventilation system shall not cause the lighting to go out;

.3 a system for continuous monitoring of the concentration of hydrocarbon gases shall be fitted. Sampling points or detector heads shall be located in suitable positions in order that potentially dangerous leakages are readily detected. When the hydrocarbon gas concentration reaches a pre-set level which shall not be higher than 10% of the lower flammable

This gazette is also available free online at **www.gpwonline.co.za**

limit, a continuous audible and visual alarm signal shall be automatically effected in the pump- room, engine control room, cargo control room and navigation bridge to alert personnel to the potential hazard; and

.4 all pump-rooms shall be provided with bilge level monitoring devices together with appropriately located alarms.

Regulation 5
Fire growth potential

1 Purpose

The purpose of this regulation is to limit the fire growth potential in every space of the ship. For this purpose, the following functional requirements shall be met:

.1 means of control for the air supply to the space shall be provided;

.2 means of control for flammable liquids in the space shall be provided; and

.3 the use of combustible materials shall be restricted.

2 Control of air supply and flammable liquid to the space

2.1 Closing appliances and stopping devices of ventilation

2.1.1 The main inlets and outlets of all ventilation systems shall be capable of being closed from outside the spaces being ventilated. The means of closing shall be easily accessible as well as prominently and permanently marked and shall indicate whether the shut-off is open or closed.

2.1.2 Power ventilation of accommodation spaces, service spaces, cargo spaces, control stations and machinery spaces shall be capable of being stopped from an easily accessible position outside the space being served. This position shall not be readily cut off in the event of a fire in the spaces served.

2.1.3 In passenger ships carrying more than 36 passengers, power ventilation, except machinery space and cargo space ventilation and any alternative system which may be required under regulation 8.2, shall be fitted with controls so grouped that all fans may be stopped from either of two separate positions which shall be situated as far apart as practicable. Fans serving power ventilation systems to cargo spaces shall be capable of being stopped from a safe position outside such spaces.

2.2 Means of control in machinery spaces

2.2.1 Means of control shall be provided for opening and closure of skylights, closure of openings in funnels which normally allow exhaust ventilation and closure of ventilator dampers.

2.2.2 Means of control shall be provided for stopping ventilating fans. Controls provided for the power ventilation serving machinery spaces shall be grouped so as to be operable from two positions, one of which shall be outside such spaces. The means

This gazette is also available free online at **www.gpwonline.co.za**

provided for stopping the power ventilation of the machinery spaces shall be entirely separate from the means provided for stopping ventilation of other spaces.

2.2.3 Means of control shall be provided for stopping forced and induced draught fans, oil fuel transfer pumps, oil fuel unit pumps, lubricating oil service pumps, thermal oil circulating pumps and oil separators (purifiers). However, paragraphs 2.2.4 and 2.2.5 need not apply to oily water separators.

2.2.4 The controls required in paragraphs 2.2.1 to 2.2.3 and in regulation 4.2.2.3.4 shall be located outside the space concerned so they will not be cut off in the event of fire in the space they serve.

2.2.5 In passenger ships, the controls required in paragraphs 2.2.1 to 2.2.4 and in regulations 8.3.3 and 9.5.2.3 and the controls for any required fire-extinguishing system shall be situated at one control position or grouped in as few positions as possible to the satisfaction of the Administration. Such positions shall have a safe access from the open deck.

2.3 Additional requirements for means of control in periodically unattended machinery spaces

2.3.1 For periodically unattended machinery spaces, the Administration shall give special consideration to maintaining the fire integrity of the machinery spaces, the location and centralization of the fire-extinguishing system controls, the required shutdown arrangements (e.g. ventilation, fuel pumps, etc.) and that additional fire-extinguishing appliances and other fire- fighting equipment and breathing apparatus may be required.

2.3.2 In passenger ships, these requirements shall be at least equivalent to those of machinery spaces normally attended.

3 Fire protection materials

3.1 Use of non-combustible materials

3.1.1 *Insulating materials*

Insulating materials shall be non-combustible, except in cargo spaces, mail rooms, baggage rooms and refrigerated compartments of service spaces. Vapour barriers and adhesives used in conjunction with insulation, as well as the insulation of pipe fittings for cold service systems, need not be of non-combustible materials, but they shall be kept to the minimum quantity practicable and their exposed surfaces shall have low flame spread characteristics.

3.1.2 *Ceilings and linings*

3.1.2.1 In passenger ships, except in cargo spaces, all linings, grounds, draught stops and ceilings shall be of non-combustible material except in mail rooms, baggage rooms, saunas or refrigerated compartments of service spaces.

This gazette is also available free online at **www.gpwonline.co.za**

3.1.2.2 In cargo ships, all linings, ceilings, draught stops and their associated grounds shall be of non-combustible materials in the following spaces:

.1 in accommodation and service spaces and control stations for ships where Method IC is specified as referred to in regulation 9.2.3.1; and

.2 in corridors and stairway enclosures serving accommodation and service spaces and control stations for ships where Method IIC and IIIC are specified as referred to in regulation 9.2.3.1.

3.1.3 *Partial bulkheads and decks on passenger ships*

3.1.3.1 Partial bulkheads or decks used to subdivide a space for utility or artistic treatment shall be of non-combustible materials.

3.1.3.2 Linings, ceilings and partial bulkheads or decks used to screen or to separate adjacent cabin balconies shall be of non-combustible materials. Cabin balconies on passenger ships constructed before 1 July 2008 shall comply with the requirements of this paragraph by the first survey after 1 July 2008.

3.2 Use of combustible materials

3.2.1 *General*

3.2.1.1 In passenger ships, "A", "B" or "C" class divisions in accommodation and services spaces and cabin balconies which are faced with combustible materials, facings, mouldings, decorations and veneers shall comply with the provisions of paragraphs 3.2.2 to 3.2.4 and regulation 6. However, traditional wooden benches and wooden linings on bulkheads and ceilings are permitted in saunas and such materials need not be subject to the calculations prescribed in paragraphs 3.2.2 and 3.2.3. However, the provisions of paragraph 3.2.3 need not be applied to cabin balconies.

3.2.1.2 In cargo ships, non-combustible bulkheads, ceilings and linings fitted in accommodation and service spaces may be faced with combustible materials, facings, mouldings, decorations and veneers provided such spaces are bounded by non-combustible bulkheads, ceilings and linings in accordance with the provisions of paragraphs 3.2.2 to 3.2.4 and regulation 6.

3.2.2 *Maximum calorific value of combustible materials*

Combustible materials used on the surfaces and linings specified in paragraph 3.2.1 shall have a calorific value [17] not exceeding 45 MJ/m^2 of the area for the thickness used. The requirements of this paragraph are not applicable to the surfaces of furniture fixed to linings or bulkheads.

3.2.3 *Total volume of combustible materials*

[17] Refer to the recommendations published by the International Organization for Standardization, in particular ISO/DIS 1716, *Reaction to fire tests for building and transport products - Determination of the gross heat of combustion (calorific value).*

This gazette is also available free online at **www.gpwonline.co.za**

Where combustible materials are used in accordance with paragraph 3.2.1, they shall comply with the following requirements:

.1 The total volume of combustible facings, mouldings, decorations and veneers in accommodation and service spaces shall not exceed a volume equivalent to 2.5 mm veneer on the combined area of the walls and ceiling linings. Furniture fixed to linings, bulkheads or decks need not be included in the calculation of the total volume of combustible materials; and

.2 In the case of ships fitted with an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code, the above volume may include some combustible material used for erection of "C" class divisions.

3.2.4 *Low flame-spread characteristics of exposed surfaces*

The following surfaces shall have low flame-spread characteristics in accordance with the Fire Test Procedures Code:

3.2.4.1 In passenger ships:

.1 exposed surfaces in corridors and stairway enclosures and of bulkhead and ceiling linings in accommodation and service spaces (except saunas) and control stations; and

.2 surfaces and grounds in concealed or inaccessible spaces in accommodation and service spaces and control stations.

.3 exposed surfaces of cabin balconies, except for natural hard wood decking systems.

3.2.4.2 In cargo ships:

.1 exposed surfaces in corridors and stairway enclosures and of ceilings in accommodation and service spaces (except saunas) and control stations; and

.2 surfaces and grounds in concealed or inaccessible spaces in accommodation and service spaces and control stations.

3.3 Furniture in stairway enclosures of passenger ships

Furniture in stairway enclosures shall be limited to seating. It shall be fixed, limited to six seats on each deck in each stairway enclosure, be of restricted fire risk determined in accordance with the Fire Test Procedure Code, and shall not restrict the passenger escape route. The Administration may permit additional seating in the main reception area within a stairway enclosure if it is fixed, non-combustible and does not restrict the passenger escape route. Furniture shall not be permitted in passenger and crew corridors forming escape routes in cabin areas. In addition to the above, lockers of non-combustible material, providing storage for non- hazardous safety equipment required by these regulations, may be permitted. Drinking water dispensers and ice cube machines may be permitted in corridors provided they are fixed and do not restrict the width of the escape routes. This applies as well to decorative flower or plant

This gazette is also available free online at **www.gpwonline.co.za**

arrangements, statues or other objects of art such as paintings and tapestries in corridors and stairways.

3.4 Furniture and furnishings on cabin balconies of passenger ships

On passenger ships, furniture and furnishings on cabin balconies shall comply with regulations 3.40.1, 3.40.2, 3.40.3, 3.40.6 and 3.40.7 unless such balconies are protected by a fixed pressure water-spraying and fixed fire detection and fire alarm systems complying with regulations 7.10 and 10.6.1.3. Passenger ships constructed before 1 July 2008 shall comply with the requirements of this paragraph by the first survey after 1 July 2008.

Regulation 6
Smoke generation potential and toxicity

1 Purpose

The purpose of this regulation is to reduce the hazard to life from smoke and toxic products generated during a fire in spaces where persons normally work or live. For this purpose, the quantity of smoke and toxic products released from combustible materials, including surface finishes, during fire shall be limited.

2 Paints, varnishes and other finishes

2.1 Paints, varnishes and other finishes used on exposed interior surfaces shall not be capable of producing excessive quantities of smoke and toxic products, this being determined in accordance with the Fire Test Procedures Code.

2.2 On passenger ships constructed on or after 1 July 2008, paints, varnishes and other finishes used on exposed surfaces of cabin balconies, excluding natural hard wood decking systems, shall not be capable of producing excessive quantities of smoke and toxic products, this being determined in accordance with the Fire Test Procedures Code.

3 Primary deck coverings

3.1 Primary deck coverings, if applied within accommodation and service spaces and control stations, shall be of approved material which will not give rise to smoke or toxic or explosive hazards at elevated temperatures, this being determined in accordance with the Fire Test Procedures Code.

3.2 On passenger ships constructed on or after 1 July 2008, primary deck coverings on cabin balconies shall not give rise to smoke, toxic or explosive hazards at elevated temperatures, this being determined in accordance with the Fire Test Procedures Code.

This gazette is also available free online at **www.gpwonline.co.za**

Part C - Suppression Of Fire

Regulation 7
Detection and alarm

1 Purpose

The purpose of this regulation is to detect a fire in the space of origin and to provide for alarm for safe escape and fire-fighting activity. For this purpose, the following functional requirements shall be met:

.1 fixed fire detection and fire alarm system installations shall be suitable for the nature of the space, fire growth potential and potential generation of smoke and gases;

.2 manually operated call points shall be placed effectively to ensure a readily accessible means of notification; and

.3 fire patrols shall provide an effective means of detecting and locating fires and alerting the navigation bridge and fire teams.

2 General requirements

2.1 A fixed fire detection and fire alarm system shall be provided in accordance with the provisions of this regulation.

2.2 A fixed fire detection and fire alarm system and a sample extraction smoke detection system required in this regulation and other regulations in this part shall be of an approved type and comply with the Fire Safety Systems Code.

2.3 Where a fixed fire detection and fire alarm system is required for the protection of spaces other than those specified in paragraph 5.1, at least one detector complying with the Fire Safety Systems Code shall be installed in each such space.

2.4 A fixed fire detection and fire alarm system for passenger ships shall be capable of remotely and individually identifying each detector and manually operated call point.

3 Initial and periodical tests

3.1 The function of fixed fire detection and fire alarm systems required by the relevant regulations of this chapter shall be tested under varying conditions of ventilation after installation.

3.2 The function of fixed fire detection and fire alarm systems shall be periodically tested to the satisfaction of the Administration by means of equipment producing hot air at the appropriate temperature, or smoke or aerosol particles having the appropriate range of density or particle size, or other phenomena associated with incipient fires to which the detector is designed to respond.

4 Protection of machinery spaces

This gazette is also available free online at **www.gpwonline.co.za**

4.1 Installation

A fixed fire detection and fire alarm system shall be installed in:

.1 periodically unattended machinery spaces;

.2 machinery spaces where:

.1 the installation of automatic and remote control systems and equipment has been approved in lieu of continuous manning of the space; and

.2 the main propulsion and associated machinery including sources of the main sources of electrical power are provided with various degrees of automatic or remote control and are under continuous manned supervision from a control room; and

.3 enclosed spaces containing incinerators

4.2 Design

The fixed fire detection and fire alarm system required in paragraph 4.1.1 shall be so designed and the detectors so positioned as to detect rapidly the onset of fire in any part of those spaces and under any normal conditions of operation of the machinery and variations of ventilation as required by the possible range of ambient temperatures. Except in spaces of restricted height and where their use is specially appropriate, detection systems using only thermal detectors shall not be permitted. The detection system shall initiate audible and visual alarms distinct in both respects from the alarms of any other system not indicating fire, in sufficient places to ensure that the alarms are heard and observed on the navigating bridge and by a responsible engineer officer. When the navigating bridge is unmanned the alarm shall sound in a place where a responsible member of the crew is on duty.

5 Protection of accommodation and service spaces and control stations

5.1 Smoke detectors in accommodation spaces

Smoke detectors shall be installed in all stairways, corridors and escape routes within accommodation spaces as provided in paragraphs 5.2, 5.3 and 5.4. Consideration shall be given to the installation of special purpose smoke detectors within ventilation ducting.

5.2 Requirements for passenger ships carrying more than 36 passengers

A fixed fire detection and fire alarm system shall be installed and arranged as to provide smoke detection in service spaces, control stations and accommodation spaces, including corridors, stairways and escape routes within accommodation spaces. Smoke detectors need not be fitted in private bathrooms and galleys. Spaces having little or no fire risk such as voids, public toilets, carbon dioxide rooms and similar spaces need not be fitted with a fixed fire detection and alarm system. Detectors fitted in cabins, when activated, shall also be capable of emitting, or cause to be emitted, an audible alarm within the space where they are located.

This gazette is also available free online at **www.gpwonline.co.za**

5.3 Requirements for passenger ships carrying not more than 36 passengers

There shall be installed throughout each separate zone, whether vertical or horizontal, in all accommodation and service spaces and, where it is considered necessary by the Administration, in control stations, except spaces which afford no substantial fire risk such as void spaces, sanitary spaces, etc., either:

.1 a fixed fire detection and fire alarm system so installed and arranged as to detect the presence of fire in such spaces and providing smoke detection in corridors, stairways and escape routes within accommodation spaces. Detectors fitted in cabins, when activated, shall also be capable of emitting, or cause to be emitted, an audible alarm within the space where they are located; or

.2 an automatic sprinkler, fire detection and fire alarm system of an approved type complying with the relevant requirements of the Fire Safety Systems Code and so installed and arranged as to protect such spaces and, in addition, a fixed fire detection and fire alarm system and so installed and arranged as to provide smoke detection in corridors, stairways and escape routes within accommodation spaces.

5.4 Protection of atriums in passenger ships

The entire main vertical zone containing the atrium shall be protected throughout with a smoke detection system.

5.5 Cargo ships

Accommodation and service spaces and control stations of cargo ships shall be protected by a fixed fire detection and fire alarm system and/or an automatic sprinkler, fire detection and fire alarm system as follows depending on a protection method adopted in accordance with regulation 9.2.3.1.

5.5.1 Method IC

A fixed fire detection and fire alarm system shall be so installed and arranged as to provide smoke detection in all corridors, stairways and escape routes within accommodation spaces.

5.5.2 Method IIC

An automatic sprinkler, fire detection and fire alarm system of an approved type complying with the relevant requirements of the Fire Safety Systems Code shall be so installed and arranged as to protect accommodation spaces, galleys and other service spaces, except spaces which afford no substantial fire risk such as void spaces, sanitary spaces, etc. In addition, a fixed fire detection and fire alarm system shall be so installed and arranged as to provide smoke detection in all corridors, stairways and escape routes within accommodation spaces.

5.5.3 Method IIIC

This gazette is also available free online at **www.gpwonline.co.za**

A fixed fire detection and fire alarm system shall be so installed and arranged as to detect the presence of fire in all accommodation spaces and service spaces providing smoke detection in corridors, stairways and escape routes within accommodation spaces, except spaces which afford no substantial fire risk such as void spaces, sanitary spaces, etc. In addition, a fixed fire detection and fire alarm system shall be so installed and arranged as to provide smoke detection in all corridors, stairways and escape routes within accommodation spaces.

6 Protection of cargo spaces in passenger ships

A fixed fire detection and fire alarm system or a sample extraction smoke detection system shall be provided in any cargo space which, in the opinion of the Administration, is not accessible, except where it is shown to the satisfaction of the Administration that the ship is engaged on voyages of such short duration that it would be unreasonable to apply this requirement.

7 Manually operated call points

Manually operated call points complying with the Fire Safety Systems Code shall be installed throughout the accommodation spaces, service spaces and control stations. One manually operated call point shall be located at each exit. Manually operated call points shall be readily accessible in the corridors of each deck such that no part of the corridor is more than 20 m from a manually operated call point.

8 Fire patrols in passenger ships

8.1 Fire patrols

For ships carrying more than 36 passengers an efficient patrol system shall be maintained so that an outbreak of fire may be promptly detected. Each member of the fire patrol shall be trained to be familiar with the arrangements of the ship as well as the location and operation of any equipment he may be called upon to use.

8.2 Inspection hatches

The construction of ceiling and bulkheads shall be such that it will be possible, without impairing the efficiency of the fire protection, for the fire patrols to detect any smoke originating in concealed and inaccessible places, except where in the opinion of the Administration there is no risk of fire originating in such places.

8.3 Two-way portable radiotelephone apparatus

Each member of the fire patrol shall be provided with a two-way portable radiotelephone apparatus.

9 Fire alarm signalling systems in passenger ships [18]

[18] Refer to the *Code on alerts and indicators 2009* (resolution A.1021(26), as may be amended).

This gazette is also available free online at **www.gpwonline.co.za**

9.1 Passenger ships shall at all times when at sea, or in port (except when out of service), be so manned or equipped as to ensure that any initial fire alarm is immediately received by a responsible member of the crew.

9.2 The control panel of fixed fire detection and fire alarm systems shall be designed on the fail-safe principle (e.g. an open detector circuit shall cause an alarm condition).

9.3 Passenger ships carrying more than 36 passengers shall have the fire detection alarms for the systems required by paragraph 5.2 centralized in a continuously manned central control station. In addition, controls for remote closing of the fire doors and shutting down the ventilation fans shall be centralized in the same location. The ventilation fans shall be capable of reactivation by the crew at the continuously manned control station. The control panels in the central control station shall be capable of indicating open or closed positions of fire doors and closed or off status of the detectors, alarms and fans. The control panel shall be continuously powered and shall have an automatic change-over to standby power supply in case of loss of normal power supply. The control panel shall be powered from the main source of electrical power and the emergency source of electrical power defined by regulation II-1/42 unless other arrangements are permitted by the regulations, as applicable.

9.4 A special alarm, operated from the navigation bridge or fire control station, shall be fitted to summon the crew. This alarm may be part of the ship' s general alarm system and shall be capable of being sounded independently of the alarm to the passenger spaces.

10 Protection of cabin balconies on passenger ships

A fixed fire detection and fire alarm system complying with the provisions of the Fire Safety Systems Code shall be installed on cabin balconies of ships to which regulation 5.3.4 applies, when furniture and furnishings on such balconies are not as defined in regulations 3.40.1, 3.40.2, 3.40.3, 3.40.6 and 3.40.7.

Regulation 8

Control of smoke spread

1 Purpose

The purpose of this regulation is to control the spread of smoke in order to minimize the hazards from smoke. For this purpose, means for controlling smoke in atriums, control stations, machinery spaces and concealed spaces shall be provided.

2 Protection of control stations outside machinery spaces

Practicable measures shall be taken for control stations outside machinery spaces in order to ensure that ventilation, visibility and freedom from smoke are maintained so that, in the event of fire, the machinery and equipment contained therein may be supervised and continue to function effectively. Alternative and separate means of air supply shall be provided and air inlets of the two sources of supply shall be so disposed that the risk of both inlets drawing in smoke simultaneously is minimized. At the

This gazette is also available free online at **www.gpwonline.co.za**

discretion of the Administration, such requirements need not apply to control stations situated on, and opening on to, an open deck or where local closing arrangements would be equally effective. The ventilation system serving safety centres may be derived from the ventilation system serving the navigation bridge, unless located in an adjacent main vertical zone.

3 Release of smoke from machinery spaces

3.1 The provisions of this paragraph shall apply to machinery spaces of category A and, where the Administration considers desirable, to other machinery spaces.

3.2 Suitable arrangements shall be made to permit the release of smoke, in the event of fire, from the space to be protected, subject to the provisions of regulation 9.5.2.1. The normal ventilation systems may be acceptable for this purpose.

3.3 Means of control shall be provided for permitting the release of smoke and such controls shall be located outside the space concerned so that, in the event of fire, they will not be cut off from the space they serve.

3.4 In passenger ships, the controls required by paragraph 3.3 shall be situated at one control position or grouped in as few positions as possible to the satisfaction of the Administration. Such positions shall have a safe access from the open deck.

4 Draught stops

Air spaces enclosed behind ceilings, panelling or linings shall be divided by close-fitting draught stops spaced not more than 14 m apart. In the vertical direction, such enclosed air spaces, including those behind linings of stairways, trunks, etc., shall be closed at each deck.

5 Smoke extraction systems in atriums of passenger ships

Atriums shall be equipped with a smoke extraction system. The smoke extraction system shall be activated by the required smoke detection system and be capable of manual control. The fans shall be sized such that the entire volume within space can be exhausted in 10 min or less.

Regulation 9
Containment of fire

1 Purpose

The purpose of this regulation is to contain a fire in the space of origin. For this purpose, the following functional requirements shall be met:

.1 the ship shall be subdivided by thermal and structural boundaries;

.2 thermal insulation of boundaries shall have due regard to the fire risk of the space and adjacent spaces; and

This gazette is also available free online at **www.gpwonline.co.za**

.3 the fire integrity of the divisions shall be maintained at openings and penetrations.

2 Thermal and structural boundaries

2.1 Thermal and structural subdivision

Ships of all types shall be subdivided into spaces by thermal and structural divisions having regard to the fire risks of the space.

2.2 Passenger ships

2.2.1 *Main vertical zones and horizontal zones*

2.2.1.1.1 In ships carrying more than 36 passengers, the hull, superstructure and deckhouses shall be subdivided into main vertical zones by "A-60" class divisions. Steps and recesses shall be kept to a minimum, but where they are necessary they shall also be "A-60" class divisions. Where a category (5), (9) or (10) space defined in paragraph 2.2.3.2.2 is on one side or where fuel oil tanks are on both sides of the division the standard may be reduced to "A-0".

2.2.1.1.2 In ships carrying not more than 36 passengers, the hull, superstructure and deckhouses in way of accommodation and service spaces shall be subdivided into main vertical zones by "A" class divisions. These divisions shall have insulation values in accordance with tables in paragraph 2.2.4.

2.2.1.2 As far as practicable, the bulkheads forming the boundaries of the main vertical zones above the bulkhead deck shall be in line with watertight subdivision bulkheads situated immediately below the bulkhead deck. The length and width of main vertical zones may be extended to a maximum of 48 m in order to bring the ends of main vertical zones to coincide with watertight subdivision bulkheads or in order to accommodate a large public space extending for the whole length of the main vertical zone provided that the total area of the main vertical zone is not greater than 1,600 m^2 on any deck. The length or width of a main vertical zone is the maximum distance between the furthermost points of the bulkheads bounding it.

2.2.1.3 Such bulkheads shall extend from deck to deck and to the shell or other boundaries.

2.2.1.4 Where a main vertical zone is subdivided by horizontal "A" class divisions into horizontal zones for the purpose of providing an appropriate barrier between a zone with sprinklers and a zone without sprinklers, the divisions shall extend between adjacent main vertical zone bulkheads and to the shell or exterior boundaries of the ship and shall be insulated in accordance with the fire insulation and integrity values given in table 9.4.

2.2.1.5.1 On ships designed for special purposes, such as automobile or railroad car ferries, where the provision of main vertical zone bulkheads would defeat the purpose for which the ship is intended, equivalent means for controlling and limiting a fire shall be substituted and specifically approved by the Administration. Service spaces and

This gazette is also available free online at **www.gpwonline.co.za**

ship stores shall not be located on ro-ro decks unless protected in accordance with the applicable regulations.

2.2.1.5.2 However, in a ship with special category spaces, such spaces shall comply with the applicable provisions of regulation 20 and where such compliance would be inconsistent with other requirements for passenger ships specified in this chapter, the requirements of regulation 20 shall prevail.

2.2.2 *Bulkheads within a main vertical zone*

2.2.2.1 For ships carrying more than 36 passengers, bulkheads which are not required to be "A" class divisions shall be at least "B" class or "C" class divisions as prescribed in the tables in paragraph 2.2.3.

2.2.2.2 For ships carrying not more than 36 passengers, bulkheads within accommodation and service spaces which are not required to be "A" class divisions shall be at least "B" class or "C" class divisions as prescribed in the tables in paragraph 2.2.4. In addition, corridor bulkheads, where not required to be "A" class, shall be "B" class divisions which shall extend from deck to deck except:

.1 when continuous "B" class ceilings or linings are fitted on both sides of the bulkhead, the portion of the bulkhead behind the continuous ceiling or lining shall be of material which, in thickness and composition, is acceptable in the construction of "B" class divisions, but which shall be required to meet "B" class integrity standards only in so far as is reasonable and practicable in the opinion of the Administration; and

.2 in the case of a ship protected by an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code, the corridor bulkheads may terminate at a ceiling in the corridor provided such bulkheads and ceilings are of "B" class standard in compliance with paragraph 2.2.4. All doors and frames in such bulkheads shall be of non-combustible materials and shall have the same fire integrity as the bulkhead in which they are fitted.

2.2.2.3 Bulkheads required to be "B" class divisions, except corridor bulkheads as prescribed in paragraph 2.2.2.2, shall extend from deck to deck and to the shell or other boundaries. However, where a continuous "B" class ceiling or lining is fitted on both sides of a bulkhead which is at least of the same fire resistance as the adjoining bulkhead, the bulkhead may terminate at the continuous ceiling or lining.

2.2.3 *Fire integrity of bulkheads and decks in ships carrying more than 36 passengers*

2.2.3.1 In addition to complying with the specific provisions for fire integrity of bulkheads and decks of passenger ships, the minimum fire integrity of all bulkheads and decks shall be as prescribed in tables 9.1 and 9.2. Where, due to any particular structural arrangements in the ship, difficulty is experienced in determining from the tables the minimum fire integrity value of any divisions, such values shall be determined to the satisfaction of the Administration.

This gazette is also available free online at **www.gpwonline.co.za**

2.2.3.2 The following requirements shall govern application of the tables:

.1 Table 9.1 shall apply to bulkheads not bounding either main vertical zones or horizontal zones. Table 9.2 shall apply to decks not forming steps in main vertical zones nor bounding horizontal zones;

.2 For determining the appropriate fire integrity standards to be applied to boundaries between adjacent spaces, such spaces are classified according to their fire risk as shown in categories (1) to (14) below. Where the contents and use of a space are such that there is a doubt as to its classification for the purpose of this regulation, or where it is possible to assign two or more classifications to a space, it shall be treated as a space within the relevant category having the most stringent boundary requirements. Smaller, enclosed rooms within a space that have less than 30% communicating openings to that space are considered separate spaces. The fire integrity of the boundary bulkheads and decks of such smaller rooms shall be as prescribed in tables 9.1 and 9.2. The title of each category is intended to be typical rather than restrictive. The number in parentheses preceding each category refers to the applicable column or row in the tables.

(1) *Control stations*

Spaces containing emergency sources of power and lighting.

Wheelhouse and chartroom.

Spaces containing the ship's radio equipment.

Fire control stations.

Control room for propulsion machinery when located outside the propulsion machinery space.

Spaces containing centralized fire alarm equipment.

Spaces containing centralized emergency public address system stations and equipment.

(2) *Stairways*

Interior stairways, lifts, totally enclosed emergency escape trunks, and escalators (other than those wholly contained within the machinery spaces) for passengers and crew and enclosures thereto.

In this connection a stairway which is enclosed at only one level shall be regarded as part of the space from which it is not separated by a fire door.

(3) *Corridors*

Passenger and crew corridors and lobbies.

(4) *Evacuation stations and external escape routes*

Survival craft stowage area.

Open deck spaces and enclosed promenades forming lifeboat and liferaft embarkation and lowering stations.

Assembly stations, internal and external.

External stairs and open decks used for escape routes.

196

The ship's side to the waterline in the lightest seagoing condition, superstructure and deckhouse sides situated below and adjacent to the liferaft and evacuation slide embarkation areas.

(5) *Open deck spaces*

Open deck spaces and enclosed promenades clear of lifeboat and liferaft embarkation and lowering stations. To be considered in this category, enclosed promenades shall have no significant fire risk, meaning that furnishings shall be restricted to deck furniture. In addition, such spaces shall be naturally ventilated by permanent openings.

Air spaces (the space outside superstructures and deckhouses).

(6) *Accommodation spaces of minor fire risk*

Cabins containing furniture and furnishings of restricted fire risk.

Offices and dispensaries containing furniture and furnishings of restricted fire risk.

Public spaces containing furniture and furnishings of restricted fire risk and having a deck area of less than 50 m^2.

(7) *Accommodation spaces of moderate fire risk*

Spaces as in category (6) above but containing furniture and furnishings of other than restricted fire risk.

Public spaces containing furniture and furnishings of restricted fire risk and having a deck area of 50 m^2 or more.

Isolated lockers and small store-rooms in accommodation spaces having areas less than 4 m^2 (in which flammable liquids are not stowed).

Motion picture projection and film stowage rooms. Diet kitchens (containing no open flame).

Cleaning gear lockers (in which flammable liquids are not stowed).

Laboratories (in which flammable liquids are not stowed).

Pharmacies.

Small drying rooms (having a deck area of 4 m^2 or less).

Specie rooms.

Operating rooms.

(8) *Accommodation spaces of greater fire risk*

Public spaces containing furniture and furnishings of other than restricted fire risk and having a deck area of 50 m^2 or more.

Barber shops and beauty parlours.

Saunas.

Sale shops.

(9) *Sanitary and similar spaces*

Communal sanitary facilities, showers, baths, water closets, etc.

Small laundry rooms.

This gazette is also available free online at **www.gpwonline.co.za**

Indoor swimming pool area.

Isolated pantries containing no cooking appliances in accommodation spaces.

Private sanitary facilities shall be considered a portion of the space in which they are located.

(10) *Tanks, voids and auxiliary machinery spaces having little or no fire risk*

Water tanks forming part of the ship's structure.

Voids and cofferdams.

Auxiliary machinery spaces which do not contain machinery having a pressure lubrication system and where storage of combustibles is prohibited, such as:

ventilation and air-conditioning rooms; windlass room; steering gear room; stabilizer equipment room; electrical propulsion motor room; rooms containing section switchboards and purely electrical equipment other than oil-filled electrical transformers (above 10 kVA); shaft alleys and pipe tunnels; spaces for pumps and refrigeration machinery (not handling or using flammable liquids).

Closed trunks serving the spaces listed above.

Other closed trunks such as pipe and cable trunks.

(11) *Auxiliary machinery spaces, cargo spaces, cargo and other oil tanks and other similar spaces of moderate fire risk*

Cargo oil tanks.

Cargo holds, trunkways and hatchways.

Refrigerated chambers.

Oil fuel tanks (where installed in a separate space with no machinery).

Shaft alleys and pipe tunnels allowing storage of combustibles.

Auxiliary machinery spaces as in category (10) which contain machinery having a pressure lubrication system or where storage of combustibles is permitted.

Oil fuel filling stations.

Spaces containing oil-filled electrical transformers (above 10 kVA).

Spaces containing turbine and reciprocating steam engine driven auxiliary generators and small internal combustion engines of power output up to 110 kW driving generators, sprinkler, drencher or fire pumps, bilge pumps, etc.

Closed trunks serving the spaces listed above.

(12) *Machinery spaces and main galleys*

Main propulsion machinery rooms (other than electric propulsion motor rooms) and boiler rooms.

This gazette is also available free online at **www.gpwonline.co.za**

Auxiliary machinery spaces other than those in categories (10) and (11) which contain internal combustion machinery or other oil-burning, heating or pumping units.

Main galleys and annexes.

Trunks and casings to the spaces listed above.

(13) *Store-rooms, workshops, pantries, etc.*

Main pantries not annexed to galleys.

Main laundry.

Large drying rooms (having a deck area of more than 4 m^2)

Miscellaneous stores.

Mail and baggage rooms.

Garbage rooms.

Workshops (not part of machinery spaces, galleys, etc.).

Lockers and store-rooms having areas greater than 4 m^2, other than those spaces that have provisions for the storage of flammable liquids.

(14) *Other spaces in which flammable liquids are stowed*

Paint lockers.

Store-rooms containing flammable liquids (including dyes, medicines, etc.).

Laboratories (in which flammable liquids are stowed);

.3 Where a single value is shown for the fire integrity of a boundary between two spaces, that value shall apply in all cases;

.4 Notwithstanding the provisions of paragraph 2.2.2 there are no special requirements for material or integrity of boundaries where only a dash appears in the tables; and

.5 The Administration shall determine in respect of category (5) spaces whether the insulation values in table 9.1 shall apply to ends of deckhouses and superstructures, and whether the insulation values in table 9.2 shall apply to weather decks. In no case shall the requirements of category (5) of tables 9.1 or 9.2 necessitate enclosure of spaces which in the opinion of the Administration need not be enclosed.

This gazette is also available free online at **www.gpwonline.co.za**

Table 9.1 - *Bulkheads not bounding either main vertical zones or horizontal zones*

Spaces	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
Control stations (1)	B-0[a]	A-0	A-0	A-0	A-0	A-60	A-60	A-60	A-0	A-0	A-0	A-60	A-60	A-60
Stairways (2)	-	A-0[a]	A-0	A-0	A-0	A-0	A-15	A-15	A-0[c]	A-0	A-15	A-30	A-15	A-30
Corridors (3)	-	-	B-15	A-60	A-0	B-15	B-15	B-15	B-15	A-0	A-15	A-30	A-0	A-30
Evacuation stations and external escape routes (4)	-	-	-	-	A-0	A-60[b,d]	A-60[b,d]	A-60[b,d]	A-0[d]	A-0	A-60[b]	A-60[b]	A-60[b]	A-60[b]
Open deck spaces (5)	-	-	-	-	-	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0
Accommodation spaces of minor fire risk (6)	-	-	-	-	-	B-0	B-0	B-0	C	A-0	A-0	A-30	A-0	A-30
Accommodation spaces of moderate fire risk (7)	-	-	-	-	-	-	B-0	B-0	C	A-0	A-15	A-60	A-15	A-60
Accommodation spaces of greater fire risk (8)	-	-	-	-	-	-	-	B-0	C	A-0	A-30	A-60	A-15	A-60
Sanitary and similar spaces (9)	-	-	-	-	-	-	-	-	C	A-0	A-0	A-0	A-0	A-0
Tanks, voids and auxiliary machinery spaces having little or no fire risk (10)	-	-	-	-	-	-	-	-	-	A-0[a]	A-0	A-0	A-0	A-0
Auxiliary machinery spaces, cargo spaces, cargo and other oil tanks and other similar spaces of moderate fire Risk (11)	-	-	-	-	-	-	-	-	-	-	A-0[a]	A-0	A-0	A-15
Machinery spaces and main (12)	-	-	-	-	-	-	-	-	-	-	-	A-0[a]	A-0	A-60

200

Galleys														
Store-rooms, workshops, pantries etc. **(13)**	-	-	-	-	-	-	-	-	-	-	-	-	A-0[a]	A-0
Other spaces in which flammable liquids are stored **(14)**	-	-	-	-	-	-	-	-	-	-	-	-	-	A-30

See notes following table 9.2.

201

Table 9.2 - *Decks not forming steps in main vertical zones nor bounding horizontal zones*

Spaces Below ↓ Spaces Above →	**(1)**	**(2)**	**(3)**	**(4)**	**(5)**	**(6)**	**(7)**	**(8)**	**(9)**	**(10)**	**(11)**	**(12)**	**(13)**	**(14)**
Control stations **(1)**	A-30	A-30	A-15	A-0	A-0	A-0	A-15	A-30	A-0	A-0	A-0	A-60	A-0	A-60
Stairways **(2)**	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-30	A-0	A-30
Corridors **(3)**	A-15	A-0	A-0[a]	A-60	A-0	A-0	A-15	A-15	A-0	A-0	A-0	A-30	A-0	A-30
Evacuation stations and external escape routes **(4)**	A-0	A-0	A-0	A-0	-	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0
Open deck spaces **(5)**	A-0	A-0	A-0	A-0	-	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0
Accommodation spaces of minor fire risk **(6)**	A-60	A-15	A-0	A-60	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0
Accommodation spaces of moderate fire risk **(7)**	A-60	A-15	A-15	A-60	A-0	A-0	A-15	A-15	A-0	A-0	A-0	A-0	A-0	A-0
Accommodation spaces of greater fire risk **(8)**	A-60	A-15	A-15	A-60	A-0	A-15	A-15	A-30	A-0	A-0	A-0	A-0	A-0	A-0
Sanitary and similar spaces **(9)**	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0
Tanks, voids and auxiliary machinery spaces having little or no fire risk **(10)**	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0[a]	A-0	A-0	A-0	A-0
Auxiliary machinery spaces, cargo spaces, cargo and other oil tanks and other similar spaces of moderate fire risk **(11)**	A-60	A-60	A-60	A-60	A-0	A-0	A-15	A-30	A-0	A-0	A-0[a]	A-0	A-0	A-30

202

Machinery spaces and main galleys **(12)**	A-60	A-60	A-60	A-60	A-0	A-60	A-60	A-60	A-0	A-0	A-30	A-30[a]	A-0	A-60
Store-rooms, workshops, pantries etc. **(13)**	A-60	A-30	A-15	A-60	A-0	A-15	A-30	A-30	A-0	A-0	A-0	A-0	A-0	A-0
Other spaces in which flammable liquids are stored **(14)**	A-60	A-60	A-60	A-60	A-0	A-30	A-60	A-60	A-0	A-0	A-0	A-0	A-0	A-0

Notes: To be applied to tables 9.1 and 9.2, as appropriate

a Where adjacent spaces are in the same numerical category and superscript "a" appears, a bulkhead or deck between such spaces need not be fitted if deemed unnecessary by the Administration. For example, in category (12) a bulkhead need not be required between a galley and its annexed pantries provided the pantry bulkhead and decks maintain the integrity of the galley boundaries. A bulkhead is, however, required between a galley and machinery space even though both spaces are in category (12).

b The ship's side, to the waterline in the lightest seagoing condition, superstructure and deckhouse sides situated below and adjacent to liferafts and evacuation slides may be reduced to "A-30".

c Where public toilets are installed completely within the stairway enclosure, the public toilet bulkhead within the stairway enclosure can be of "B" class integrity.

d Where spaces of categories (6), (7), (8) and (9) are located completely within the outer perimeter of the assembly station, the bulkheads of these spaces are allowed to be of "B-0" class integrity. Control positions for audio, video and light installations may be considered as part of the assembly station.

This gazette is also available free online at **www.gpwonline.co.za**

2.2.3.3 Continuous "B" class ceilings or linings, in association with the relevant decks or bulkheads, may be accepted as contributing wholly or in part, to the required insulation and integrity of a division.

2.2.3.4 *Construction and arrangement of saunas*

2.2.3.4.1 The perimeter of the sauna shall be of "A" class boundaries and may include changing rooms, showers and toilets. The sauna shall be insulated to A-60 standard against other spaces except those inside of the perimeter and spaces of categories (5), (9) and (10).

2.2.3.4.2 Bathrooms with direct access to saunas may be considered as part of them. In such cases, the door between sauna and the bathroom need not comply with fire safety requirements.

2.2.3.4.3 The traditional wooden lining on the bulkheads and ceiling are permitted in the sauna. The ceiling above the oven shall be lined with a non-combustible plate with an air gap of at least 30 mm. The distance from the hot surfaces to combustible materials shall be at least 500 mm or the combustible materials shall be protected (e.g. non-combustible plate with an air gap of at least 30 mm).

2.2.3.4.4 The traditional wooden benches are permitted to be used in the sauna.

2.2.3.4.5 The sauna door shall open outwards by pushing.

2.2.3.4.6 Electrically heated ovens shall be provided with a timer.

2.2.4 *Fire integrity of bulkheads and decks in ships carrying not more than 36 passengers*

2.2.4.1 In addition to complying with the specific provisions for fire integrity of bulkheads and decks of passenger ships, the minimum fire integrity of bulkheads and decks shall be as prescribed in tables 9.3 and 9.4.

2.2.4.2 The following requirements govern application of the tables:

.1 Tables 9.3 and 9.4 shall apply respectively to the bulkheads and decks separating adjacent spaces;

.2 For determining the appropriate fire integrity standards to be applied to divisions between adjacent spaces, such spaces are classified according to their fire risk as shown in categories (1) to (11) below. Where the contents and use of a space are such that there is a doubt as to its classification for the purpose of this regulation, or where it is possible to assign two or more classifications to a space, it shall be treated as a space within the relevant category having the most stringent boundary requirements. Smaller, enclosed rooms within a space that have less than 30 % communicating openings to that space are considered separate spaces. The fire integrity of the boundary bulkheads and decks of such smaller rooms shall be as prescribed in tables 9.3 and 9.4. The title of each category is intended to be typical rather than restrictive. The

This gazette is also available free online at **www.gpwonline.co.za**

number in parentheses preceding each category refers to the applicable column or row in the tables.

(1) *Control stations*

Spaces containing emergency sources of power and lighting.

Wheelhouse and chartroom.

Spaces containing the ship's radio equipment.

Fire control stations.

Control room for propulsion machinery when located outside the machinery space.

Spaces containing centralized fire alarm equipment.

(2) *Corridors*

Passenger and crew corridors and lobbies.

(3) *Accommodation spaces*

Spaces as defined in regulation 3.1 excluding corridors.

(4) *Stairways*

Interior stairways, lifts, totally enclosed emergency escape trunks, and escalators (other than those wholly contained within the machinery spaces) and enclosures thereto.

In this connection, a stairway which is enclosed only at one level shall be regarded as part of the space from which it is not separated by a fire door.

(5) *Service spaces (low risk)*

Lockers and store-rooms not having provisions for the storage of flammable liquids and having areas less than 4 m^2 and drying rooms and laundries.

(6) *Machinery spaces of category A*

Spaces as defined in regulation 3.31.

(7) *Other machinery spaces*

Electrical equipment rooms (auto-telephone exchange, air-conditioning duct spaces).

Spaces as defined in regulation 3.30 excluding machinery spaces of category A.

(8) *Cargo spaces*

All spaces used for cargo (including cargo oil tanks) and trunkways and hatchways to such spaces, other than special category spaces.

(9) *Service spaces (high risk)*

Galleys, pantries containing cooking appliances, paint and lamp rooms, lockers and store-rooms having areas of 4 m^2 or more, spaces for the storage of flammable liquids, saunas and workshops other than those forming part of the machinery spaces.

This gazette is also available free online at **www.gpwonline.co.za**

(10) *Open decks*

Open deck spaces and enclosed promenades having little or no fire risk. Enclosed promenades should have no significant fire risk, meaning that furnishing should be restricted to deck furniture. In addition, such spaces should be naturally ventilated by permanent openings.

Air spaces (the space outside superstructures and deckhouses).

(11) *Special category and ro-ro spaces*

Spaces as defined in regulation 3.41 and 3.46;

.3 In determining the applicable fire integrity standard of a boundary between two spaces within a main vertical zone or horizontal zone which is not protected by an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code or between such zones neither of which is so protected, the higher of the two values given in the tables shall apply; and

.4 In determining the applicable fire integrity standard of a boundary between two spaces within a main vertical zone or horizontal zone which is protected by an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code or between such zones both of which are so protected, the lesser of the two values given in the tables shall apply. Where a zone with sprinklers and a zone without sprinklers meet within accommodation and service spaces, the higher of the two values given in the tables shall apply to the division between the zones.

2.2.4.3 Continuous "B" class ceilings or linings, in association with the relevant decks or bulkheads, may be accepted as contributing, wholly or in part, to the required insulation and integrity of a division.

2.2.4.4 External boundaries which are required in regulation 11.2 to be of steel or other equivalent material may be pierced for the fitting of windows and sidescuttles provided that there is no requirement for such boundaries of passenger ships to have "A" class integrity. Similarly, in such boundaries which are not required to have "A" class integrity, doors may be constructed of materials which are to the satisfaction of the Administration.

2.2.4.5 Saunas shall comply with paragraph 2.2.3.4.

This gazette is also available free online at **www.gpwonline.co.za**

Table 9.3 - *Fire integrity of bulkheads separating adjacent spaces*

Spaces	**(1)**	**(2)**	**(3)**	**(4)**	**(5)**	**(6)**	**(7)**	**(8)**	**(9)**	**(10)**	**(11)**
Control stations **(1)**	A-0[c]	A-0	A-60	A-0	A-15	A-60	A-15	A-60	A-60	*	A-60
Corridors **(2)**		C[e]	B-0[e]	A-0[a] B-0[e]	B-0[e]	A-60	A-0	A-0	A-15 A-0[d]	*	A-30[g]
Accommodation spaces **(3)**			C[e]	A-0[a] B-0[e]	B-0[e]	A-60	A-0	A-0	A-15 A-0[d]	*	A-30 A-0[d]
Stairways **(4)**				A-0[a] B-0[e]	A-0[a] B-0[e]	A-60	A-0	A-0	A-15 A-0[d]	*	A-30[g]
Service spaces (low risk) **(5)**					C[e]	A-60	A-0	A-0	A-0	*	A-0
Machinery spaces of category A **(6)**						*	A-0	A-0	A-60	*	A-60
Other machinery spaces **(7)**							A-0[b]	A-0	A-0	*	A-0
Cargo spaces **(8)**								*	A-0	*	A-0
Service spaces (high risk) **(9)**									A-0[b]	*	A-30
Open decks **(10)**											A-0
Special category and ro-ro spaces **(11)**											A-30[g]

See notes following table 9.4.

This gazette is also available free online at **www.gpwonline.co.za**

Table 9.4 - *Fire integrity of decks separating adjacent spaces*

Spaces Below ↓ Spaces Above →		**(1)**	**(2)**	**(3)**	**(4)**	**(5)**	**(6)**	**(7)**	**(8)**	**(9)**	**(10)**	**(11)**
Control stations	**(1)**	A-0	A-0	A-0	A-0	A-0	A-60	A-0	A-0	A-0	*	A-60[g]
Corridors	**(2)**	A-0	*	*	A-0	*	A-60	A-0	A-0	A-0	*	A-30[g]
Accommodation spaces	**(3)**	A-60	A-0	*	A-0	*	A-60	A-0	A-0	A-0	*	A-30 A-0[d]
Stairways	**(4)**	A-0	A-0	A-0	*	A-0	A-60	A-0	A-0	A-0	*	A-30[g]
Service spaces (low risk)	**(5)**	A-15	A-0	A-0	A-0	*	A-60	A-0	A-0	A-0	*	A-0
Machinery spaces of category A	**(6)**	A-60	A-60	A-60	A-60	A-60	*	A-60[f]	A-30	A-60	*	A-60
Other machinery spaces	**(7)**	A-15	A-0	A-0	A-0	A-0	A-0	*	A-0	A-0	*	A-0
Cargo spaces	**)8)**	A-60	A-0	A-0	A-0	A-0	A-0	A-0	*	A-0	*	A-0
Service spaces (high risk)	**(9)**	A-60	A-30 A-0[d]	A-30 A-0[d]	A-30 A-0[d]	A-0	A-60	A-0	A-0	A-0	*	A-30
Open decks	**(10)**	*	*	*	*	*	*	*	*	*	-	A-0
Special category and ro-ro spaces	**(11)**	A-60	A-30[g]	A-30 A-0[d]	A-30[g]	A-0	A-60[g]	A-0	A-0	A-30	A-0	A-30[g]

Notes: To be applied to both tables 9.3 and 9.4 as appropriate.

a For clarification as to which applies, see paragraphs 2.2.2 and 2.2.5.

b Where spaces are of the same numerical category and superscript b appears, a bulkhead or deck of the rating shown in the tables is only required when the adjacent spaces are for a different purpose, (e.g. in category (9)). A galley next to a galley does not require a bulkhead but a galley next to a paint room requires an "A-0" bulkhead.

c Bulkhead separating the wheelhouse and chartroom from each other may have a "B-0" rating. No fire rating is required for those partitions separating the navigation bridge and the safety centre when the latter is within the navigation bridge.

This gazette is also available free online at **www.gpwonline.co.za**

d See paragraphs 2.2.4.2.3 and 2.2.4.2.4.

e For the application of paragraph 2.2.1.1.2, "B-0" and "C", where appearing in table 9.3, shall be read as "A-0".

f Fire insulation need not be fitted if the machinery space in category (7), in the opinion of the Administration, has little or no fire risk.

g Ships constructed before 1 July 2014 shall comply, as a minimum, with the previous requirements applicable at the time the ship was constructed, as specified in regulation 1.2.

* Where an asterisk appears in the tables, the division is required to be of steel or other equivalent material, but is not required to be of "A" class standard. However, where a deck, except in a category (10) space, is penetrated for the passage of electric cables, pipes and vent ducts, such penetrations should be made tight to prevent the passage of flame and smoke. Divisions between control stations (emergency generators) and open decks may have air intake openings without means for closure, unless a fixed gas fire-fighting system is fitted.

For the application of paragraph 2.2.1.1.2, an asterisk, where appearing in table 9.4, except for categories (8) and (10), shall be read as "A-0".

This gazette is also available free online at **www.gpwonline.co.za**

2.2.5 *Protection of stairways and lifts in accommodation area*

2.2.5.1 Stairways shall be within enclosures formed of "A" class divisions, with positive means of closure at all openings, except that:

.1 a stairway connecting only two decks need not be enclosed, provided the integrity of the deck is maintained by proper bulkheads or self-closing doors in one ' tween-deck space. When a stairway is closed in one ' tween-deck space, the stairway enclosure shall be protected in accordance with the tables for decks in paragraphs 2.2.3 or 2.2.4; and

.2 stairways may be fitted in the open in a public space, provided they lie wholly within the public space.

2.2.5.2 Lift trunks shall be so fitted as to prevent the passage of smoke and flame from one ' tween-deck to another and shall be provided with means of closing so as to permit the control of draught and smoke. Machinery for lifts located within stairway enclosures shall be arranged in a separate room, surrounded by steel boundaries, except that small passages for lift cables are permitted. Lifts which open into spaces other than corridors, public spaces, special category spaces, stairways and external areas shall not open into stairways included in the means of escape.

2.2.6 *Arrangement of cabin balconies*

On passenger ships constructed on or after 1 July 2008, non-load bearing partial bulkheads which separate adjacent cabin balconies shall be capable of being opened by the crew from each side for the purpose of fighting fires.

2.2.7 *Protection of atriums*

2.2.7.1 Atriums shall be within enclosures formed of "A" class divisions having a fire rating determined in accordance with tables 9.2 and 9.4, as applicable.

2.2.7.2 Decks separating spaces within atriums shall have a fire rating determined in accordance with tables 9.2 and 9.4, as applicable.

2.3 Cargo ships except tankers

2.3.1 *Methods of protection in accommodation area*

2.3.1.1 One of the following methods of protection shall be adopted in accommodation and service spaces and control stations:

.1 Method IC

The construction of internal divisional bulkheads of non-combustible "B" or "C" class divisions generally without the installation of an automatic sprinkler, fire detection and fire alarm system in the accommodation and service spaces, except as required by regulation 7.5.5.1; or

.2 Method IIC

The fitting of an automatic sprinkler, fire detection and fire alarm system as required by regulation 7.5.5.2 for the detection and extinction of fire in

This gazette is also available free online at **www.gpwonline.co.za**

all spaces in which fire might be expected to originate, generally with no restriction on the type of internal divisional bulkheads; or

.3 Method IIIC

The fitting of a fixed fire detection and fire alarm system as required by regulation 7.5.5.3, in spaces in which a fire might be expected to originate, generally with no restriction on the type of internal divisional bulkheads, except that in no case must the area of any accommodation space or spaces bounded by an "A" or "B" class division exceed 50 m^2. Consideration may be given by the Administration to increasing this area for public spaces.

2.3.1.2 The requirements for the use of non-combustible materials in the construction and insulation of boundary bulkheads of machinery spaces, control stations, service spaces, etc., and the protection of the above stairway enclosures and corridors will be common to all three methods outlined in paragraph 2.3.1.1.

2.3.2 *Bulkheads within accommodation area*

2.3.2.1 Bulkheads required to be "B" class divisions shall extend from deck to deck and to the shell or other boundaries. However, where a continuous "B" class ceiling or lining is fitted on both sides of the bulkhead, the bulkhead may terminate at the continuous ceiling or lining.

2.3.2.2 Method IC

Bulkheads not required by this or other regulations for cargo ships to be "A" or "B" class divisions, shall be of at least "C" class construction.

2.3.2.3 Method IIC

There shall be no restriction on the construction of bulkheads not required by this or other regulations for cargo ships to be "A" or "B" class divisions except in individual cases where "C" class bulkheads are required in accordance with table 9.5.

2.3.2.4 Method IIIC

There shall be no restriction on the construction of bulkheads not required for cargo ships to be "A" or "B" class divisions except that the area of any accommodation space or spaces bounded by a continuous "A" or "B" class division must in no case exceed 50 m^2, except in individual cases where "C" class bulkheads are required in accordance with table 9.5. Consideration may be given by the Administration to increasing this area for public spaces.

2.3.3 *Fire integrity of bulkheads and decks*

2.3.3.1 In addition to complying with the specific provisions for fire integrity of bulkheads and decks of cargo ships, the minimum fire integrity of bulkheads and decks shall be as prescribed in tables 9.5 and 9.6.

2.3.3.2 The following requirements shall govern application of the tables:

This gazette is also available free online at **www.gpwonline.co.za**

.1 Tables 9.5 and 9.6 shall apply respectively to the bulkheads and decks separating adjacent spaces;

.2 For determining the appropriate fire integrity standards to be applied to divisions between adjacent spaces, such spaces are classified according to their fire risk as shown in categories (1) to (11) below. Where the contents and use of a space are such that there is a doubt as to its classification for the purpose of this regulation, or where it is possible to assign two or more classifications to a space, it shall be treated as a space within the relevant category having the most stringent boundary requirements. Smaller, enclosed rooms within a space that have less than 30 % communicating openings to that space are considered separate spaces. The fire integrity of the boundary bulkheads and decks of such smaller rooms shall be as prescribed in tables 9.5 and 9.6. The title of each category is intended to be typical rather than restrictive. The number in parentheses preceding each category refers to the applicable column or row in the tables;

(1) *Control stations*

Spaces containing emergency sources of power and lighting.

Wheelhouse and chartroom.

Spaces containing the ship's radio equipment.

Fire control stations.

Control room for propulsion machinery when located outside the machinery space.

Spaces containing centralized fire alarm equipment.

(2) *Corridors*

Corridors and lobbies.

(3) *Accommodation spaces*

Spaces as defined in regulation 3.1, excluding corridors.

(4) *Stairways*

Interior stairway, lifts, totally enclosed emergency escape trunks, and escalators (other than those wholly contained within the machinery spaces) and enclosures thereto. In this connection, a stairway which is enclosed only at one level shall be regarded as part of the space from which it is not separated by a fire door.

(5) *Service spaces (low risk)*

Lockers and store-rooms not having provisions for the storage of flammable liquids and having areas less than 4 m^2 and drying rooms and laundries.

(6) *Machinery spaces of category A*

Spaces as defined in regulation 3.31.

(7) *Other machinery spaces*

This gazette is also available free online at **www.gpwonline.co.za**

Electrical equipment rooms (auto-telephone exchange, air-conditioning duct spaces). Spaces as defined in regulation 3.30 excluding machinery spaces of category A.

(8) *Cargo spaces*

All spaces used for cargo (including cargo oil tanks) and trunkways and hatchways to such spaces.

(9) *Service spaces (high risk)*

Galleys, pantries containing cooking appliances, saunas, paint lockers and store-rooms having areas of 4 m^2 or more, spaces for the storage of flammable liquids, and workshops other than those forming part of the machinery spaces.

(10) *Open decks*

Open deck spaces and enclosed promenades having little or no fire risk. To be considered in this category, enclosed promenades shall have no significant fire risk, meaning that furnishings shall be restricted to deck furniture. In addition, such spaces shall be naturally ventilated by permanent openings. Air spaces (the space outside superstructures and deckhouses).

(11) *Ro-ro and vehicle spaces*

Ro-ro spaces as defined in regulation 3.41. Vehicle spaces as defined in regulation 3.49.

This gazette is also available free online at **www.gpwonline.co.za**

Table 9.5 - *Fire integrity of bulkheads separating adjacent spaces*

Spaces	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)
Control stations (1)	A-0[e]	A-0	A-60	A-0	A-15	A-60	A-15	A-60	A-60	*	A-60
Corridors (2)		C	B-0	B-0 A-0[c]	B-0	A-60	A-0	A-0	A-0	*	A-30
Accommodation spaces (3)			C[a,b]	B-0 A-0[c]	B-0	A-60	A-0	A-0	A-0	*	A-30
Stairways (4)				B-0 A-0[c]	B-0 A-0[c]	A-60	A-0	A-0	A-0	*	A-30
Service spaces (low risk) (5)					C	A-60	A-0	A-0	A-0	*	A-0
Machinery spaces of category A (6)						*	A-0	A-0[g]	A-60	*	A-60[f]
Other machinery spaces (7)							A-0[d]	A-0	A-0	*	A-0
Cargo spaces (8)								*	A-0	*	A-0
Service spaces (high risk) (9)									A-0[d]	*	A-30
Open decks (10)										-	A-0
Ro-ro and vehicle spaces (11)											A-30[j]

See notes following table 9.6.

This gazette is also available free online at **www.gpwonline.co.za**

Table 9.6 - *Fire integrity of decks separating adjacent spaces*

Spaces Below ↓ Spaces Above →	**(1)**	**(2)**	**(3)**	**(4)**	**(5)**	**(6)**	**(7)**	**(8)**	**(9)**	**(10)**	**(11)**
Control stations **(1)**	A-0	A-0	A-0	A-0	A-0	A-60	A-0	A-0	A-0	*	A-60
Corridors **(2)**	A-0	*	*	A-0	*	A-60	A-0	A-0	A-0	*	A-30
Accommodation spaces **(3)**	A-60	A-0	*	A-0	*	A-60	A-0	A-0	A-0	*	A-30
Stairways **(4)**	A-0	A-0	A-0	*	A-0	A-60	A-0	A-0	A-0	*	A-30
Service spaces (low risk) **(5)**	A-15	A-0	A-0	A-0	*	A-60	A-0	A-0	A-0	*	A-0
Machinery spaces of category A **(6)**	A-60	A-60	A-60	A-60	A-60	*	A-60[i]	A-30	A-60	*	A-60
Other machinery spaces **(7)**	A-15	A-0	A-0	A-0	A-0	A-0	*	A-0	A-0	*	A-0
Cargo spaces **(8)**	A-60	A-0	A-0	A-0	A-0	A-0	A-0	*	A-0	*	A-0
Service spaces (high risk) **(9)**	A-60	A-0	A-0	A-0	A-0	A-60	A-0	A-0	A-0[d]	*	A-30
Open decks **(10)**	*	*	*	*	*	*	*	*	*	-	A-0[j]
Ro-ro and vehicle spaces **(11)**	A-60	A-30	A-30	A-30	A-0	A-60	A-0	A-0	A-30	A-0[j]	A-30[j]

Note: To be applied to tables 9.5and 9.6 as appropriate.

a No special requirements are imposed upon bulkheads in methods IIC and IIIC fire protection.

b In case of method IIIC "B" class bulkheads of "B-0" rating shall be provided between spaces or groups of spaces of 50 m^2 and over in area.

c For clarification as to which applies, see paragraphs 2.3.2 and 2.3.4.

d Where spaces are of the same numerical category and superscript d appear, a bulkhead or deck of the rating shown in the tables is only required when the adjacent spaces are for a different purpose (e.g. in category (9)). A galley next to a galley does not require a bulkhead but a galley next to a paint room requires an "A-0" bulkhead.

e Bulkheads separating the wheelhouse, chartroom and radio room from each other may have a "B-0" rating.

This gazette is also available free online at **www.gpwonline.co.za**

f An "A-0" rating may be used if no dangerous goods are intended to be carried or if such goods are stowed not less than 3 m horizontally from such a bulkhead.

g For cargo spaces in which dangerous goods are intended to be carried, regulation 19.3.8 applies.

h deleted.

i Fire insulation need not be fitted if the machinery in category (7) if, in the opinion of the Administration, it has little or no fire risk.

j Ships constructed before 1 July 2014 shall comply, as a minimum, with the previous requirements applicable at the time the ship was constructed, as specified in regulation 1.2.

* Where an asterisk appears in the tables, the division is required to be of steel or other equivalent material but is not required to be of "A" class standard. However, where a deck, except an open deck, is penetrated for the passage of electric cables, pipes and vent ducts, such penetrations should be made tight to prevent the passage of flame and smoke. Divisions between control stations (emergency generators) and open decks may have air intake openings without means for closure, unless a fixed gas fire-fighting system is fitted.

This gazette is also available free online at **www.gpwonline.co.za**

2.3.3.3 Continuous "B" class ceilings or linings, in association with the relevant decks or bulkheads, may be accepted as contributing, wholly or in part, to the required insulation and integrity of a division.

2.3.3.4 External boundaries which are required in regulation 11.2 to be of steel or other equivalent material may be pierced for the fitting of windows and sidescuttles provided that there is no requirement for such boundaries of cargo ships to have "A" class integrity. Similarly, in such boundaries which are not required to have "A" class integrity, doors may be constructed of materials which are to the satisfaction of the Administration.

2.3.3.5 Saunas shall comply with paragraph 2.2.3.4.

2.3.4 *Protection of stairways and lift trunks in accommodation spaces, service spaces and control stations*

2.3.4.1 Stairways which penetrate only a single deck shall be protected, at a minimum, at one level by at least "B-0" class divisions and self-closing doors. Lifts which penetrate only a single deck shall be surrounded by "A-0" class divisions with steel doors at both levels. Stairways and lift trunks which penetrate more than a single deck shall be surrounded by at least "A-0" class divisions and be protected by self-closing doors at all levels.

2.3.4.2 On ships having accommodation for 12 persons or less, where stairways penetrate more than a single deck and where there are at least two escape routes direct to the open deck at every accommodation level, the "A-0" requirements of paragraph 2.3.4.1 may be reduced to "B-0".

2.4 Tankers

2.4.1 *Application*

For tankers, only method IC as defined in paragraph 2.3.1.1 shall be used.

2.4.2 *Fire integrity of bulkheads and decks*

2.4.2.1 In lieu of paragraph 2.3 and in addition to complying with the specific provisions for fire integrity of bulkheads and decks of tankers, the minimum fire integrity of bulkheads and decks shall be as prescribed in tables 9.7 and 9.8.

2.4.2.2 The following requirements shall govern application of the tables:

.1 Tables 9.7 and 9.8 shall apply respectively to the bulkhead and decks separating adjacent spaces;

.2 For determining the appropriate fire integrity standards to be applied to divisions between adjacent spaces, such spaces are classified according to their fire risk as shown in categories (1) to (10) below. Where the contents and use of a space are such that there is a doubt as to its classification for the purpose of this regulation, or where it is possible to assign two or more classifications to a space, it shall be treated as a

This gazette is also available free online at **www.gpwonline.co.za**

space within the relevant category having the most stringent boundary requirements. Smaller, enclosed areas within a space that have less than 30 % communicating openings to that space are considered separate areas. The fire integrity of the boundary bulkheads and decks of such smaller spaces shall be as prescribed in tables 9.7 and 9.8. The title of each category is intended to be typical rather than restrictive. The number in parentheses preceding each category refers to the applicable column or row in the tables;

(1) *Control stations*

Spaces containing emergency sources of power and lighting.

Wheelhouse and chartroom.

Spaces containing the ship's radio equipment.

Fire control stations.

Control room for propulsion machinery when located outside the machinery space.

Spaces containing centralized fire alarm equipment.

(2) *Corridors*

Corridors and lobbies.

(3) *Accommodation spaces*

Spaces as defined in regulation 3.1, excluding corridors.

(4) *Stairways*

Interior stairways, lifts, totally enclosed emergency escape trunks, and escalators (other than those wholly contained within the machinery spaces) and enclosures thereto.

In this connection, a stairway which is enclosed only at one level shall be regarded as part of the space from which it is not separated by a fire door.

(5) *Service spaces (low risk)*

Lockers and store-rooms not having provisions for the storage of flammable liquids and having areas less than 4 m^2 and drying rooms and laundries.

(6) *Machinery spaces of category A*

Spaces as defined in regulation 3.31.

(7) *Other machinery spaces*

Electrical equipment rooms (auto-telephone exchange and air-conditioning duct spaces). Spaces as defined in regulation 3.30 excluding machinery spaces of category A.

(8) *Cargo pump-rooms*

Spaces containing cargo pumps and entrances and trunks to such spaces.

(9) *Service spaces (high risk)*

This gazette is also available free online at **www.gpwonline.co.za**

Galleys, pantries containing cooking appliances, saunas, paint, lockers and store-rooms having areas of 4 m^2 or more, spaces for the storage of flammable liquids and workshops other than those forming part of the machinery spaces.

(10) *Open decks*

Open deck spaces and enclosed promenades having little or no fire risk. To be considered in this category, enclosed promenades shall have no significant fire risk, meaning that furnishings shall be restricted to deck furniture. In addition, such spaces shall be naturally ventilated by permanent openings.

Air spaces (the space outside superstructures and deckhouses).

2.4.2.3 Continuous "B" class ceilings or linings, in association with the relevant decks or bulkheads, may be accepted as contributing, wholly or in part, to the required insulation and integrity of a division.

2.4.2.4 External boundaries which are required in regulation 11.2 to be of steel or other equivalent material may be pierced for the fitting of windows and sidescuttles provided that there is no requirement for such boundaries of tankers to have "A" class integrity. Similarly, in such boundaries which are not required to have "A" class integrity, doors may be constructed of materials which are to the satisfaction of the Administration.

2.4.2.5 Exterior boundaries of superstructures and deckhouses enclosing accommodation and including any overhanging decks which support such accommodation, shall be constructed of steel and insulated to "A-60" standard for the whole of the portions which face the cargo area and on the outward sides for a distance of 3 m from the end boundary facing the cargo area. The distance of 3 m shall be measured horizontally and parallel to the middle line of the ship from the boundary which faces the cargo area at each deck level. In the case of the sides of those superstructures and deckhouses, such insulation shall be carried up to the underside of the deck of the navigation bridge.

2.4.2.6 Skylights to cargo pump-rooms shall be of steel, shall not contain any glass and shall be capable of being closed from outside the pump-room.

2.4.2.7 Construction and arrangement of saunas shall comply with paragraph 2.2.3.4.

This gazette is also available free online at **www.gpwonline.co.za**

Table 9.7 - *Fire integrity of bulkheads separating adjacent spaces*

Spaces	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
Control stations (1)	A-0[c]	A-0	A-60	A-0	A-15	A-60	A-15	A-60	A-60	*
Corridors (2)	-	C	B-0	B-0 A-0[a]	B-0	A-60	A-0	A-60	A-0	*
Accommodation spaces (3)	-	-	C	B-0 A-0[a]	B-0	A-60	A-0	A-60	A-0	*
Stairways (4)	-	-	-	B-0 A-0[a]	B-0 A-0[a]	A-60	A-0	A-60	A-0	*
Service spaces (low risk) (5)	-	-	-	-	C	A-60	A-0	A-60	A-0	*
Machinery spaces of category A (6)	-	-	-	-	-	*	A-0	A-0[d]	A-60	*
Other machinery spaces (7)	-	-	-	-	-	-	A-0[b]	A-0	A-0	*
Cargo pump-rooms (8)	-	-	-	-	-	-	-	*	A-60	*
Service spaces (high risk) (9)	-	-	-	-	-	-	-	-	A-0[b]	*
Open decks (10)	-	-	-	-	-	-	-	-	-	-

See notes following table 9.8.

220

Table 9.8 - *Fire integrity of decks separating adjacent spaces*

Spaces Below ↓ Spaces Above →	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
Control stations (1)	A-0	A-0	A-0	A-0	A-0	A-60	A-0	-	A-0	*
Corridors (2)	A-0	*	*	A-0	*	A-60	A-0	-	A-0	*
Accommodation spaces (3)	A-60	A-0	*	A-0	*	A-60	A-0	-	A-0	*
Stairways (4)	A-0	A-0	A-0	*	A-0	A-60	A-0	-	A-0	*
Service spaces (low risk) (5)	A-15	A-0	A-0	A-0	*	A-60	A-0	-	A-0	*
Machinery spaces of category A (6)	A-60	A-60	A-60	A-60	A-60	*	A-60[e]	A-0	A-60	*
Other machinery spaces (7)	A-15	A-0	A-0	A-0	A-0	A-0	*	A-0	A-0	*
Cargo pump-rooms (8)	-	-	-	-	-	A-0[d]	A-0	*	-	*
Service spaces (high risk) (9)	A-60	A-0	A-0	A-0	A-0	A-60	A-0	-	A-0[b]	*
Open decks (10)	*	*	*	*	*	*	*	*	*	-

Notes: To be applied to tables 9.7 and 9.8 as appropriate.

a For clarification as to which applies, see paragraphs 2.3.2 and 2.3.4.

b Where spaces are of the same numerical category and superscript b appear, a bulkhead or deck of the rating shown in the tables is only required when the adjacent spaces are for a different purpose (e.g. in category (9)). A galley next to a galley does not require a bulkhead but a galley next to a paint room requires an "A-0" bulkhead.

c Bulkheads separating the wheelhouse, chartroom and radio room from each other may have a "B-0" rating.

d Bulkheads and decks between cargo pump-rooms and machinery spaces of category A may be penetrated by cargo pump shaft glands and similar gland penetrations, provided that gas tight seals with efficient lubrication or other means of ensuring the permanence of the gas seal are fitted in way of the bulkheads or deck.

e Fire insulation need not be fitted if the machinery in category (7) if, in the opinion of the Administration, it has little or no fire risk.

This gazette is also available free online at **www.gpwonline.co.za**

* Where an asterisk appears in the table, the division is required to be of steel or other equivalent material, but is not requ ired to be of "A" class standard. However, where a deck, except an open deck, is penetrated for the passage of electric cables, pipes and vent ducts, such penetrations should be made tight to prevent the passage of flame and smoke. Divisions between control stations (emergency generators) and open decks may have air intake openings without means for closure, unless a fixed gas fire-fighting system is fitted.

This gazette is also available free online at **www.gpwonline.co.za**

3 Penetration in fire-resisting divisions and prevention of heat transmission

3.1 Where "A" class divisions are penetrated, such penetrations shall be tested in accordance with the Fire Test Procedures Code, subject to the provisions of paragraph 4.1.1.6. In the case of ventilation ducts, paragraphs 7.1.2 and 7.3.1 apply. However, where a pipe penetration is made of steel or equivalent material having a thickness of 3 mm or greater and a length of not less than 900 mm (preferably 450 mm on each side of the division), and no openings, testing is not required. Such penetrations shall be suitably insulated by extension of the insulation at the same level of the division.

3.2 Where "B" class divisions are penetrated for the passage of electric cables, pipes, trunks, ducts, etc., or for the fitting of ventilation terminals, lighting fixtures and similar devices, arrangements shall be made to ensure that the fire resistance is not impaired, subject to the provisions of paragraph 7.3.2. Pipes other than steel or copper that penetrate "B" class divisions shall be protected by either:

.1 a fire tested penetration device, suitable for the fire resistance of the division pierced and the type of pipe used; or

.2 a steel sleeve, having a thickness of not less than 1.8 mm and a length of not less than 900 mm for pipe diameters of 150 mm or more and not less than 600 mm for pipe diameters of less than 150 mm (preferably equally divided to each side of the division). The pipe shall be connected to the ends of the sleeve by flanges or couplings; or the clearance between the sleeve and the pipe shall not exceed 2.5 mm; or any clearance between pipe and sleeve shall be made tight by means of non-combustible or other suitable material.

3.3 Uninsulated metallic pipes penetrating "A" or "B" class divisions shall be of materials having a melting temperature which exceeds 950º for "A-0" and 850ºC for "B-0" class divisions.

3.4 In approving structural fire protection details, the Administration shall have regard to the risk of heat transmission at intersections and terminal points of required thermal barriers. The insulation of a deck or bulkhead shall be carried past the penetration, intersection or terminal point for a distance of at least 450 mm in the case of steel and aluminium structures. If a space is divided with a deck or a bulkhead of "A" class standard having insulation of different values, the insulation with the higher value shall continue on the deck or bulkhead with the insulation of the lesser value for a distance of at least 450 mm.

4 Protection of openings in fire resisting divisions

4.1 Openings in bulkheads and decks in passenger ships

4.1.1 *Openings in "A" class divisions*

4.1.1.1 Except for hatches between cargo, special category, store, and baggage spaces, and between such spaces and the weather decks, openings shall be provided with permanently attached means of closing which shall be at least as effective for resisting fires as the divisions in which they are fitted.

This gazette is also available free online at **www.gpwonline.co.za**

CONTINUES ON PAGE 386 OF BOOK 4

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**



Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 4 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845



AIDS HELPLINE: 0800-0123-22 Prevention is the cure

4.1.1.2 The construction of doors and door frames in "A" class divisions, with the means of securing them when closed, shall provide resistance to fire as well as to the passage of smoke and flame equivalent to that of the bulkheads in which the doors are situated, this being determined in accordance with the Fire Test Procedures Code. Doors approved without the sill being part of the frame, which are installed on or after 1 July 2010, shall be installed such that the gap under the door does not exceed 12 mm. A non-combustible sill shall be installed under the door such that floor coverings do not extend beneath the closed door.

4.1.1.3 Such doors and door frames shall be constructed of steel or other equivalent material. Watertight doors need not be insulated.

4.1.1.4 It shall be possible for each door to be opened and closed from each side of the bulkhead by one person only.

4.1.1.5 Fire doors in main vertical zone bulkheads, galley boundaries and stairway enclosures other than power-operated watertight doors and those which are normally locked, shall satisfy the following requirements:

.1 the doors shall be self-closing and be capable of closing with an angle of inclination of up to 3.5 degrees opposing closure;

.2 the approximate time of closure for hinged fire doors shall be no more than 40 s and no less than 10 s from the beginning of their movement with the ship in upright position. The approximate uniform rate of closure for sliding doors shall be of no more than 0.2 m/s and no less than 0.1 m/s with the ship in upright position;

.3 the doors, except those for emergency escape trunks, shall be capable of remote release from the continuously manned central control station, either simultaneously or in groups and shall be capable of release also individually from a position at both sides of the door. Release switches shall have an on-off function to prevent automatic resetting of the system;

.4 hold-back hooks not subject to central control station release are prohibited;

.5 a door closed remotely from the central control station shall be capable of being re-opened from both sides of the door by local control. After such local opening, the door shall automatically close again;

.6 indication must be provided at the fire door indicator panel in the continuously manned central control station whether each door is closed;

.7 the release mechanism shall be so designed that the door will automatically close in the event of disruption of the control system or central power supply;

.8 local power accumulators for power-operated doors shall be provided in the immediate vicinity of the doors to enable the doors to be operated after disruption of the control system or central power supply at least ten times (fully opened and closed) using the local controls;

This gazette is also available free online at **www.gpwonline.co.za**

.9 disruption of the control system or central power supply at one door shall not impair the safe functioning of the other doors;

.10 remote-released sliding or power-operated doors shall be equipped with an alarm that sounds at least 5 s but no more than 10 s after the door being released from the central control station and before the door begins to move and continues sounding until the door is completely closed;

.11 a door designed to re-open upon contacting an object in its path shall re-open not more than 1 m from the point of contact;

.12 double-leaf doors equipped with a latch necessary for their fire integrity shall have a latch that is automatically activated by the operation of the doors when released by the system;

.13 doors giving direct access to special category spaces which are power-operated and automatically closed need not be equipped with the alarms and remote-release mechanisms required in paragraphs 4.1.1.5.3 and 4.1.1.5.10;

.14 the components of the local control system shall be accessible for maintenance and adjusting;

.15 power-operated doors shall be provided with a control system of an approved type which shall be able to operate in case of fire and be in accordance with the Fire Test Procedures Code. This system shall satisfy the following requirements:

.1 the control system shall be able to operate the door at the temperature of at least 200º for at least 60 min, served by the power supply;

.2 the power supply for all other doors not subject to fire shall not be impaired; and

.3 at temperatures exceeding 200º the control system shall be automatically isolated from the power supply and shall be capable of keeping the door closed up to at least 945º.

4.1.1.6 In ships carrying not more than 36 passengers, where a space is protected by an automatic sprinkler fire detection and fire alarm system complying with the provisions the Fire Safety Systems Code or fitted with a continuous "B" class ceiling, openings in decks not forming steps in main vertical zones nor bounding horizontal zones shall be closed reasonably tight and such decks shall meet the "A" class integrity requirements in so far as is reasonable and practicable in the opinion of the Administration.

4.1.1.7 The requirements for "A" class integrity of the outer boundaries of a ship shall not apply to glass partitions, windows and sidescuttles, provided that there is no requirement for such boundaries to have "A" class integrity in paragraph 4.1.3.3. The requirements for "A" class integrity of the outer boundaries of the ship shall not apply to exterior doors, except for those in superstructures and deckhouses facing lifesaving appliances, embarkation and external assembly station areas, external stairs and open decks used for escape routes. Stairway enclosure doors need not meet this requirement.

This gazette is also available free online at **www.gpwonline.co.za**

4.1.1.8 Except for watertight doors, weathertight doors (semi- watertight doors), doors leading to the open deck and doors which need to be reasonably gastight, all "A" class doors located in stairways, public spaces and main vertical zone bulkheads in escape routes shall be equipped with a self-closing hose port of material, construction and fire resistance which is equivalent to the door into which it is fitted, and shall be a 150 mm square clear opening with the door closed and shall be inset into the lower edge of the door, opposite the door hinges or, in the case of sliding doors, nearest the opening.

4.1.1.9 Where it is necessary that a ventilation duct passes through a main vertical zone division, a fail-safe automatic closing fire damper shall be fitted adjacent to the division. The damper shall also be capable of being manually closed from each side of the division. The operating position shall be readily accessible and be marked in red light-reflecting colour. The duct between the division and the damper shall be of steel or other equivalent material and, if necessary, insulated to comply with the requirements of paragraph 3.1. The damper shall be fitted on at least one side of the division with a visible indicator showing whether the damper is in the open position.

4.1.2 *Openings in "B" class divisions*

4.1.2.1 Doors and door frames in "B" class divisions and means of securing them shall provide a method of closure which shall have resistance to fire equivalent to that of the divisions, this being determined in accordance with the Fire Test Procedure Code except that ventilation openings may be permitted in the lower portion of such doors. Where such opening is in or under a door the total net area of any such opening or openings shall not exceed 0.05 m^2. Alternatively, a non-combustible air balance duct routed between the cabin and the corridor, and located below the sanitary unit is permitted where the cross-sectional area of the duct does not exceed 0.05 m^2. All ventilation openings shall be fitted with a grill made of non-combustible material. Doors shall be non-combustible. Doors approved without the sill being part of the frame, which are installed on or after 1 July 2010, shall be installed such that the gap under the door does not exceed 25 mm.

4.1.2.2 Cabin doors in "B" class divisions shall be of a self-closing type. Hold-back hooks are not permitted.

4.1.2.3 The requirements for "B" class integrity of the outer boundaries of a ship shall not apply to glass partitions, windows and sidescuttles. Similarly, the requirements for "B" class integrity shall not apply to exterior doors in superstructures and deckhouses. For ships carrying not more than 36 passengers, the Administration may permit the use of combustible materials in doors separating cabins from the individual interior sanitary spaces such as showers.

4.1.2.4 In ships carrying not more than 36 passengers, where an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code is fitted:

.1 openings in decks not forming steps in main vertical zones nor bounding horizontal zones shall be closed reasonably tight and such decks shall meet the "B" class integrity requirements in so far as is reasonable and practicable in the opinion of the Administration; and

This gazette is also available free online at **www.gpwonline.co.za**

.2 openings in corridor bulkheads of "B" class materials shall be protected in accordance with the provisions of paragraph 2.2.2.

4.1.3 *Windows and sidescuttles*

4.1.3.1 Windows and sidescuttles in bulkheads within accommodation and service spaces and control stations other than those to which the provisions of paragraph 4.1.1.7 and of paragraph 4.1.2.3 apply, shall be so constructed as to preserve the integrity requirements of the type of bulkheads in which they are fitted, this being determined in accordance with the Fire Test Procedures Code.

4.1.3.2 Notwithstanding the requirements of tables 9.1 to 9.4, windows and sidescuttles in bulkheads separating accommodation and service spaces and control stations from weather shall be constructed with frames of steel or other suitable material. The glass shall be retained by a metal glazing bead or angle.

4.1.3.3 Windows facing life-saving appliances, embarkation and assembly stations, external stairs and open decks used for escape routes, and windows situated below liferaft and escape slide embarkation areas shall have fire integrity as required in table 9.1. Where automatic dedicated sprinkler heads are provided for windows, "A-0" windows may be accepted as equivalent. To be considered under this paragraph, the sprinkler heads must either be:

.1 dedicated heads located above the windows, and installed in addition to the conventional ceiling sprinklers; or

.2 conventional ceiling sprinkler heads arranged such that the window is protected by an average application rate of at least 5 l/m^2 and the additional window area is included in the calculation of the area of coverage; or

.3 water-mist nozzles that have been tested and approved in accordance with the guidelines approved by the Organization [93].

Windows located in the ship's side below the lifeboat embarkation area shall have fire integrity at least equal to "A-0" class.

4.1.3.4 Notwithstanding the requirement in paragraph 4.1.3.3, the requirements in paragraphs 4.1.3.5 and 4.1.3.6 shall apply to ships constructed on or after 1 January 2020.

4.1.3.5 For ships carrying more than 36 passengers, windows facing survival craft, embarkation and assembly stations, external stairs and open decks used for escape routes, and windows situated below liferaft and escape slide embarkation areas shall have fire integrity as required in table 9.1. Where automatic dedicated sprinkler heads are provided for windows, "A-0" windows may be accepted as equivalent. To be considered under this paragraph, the sprinkler heads must either be:

.1 dedicated heads located above the windows, and installed in addition to the conventional ceiling sprinklers; or

[93] Refer to Revised Guidelines for approval of sprinkler systems equivalent to that referred to in SOLAS regulation II-2/12 (resolution A.800(19), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

.2 conventional ceiling sprinkler heads arranged such that the window is protected by an average application rate of at least 5 l/min per square metre and the additional window area is included in the calculation of the area of coverage; or

.3 water-mist nozzles that have been tested and approved in accordance with the Guidelines approved by the Organization [93]; and

Windows located in the ship's side below the lifeboat embarkation area shall have fire integrity at least equal to "A-0" class.

4.1.3.6 For ships carrying not more than 36 passengers, windows facing survival craft and escape slide, embarkation areas and windows situated below such areas shall have fire integrity at least equal to "A-0" class.

4.2 Doors in fire-resisting divisions in cargo ships

4.2.1 The fire resistance of doors shall be equivalent to that of the division in which they are fitted, this being determined in accordance with the Fire Test Procedures Code. Doors and door frames in "A" class divisions shall be constructed of steel. Doors in "B" class divisions shall be non-combustible. Doors fitted in boundary bulkheads of machinery spaces of category A shall be reasonably gastight and self-closing. In ships constructed according to method IC, the Administration may permit the use of combustible materials in doors separating cabins from individual interior sanitary accommodation such as showers. Doors approved as “A” class without the sill being part of the frame, which are installed on or after 1 July 2010, shall be installed such that the gap under the door does not exceed 12 mm and a non-combustible sill shall be installed under the door such that floor coverings do not extend beneath the closed door. Doors approved as “B” class without the sill being part of the frame, which are installed on or after 1 July 2010, shall be installed such that the gap under the door does not exceed 25 mm.

4.2.2 Doors required to be self-closing shall not be fitted with hold-back hooks. However, hold-back arrangements fitted with remote release devices of the fail-safe type may be utilized.

4.2.3 In corridor bulkheads ventilation openings may be permitted in and under the doors of cabins and public spaces. Ventilation openings are also permitted in "B" class doors leading to lavatories, offices, pantries, lockers and store rooms. Except as permitted below, the openings shall be provided only in the lower half of a door. Where such an opening is in or under a door the total net area of any such opening or openings shall not exceed 0.05 m^2. Alternatively, a non-combustible air balance duct routed between the cabin and the corridor, and located below the sanitary unit is permitted where the cross-sectional area of the duct does not exceed 0.05 m^2. Ventilation openings, except those under the door, shall be fitted with a grille made of non-combustible material.

4.2.4 Watertight doors need not be insulated.

5 Protection of openings in machinery spaces boundaries

This gazette is also available free online at **www.gpwonline.co.za**

5.1 Application

5.1.1 The provision of this paragraph shall apply to machinery spaces of category A and, where the Administration considers it desirable, to other machinery spaces.

5.2 Protection of openings in machinery space boundaries

5.2.1 The number of skylights, doors, ventilators, openings in funnels to permit exhaust ventilation and other openings to machinery spaces shall be reduced to a minimum consistent with the needs of ventilation and the proper and safe working of the ship.

5.2.2 Skylights shall be of steel and shall not contain glass panels.

5.2.3 Means of control shall be provided for closing power-operated doors or actuating release mechanisms on doors other than power-operated watertight doors. The control shall be located outside the space concerned, where they will not be cut off in the event of fire in the space it serves.

5.2.4 In passenger ships, the means of control required in paragraph 5.2.3 shall be situated at one control position or grouped in as few positions as possible to the satisfaction of the Administration. Such positions shall have safe access from the open deck.

5.2.5 In passenger ships, doors, other than power-operated watertight doors shall be so arranged that positive closure is assured in case of fire in the space by power-operated closing arrangements or by the provision of self-closing doors capable of closing against an inclination of 3.5 degrees opposing closure, and having a fail-safe hold-back arrangement, provided with a remotely operated release device. Doors for emergency escape trunks need not be fitted with a fail-safe hold-back facility and a remotely operated release device.

5.2.6 Windows shall not be fitted in machinery space boundaries. However, this does not preclude the use of glass in control rooms within the machinery spaces.

6 Protection of cargo space boundaries

6.1 In passenger ships carrying more than 36 passengers, the boundary bulkheads and decks of special category and ro-ro spaces shall be insulated to "A-60" class standard. However, where a category (5), (9) and (10) space, as defined in paragraph 2.2.3, is on one side of the division the standard may be reduced to "A-0". Where fuel oil tanks are below a special category space, the integrity of the deck between such spaces may be reduced to "A-0" standard.

6.2 In passenger ships, indicators shall be provided on the navigating bridge which shall indicate when any fire door leading to or from the special category spaces is closed.

6.3 In tankers, for the protection of cargo tanks carrying crude oil and petroleum products having a flashpoint not exceeding 60º, materials readily rendered ineffective

This gazette is also available free online at **www.gpwonline.co.za**

by heat shall not be used for valves, fittings, tank opening covers, cargo vent piping, and cargo piping so as to prevent the spread of fire to the cargo.

7 Ventilation systems

(This paragraph applies to ships constructed on or after 1 January 2016)

7.1 General

7.1.1 Ventilation ducts, including single and double wall ducts, shall be of steel or equivalent material except flexible bellows of short length not exceeding 600 mm used for connecting fans to the ducting in air-conditioning rooms. Unless expressly provided otherwise in paragraph 7.1.6, any other material used in the construction of ducts, including insulation, shall also be non-combustible. However, short ducts, not generally exceeding 2 m in length and with a free cross-sectional area [94] not exceeding 0.02 m^2, need not be of steel or equivalent material, subject to the following conditions:

.1 the ducts shall be made of non-combustible material, which may be faced internally and externally with membranes having low flame-spread characteristics and, in each case, a calorific value [95] not exceeding 45 MJ/m2 of their surface area for the thickness used;

.2 the ducts are only used at the end of the ventilation device; and

.3 the ducts are not situated less than 600 mm, measured along the duct, from an opening in an "A" or "B" class division, including continuous "B" class ceiling.

7.1.2 The following arrangements shall be tested in accordance with the Fire Test Procedures Code:

.1 fire dampers, including their relevant means of operation, however, the testing is not required for dampers located at the lower end of the duct in exhaust ducts for galley ranges, which must be of steel and capable of stopping the draught in the duct; and

.2 duct penetrations through "A" class divisions. However, the test is not required where steel sleeves are directly joined to ventilation ducts by means of riveted or screwed connections or by welding.

7.1.3 Fire dampers shall be easily accessible. Where they are placed behind ceilings or linings, these ceilings or linings shall be provided with an inspection hatch on which the identification number of the fire damper is marked. The fire damper identification number shall also be marked on any remote controls provided.

7.1.4 Ventilation ducts shall be provided with hatches for inspection and cleaning. The hatches shall be located near the fire dampers.

---

[94] The term *free cross-sectional area* means, even in the case of a pre-insulated duct, the area calculated on the basis of the inner dimensions of the duct itself and not the insulation.

[95] Refer to the recommendations published by the International Organization for Standardization, in particular publication ISO 1716:2002, *Reaction to the fire tests for building products – Determination of the heat of combustion*.

This gazette is also available free online at **www.gpwonline.co.za**

7.1.5 The main inlets and outlets of ventilation systems shall be capable of being closed from outside the spaces being ventilated. The means of closing shall be easily accessible as well as prominently and permanently marked and shall indicate the operating position of the closing device.

7.1.6 Combustible gaskets in flanged ventilation duct connections are not permitted within 600 mm of openings in "A" or "B" class divisions and in ducts required to be of "A" class construction.

7.1.7 Ventilation openings or air balance ducts between two enclosed spaces shall not be provided except as permitted by paragraphs 4.1.2.1 and 4.2.3.

7.2 Arrangement of ducts

7.2.1 The ventilation systems for machinery spaces of category A, vehicle spaces, ro-ro spaces, galleys, special category spaces and cargo spaces shall, in general, be separated from each other and from the ventilation systems serving other spaces. However, the galley ventilation systems on cargo ships of less than 4,000 gross tonnage and in passenger ships carrying not more than 36 passengers need not be completely separated from other ventilation systems, but may be served by separate ducts from a ventilation unit serving other spaces. In such a case, an automatic fire damper shall be fitted in the galley ventilation duct near the ventilation unit.

7.2.2 Ducts provided for the ventilation of machinery spaces of category A, galleys, vehicle spaces, ro-ro spaces or special category spaces shall not pass through accommodation spaces, service spaces, or control stations unless they comply with paragraph 7.2.4.

7.2.3 Ducts provided for the ventilation of accommodation spaces, service spaces or control stations shall not pass through machinery spaces of category A, galleys, vehicle spaces, ro-ro spaces or special category spaces unless they comply with paragraph 7.2.4.

7.2.4 As permitted by paragraphs 7.2.2 and 7.2.3 ducts shall be either:

1.1 constructed of steel having a thickness of at least 3 mm for ducts with a free cross-sectional area of less than 0.075 m^2, at least 4 mm for ducts with a free cross-sectional area of between 0.075 m^2 and 0.45 m^2, and at least 5 mm for ducts with a free cross-sectional area of over 0.45 m^2;

1.2 suitably supported and stiffened;

1.3 fitted with automatic fire dampers close to the boundaries penetrated; and

1.4 insulated to "A-60" class standard from the boundaries of the spaces they serve to a point at least 5 m beyond each fire damper;

or

2.1 constructed of steel in accordance with paragraphs 7.2.4.1.1 and 7.2.4.1.2; and

This gazette is also available free online at **www.gpwonline.co.za**

2.2 insulated to "A-60" class standard throughout the spaces they pass through, except for ducts that pass through spaces of category (9) or (10) as defined in paragraph 2.2.3.2.2.

7.2.5 For the purposes of paragraphs 7.2.4.1.4 and 7.2.4.2.2, ducts shall be insulated over their entire cross-sectional external surface. Ducts that are outside but adjacent to the specified space, and share one or more surfaces with it, shall be considered to pass through the specified space, and shall be insulated over the surface they share with the space for a distance of 450 mm past the duct [96].

7.2.6 Where it is necessary that a ventilation duct passes through a main vertical zone division, an automatic fire damper shall be fitted adjacent to the division. The damper shall also be capable of being manually closed from each side of the division. The control location shall be readily accessible and be clearly and prominently marked. The duct between the division and the damper shall be constructed of steel in accordance with paragraphs 7.2.4.1.1 and 7.2.4.1.2 and insulated to at least the same fire integrity as the division penetrated. The damper shall be fitted on at least one side of the division with a visible indicator showing the operating position of the damper.

7.3 Details of fire dampers and duct penetrations

7.3.1 Ducts passing through "A" class divisions shall meet the following requirements:

.1 where a thin plated duct with a free cross sectional area equal to, or less than, 0.02 m^2 passes through "A" class divisions, the opening shall be fitted with a steel sheet sleeve having a thickness of at least 3 mm and a length of at least 200 mm, divided preferably into 100 mm on each side of a bulkhead or, in the case of a deck, wholly laid on the lower side of the decks penetrated;

.2 where ventilation ducts with a free cross-sectional area exceeding 0.02 m2, but not more than 0.075 m^2, pass through "A" class divisions, the openings shall be lined with steel sheet sleeves. The ducts and sleeves shall have a thickness of at least 3 mm and a length of at least 900 mm. When passing through bulkheads, this length shall be divided preferably into 450 mm on each side of the bulkhead. These ducts, or sleeves lining such ducts, shall be provided with fire insulation. The insulation shall have at least the same fire integrity as the division through which the duct passes; and

.3 automatic fire dampers shall be fitted in all ducts with a free cross-sectional area exceeding 0.075 m^2 that pass through "A" class divisions. Each damper shall be fitted close to the division penetrated and the duct between the damper and the division penetrated shall be constructed of steel in accordance with paragraphs 7.2.4.1.1 and 7.2.4.1.2. The fire damper shall operate automatically, but shall also be capable of being closed manually from both sides of the division. The damper shall be fitted with a visible indicator which shows the operating position of the damper. Fire dampers are not required, however, where ducts pass through spaces surrounded by "A" class divisions, without serving those spaces, provided

[96] Sketches of such arrangements are contained in the *Unified Interpretations of SOLAS chapter II-2* (MSC.1/Circ.1276).

This gazette is also available free online at **www.gpwonline.co.za**

those ducts have the same fire integrity as the divisions which they penetrate. A duct of cross-sectional area exceeding 0.075 m2 shall not be divided into smaller ducts at the penetration of an "A" class division and then recombined into the original duct once through the division to avoid installing the damper required by this provision.

7.3.2 Ventilation ducts with a free cross-sectional area exceeding 0.02 m2 passing through "B" class bulkheads shall be lined with steel sheet sleeves of 900 mm in length, divided preferably into 450 mm on each side of the bulkheads unless the duct is of steel for this length.

7.3.3 All fire dampers shall be capable of manual operation. The dampers shall have a direct mechanical means of release or, alternatively, be closed by electrical, hydraulic, or pneumatic operation. All dampers shall be manually operable from both sides of the division. Automatic fire dampers, including those capable of remote operation, shall have a failsafe mechanism that will close the damper in a fire even upon loss of electrical power or hydraulic or pneumatic pressure loss. Remotely operated fire dampers shall be capable of being reopened manually at the damper.

7.4 Ventilation systems for passenger ships carrying more than 36 passengers

7.4.1 In addition to the requirements in sections 7.1, 7.2 and 7.3, the ventilation system of a passenger ship carrying more than 36 passengers shall also meet the following requirements.

7.4.2 In general, the ventilation fans shall be so arranged that the ducts reaching the various spaces remain within a main vertical zone.

7.4.3 Stairway enclosures shall be served by an independent ventilation fan and duct system (exhaust and supply) which shall not serve any other spaces in the ventilation systems.

7.4.4 A duct, irrespective of its cross-section, serving more than one 'tween-deck accommodation space, service space or control station, shall be fitted, near the penetration of each deck of such spaces, with an automatic smoke damper that shall also be capable of being closed manually from the protected deck above the damper. Where a fan serves more than one 'tween-deck space through separate ducts within a main vertical zone, each dedicated to a single 'tween-deck space, each duct shall be provided with a manually operated smoke damper fitted close to the fan.

7.4.5 Vertical ducts shall, if necessary, be insulated as required by tables 9.1 and 9.2. Ducts shall be insulated as required for decks between the space they serve and the space being considered, as applicable.

7.5 Exhaust ducts from galley ranges

7.5.1 *Requirements for passenger ships carrying more than 36 passengers*

7.5.1.1 In addition to the requirements in sections 7.1, 7.2 and 7.3, exhaust ducts from galley ranges shall be constructed in accordance with paragraphs 7.2.4.2.1 and

This gazette is also available free online at **www.gpwonline.co.za**

7.2.4.2.2 and insulated to "A-60" class standard throughout accommodation spaces, service spaces, or control stations they pass through. They shall also be fitted with:

.1 a grease trap readily removable for cleaning unless an alternative approved grease removal system is fitted;

.2 a fire damper located in the lower end of the duct at the junction between the duct and the galley range hood which is automatically and remotely operated and, in addition, a remotely operated fire damper located in the upper end of the duct close to the outlet of the duct;

.3 a fixed means for extinguishing a fire within the duct [97]

.4 remote-control arrangements for shutting off the exhaust fans and supply fans, for operating the fire dampers mentioned in paragraph 7.5.1.1.2 and for operating the fire-extinguishing system, which shall be placed in a position outside the galley close to the entrance to the galley. Where a multi-branch system is installed, a remote means located with the above controls shall be provided to close all branches exhausting through the same main duct before an extinguishing medium is released into the system; and

.5 suitably located hatches for inspection and cleaning, including one provided close to the exhaust fan and one fitted in the lower end where grease accumulates.

7.5.1.2 Exhaust ducts from ranges for cooking equipment installed on open decks shall conform to paragraph 7.5.1.1, as applicable, when passing through accommodation spaces or spaces containing combustible materials.

7.5.2 *Requirements for cargo ships and passenger ships carrying not more than 36 passengers*

When passing through accommodation spaces or spaces containing combustible materials, the exhaust ducts from galley ranges shall be constructed in accordance with paragraphs 7.2.4.1.1 and 7.2.4.1.2. Each exhaust duct shall be fitted with:

.1 a grease trap readily removable for cleaning;

.2 an automatically and remotely operated fire damper located in the lower end of the duct at the junction between the duct and the galley range hood and, in addition, a remotely operated fire damper in the upper end of the duct close to the outlet of the duct;

.3 arrangements, operable from within the galley, for shutting off the exhaust and supply fans; and

.4 fixed means for extinguishing a fire within the duct. [98]

7.6 Ventilation rooms serving machinery spaces of category A containing internal combustion machinery

[97] Refer to the recommendations published by the International Organization for Standardization, in particular publication ISO 15371:2009, *Ships and marine technology – Fire-extinguishing systems for protection of galley cooking equipment.*

[98] Refer to the recommendations published by the International Organization for Standardization, in particular publication ISO 15371:2009, *Ships and marine technology – Fire-extinguishing systems for protection of galley cooking equipment.*

This gazette is also available free online at **www.gpwonline.co.za**

7.6.1 Where a ventilation room serves only such an adjacent machinery space and there is no fire division between the ventilation room and the machinery space, the means for closing the ventilation duct or ducts serving the machinery space shall be located outside of the ventilation room and machinery space.

7.6.2 Where a ventilation room serves such a machinery space as well as other spaces and is separated from the machinery space by a "A-0" class division, including penetrations, the means for closing the ventilation duct or ducts for the machinery space can be located in the ventilation room.

7.7 Ventilation systems for laundries in passenger ships carrying more than 36 passengers

Exhaust ducts from laundries and drying rooms of category (13) spaces as defined in paragraph 2.2.3.2.2 shall be fitted with:

.1 filters readily removable for cleaning purposes;

.2 a fire damper located in the lower end of the duct which is automatically and remotely operated;

.3 remote-control arrangements for shutting off the exhaust fans and supply fans from within the space and for operating the fire damper mentioned in paragraph 7.7.2; and

.4 suitably located hatches for inspection and cleaning.

Regulation 10
Fire fighting

1 Purpose

1.1 The purpose of this regulation is to suppress and swiftly extinguish a fire in the space of origin, except for paragraph 1.2. For this purpose, the following functional requirements shall be met:

.1 fixed fire-extinguishing systems shall be installed having due regard to the fire growth potential of the protected spaces; and

.2 fire-extinguishing appliances shall be readily available.

1.2 For open-top container holds [99] and on deck container stowage areas on ships designed to carry containers on or above the weather deck, constructed on or after 1 January 2016, fire protection arrangements shall be provided for the purpose of containing a fire in the space or area of origin and cooling adjacent areas to prevent fire spread and structural damage.

2 Water supply systems

[99] For a definition of this term, refer to *Interim guidelines for open-top containerships* (MSC/Circ.608/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

Ships shall be provided with fire pumps, fire mains, hydrants and hoses complying with the applicable requirements of this regulation.

2.1 Fire mains and hydrants

2.1.1 *General*

Materials readily rendered ineffective by heat shall not be used for fire mains and hydrants unless adequately protected. The pipes and hydrants shall be so placed that the fire hoses may be easily coupled to them. The arrangement of pipes and hydrants shall be such as to avoid the possibility of freezing. Suitable drainage provisions shall be provided for fire main piping. Isolation valves shall be installed for all open deck fire main branches used for purposes other than fire fighting. In ships where deck cargo may be carried, the positions of the hydrants shall be such that they are always readily accessible and the pipes shall be arranged as far as practicable to avoid risk of damage by such cargo.

2.1.2 *Ready availability of water supply*

The arrangements for the ready availability of water supply shall be:

.1 in passenger ships:

.1 of 1,000 gross tonnage and upwards such that at least one effective jet of water is immediately available from any hydrant in an interior location and so as to ensure the continuation of the output of water by the automatic starting of one required fire pump;

.2 of less than 1,000 gross tonnage by automatic start of at least one fire pump or by remote starting from the navigation bridge of at least one fire pump. If the pump starts automatically or if the bottom valve cannot be opened from where the pump is remotely started, the bottom valve shall always be kept open; and

.3 if fitted with periodically unattended machinery spaces in accordance with regulation II-1/54, the Administration shall determine provisions for fixed water fire-extinguishing arrangement for such spaces equivalent to those required for normally attended machinery spaces;

.2 in cargo ships:

.1 to the satisfaction of the Administration; and

.2 with a periodically unattended machinery space or when only one person is required on watch, there shall be immediate water delivery from the fire main system at a suitable pressure, either by remote starting of one of the main fire pumps with remote starting from the navigating bridge and fire control station, if any, or permanent pressurization of the fire main system by one of the main fire pumps, except that the Administration may waive this requirement for cargo ships of less than 1,600 gross tonnage if the fire pump starting arrangement in the machinery space is in an easily accessible position.

This gazette is also available free online at **www.gpwonline.co.za**

2.1.3 *Diameter of fire mains*

The diameter of the fire main and water service pipes shall be sufficient for the effective distribution of the maximum required discharge from two fire pumps operating simultaneously, except that in the case of cargo ships, other than those included in paragraph 7.3.2, the diameter need only be sufficient for the discharge of 140 m^3/h.

2.1.4 *Isolating valves and relief valves*

2.1.4.1 Isolating valves to separate the section of the fire main within the machinery space containing the main fire pump or pumps from the rest of the fire main shall be fitted in an easily accessible and tenable position outside the machinery spaces. The fire main shall be so arranged that when the isolating valves are shut all the hydrants on the ship, except those in the machinery space referred to above, can be supplied with water by another fire pump or an emergency fire pump. The emergency fire pump, its seawater inlet, and suction and delivery pipes and isolating valves shall be located outside the machinery space. If this arrangement cannot be made, the sea-chest may be fitted in the machinery space if the valve is remotely controlled from a position in the same compartment as the emergency fire pump and the suction pipe is as short as practicable. Short lengths of suction or discharge piping may penetrate the machinery space, provided they are enclosed in a substantial steel casing, or are insulated to A-60 class standards. The pipes shall have substantial wall thickness, but in no case less than 11 mm, and shall be welded except for the flanged connection to the sea inlet valve.

2.1.4.2 A valve shall be fitted to serve each fire hydrant so that any fire hose may be removed while the fire pumps are in operation.

2.1.4.3 Relief valves shall be provided in conjunction with fire pumps if the pumps are capable of developing a pressure exceeding the design pressure of the water service pipes, hydrants and hoses. These valves shall be so placed and adjusted as to prevent excessive pressure in any part of the fire main system.

2.1.4.4 In tankers, isolation valves shall be fitted in the fire main at poop front in a protected position and on the tank deck at intervals of not more than 40 m to preserve the integrity of the fire main system in case of fire or explosion.

2.1.5 *Number and position of hydrants*

2.1.5.1 The number and position of hydrants shall be such that at least two jets of water not emanating from the same hydrant, one of which shall be from a single length of hose, may reach any part of the ship normally accessible to the passengers or crew while the ship is being navigated and any part of any cargo space when empty, any ro-ro space or any vehicle space in which latter case the two jets shall reach any part of the space, each from a single length of hose. Furthermore, such hydrants shall be positioned near the accesses to the protected spaces.

2.1.5.2 In addition to the requirements in the paragraph 2.1.5.1, passenger ships shall comply with the following:

This gazette is also available free online at **www.gpwonline.co.za**

.1 in the accommodation, service and machinery spaces the number and position of hydrants shall be such that the requirements of paragraph 2.1.5.1 may be complied with when all watertight doors and all doors in main vertical zone bulkheads are closed; and

.2 where access is provided to a machinery space of category A at a low level from an adjacent shaft tunnel, two hydrants shall be provided external to, but near the entrance to that machinery space. Where such access is provided from other spaces, in one of those spaces two hydrants shall be provided near the entrance to the machinery space of category A. Such provision need not be made where the tunnel or adjacent spaces are not part of the escape route.

2.1.6 *Pressure at hydrants*

With the two pumps simultaneously delivering water through the nozzles specified in paragraph 2.3.3, with the quantity of water as specified in paragraph 2.1.3, through any adjacent hydrants, the following minimum pressures shall be maintained at all hydrants:

.1 for passenger ships:
4,000 gross tonnage and upwards 0.40 N/mm^2;
less than 4,000 gross tonnage 0.30 N/mm^2;

.2 for cargo ships:
6,000 gross tonnage and upwards 0.27 N/mm^2;
less than 6,000 gross tonnage 0.25 N/mm^2;
and

.3 the maximum pressure at any hydrant shall not exceed that at which the effective control of a fire hose can be demonstrated.

2.1.7 *International shore connection*

2.1.7.1 Ships of 500 gross tonnage and upwards shall be provided with at least one international shore connection complying with the Fire Safety Systems Code.

2.1.7.2 Facilities shall be available enabling such a connection to be used on either side of the ship.

2.2 Fire pumps

2.2.1 *Pumps accepted as fire pumps*

Sanitary, ballast, bilge or general service pumps may be accepted as fire pumps, provided that they are not normally used for pumping oil and that if they are subject to occasional duty for the transfer or pumping of oil fuel, suitable change-over arrangements are fitted.

2.2.2 *Number of fire pumps*

This gazette is also available free online at **www.gpwonline.co.za**

Ships shall be provided with independently driven fire pumps as follows:

.1 in passenger ships of:
4,000 gross tonnage and upwards at least three
less than 4,000 gross tonnage at least two

.2 in cargo ships of:
1,000 gross tonnage and upwards at least two
less than 1,000 gross tonnage at least two power driven pumps, one of which shall be independently driven.

2.2.3 *Arrangement of fire pumps and fire mains*

2.2.3.1 *Fire pumps*

The arrangement of sea connections, fire pumps and their sources of power shall be as to ensure that:

.1 in passenger ships of 1,000 gross tonnage and upwards, in the event of a fire in any one compartment all the fire pumps will not be put out of action; and

.2 in passenger ships of less than 1,000 gross tonnage and in cargo ships, if a fire in any one compartment could put all the pumps out of action, there shall be an alternative means consisting of an emergency fire pump complying with the provisions of the Fire Safety Systems Code with its source of power and sea connection located outside the space where the main fire pumps or their sources of power are located.

2.2.3.2 *Requirements for the space containing the emergency fire pump*

2.2.3.2.1 Location of the space

The space containing the fire pump shall not be contiguous to the boundaries of machinery spaces of category A or those spaces containing main fire pumps. Where this is not practicable, the common bulkhead between the two spaces shall be insulated to a standard of structural fire protection equivalent to that required for a control station in regulation 9.2.3.3.

2.2.3.2.2 Access to the emergency fire pump

No direct access shall be permitted between the machinery space and the space containing the emergency fire pump and its source of power. When this is impracticable, the Administration may accept an arrangement where the access is by means of an airlock with the door of the machinery space being of A-60 class standard, and the other door being at least steel, both reasonably gastight, self-closing and without any hold back arrangements. Alternatively, the access may be through a watertight door capable of being operated from a space remote from the machinery space and the space containing the emergency fire pump and unlikely to be cut off in the event of fire in those spaces. In such cases, a second means of access to the space containing the emergency fire pump and its source of power shall be provided.

239

2.2.3.2.3 Ventilation of the emergency fire pump space

Ventilation arrangements to the space containing the independent source of power for the emergency fire pump shall be such as to preclude, as far as practicable, the possibility of smoke from a machinery space fire entering or being drawn into that space.

2.2.3.3 Additional pumps for cargo ships

In addition, in cargo ships where other pumps, such as general service, bilge and ballast, etc., are fitted in a machinery space, arrangements shall be made to ensure that at least one of these pumps, having the capacity and pressure required by paragraphs 2.1.6.2 and 2.2.4.2, is capable of providing water to the fire main.

2.2.4 *Capacity of fire pumps*

2.2.4.1 Total capacity of required fire pumps

The required fire pumps shall be capable of delivering for fire-fighting purposes a quantity of water, at the pressure specified in paragraph 2.1.6, as follows:

.1 pumps in passenger ships, the quantity of water is not less than two thirds of the quantity required to be dealt with by the bilge pumps when employed for bilge pumping; and

.2 pumps in cargo ships, other than any emergency pump, the quantity of water is not less than four thirds of the quantity required under regulation II-1/35-1 to be dealt with by each of the independent bilge pumps in a passenger ship of the same dimension when employed in bilge pumping, provided that in no cargo ship, other than those included in paragraph 7.3.2, need the total required capacity of the fire pumps exceed 180 m³/h.

2.2.4.2 Capacity of each fire pump

Each of the required fire pumps (other than any emergency pump required in paragraph 2.2.3.1.2 for cargo ships) shall have a capacity not less than 80% of the total required capacity divided by the minimum number of required fire pumps but in any case, not less than 25 m³/h and each such pump shall in any event be capable of delivering at least the two required jets of water. These fire pumps shall be capable of supplying the fire main system under the required conditions. Where more pumps than the minimum of required pumps are installed such additional pumps shall have a capacity of at least 25 m³/h and shall be capable of delivering at least the two jets of water required in paragraph 2.1.5.1.

2.3 Fire hoses and nozzles

2.3.1 *General specifications*

2.3.1.1 Fire hoses shall be of non-perishable material approved by the Administration and shall be sufficient in length to project a jet of water to any of the spaces in which

This gazette is also available free online at **www.gpwonline.co.za**

they may be required to be used. Each hose shall be provided with a nozzle and the necessary couplings. Hoses specified in this chapter as "fire hoses" shall, together with any necessary fittings and tools, be kept ready for use in conspicuous positions near the water service hydrants or connections. Additionally, in interior locations in passenger ships carrying more than 36 passengers fire hoses shall be connected to the hydrants at all times. Fire hoses shall have a length of at least 10 m, but not more than:

.1 15 m in machinery spaces;

.2 20 m in other spaces and open decks; and

.3 25 m for open decks on ships with a maximum breadth in excess of 30 m.

2.3.1.2 Unless one hose and nozzle is provided for each hydrant in the ship, there shall be complete interchangeability of hose couplings and nozzles.

2.3.2 *Number and diameter of fire hoses*

2.3.2.1 Ships shall be provided with fire hoses the number and diameter of which shall be to the satisfaction of the Administration.

2.3.2.2 In passenger ships, there shall be at least one fire hose for each of the hydrants required by paragraph 2.1.5 and these hoses shall be used only for the purposes of extinguishing fires or testing the fire-extinguishing apparatus at fire drills and surveys.

2.3.2.3 In cargo ships:

.1 of 1,000 gross tonnage and upwards, the number of fire hoses to be provided shall be one for each 30 m length of the ship and one spare but in no case less than five in all. This number does not include any hoses required in any engine or boiler room. The Administration may increase the number of hoses required so as to ensure that hoses in sufficient number are available and accessible at all times, having regard to the type of ship and the nature of trade in which the ship is employed. Ships carrying dangerous goods in accordance with regulation 19 shall be provided with 3 hoses and nozzles, in addition to those required above; and

.2 of less than 1,000 gross tonnage, the number of fire hoses to be provided shall be calculated in accordance with the provisions of paragraph 2.3.2.3.1. However, the number of hoses shall in no case be less than three.

2.3.3 *Size and types of nozzles*

2.3.3.1 For the purposes of this chapter, standard nozzle sizes shall be 12 mm, 16 mm and 19 mm or as near thereto as possible. Larger diameter nozzles may be permitted at the discretion of the Administration.

This gazette is also available free online at **www.gpwonline.co.za**

2.3.3.2 For accommodation and service spaces, a nozzle size greater than 12 mm need not be used.

2.3.3.3 For machinery spaces and exterior locations, the nozzle size shall be such as to obtain the maximum discharge possible from two jets at the pressure mentioned in paragraph 2.1.6 from the smallest pump, provided that a nozzle size greater than 19 mm need not be used.

2.3.3.4 Nozzles shall be of an approved dual-purpose type (i.e., spray/jet type) incorporating a shutoff.

3 Portable fire extinguishers [100]

3.1 Type and design

Portable fire extinguishers shall comply with the requirements of the Fire Safety Systems Code.

3.2 Arrangement of fire extinguishers

3.2.1 Accommodation spaces, service spaces and control stations shall be provided with portable fire extinguishers of appropriate types and in sufficient number to the satisfaction of the Administration. Ships of 1,000 gross tonnage and upwards shall carry at least five portable fire extinguishers.

3.2.2 One of the portable fire extinguishers intended for use in any space shall be stowed near the entrance to that space.

3.2.3 Carbon dioxide fire extinguishers shall not be placed in accommodation spaces. In control stations and other spaces containing electrical or electronic equipment or appliances necessary for the safety of the ship, fire extinguishers should be provided whose extinguishing media are neither electrically conductive nor harmful to the equipment and appliances.

3.2.4 Fire extinguishers shall be situated ready for use at easily visible places, which can be reached quickly and easily at any time in the event of a fire, and in such a way that their serviceability is not impaired by the weather, vibration or other external factors. Portable fire extinguishers shall be provided with devices which indicate whether they have been used.

3.3 Spare charges

3.3.1 Spare charges shall be provided for 100% of the first 10 extinguishers and 50% of the remaining fire extinguishers capable of being recharged on board. Not more than 60 total spare charges are required. Instructions for recharging shall be carried on board.

[100] Refer to *Improved Guidelines for marine portable fire extinguishers* (resolution A.951(23)) and *Unified interpretation of SOLAS chapter II-2 on the number and arrangement of portable fire extinguishers on board ships* (MSC.1/Circ.1275 and Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

3.3.2 For fire extinguishers which cannot be recharged onboard, additional portable fire extinguishers of the same quantity, type, capacity and number as determined in paragraph 3.3.1 above shall be provided in lieu of spare charges.

4 Fixed fire-extinguishing systems

4.1 Types of fixed fire extinguishing systems

4.1.1 A fixed fire extinguishing system required by paragraph 5 below may be any of the following systems:

.1 a fixed gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code;

.2 a fixed high-expansion foam fire-extinguishing system complying with the provisions of the Fire Safety Systems Code; and

.3 a fixed pressure water-spraying fire-extinguishing system complying with the provisions of the Fire Safety Systems Code.

4.1.2 Where a fixed fire-extinguishing system not required by this chapter is installed, it shall meet the requirements of the relevant regulations of this chapter and the Fire Safety Systems Code.

4.1.3 Fire-extinguishing systems using Halon 1211, 1301, and 2402 and perfluorocarbons shall be prohibited. [101]

4.1.4 In general, the Administration shall not permit the use of steam as a fire-extinguishing medium in fixed fire-extinguishing systems. Where the use of steam is permitted by the Administration, it shall be used only in restricted areas as an addition to the required fire-extinguishing system and shall comply with the requirements of the Fire Safety System Code.

4.1.5 By the first scheduled dry-docking after 1 January 2010, fixed carbon dioxide fire-extinguishing systems for the protection of machinery spaces and cargo pump-rooms on ships constructed before 1 July 2002 shall comply with the provisions of paragraph 2.2.2 of chapter 5 of the Fire Safety Systems Code.

4.2 Closing appliances for fixed gas fire-extinguishing systems

Where a fixed gas fire-extinguishing system is used, openings which may admit air to, or allow gas to escape from, a protected space shall be capable of being closed from outside the protected space.

4.3 Storage rooms of fire-extinguishing medium

When the fire-extinguishing medium is stored outside a protected space, it shall be stored in a room which is located behind the forward collision bulkhead, and is used for no other purposes. Any entrance to such a storage room shall preferably be from

[101] The list of halon banking and reception facilities to recharge or decommission existing fire-extinguishing systems are circulated through the Global Integrated Shipping Information System (GISIS) (resolution A.1074(28)), under the module "Test Laboratories and Halon Facilities"

This gazette is also available free online at www.gpwonline.co.za

the open deck and shall be independent of the protected space. If the storage space is located below deck, it shall be located no more than one deck below the open deck and shall be directly accessible by a stairway or ladder from the open deck. Spaces which are located below deck or spaces where access from the open deck is not provided, shall be fitted with a mechanical ventilation system designed to take exhaust air from the bottom of the space and shall be sized to provide at least 6 air changes per hour. Access doors shall open outwards, and bulkheads and decks including doors and other means of closing any opening therein, which form the boundaries between such rooms and adjacent enclosed spaces shall be gastight. For the purpose of the application of tables 9.1 to 9.8, such storage rooms shall be treated as fire control stations.

4.4 Water pumps for other fire-extinguishing systems

Pumps, other than those serving the fire main, required for the provision of water for fire-extinguishing systems required by this chapter, their sources of power and their controls shall be installed outside the space or spaces protected by such systems and shall be so arranged that a fire in the space or spaces protected will not put any such system out of action.

5 Fire extinguishing arrangements in machinery spaces

5.1 Machinery spaces containing oil-fired boilers or oil fuel units

5.1.1 *Fixed fire-extinguishing systems*

Machinery spaces of category A containing oil-fired boilers or oil fuel units shall be provided with any one of the fixed fire-extinguishing systems in paragraph 4.1. In each case, if the engine and boiler rooms are not entirely separate, or if fuel oil can drain from the boiler room into the engine-room, the combined engine and boiler rooms shall be considered as one compartment.

5.1.2 *Additional fire-extinguishing arrangements* [102]

5.1.2.1 There shall be in each boiler room or at an entrance outside of the boiler room at least one portable foam applicator unit complying with the provisions of the Fire Safety Systems Code.

5.1.2.2 There shall be at least two portable foam extinguishers or equivalent in each firing space in each boiler room and in each space in which a part of the oil fuel installation is situated. There shall be not less than one approved foam-type extinguisher of at least 135 l capacity or equivalent in each boiler room. These extinguishers shall be provided with hoses on reels suitable for reaching any part of the boiler room. In the case of domestic boilers of less than 175 kW, or boilers protected by fixed water-based local application fire-extinguishing systems as required by paragraph 5.6, an approved foam-type extinguisher of at least 135 l capacity is not required.

[102]Refer to *Unified interpretation of SOLAS chapter II-2 on the number and arrangement of portable fire extinguishers on board ships* (MSC.1/Circ.1275 and Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

5.1.2.3 In each firing space there shall be a receptacle containing at least 0.1 m^3 sand, sawdust impregnated with soda, or other approved dry material, along with a suitable shovel for spreading the material. An approved portable extinguisher may be substituted as an alternative.

5.2 Machinery spaces of category A containing internal combustion machinery

5.2.1 Fixed fire-extinguishing systems

Machinery spaces of category A containing internal combustion machinery shall be provided with one of the fixed fire-extinguishing systems in paragraph 4.1.

5.2.2 Additional fire-extinguishing arrangements [102]

5.2.2.1 There shall be at least one portable foam applicator unit complying with the provisions of the Fire Safety Systems Code.

5.2.2.2 There shall be in each such space approved foam-type fire extinguishers, each of at least 45 l capacity or equivalent, sufficient in number to enable foam or its equivalent to be directed on to any part of the fuel and lubricating oil pressure systems, gearing and other fire hazards. In addition, there shall be provided a sufficient number of portable foam extinguishers or equivalent which shall be so located that no point in the space is more than 10 m walking distance from an extinguisher and that there are at least two such extinguishers in each such space. For smaller spaces of cargo ships the Administration may consider relaxing this requirement.

5.3 Machinery spaces containing steam turbines or enclosed steam engines

5.3.1 *Fixed fire-extinguishing systems*

In spaces containing steam turbines or enclosed steam engines used for main propulsion or other purposes having in the aggregate a total output of not less than 375 kW, one of the fire-extinguishing systems specified in paragraph 4.1 shall be provided if such spaces are periodically unattended.

5.3.2 *Additional fire-extinguishing arrangements* [103]

5.3.2.1 There shall be approved foam fire extinguishers each of at least 45 l capacity or equivalent sufficient in number to enable foam or its equivalent to be directed on to any part of the pressure lubrication system, on to any part of the casings enclosing pressure lubricated parts of the turbines, engines or associated gearing, and any other fire hazards. However, such extinguishers shall not be required if protection, at least equivalent to that required by this subparagraph, is provided in such spaces by a fixed fire-extinguishing system fitted in compliance with paragraph 4.1.

5.3.2.2 There shall be a sufficient number of portable foam extinguishers **Error! Bookmark not defined.** or equivalent which shall be so located that no point in the space is more than 10 m walking distance from an extinguisher and that there are at

[103]Refer to *Unified interpretation of SOLAS chapter II-2 on the number and arrangement of portable fire extinguishers on board ships* (MSC.1/Circ.1275 and Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

least two such extinguishers in each such space, except that such extinguishers shall not be required in addition to any provided in compliance with paragraph 5.1.2.2.

5.4 Other machinery spaces

Where, in the opinion of the Administration, a fire hazard exists in any machinery space for which no specific provisions for fire-extinguishing appliances are prescribed in paragraphs 5.1, 5.2 and 5.3, there shall be provided in, or adjacent to, that space such a number of approved portable fire extinguishers or other means of fire extinction as the Administration may deem sufficient.

5.5 Additional requirements for passenger ships

In passenger ships carrying more than 36 passengers, each machinery space of category A shall be provided with at least two suitable water fog applicators. [104]

5.6 Fixed local application fire-fighting systems

5.6.1 Paragraph 5.6 shall apply to passenger ships of 500 gross tonnage and above and cargo ships of 2000 gross tonnage and above.

5.6.2 Machinery spaces of category A above 500 m^3 in volume shall, in addition to the fixed fire-extinguishing system required in paragraph 5.1.1, be protected by an approved type of fixed water-based or equivalent local application fire-fighting system, based on the guidelines developed by the Organization [105]. In the case of periodically unattended machinery spaces, the fire fighting system shall have both automatic and manual release capabilities. In the case of continuously manned machinery spaces, the fire-fighting system is only required to have a manual release capability.

5.6.3 Fixed local application fire-fighting systems are to protect areas such as the following without the necessity of engine shutdown, personnel evacuation, or sealing of the spaces:

.1 the fire hazard portions of internal combustion machinery or, for ships constructed before 1 July 2014, the fire hazard portions of internal combustion machinery used for the ship's main propulsion and power generation;

.2 boiler fronts;

.3 the fire hazard portions of incinerators; and

.4 purifiers for heated fuel oil.

5.6.4 Activation of any local application system shall give a visual and distinct audible alarm in the protected space and at continuously manned stations. The alarm shall

[104] A water fog applicator might consist of a metal L-shaped pipe, the long limb being about 2 m in length capable of being fitted to a fire hose and the short limb being about 250 mm in length fitted with a fixed water fog nozzle or capable of being fitted with a water spray nozzle .

[105] Refer to *Revised Guidelines for the approval of fixed water-based local application fire-fighting systems for use in category A machinery spaces* (MSC/Circ.913) (MSC.1/Circ.1387), *Unified interpretations of the Guidelines for the approval of fixed water-based local application fire-fighting systems* (MSC/Circ.913) (MSC/Circ.1082) and *Unified interpretations of SOLAS chapter II-2* (MSC.1/Circ.1276).

This gazette is also available free online at **www.gpwonline.co.za**

indicate the specific system activated. The system alarm requirements described within this paragraph are in addition to, and not a substitute for, the detection and fire alarm system required elsewhere in this chapter.

6 Fire-extinguishing arrangements in control stations, accommodation and service spaces

6.1 Sprinkler and water spray systems in passenger ships

6.1.1 Passenger ships carrying more than 36 passengers shall be equipped with an automatic sprinkler, fire detection and fire alarm system of an approved type complying with the requirements of the Fire Safety Systems Code in all control stations, accommodation and service spaces, including corridors and stairways. Alternatively, control stations, where water may cause damage to essential equipment, may be fitted with an approved fixed fire-extinguishing system of another type. Spaces having little or no fire risk such as voids, public toilets, carbon dioxide rooms and similar spaces need not be fitted with an automatic sprinkler system.

6.1.2 In passenger ships carrying not more than 36 passengers, when a fixed smoke detection and fire alarm system complying with the provisions of the Fire Safety Systems Code is provided only in corridors, stairways and escape routes within accommodation spaces, an automatic sprinkler system shall be installed in accordance with regulation 7.5.3.2.

6.1.3 A fixed pressure water-spraying fire-extinguishing system complying with the provisions of the Fire Safety Systems Code shall be installed on cabin balconies of ships to which regulation 5.3.4 applies, where furniture and furnishings on such balconies are not as defined in regulations 3.40.1, 3.40.2, 3.40.3, 3.40.6 and 3.40.7.

6.2 Sprinkler systems for cargo ships

In cargo ships in which method IIC specified in regulation 9.2.3.1.1.2 is adopted, an automatic sprinkler, fire detection and fire alarm system shall be fitted in accordance with the requirements in regulation 7.5.5.2.

6.3 Spaces containing flammable liquid

6.3.1 Paint lockers shall be protected by:

- **.1** a carbon dioxide system, designed to give a minimum volume of free gas equal to 40% of the gross volume of the protected space;
- **.2** a dry powder system, designed for at least 0.5 kg powder/m³;
- **.3** a water spraying or sprinkler system, designed for 5 l/m² min. Water spraying systems may be connected to the fire main of the ship; or
- **.4** a system providing equivalent protection, as determined by the Administration.

In any case, the system shall be operable from outside the protected space.

This gazette is also available free online at **www.gpwonline.co.za**

6.3.2 Flammable liquid lockers shall be protected by an appropriate fire-extinguishing arrangement approved by the Administration.

6.3.3 For lockers of a deck area of less than 4 m², which do not give access to accommodation spaces, a carbon dioxide portable fire extinguisher sized to provide a minimum volume of free gas equal to 40% of the gross volume of the space may be accepted in lieu of a fixed system. A discharge port shall be arranged in the locker to allow the discharge of the extinguisher without having to enter into the protected space. The required portable fire extinguisher shall be stowed adjacent to the port. Alternatively, a port or hose connection may be provided to facilitate the use of fire main water.

6.4 Deep-fat cooking equipment

Deep-fat cooking equipment installed in enclosed spaces or on open decks shall be fitted with the following:

.1 an automatic or manual extinguishing system tested to an international standard acceptable to the Organization; [106]

.2 a primary and backup thermostat with an alarm to alert the operator in the event of failure of either thermostat;

.3 arrangements for automatically shutting off the electrical power upon activation of the extinguishing system;

.4 an alarm for indicating operation of the extinguishing system in the galley where the equipment is installed; and

.5 controls for manual operation of the extinguishing system which are clearly labelled for ready use by the crew.

7 Fire-extinguishing arrangements in cargo spaces

7.1 Fixed gas fire-extinguishing systems for general cargo

7.1.1 Except as provided for in paragraph 7.2, the cargo spaces of passenger ships of 1,000 gross tonnage and upwards shall be protected by a fixed carbon dioxide or inert gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code or by a fixed high expansion foam fire-extinguishing system which gives equivalent protection.

7.1.2 Where it is shown to the satisfaction of the Administration that a passenger ship is engaged on voyages of such short duration that it would be unreasonable to apply the requirements of paragraph 7.1.1 and also in ships of less than 1,000 gross tonnage, the arrangements in cargo spaces shall be to the satisfaction of the Administration, provided that the ship is fitted with steel hatch covers and effective means of closing all ventilators and other openings leading to the cargo spaces.

[106] Refer to the recommendations by the International Organization for Standardization, in particular publication ISO 15371:2009, *Ships and marine technology - Fire-extinguishing systems for protection of galley cooking equipment*.

This gazette is also available free online at **www.gpwonline.co.za**

7.1.3 Except for ro-ro and vehicle spaces, cargo spaces on cargo ships of 2,000 gross tonnage and upwards shall be protected by a fixed carbon dioxide or inert gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code, or by a fire-extinguishing system which gives equivalent protection.

7.1.4 The Administration may exempt from the requirements of paragraphs 7.1.3 and 7.2, cargo spaces of any cargo ship if constructed, and solely intended for, the carriage of ore, coal, grain, unseasoned timber, non-combustible cargoes or cargoes which, in the opinion of the Administration, constitute a low fire risk. [107] Such exemptions may be granted only if the ship is fitted with steel hatch covers and effective means of closing ventilators and other openings leading to the cargo spaces. When such exemptions are granted, the Administration shall issue an Exemption Certificate, irrespective of the date of construction of the ship concerned, in accordance with regulation I/12(a)(vi), and shall ensure that the list of cargoes the ship is permitted to carry is attached to the Exemption Certificate.

7.2 Fixed gas fire-extinguishing systems for dangerous goods

A ship engaged in the carriage of dangerous goods in any cargo spaces shall be provided with a fixed carbon dioxide or inert gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code or with a fire-extinguishing system which, in the opinion of the Administration, gives equivalent protection for the cargoes carried.

7.3 Firefighting for ships constructed on or after 1 January 2016 designed to carry containers on or above the weather deck

7.3.1 Ships shall carry, in addition to the equipment and arrangements required by paragraphs 1 and 2, at least one water mist lance.

7.3.1.1 The water mist lance shall consist of a tube with a piercing nozzle which is capable of penetrating a container wall and producing water mist inside a confined space (container, etc.) when connected to the fire main.

7.3.2 Ships designed to carry five or more tiers of containers on or above the weather deck shall carry, in addition to the requirements of paragraph 7.3.1, mobile water monitors [108] as follows:

.1 ships with breadth less than 30 m: at least two mobile water monitors; or

.2 ships with breadth of 30 m or more: at least four mobile water monitors.

7.3.2.1 The mobile water monitors, all necessary hoses, fittings and required fixing hardware shall be kept ready for use in a location outside the cargo space area not likely to be cut-off in the event of a fire in the cargo spaces.

[107] Refer to the IMSBC Code, resolution MSC.268(85), as amended, appendix 1, entry for coal, and to the *List of solid bulk cargoes for which a fixed gas fire-extinguishing system may be exempted or for which a fixed gas fire-extinguishing system is ineffective* (MSC.1/Circ.1395/Rev.6).

[108] Refer to *Guidelines for the design, performance, testing and approval of mobile water monitors used for the protection of on-deck cargo areas of ships designed and constructed to carry five or more tiers of containers on or above the weather deck* (MSC.1/Circ.1472).

This gazette is also available free online at **www.gpwonline.co.za**

7.3.2.2 A sufficient number of fire hydrants shall be provided such that:

.1 all provided mobile water monitors can be operated simultaneously for creating effective water barriers forward and aft of each container bay;

.2 the two jets of water required by paragraph 2.1.5.1 can be supplied at the pressure required by paragraph 2.1.6; and

.3 each of the required mobile water monitors can be supplied by separate hydrants at the pressure necessary to reach the top tier of containers on deck.

7.3.2.3 The mobile water monitors may be supplied by the fire main, provided the capacity of fire pumps and fire main diameter are adequate to simultaneously operate the mobile water monitors and two jets of water from fire hoses at the required pressure values. If carrying dangerous goods, the capacity of fire pumps and fire main diameter shall also comply with regulation 19.3.1.5, as far as applicable to on-deck cargo areas.

7.3.2.4 The operational performance of each mobile water monitor shall be tested during initial survey on board the ship to the satisfaction of the Administration. The test shall verify that:

.1 the mobile water monitor can be securely fixed to the ship structure ensuring safe and effective operation; and

.2 the mobile water monitor jet reaches the top tier of containers with all required monitors and water jets from fire hoses operated simultaneously.

8 Cargo tank protection

8.1 Fixed deck foam systems

8.1.1 For tankers of 20,000 tonnes deadweight and upwards, a fixed deck foam system shall be provided in accordance with the requirements of the Fire Safety Systems Code, except that, in lieu of the above, the Administration, after having given consideration to the ship's arrangement and equipment, may accept other fixed installations if they afford protection equivalent to the above, in accordance with regulation I/5. The requirements for alternative fixed installations shall comply with the requirements in paragraph 8.1.2.

8.1.2 In accordance with paragraph 8.1.1, where the Administration accepts an equivalent fixed installation in lieu of the fixed deck foam system, the installation shall:

.1 be capable of extinguishing spill fires and also preclude ignition of spilled oil not yet ignited; and

.2 be capable of combating fires in ruptured tanks.

8.1.3 Tankers of less than 20,000 tonnes deadweight shall be provided with a deck foam system complying with the requirements of the Fire Safety Systems Code.

9 Protection of cargo pump rooms in tankers

9.1 Fixed fire-extinguishing systems

This gazette is also available free online at **www.gpwonline.co.za**

Each cargo pump-room shall be provided with one of the following fixed fire-extinguishing systems operated from a readily accessible position outside the pump-room. Cargo pump-rooms shall be provided with a system suitable for machinery spaces of category A.

9.1.1 A carbon dioxide system complying with the provisions the Fire Safety Systems Code and with the following:

.1 the alarms giving audible warning of the release of fire-extinguishing medium shall be safe for use in a flammable cargo vapour/air mixture; and

.2 a notice shall be exhibited at the controls stating that due to the electrostatic ignition hazard, the system is to be used only for fire extinguishing and not for inerting purposes.

9.1.2 A high-expansion foam system complying with the provisions of the Fire Safety Systems Code, provided that the foam concentrate supply is suitable for extinguishing fires involving the cargoes carried.

9.1.3 A fixed pressure water-spraying system complying with the provisions of the Fire Safety Systems Code.

9.2 Quantity of fire-extinguishing medium

Where the extinguishing medium used in the cargo pump-room system is also used in systems serving other spaces, the quantity of medium provided or its delivery rate need not be more than the maximum required for the largest compartment.

10 Fire-fighter' s outfits

10.1 Types of fire-fighter’s outfits

.1 Fire-fighter's outfits shall comply with the Fire Safety Systems Code; and

.2 Self-contained compressed air breathing apparatus of fire-fighter's outfits shall comply with paragraph 2.1.2.2 of chapter 3 of the Fire Safety Systems Code by 1 July 2019.

10.2 Number of fire-fighter’s outfits

10.2.1 Ships shall carry at least two fire-fighter’s outfits.

10.2.2 In addition, in passenger ships there shall be provided:

.1 for every 80 m, or part thereof, of the aggregate of the lengths of all passenger spaces and service spaces on the deck which carries such spaces or, if there is more than one such deck, on the deck which has the largest aggregate of such lengths, two fire-fighter’s outfits and, in addition, two sets of personal equipment, each set comprising the items stipulated in the Fire Safety Systems Code. In passenger ships carrying more than 36 passengers, two additional fire-fighter’s outfits shall be provided for each main vertical zone. However, for stairway enclosures

This gazette is also available free online at **www.gpwonline.co.za**

which constitute individual main vertical zones and for the main vertical zones in the fore or aft end of a ship which do not contain spaces of categories (6), (7), (8) or (12) defined in regulation 9.2.2.3, no additional fire-fighter's outfits are required; and

.2 ships carrying more than 36 passengers, for each pair of breathing apparatus there shall be provided one water fog applicator which shall be stored adjacent to such apparatus.

10.2.3 In addition, in tankers, two fire-fighter's outfits shall be provided.

10.2.4 The Administration may require additional sets of personal equipment and breathing apparatus, having due regard to the size and type of the ship.

10.2.5 Two spare charges shall be provided for each required breathing apparatus. Passenger ships carrying not more than 36 passengers and cargo ships that are equipped with suitably located means for fully recharging the air cylinders free from contamination, need carry only one spare charge for each required apparatus. In passenger ships carrying more than 36 passengers, at least two spare charges for each breathing apparatus shall be provided.

10.2.6 Passenger ships carrying more than 36 passengers constructed on or after 1 July 2010 shall be fitted with a suitably located means for fully recharging breathing air cylinders, free from contamination. The means for recharging shall be either:

.1 breathing air compressors supplied from the main and emergency switchboard, or independently driven, with a minimum capacity of 60 l/min per required breathing apparatus, not to exceed 420 l/min; or

.2 self-contained high-pressure storage systems of suitable pressure to recharge the breathing apparatus used on board, with a capacity of at least 1,200 l per required breathing apparatus, not to exceed 50,000 l of free air.

10.3 Storage of fire-fighter's outfits

10.3.1 The fire-fighter's outfits or sets of personal equipment shall be kept ready for use in an easily accessible location that is permanently and clearly marked and, where more than one fire- fighter's outfit or more than one set of personal equipment is carried, they shall be stored in widely separated positions.

10.3.2 In passenger ships, at least two fire-fighter's outfits and, in addition, one set of personal equipment shall be available at any one position. At least two fire-fighter's outfits shall be stored in each main vertical zone.

10.4 Fire-fighter's communication

For ships constructed on or after 1 July 2014, a minimum of two two-way portable radiotelephone apparatus for each fire party for fire-fighter's communication shall be carried on board. Those two-way portable radiotelephone apparatus shall be of an explosion-proof type or intrinsically safe. Ships constructed before 1 July 2014 shall

This gazette is also available free online at **www.gpwonline.co.za**

comply with the requirements of this paragraph not later than the first survey after 1 July 2018.

Regulation 11
Structural integrity

1 Purpose

The purpose of this regulation is to maintain structural integrity of the ship preventing partial or whole collapse of the ship structures due to strength deterioration by heat. For this purpose, materials used in the ships' structure shall ensure that the structural integrity is not degraded due to fire.

2 Material of hull, superstructures, structural bulkheads, decks and deckhouses

The hull, superstructures, structural bulkheads, decks and deckhouses shall be constructed of steel or other equivalent material. For the purpose of applying the definition of steel or other equivalent material as given in regulation 3.43 the "applicable fire exposure" shall be according to the integrity and insulation standards given in tables 9.1 to 9.4. For example, where divisions such as decks or sides and ends of deckhouses are permitted to have "B-0" fire integrity, the "applicable fire exposure" shall be half an hour.

3 Structure of aluminium alloy

Unless otherwise specified in paragraph 2, in cases where any part of the structure is of aluminium alloy, the following shall apply:

.1 the insulation of aluminium alloy components of "A" or "B" class divisions, except structure which, in the opinion of the Administration, is non-load-bearing, shall be such that the temperature of the structural core does not rise more than 200 degrees C above the ambient temperature at any time during the applicable fire exposure to the standard fire test; and

.2 special attention shall be given to the insulation of aluminium alloy components of columns, stanchions and other structural members required to support lifeboat and liferaft stowage, launching and embarkation areas, and "A" and "B" class divisions to ensure:

.1 that for such members supporting lifeboat and liferaft areas and "A" class divisions, the temperature rise limitation specified in paragraph 3.1 shall apply at the end of one hour; and

.2 that for such members required to support "B" class divisions, the temperature rise limitation specified in paragraph 3.1 shall apply at the end of half an hour.

4 Machinery spaces of category A

4.1 Crowns and casings

This gazette is also available free online at **www.gpwonline.co.za**

Crowns and casings of machinery spaces of category A shall be of steel construction and shall be insulated as required by tables 9.5 and 9.7, as appropriate.

4.2 Floor plating

The floor plating of normal passageways in machinery spaces of category A shall be made of steel.

5 Materials of overboard fittings

Materials readily rendered ineffective by heat shall not be used for overboard scuppers, sanitary discharges, and other outlets which are close to the waterline and where the failure of the material in the event of fire would give rise to danger of flooding.

6 Protection of cargo tank structure against pressure or vacuum in tankers

6.1 General

The venting arrangements shall be so designed and operated as to ensure that neither pressure nor vacuum in cargo tanks shall exceed design parameters and be such as to provide for:

.1 the flow of the small volumes of vapour, air or inert gas mixtures caused by thermal variations in a cargo tank in all cases through pressure/vacuum valves; and

.2 the passage of large volumes of vapour, air or inert gas mixtures during cargo loading and ballasting, or during discharging.

6.2 Openings for small flow by thermal variations

Openings for pressure release required by paragraph 6.1.1 shall:

.1 have as great a height as is practicable above the cargo tank deck to obtain maximum dispersal of flammable vapours, but in no case less than 2 m above the cargo tank deck; and

.2 be arranged at the furthest distance practicable but not less than 5 m from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery and equipment which may constitute an ignition hazard. Anchor windlass and chain locker openings constitute an ignition hazard.

For tankers constructed on or after 1 January 2017, the openings shall be arranged in accordance with regulation 4.5.3.4.1.

6.3 Safety measures in cargo tanks

6.3.1 *Preventive measures against liquid rising in the venting system*

Provisions shall be made to guard against liquid rising in the venting system to a height which would exceed the design head of cargo tanks. This shall be accomplished by

This gazette is also available free online at **www.gpwonline.co.za**

high-level alarms or overflow control systems or other equivalent means, together with independent gauging devices and cargo tank filling procedures. For the purposes of this regulation, spill valves are not considered equivalent to an overflow system.

6.3.2 *Secondary means for pressure/vacuum relief*

A secondary means of allowing full flow relief of vapour, air or inert gas mixtures to prevent over-pressure or under-pressure in the event of failure of the arrangements in paragraph 6.1.2. In addition, for tankers constructed on or after 1 January 2017, the secondary means shall be capable of preventing over-pressure or under-pressure in the event of damage to, or inadvertent closing of, the means of isolation required in regulation 4.5.3.2.2. Alternatively, pressure sensors may be fitted in each tank protected by the arrangement required in paragraph 6.1.2, with a monitoring system in the ship's cargo control room or the position from which cargo operations are normally carried out. Such monitoring equipment shall also provide an alarm facility which is activated by detection of over-pressure or under-pressure conditions within a tank.

6.3.3 *Bypasses in vent mains*

Pressure/vacuum valves required by paragraph 6.1.1 may be provided with a bypass arrangement when they are located in a vent main or masthead riser. Where such an arrangement is provided there shall be suitable indicators to show whether the bypass is open or closed.

6.3.4 *Pressure/vacuum-breaking devices*

One or more pressure/vacuum-breaking devices shall be provided to prevent the cargo tanks from being subject to:

.1 a positive pressure, in excess of the test pressure of the cargo tank, if the cargo were to be loaded at the maximum rated capacity and all other outlets are left shut; and

.2 a negative pressure in excess of 700 mm water gauge if cargo were to be discharged at the maximum rated capacity of the cargo pumps and the inert gas blowers were to fail.

Such devices shall be installed on the inert gas main unless they are installed in the venting system required by regulation 4.5.3.1 or on individual cargo tanks. The location and design of the devices shall be in accordance with regulation 4.5.3 and paragraph 6.

6.4 Size of vent outlets

Vent outlets for cargo loading, discharging and ballasting required by paragraph 6.1.2 shall be designed on the basis of the maximum designed loading rate multiplied by a factor of at least 1.25 to take account of gas evolution, in order to prevent the pressure in any cargo tank from exceeding the design pressure. The master shall be provided with information regarding the maximum permissible loading rate for each cargo tank and in the case of combined venting systems, for each group of cargo tanks.

This gazette is also available free online at **www.gpwonline.co.za**

Part D - Escape

Regulation 12
Notification of crew and passengers

1 Purpose

The purpose of this regulation is to notify crew and passengers of a fire for safe evacuation. For this purpose, a general emergency alarm system and a public address system shall be provided.

2 General emergency alarm system

A general emergency alarm system required by regulation III/6.4.2 shall be used for notifying crew and passengers of a fire.

3 Public address systems in passenger ships

A public address system or other effective means of communication complying with the requirements of regulation III/6.5 shall be available throughout the accommodation and service spaces and control stations and open decks.

Regulation 13
Means of escape

1 Purpose

The purpose of this regulation is to provide means of escape so that persons onboard can safely and swiftly escape to the lifeboat and liferaft embarkation deck. For this purpose, the following functional requirements shall be met:

.1 safe escape routes shall be provided;

.2 escape routes shall be maintained in a safe condition, clear of obstacles; and

.3 additional aids for escape shall be provided as necessary to ensure accessibility, clear marking, and adequate design for emergency situations.

2 General requirements

2.1 Unless expressly provided otherwise in this regulation, at least two widely separated and ready means of escape shall be provided from all spaces or group of spaces.

2.2 Lifts shall not be considered as forming one of the means of escape as required by this regulation.

3 Means of escape from control stations, accommodation and service spaces

This gazette is also available free online at **www.gpwonline.co.za**

3.1 General requirements

3.1.1 Stairways and ladders shall be so arranged as to provide ready means of escape to the lifeboat and liferaft embarkation deck from passenger and crew accommodation spaces and from spaces in which the crew is normally employed, other than machinery spaces.

3.1.2 Unless expressly provided otherwise in this regulation, a corridor, lobby, or part of a corridor from which there is only one route of escape shall be prohibited. Dead-end corridors used in service areas which are necessary for the practical utility of the ship, such as fuel oil stations and athwartship supply corridors, shall be permitted, provided such dead-end corridors are separated from crew accommodation areas and are inaccessible from passenger accommodation areas. Also, a part of a corridor that has a depth not exceeding its width is considered a recess or local extension and is permitted.

3.1.3 All stairways in accommodation and service spaces and control stations shall be of steel frame construction except where the Administration sanctions the use of other equivalent material.

3.1.4 If a radiotelegraph station has no direct access to the open deck, two means of escape from or access to, the station shall be provided, one of which may be a porthole or window of sufficient size or other means to the satisfaction of the Administration.

3.1.5 Doors in escape routes shall, in general, open in-way of the direction of escape, except that:

.1 individual cabin doors may open into the cabins in order to avoid injury to persons in the corridor when the door is opened; and

.2 doors in vertical emergency escape trunks may open out of the trunk in order to permit the trunk to be used both for escape and for access.

3.2 Means of escape in passenger ships

3.2.1 *Escape from spaces below the bulkhead deck*

3.2.1.1 Below the bulkhead deck two means of escape, at least one of which shall be independent of watertight doors, shall be provided from each watertight compartment or similarly restricted space or group of spaces. Exceptionally, the Administration may dispense with one of the means of escape for crew spaces that are entered only occasionally, if the required escape route is independent of watertight doors.

3.2.1.2 Where the Administration has granted dispensation under the provisions of paragraph 3.2.1.1, this sole means of escape shall provide safe escape. However, stairways shall not be less than 800 mm in clear width with handrails on both sides.

3.2.2 *Escape from spaces above the bulkhead deck*

This gazette is also available free online at **www.gpwonline.co.za**

Above the bulkhead deck there shall be at least two means of escape from each main vertical zone or similarly restricted space or group of spaces at least one of which shall give access to a stairway forming a vertical escape.

3.2.3 *Direct access to stairway enclosures*

Stairway enclosures in accommodation and service spaces shall have direct access from the corridors and be of a sufficient area to prevent congestion, having in view the number of persons likely to use them in an emergency. Within the perimeter of such stairway enclosures, only public toilets, lockers of non-combustible material providing storage for non-hazardous safety equipment and open information counters are permitted. Only corridors, lifts, public toilets, special category spaces and open ro-ro spaces to which any passengers carried can have access, other escape stairways required by paragraph 3.2.4.1 and external areas are permitted to have direct access to these stairway enclosures. Public spaces may also have direct access to stairway enclosures except for the backstage of a theatre. Small corridors or "lobbies" used to separate an enclosed stairway from galleys or main laundries may have direct access to the stairway provided they have a minimum deck area of 4.5 m², a width of no less than 900 mm and contain a fire hose station.

3.2.4 *Details of means of escape*

3.2.4.1 At least one of the means of escape required by paragraphs 3.2.1.1 and 3.2.2 shall consist of a readily accessible enclosed stairway, which shall provide continuous fire shelter from the level of its origin to the appropriate lifeboat and liferaft embarkation decks, or to the uppermost weather deck if the embarkation deck does not extend to the main vertical zone being considered. In the latter case, direct access to the embarkation deck by way of external open stairways and passageways shall be provided and shall have emergency lighting in accordance with regulation III/11.5 and slip-free surfaces underfoot. Boundaries facing external open stairways and passageways forming part of an escape route and boundaries in such a position that their failure during a fire would impede escape to the embarkation deck shall have fire integrity, including insulation values, in accordance with tables 9.1 to 9.4, as appropriate.

3.2.4.2 Protection of access from the stairway enclosures to the lifeboat and liferaft embarkation areas shall be provided either directly or through protected internal routes which have fire integrity and insulation values for stairway enclosures as determined by tables 9.1 to 9.4, as appropriate.

3.2.4.3 Stairways serving only a space and a balcony in that space shall not be considered as forming one of the required means of escape.

3.2.4.4 Each level within an atrium shall have two means of escape, one of which shall give direct access to an enclosed vertical means of escape meeting the requirements of paragraph 3.2.4.1.

3.2.4.5 The widths, number and continuity of escapes shall be in accordance with the requirements in the Fire Safety Systems Code.

258

3.2.5 *Marking of escape routes*

3.2.5.1 In addition to the emergency lighting required by regulations II-1/42 and III/11.5, the means of escape, including stairways and exits, shall be marked by lighting or photoluminescent strip indicators placed not more than 300 mm above the deck at all points of the escape route including angles and intersections. The marking must enable passengers to identify the routes of escape and readily identify the escape exits. If electric illumination is used, it shall be supplied by the emergency source of power and it shall be so arranged that the failure of any single light or cut in a lighting strip will not result in the marking being ineffective. Additionally, escape route signs and fire equipment location markings shall be of photoluminescent material or marked by lighting. The Administration shall ensure that such lighting or photoluminescent equipment has been evaluated, tested and applied in accordance with the Fire Safety Systems Code.

3.2.5.2 In passenger ships carrying more than 36 passengers, the requirements of the paragraph 3.2.5.1 shall also apply to the crew accommodation areas.

3.2.5.3 In lieu of the escape route lighting system required by paragraph 3.2.5.1, alternative evacuation guidance systems may be accepted if approved by the Administration based on the guidelines developed by the Organization [109].

3.2.6 *Normally locked doors that form part of an escape route*

3.2.6.1 Cabin and stateroom doors shall not require keys to unlock them from inside the room. Neither shall there be any doors along any designated escape route which require keys to unlock them when moving in the direction of escape.

3.2.6.2 Escape doors from public spaces that are normally latched shall be fitted with a means of quick release. Such means shall consist of a door-latching mechanism incorporating a device that releases the latch upon the application of a force in the direction of escape flow. Quick release mechanisms shall be designed and installed to the satisfaction of the Administration and, in particular:

.1 consist of bars or panels, the actuating portion of which extends across at least one half of the width of the door leaf, at least 760 mm and not more than 1120 mm above the deck;

.2 cause the latch to release when a force not exceeding 67 N is applied; and

.3 not be equipped with any locking device, set screw or other arrangement that prevents the release of the latch when pressure is applied to the releasing device.

3.2.7 *Evacuation analysis for passenger ships* [110]

[109] Refer to *Functional requirements and performance standards for the assessment of evacuation guidance systems* (MSC/Circ.1167) and *Interim guidelines for the testing, approval and maintenance of evacuation guidance systems used as an alternative to low-location lighting systems* (MSC/Circ.1168).

[110] Refer to the *Revised Guidelines on evacuation analyses for new and existing passenger ships* (MSC.1/Circ.1533), as may be amended.

This gazette is also available free online at **www.gpwonline.co.za**

3.2.7.1 Escape routes shall be evaluated by an evacuation analysis early in the design process. This analysis shall apply to:

.1 ro-ro passenger ships constructed on or after 1 July 1999; and

.2 other passenger ships constructed on or after 1 January 2020 carrying more than 36 passengers.

3.2.7.2 The analysis shall be used to identify and eliminate, as far as practicable, congestion which may develop during an abandonment, due to normal movement of passengers and crew along escape routes, including the possibility that crew may need to move along these routes in a direction opposite to the movement of passengers. In addition, the analysis shall be used to demonstrate that escape arrangements are sufficiently flexible to provide for the possibility that certain escape routes, assembly stations, embarkation stations or survival craft may not be available as a result of a casualty.

3.3 Means of escape in cargo ships

3.3.1 *General*

At all levels of accommodation there shall be provided at least two widely separated means of escape from each restricted space or group of spaces.

3.3.2 *Escape from spaces below the lowest open deck*

Below the lowest open deck the main means of escape shall be a stairway and the second escape may be a trunk or a stairway.

3.3.3 *Escape from spaces above the lowest open deck*

Above the lowest open deck the means of escape shall be stairways or doors to an open deck or a combination thereof.

3.3.4 *Dead-end corridors*

No dead-end corridors having a length of more than 7 m shall be accepted.

3.3.5 *Width and continuity of escape routes*

The width, number and continuity of escape routes shall be in accordance with the requirements in the Fire Safety Systems Code.

3.3.6 *Dispensation from two means of escape*

Exceptionally the Administration may dispense with one of the means of escape, for crew spaces that are entered only occasionally, if the required escape route is independent of watertight doors.

This gazette is also available free online at **www.gpwonline.co.za**

3.4 Emergency escape breathing devices [111]

3.4.1 Emergency escape breathing devices shall comply with the Fire Safety Systems Code. Spare emergency escape breathing devices shall be kept onboard.

3.4.2 All ships shall carry at least two emergency escape breathing devices within accommodation spaces.

3.4.3 In passenger ships, at least two emergency escape breathing devices shall be carried in each main vertical zone.

3.4.4 In passenger ships carrying more than 36 passengers, two emergency escape breathing devices, in addition to those required in paragraph 3.4.3 above, shall be carried in each main vertical zone.

3.4.5 However, paragraphs 3.4.3 and 3.4.4 do not apply to stairway enclosures which constitute individual main vertical zones and for the main vertical zones in the fore or aft end of a ship which do not contain spaces of categories (6), (7), (8) or (12) defined in regulation 9.2.2.3.

4 Means of escape from machinery spaces

4.1 Means of escape on passenger ships

Means of escape from each machinery space in passenger ships shall comply with the following provisions.

4.1.1 *Escape from spaces below the bulkhead deck*

Where the space is below the bulkhead deck the two means of escape shall consist of either:

.1 two sets of steel ladders as widely separated as possible, leading to doors in the upper part of the space similarly separated and from which access is provided to the appropriate lifeboat and liferaft embarkation decks. One of these ladders shall be located within a protected enclosure that satisfies regulation 9.2.2.3, category (2), or regulation 9.2.2.4, category (4), as appropriate, from the lower part of the space it serves to a safe position outside the space. Self-closing fire doors of the same fire integrity standards shall be fitted in the enclosure. The ladder shall be fixed in such a way that heat is not transferred into the enclosure through non-insulated fixing points. The protected enclosure shall have minimum internal dimensions of at least 800 mm x 800 mm, and shall have emergency lighting provisions; or

.2 one steel ladder leading to a door in the upper part of the space from which access is provided to the embarkation deck and additionally, in the lower part of the space and in a position well separated from the ladder referred to, a steel door capable of being operated from each side and which

[111] Refer to *Guidelines for the performance, location, use and care of emergency escape breathing devices (EEBDs)* (MSC/Circ.849).

This gazette is also available free online at **www.gpwonline.co.za**

provides access to a safe escape route from the lower part of the space to the embarkation deck.

4.1.2 *Escape from spaces above the bulkhead deck*

Where the space is above the bulkhead deck, the two means of escape shall be as widely separated as possible and the doors leading from such means of escape shall be in a position from which access is provided to the appropriate lifeboat and liferaft embarkation decks. Where such means of escape require the use of ladders, these shall be of steel.

4.1.3 *Dispensation from two means of escape*

In a ship of less than 1,000 gross tonnage, the Administration may dispense with one of the means of escape, due regard being paid to the width and disposition of the upper part of the space. In a ship of 1,000 gross tonnage and above, the Administration may dispense with one means of escape from any such space, including a normally unattended auxiliary machinery space, so long as either a door or a steel ladder provides a safe escape route to the embarkation deck, due regard being paid to the nature and location of the space and whether persons are normally employed in that space. In the steering gear space, a second means of escape shall be provided when the emergency steering position is located in that space unless there is direct access to the open deck.

4.1.4 *Escape from machinery control rooms*

Two means of escape shall be provided from a machinery control room located within a machinery space, at least one of which will provide continuous fire shelter to a safe position outside the machinery space.

4.1.5 *Inclined ladders and stairways*

For ships constructed on or after 1 January 2016, all inclined ladders/stairways fitted to comply with paragraph 4.1.1 with open treads in machinery spaces being part of or providing access to escape routes but not located within a protected enclosure shall be made of steel. Such ladders/stairways shall be fitted with steel shields attached to their undersides, such as to provide escaping personnel protection against heat and flame from beneath.

4.1.6 *Escape from main workshops within machinery spaces*

For ships constructed on or after 1 January 2016, two means of escape shall be provided from the main workshop within a machinery space. At least one of these escape routes shall provide a continuous fire shelter to a safe position outside the machinery space.

4.2 Means of escape on cargo ships

Means of escape from each machinery space in cargo ships shall comply with the following provisions.

262

4.2.1 *Escape from machinery spaces of category A*

Except as provided in paragraph 4.2.2, two means of escape shall be provided from each machinery space of category A. In particular, one of the following provisions shall be complied with:

.1 two sets of steel ladders as widely separated as possible leading to doors in the upper part of the space similarly separated and from which access is provided to the open deck. One of these ladders shall be located within a protected enclosure that satisfies regulation 9.2.3.3, category (4), from the lower part of the space it serves to a safe position outside the space. Self-closing fire doors of the same fire integrity standards shall be fitted in the enclosure. The ladder shall be fixed in such a way that heat is not transferred into the enclosure through non-insulated fixing points. The enclosure shall have minimum internal dimensions of at least 800 mm x 800 mm, and shall have emergency lighting provisions; or

.2 one steel ladder leading to a door in the upper part of the space from which access is provided to the open deck and, additionally, in the lower part of the space and in a position well separated from the ladder referred to, a steel door capable of being operated from each side and which provides access to a safe escape route from the lower part of the space to the open deck.

4.2.2 *Dispensation from two means of escape*

In a ship of less than 1,000 gross tonnage, the Administration may dispense with one of the means of escape required under paragraph 4.2.1, due regard being paid to the dimension and disposition of the upper part of the space. In addition, the means of escape from machinery spaces of category A need not comply with the requirement for an enclosed fire shelter listed in paragraph 4.2.1.1. In the steering gear space, a second means of escape shall be provided when the emergency steering position is located in that space unless there is direct access to the open deck.

4.2.3 *Escape from machinery spaces other than those of category A*

From machinery spaces other than those of category A, two escape routes shall be provided except that a single escape route may be accepted for spaces that are entered only occasionally, and for spaces where the maximum travel distance to the door is 5 m or less.

4.2.4 *Inclined ladders and stairways*

For ships constructed on or after 1 January 2016, all inclined ladders/stairways fitted to comply with paragraph 4.2.1 with open treads in machinery spaces being part of or providing access to escape routes but not located within a protected enclosure shall be made of steel. Such ladders/stairways shall be fitted with steel shields attached to their undersides, such as to provide escaping personnel protection against heat and flame from beneath.

This gazette is also available free online at **www.gpwonline.co.za**

4.2.5 *Escape from machinery control rooms in machinery spaces of category "A"*

For ships constructed on or after 1 January 2016, two means of escape shall be provided from the machinery control room located within a machinery space. At least one of these escape routes shall provide a continuous fire shelter to a safe position outside the machinery space.

4.2.6 *Escape from main workshops in machinery spaces of category "A"*

For ships constructed on or after 1 January 2016, two means of escape shall be provided from the main workshop within a machinery space. At least one of these escape routes shall provide a continuous fire shelter to a safe position outside the machinery space.

4.3 Emergency escape breathing devices

4.3.1 On all ships, within the machinery spaces, emergency escape breathing devices shall be situated ready for use at easily visible places, which can be reached quickly and easily at any time in the event of fire. The location of emergency escape breathing devices shall take into account the layout of the machinery space and the number of persons normally working in the spaces. [112]

4.3.2 The number and location of these devices shall be indicated in the fire control plan required in regulation 15.2.4.

4.3.3 Emergency escape breathing devices shall comply with the Fire Safety Systems Code.

5 Means of escape on passenger ships from special category and open ro-ro spaces to which any passengers carried can have access

5.1 In special category and open ro-ro spaces to which any passengers carried can have access, the number and locations of the means of escape both below and above the bulkhead deck shall be to the satisfaction of the Administration and, in general, the safety of access to the embarkation deck shall be at least equivalent to that provided for under paragraphs 3.2.1.1, 3.2.2, 3.2.4.1 and 3.2.4.2. Such spaces shall be provided with designated walkways to the means of escape with a breadth of at least 600 mm. The parking arrangements for the vehicles shall maintain the walkways clear at all times.

5.2 One of the escape routes from the machinery spaces where the crew is normally employed shall avoid direct access to any special category space.

6 Means of escape from ro-ro spaces

At least two means of escape shall be provided in ro-ro spaces where the crew are normally employed. The escape routes shall provide a safe escape to the lifeboat and liferaft embarkation decks and shall be located at the fore and aft ends of the space.

[112]Refer to *Guidelines for the performance, location, use and care of emergency escape breathing devices(EEBDs)* (MSC/Circ.849).

This gazette is also available free online at **www.gpwonline.co.za**

7 Additional requirements for ro-ro passenger ships

7.1 General

7.1.1 Escape routes shall be provided from every normally occupied space on the ship to an assembly station. These escape routes shall be arranged so as to provide the most direct route possible to the assembly station, [113] and shall be marked with symbols based on the guidelines developed by the Organization. [114]

7.1.2 The escape route from cabins to stairway enclosures shall be as direct as possible, with a minimum number of changes in direction. It shall not be necessary to cross from one side of the ship to the other to reach an escape route. It shall not be necessary to climb more than two decks up or down in order to reach an assembly station or open deck from any passenger space.

7.1.3 External routes shall be provided from open decks, as referred to in paragraph 7.1.2, to the survival craft embarkation stations.

7.1.4 Where enclosed spaces adjoin an open deck, openings from the enclosed space to the open deck shall, where practicable, be capable of being used as an emergency exit.

7.1.5 Escape routes shall not be obstructed by furniture and other obstructions. With the exception of tables and chairs which may be cleared to provide open space, cabinets and other heavy furnishings in public spaces and along escape routes shall be secured in place to prevent shifting if the ship rolls or lists. Floor coverings shall also be secured in place. When the ship is underway, escape routes shall be kept clear of obstructions such as cleaning carts, bedding, luggage and boxes of goods.

7.2 Instruction for safe escape

7.2.1 Decks shall be sequentially numbered, starting with "1" at the tank top or lowest deck. The numbers shall be prominently displayed at stair landings and lift lobbies. Decks may also be named, but the deck number shall always be displayed with the name.

7.2.2 Simple "mimic" plans showing the "you are here" position and escape routes marked by arrows, shall be prominently displayed on the inside of each cabin door and in public spaces. The plan shall show the directions of escape and shall be properly oriented in relation to its position on the ship.

7.3 Strength of handrails and corridors

[113] Refer to *Indication of the "assembly stations" in passenger ships* (MSC/Circ.777)

[114] Refer to *Symbols related to life-saving appliances and arrangements* (resolution A.760(18), as amended) and/or tables 1 and 2 of *Escape route signs and equipment location markings* (resolution A.1116(30)), as appropriate. Refer to the new symbols in tables 1 and 2 of resolution A.1116(30) where the symbols for a specific item are differently expressed in resolutions A.760(18), as amended and A.1116(30).

This gazette is also available free online at **www.gpwonline.co.za**

7.3.1 Handrails or other handholds shall be provided in corridors along the entire escape route so that a firm handhold is available at every step of the way, where possible, to the assembly stations and embarkation stations. Such handrails shall be provided on both sides of longitudinal corridors more than 1.8 m in width and transverse corridors more than 1 m in width. Particular attention shall be paid to the need to be able to cross lobbies, atriums and other large open spaces along escape routes. Handrails and other handholds shall be of such strength as to withstand a distributed horizontal load of 750 N/m applied in the direction of the centre of the corridor or space, and a distributed vertical load of 750 N/m applied in the downward direction. The two loads need not be applied simultaneously.

7.3.2 The lowest 0.5 m of bulkheads and other partitions forming vertical divisions along escape routes shall be able to sustain a load of 750 N/m to allow them to be used as walking surfaces from the side of the escape route with the ship at large angles of heel.

This gazette is also available free online at **www.gpwonline.co.za**

Part E - Operational Requirements

Regulation 14
Operational readiness and maintenance

1 Purpose

The purpose of this regulation is to maintain and monitor the effectiveness of the fire safety measures the ship is provided with. For this purpose, the following functional requirements shall be met:

.1 fire protection systems and fire-fighting systems and appliances shall be maintained ready for use; and

.2 fire protection systems and fire-fighting systems and appliances shall be properly tested and inspected.

2 General requirements

At all times while the ship is in service, the requirements of paragraph 1.1 shall be complied with. A ship is not in service when:

.1 it is in for repairs or lay-up (either at anchor or in port) or in dry-dock;

.2 it is declared not in service by the owner or the owner' s representative; and

.3 in the case of passenger ships, there are no passengers on board.

2.1 Operational readiness

2.1.1 The following fire protection systems shall be kept in good order so as to ensure their required performance if a fire occurs:

.1 structural fire protection including fire resisting divisions, and protection of openings and penetrations in these divisions;

.2 fire detection and fire alarm systems; and

.3 means of escape systems and appliances.

2.1.2 Fire-fighting systems and appliances shall be kept in good working order and readily available for immediate use. Portable extinguishers which have been discharged shall be immediately recharged or replaced with an equivalent unit.

2.2 Maintenance, testing and inspections

2.2.1 Maintenance, testing and inspections shall be carried out based on the guidelines developed by the Organization [115] and in a manner having due regard to ensuring the reliability of fire-fighting systems and appliances.

[115]Refer to *Revised Guidelines on maintenance and inspection of fire protection systems and appliances* (MSC.1/Circ.1432, as amended by MSC.1/Circ.1516).

This gazette is also available free online at **www.gpwonline.co.za**

2.2.2 The maintenance plan shall be kept on board the ship and shall be available for inspection whenever required by the Administration.

2.2.3 The maintenance plan shall include at least the following fire protection systems and fire-fighting systems and appliances, where installed:

.1 fire mains, fire pumps and hydrants including hoses, nozzles and international shore connections;

.2 fixed fire detection and fire alarm systems;

.3 fixed fire-extinguishing systems and other fire extinguishing appliances;

.4 automatic sprinkler, fire detection and fire alarm systems;

.5 ventilation systems including fire and smoke dampers, fans and their controls;

.6 emergency shut down of fuel supply;

.7 fire doors including their controls;

.8 general emergency alarm systems;

.9 emergency escape breathing devices;

.10 portable fire extinguishers including space charges; and

.11 fire-fighter' s outfits.

2.2.4 The maintenance programme may be computer-based.

3 Additional requirements for passenger ships

In addition to the fire protection systems and appliances listed in paragraph 2.2.3, ships carrying more than 36 passengers shall develop a maintenance plan for low-location lighting and public address systems.

4 Additional requirements for tankers

In addition to the fire protection systems and appliances listed in paragraph 2.2.3, tankers shall develop a maintenance plan for:

.1 inert gas systems;

.2 deck foam systems;

.3 fire safety arrangements in cargo pump rooms; and

.4 flammable gas detectors.

Regulation 15
Instructions, onboard training and drills

1 Purpose

This gazette is also available free online at **www.gpwonline.co.za**

The purpose of this regulation is to mitigate the consequences of fire by means of proper instructions for training and drills of persons onboard in correct procedures under emergency conditions. For this purpose, the crew shall have the necessary knowledge and skills to handle fire emergency cases, including passenger care.

2 General requirements

2.1 Instructions, duties and organization

2.1.1 Crew members shall receive instruction on fire safety onboard the ship.

2.1.2 Crew members shall receive instructions on their assigned duties.

2.1.3 Parties responsible for fire-extinguishing shall be organized. These parties shall have the capability to complete their duties at all times while the ship is in service.

2.2 Onboard training and drills

2.2.1 Crew members shall be trained to be familiar with the arrangements of the ship as well as the location and operation of any fire-fighting systems and appliances that they may be called upon to use.

2.2.2 Training in the use of the emergency escape breathing devices shall be considered as part of on board training.

2.2.3 Performance of crew members assigned fire-fighting duties shall be periodically evaluated by conducting onboard training and drills to identify areas in need of improvement, to ensure competency in fire-fighting skills is maintained, and to ensure the operational readiness of the fire-fighting organization.

2.2.4 Onboard training in the use of the ship' s fire-extinguishing systems and appliances shall be planned and conducted in accordance with provisions of regulation III/19.4.1.

2.2.5 Fire drills shall be conducted and recorded in accordance with the provisions of regulations III/19.3 and III/19.5.

2.2.6 An onboard means of recharging breathing apparatus cylinders used during drills shall be provided or a suitable number of spare cylinders shall be carried on board to replace those used.

2.3 Training manuals

2.3.1 A training manual shall be provided in each crew mess room and recreation room or in each crew cabin.

2.3.2 The training manual shall be written in the working language of the ship.

2.3.3 The training manual, which may comprise several volumes, shall contain the instructions and information required in paragraph 2.3.4 in easily understood terms and

This gazette is also available free online at **www.gpwonline.co.za**

illustrated wherever possible. Any part of such information may be provided in the form of audio-visual aides in lieu of the manual.

2.3.4 The training manual shall explain the following in detail:

.1 general fire safety practice and precautions related to the dangers of smoking, electrical hazards, flammable liquids and similar common shipboard hazards;

.2 general instructions on fire-fighting activities and fire- fighting procedures including procedures for notification of a fire and use of manually operated call points;

.3 meanings of the ship' s alarms;

.4 operation and use of fire-fighting systems and appliances;

.5 operation and use of fire doors;

.6 operation and use of fire and smoke dampers; and

.7 escape systems and appliances.

2.4 Fire control plans [116]

2.4.1 General arrangement plans shall be permanently exhibited for the guidance of the ship' s officers, showing clearly for each deck the control stations, the various fire sections enclosed by "A" class divisions, the sections enclosed by "B" class divisions together with particulars of the fire detection and fire alarm systems, the sprinkler installation, the fire-extinguishing appliances, means of access to different compartments, decks, etc., and the ventilating system including particulars of the fan control positions, the position of dampers and identification numbers of the ventilating fans serving each section. Alternatively, at the discretion of the Administration, the aforementioned details may be set out in a booklet, a copy of which shall be supplied to each officer, and one copy shall at all times be available on board in an accessible position. Plans and booklets shall be kept up to date; any alterations thereto shall be recorded as soon as practicable. Description in such plans and booklets shall be in the language or languages required by the Administration. If the language is neither English nor French, a translation into one of those languages shall be included.

2.4.2 A duplicate set of fire control plans or a booklet containing such plans shall be permanently stored in a prominently marked weathertight enclosure outside the deckhouse for the assistance of shore-side fire-fighting personnel. [117]

3 Additional requirements for passenger ships

3.1 Fire drills

[116] Refer to *Graphical symbols for shipboard fire control plans* (resolution A.952(23)) and/or table 3 of Escape route signs and equipment location markings (resolution A.1116(30)), as appropriate. Refer to the symbols in table 3 of resolution A.1116(30) where the symbols for a specific item are differently expressed in resolutions A.952(23) and A.1116(30).

[117] Refer to *Guidance concerning the location of fire control plans for assistance of shoreside fire-fighting personnel* (MSC/Circ.451).

This gazette is also available free online at **www.gpwonline.co.za**

In addition to the requirement of paragraph 2.2.3, fire drills shall be conducted in accordance with the provisions of regulation III/30 having due regard to notification of passengers and movement of passengers to assembly stations and embarkation decks.

3.2 Fire control plans

In ships carrying more than 36 passengers, plans and booklets required by this regulation shall provide information regarding fire protection, fire detection and fire extinction based on the guidelines issued by the Organization. [118]

Regulation 16
Operations

1 Purpose

The purpose of this regulation is to provide information and instructions for proper ship and cargo handling operations in relation to fire safety. For this purpose, the following functional requirements shall be met:

.1 fire safety operational booklets shall be provided on board; and

.2 flammable vapour releases from cargo tank venting shall be controlled.

2 Fire safety operational booklets

2.1 The required fire safety operational booklet shall contain the necessary information and instructions for the safe operation of the ship and cargo handling operations in relation to fire safety. The booklet shall include information concerning the crew' s responsibilities for the general fire safety of the ship while loading and discharging cargo and while underway. Necessary fire safety precautions for handling general cargoes shall be explained. For ships carrying dangerous goods and flammable bulk cargoes, the fire safety operational booklet shall also provide reference to the pertinent fire-fighting and emergency cargo handling instructions contained in the International Maritime Solid Bulk Cargoes (IMSBC) Code, the International Bulk Chemical Code, the International Gas Carrier Code and the International Maritime Dangerous Goods Code, as appropriate.

2.2 The fire safety operational booklet shall be provided in each crew mess room and recreation room or in each crew cabin.

2.3 The fire safety operational booklet shall be written in the working language of the ship.

2.4 The fire safety operational booklet may be combined with the training manuals required in regulation 15.2.3.

[118]Refer to *Guidelines on the information to be provided with fire control plans and booklets required by SOLAS regulations II-2/20 and 41-2* (resolution A.756(18)).

This gazette is also available free online at **www.gpwonline.co.za**

3 Additional requirements for tankers

3.1 General

The fire safety operational booklet referred to in paragraph 2 shall include provisions for preventing fire spread to the cargo area due to ignition of flammable vapours and include procedures of cargo tank gas-purging and/or gas-freeing taking into account the provisions in paragraph 3.2.

3.2 Procedures for cargo tank purging and/or gas-freeing

3.2.1 When the ship is provided with an inert gas system, the cargo tanks shall first be purged in accordance with the provisions of regulation 4.5.6 until the concentration of hydrocarbon vapours in the cargo tanks has been reduced to less than 2% by volume. Thereafter, gas-freeing may take place at the cargo tank deck level.

3.2.2 When the ship is not provided with an inert gas system, the operation shall be such that the flammable vapour is discharged initially through:

.1 the vent outlets as specified in regulation 4.5.3.4;

.2 outlets at least 2 m above the cargo tank deck level with a vertical efflux velocity of at least 30 m/s maintained during the gas-freeing operation; or

.3 outlets at least 2 m above the cargo tank deck level with a vertical efflux velocity of at least 20 m/s and which are protected by suitable devices to prevent the passage of flame.

3.2.3 The above outlets shall be located not less than 10 m measured horizontally from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery, includes anchor windlass and chain locker openings, and equipment which may constitute an ignition hazard.

3.2.4 When the flammable vapour concentration at the outlet has been reduced to 30% of the lower flammable limit, gas-freeing may be continued at cargo tank deck level.

3.3 Operation of inert gas system

3.3.1 The inert gas system for tankers required in accordance with regulation 4.5.5.1 shall be so operated as to render and maintain the atmosphere of the cargo tanks non-flammable, except when such tanks are required to be gas-free.

3.3.2 Notwithstanding the above, for chemical tankers, the application of inert gas, may take place after the cargo tank has been loaded, but before commencement of unloading and shall continue to be applied until that cargo tank has been purged of all flammable vapours before gas-freeing. Only nitrogen is acceptable as inert gas under this provision.

3.3.3 Notwithstanding regulation 1.2.2.2, the provisions of this paragraph shall only apply to tankers constructed on or after 1 January 2016. If the oxygen content of the inert gas exceeds 5% by volume, immediate action shall be taken to improve the gas

This gazette is also available free online at **www.gpwonline.co.za**

quality. Unless the quality of the gas improves, all operations in those cargo tanks to which inert gas is being supplied shall be suspended so as to avoid air being drawn into the cargo tanks, the gas regulating valve, if fitted, shall be closed and the off-specification gas shall be vented to atmosphere.

3.3.4 In the event that the inert gas system is unable to meet the requirement in paragraph 16.3.3.1 and it has been assessed that it is impractical to effect a repair, then cargo discharge and cleaning of those cargo tanks requiring inerting shall only be resumed when suitable emergency procedures have been followed, taking into account guidelines developed by the Organization [119].

[119]Refer to *Clarification of inert gas system requirements under the Convention* (MSC/Circ.485, as amended) and *Revised Guidelines for inert gas systems* (MSC/Circ.353), as amended by MSC/Circ.387.

This gazette is also available free online at **www.gpwonline.co.za**

Part F - Alternative Design And Arrangements

Regulation 17
Alternative design and arrangements

1 Purpose

The purpose of this regulation is to provide a methodology for alternative design and arrangements for fire safety.

2 General

2.1 Fire safety design and arrangements may deviate from the prescriptive requirements set out in parts B, C, D, E or G, provided that the design and arrangements meet the fire safety objectives and the functional requirements.

2.2 When fire safety design or arrangements deviate from the prescriptive requirements of this chapter, engineering analysis, evaluation and approval of the alternative design and arrangements shall be carried out in accordance with this regulation.

3 Engineering analysis

The engineering analysis shall be prepared and submitted to the Administration, based on the guidelines developed by the Organization [120] and shall include, as a minimum, the following elements:

- **.1** determination of the ship type and space(s) concerned;
- **.2** identification of prescriptive requirement(s) with which the ship or the space(s) will not comply;
- **.3** identification of the fire and explosion hazards of the ship or the space(s) concerned;
  - **.1** identification of the possible ignition sources;
  - **.2** identification of the fire growth potential of each space concerned;
  - **.3** identification of the smoke and toxic effluent generation potential for each space concerned;
  - **.4** identification of the potential for the spread of fire, smoke or of toxic effluents from the space(s) concerned to other spaces;
- **.4** determination of the required fire safety performance criteria for the ships or the space(s) concerned addressed by the prescriptive requirement(s);
  - **.1** performance criteria shall be based on the fire safety objectives and on the functional requirements of this chapter;

[120] Refer to *Guidelines on alternative design and arrangements for fire safety* (MSC/Circ.1002 and its Corr.1, Corr.2 and Corr.3, as amended by MSC.1/Circ.1552).

This gazette is also available free online at **www.gpwonline.co.za**

.2 performance criteria shall provide a degree of safety not less than that achieved by using the prescriptive requirements; and

.3 performance criteria shall be quantifiable and measurable;

.5 detailed description of the alternative design and arrangements, including a list of the assumptions used in the design and any proposed operational restrictions or conditions; and

.6 technical justification demonstrating that the alternative design and arrangements meet the required fire safety performance criteria.

4 Evaluation of the alternative design and arrangements

4.1 The engineering analysis required in paragraph 3 shall be evaluated and approved by the Administration taking into account the guidelines developed by the Organization. [121]

4.2 A copy of the documentation, as approved by the Administration, indicating that the alternative design] and arrangements comply with this regulation shall be carried onboard the ship.

5 Exchange of information

The Administration shall communicate to the Organization pertinent information concerning alternative design and arrangements approved by them for circulation to all contracting governments.

6 Re-evaluation due to change of conditions

If the assumptions, and operational restrictions that were stipulated in the alternative design and arrangements are changed, the engineering analysis shall be carried out under the changed condition and shall be approved by the Administration.

[121] Refer to *Guidelines on alternative design and arrangements for fire safety* (MSC/Circ.1002 and its Corr.1, Corr.2 and Corr.3, as amended by MSC.1/Circ.1552).

This gazette is also available free online at **www.gpwonline.co.za**

Part G - Special Requirements

Regulation 18
Helicopter facilities

1 Purpose

The purpose of this regulation is to provide additional measures in order to address the fire safety objectives of this chapter for ships fitted with special facilities for helicopters. For this purpose, the following functional requirements shall be met:

.1 helideck structure must be adequate to protect the ship from the fire hazards associated with helicopter operations;

.2 firefighting appliances shall be provided to adequately protect the ship from the fire hazards associated with helicopter operations;

.3 refuelling and hangar facilities and operations shall provide the necessary measures to protect the ship from the fire hazards associated with helicopter operations; and

.4 operation manuals and training shall be provided.

2 Application

2.1 In addition to complying with the requirements of regulations in parts B, C, D and E, as appropriate, ships equipped with helidecks shall comply with the requirements of this regulation.

2.2 Where helicopters land or conduct winching operations on an occasional or emergency basis on ships without helidecks, fire- fighting equipment fitted in accordance with the requirements in Part C may be used. This equipment shall be made readily available in close proximity to the landing or winching areas during helicopter operations.

2.3 Notwithstanding the requirements of paragraph 2.2 above, ships constructed on or after 1 January 2020, having a helicopter landing area, shall be provided with foam firefighting appliances which comply with the relevant provisions of chapter 17 of the Fire Safety Systems Code.

2.4 Notwithstanding the requirements of paragraph 2.2 or 2.3 above, ro-ro passenger ships without helidecks shall comply with regulation III/28.

3 Structure

3.1 Construction of steel or other equivalent material

In general, the construction of the helidecks shall be of steel or other equivalent materials. If the helideck forms the deckhead of a deckhouse or superstructure, it shall be insulated to "A-60" class standard.

This gazette is also available free online at **www.gpwonline.co.za**

3.2 Construction of aluminium or other low melting point metals

If the Administration permits aluminium or other low melting point metal construction that is not made equivalent to steel, the following provisions shall be satisfied:

.1 if the platform is cantilevered over the side of the ship, after each fire on the ship or on the platform, the platform shall undergo a structural analysis to determine its suitability for further use; and

.2 if the platform is located above the ship' s deckhouse or similar structure, the following conditions shall be satisfied:

.1 the deckhouse top and bulkheads under the platform shall have no openings;

.2 windows under the platform shall be provided with steel shutters; and

.3 after each fire on the platform or in close proximity, the platform shall undergo a structural analysis to determine its suitability for further use.

4 Means of escape

A helideck shall be provided with both a main and an emergency means of escape and access for firefighting and rescue personnel. These shall be located as far apart from each other as is practicable and preferably on opposite sides of the helideck.

5 Fire-fighting appliances

5.1 In close proximity to the helideck, the following fire-fighting appliances shall be provided and stored near the means of access to that helideck:

.1 at least two dry powder extinguishers having a total capacity of not less than 45 kg; [122]

.2 carbon dioxide extinguishers of a total capacity of not less than 18 kg or equivalent; [122]

.3 a suitable foam application system consisting of monitors or foam making branch pipes capable of delivering foam to all parts of the helideck in all weather conditions in which helicopters can operate. The system shall be capable of delivering a discharge rate as required in table 18.1 for at least five minutes;

Table 18.1 - *Foam discharge rates*

Category	Helicopter overall length	Discharge rate foam solution (L/min)
H1	up to but not including 15 m	250
H2	from 15 m up to but not including 24 m	500
H3	from 24 m up to but not including 35 m	800

[122]Refer to *Unified interpretation of SOLAS chapter II-2 on the number and arrangement of portable fire extinguishers on board ships* (MSC.1/Circ.1275 and its Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

.4 the principal agent shall be suitable for use with salt water and conform to performance standards not inferior to those acceptable to the Organization; [123]

.5 at least two nozzles of an approved dual-purpose type (jet/spray) and hoses sufficient to reach any part of the helideck;

.6 in lieu of the requirements of paragraphs 5.1.3 through 5.1.5, on ships constructed on or after 1 January 2020 having a helideck, foam firefighting appliances which comply with the provisions of the Fire Safety Systems Code.

.7 in addition to the requirements of regulation 10.10, two sets of fire-fighter' s outfits; and

.8 at least the following equipment shall be stored in a manner that provides for immediate use and protection from the elements:

.1 adjustable wrench;

.2 -blanket, fire resistant;

.3 cutters, bolt 60 cm;

.4 hook, grab or salving;

.5 hacksaw, heavy duty complete with 6 spare blades;

.6 ladder;

.7 lift line 5 mm diameter x 15 m in length;

.8 pliers, side cutting;

.9 set of assorted screwdrivers; and

.10 harness knife complete with sheath.

6 Drainage facilities

Drainage facilities in way of helidecks shall be constructed of steel and shall lead directly overboard independent of any other system and shall be designed so that drainage does not fall onto any part of the ship.

7 Helicopter refuelling and hangar facilities

Where the ship has helicopter refuelling and hangar facilities, the following requirements shall be complied with:

.1 a designated area shall be provided for the storage of fuel tanks which shall be:

.1 as remote as is practicable from accommodation spaces, escape routes and embarkation stations; and

.2 isolated from areas containing a source of vapour ignition;

[123]Refer to the *International Civil Aviation Organization Airport Services Manual*, part 1 - Rescue and Fire fighting, Chapter 8, Extinguishing Agent Characteristics, Paragraph 8.1.5 - Foam Specifications Table 8-1, Level "B".

This gazette is also available free online at **www.gpwonline.co.za**

.2 the fuel storage area shall be provided with arrangements whereby fuel spillage may be collected and drained to a safe location;

.3 tanks and associated equipment shall be protected against physical damage and from a fire in an adjacent space or area;

.4 where portable fuel storage tanks are used, special attention shall be given to:

.1 design of the tank for its intended purpose;

.2 mounting and securing arrangements;

.3 electric bonding; and

.4 inspection procedures;

.5 storage tank fuel pumps shall be provided with means which permit shutdown from a safe remote location in the event of a fire. Where a gravity fuelling system is installed, equivalent closing arrangements shall be provided to isolate the fuel source;

.6 the fuel pumping unit shall be connected to one tank at a time. The piping between the tank and the pumping unit shall be of steel or equivalent material, as short as possible, and protected against damage;

.7 electrical fuel pumping units and associated control equipment shall be of a type suitable for the location and potential hazards;

.8 fuel pumping units shall incorporate a device which will prevent over-pressurization of the delivery or filling hose;

.9 equipment used in refuelling operations shall be electrically bonded;

.10 "NO SMOKING" signs shall be displayed at appropriate locations;

.11 hangar, refuelling and maintenance facilities shall be treated as category "A" machinery spaces with regard to structural fire protection, fixed fire-extinguishing and detection system requirements;

.12 enclosed hangar facilities or enclosed spaces containing refuelling installations shall be provided with mechanical ventilation, as required by regulation 20.3 for closed ro-ro spaces of cargo ships. Ventilation fans shall be of non-sparking type; and

.13 electric equipment and wiring in enclosed hangar or enclosed spaces containing refuelling installations shall comply with regulations 20.3.2, 20.3.3 and 20.3.4.

8 Operations manual and fire-fighting service

8.1 Each helicopter facility shall have an operations manual, including a description and a checklist of safety precautions, procedures and equipment requirements. This manual may be part of the ship' s emergency response procedures.

8.2 The procedures and precautions to be followed during refuelling operations shall be in accordance with recognized safe practices and contained in the operations manual.

This gazette is also available free online at **www.gpwonline.co.za**

8.3 Fire-fighting personnel consisting of at least two persons trained for rescue and fire-fighting duties and fire-fighting equipment shall be immediately available at all times when helicopter operations are expected.

8.4 Fire-fighting personnel shall be present during refuelling operations. However, the fire-fighting personnel shall not be involved with refuelling activities.

8.5 On-board refresher training shall be carried out and additional supplies of fire-fighting media shall be provided for training and testing of the equipment.

Regulation 19
Carriage of dangerous goods [124]

1 Purpose

The purpose of this regulation is to provide additional safety measures in order to address the fire safety objectives of this chapter for ships carrying dangerous goods. For this purpose, the following functional requirements shall be met:

.1 fire protection systems shall be provided to protect the ship from the added fire hazards associated with carriage of dangerous goods;

.2 dangerous goods shall be adequately separated from ignition sources; and

.3 appropriate personnel protective equipment shall be provided for the hazards associated with the carriage of dangerous goods.

2 General requirements

2.1 In addition to complying with the requirements of regulations in parts B, C, D, E and regulations 18 and 20 [125], as appropriate, ship types and cargo spaces, referred to in paragraph 2.2, intended for the carriage of dangerous goods shall comply with the requirements of this regulation, as appropriate, except when carrying dangerous goods in limited quantities [126] and excepted quantities [127] unless such requirements have already been met by compliance with the requirements elsewhere in this chapter. The types of ships and modes of carriage of dangerous goods are referred to in paragraph 2.2 and in table 19.1. Cargo ships of less than 500 gross tonnage shall comply with this regulation, but Administrations may reduce the requirements and such reduced requirements shall be recorded in the document of compliance referred to in paragraph 4.

2.2 The following ship types and cargo spaces shall govern the application of tables 19.1 and 19.2:

[124]Refer to *Interim guidelines for open-top containerships* (MSC/Circ.608/Rev.1).
[125]Refer to part 7 of the IMDG Code.
[126]Refer to chapter 3.4 of the IMDG Code.
[127]Refer to chapter 3.5 of the IMDG Code

This gazette is also available free online at **www.gpwonline.co.za**

.1 ships and cargo spaces not specifically designed for the carriage of freight containers, but intended for the carriage of dangerous goods in packaged form including goods in freight containers and portable tanks;

.2 purpose-built container ships and cargo spaces intended for the carriage of dangerous goods in freight containers and portable tanks;

.3 ro-ro ships and ro-ro spaces intended for the carriage of dangerous goods;

.4 ships and cargo spaces intended for the carriage of solid dangerous goods in bulk; and

.5 ships and cargo spaces intended for carriage of dangerous goods other than liquids and gases in bulk in shipborne barges.

3 Special requirements

Unless otherwise specified, the following requirements shall govern the application of tables 19.1, 19.2 and 19.3 to both "on-deck" and "under-deck" stowage of dangerous goods where the numbers of the following paragraphs are indicated in the first column of the tables.

3.1 Water supplies

3.1.1 Arrangements shall be made to ensure immediate availability of a supply of water from the fire main at the required pressure either by permanent pressurization or by suitably placed remote arrangements for the fire pumps.

3.1.2 The quantity of water delivered shall be capable of supplying four nozzles of a size and at pressures as specified in regulation 10.2, capable of being trained on any part of the cargo space when empty. This amount of water may be applied by equivalent means to the satisfaction of the Administration.

3.1.3 Means shall be provided for effectively cooling the designated underdeck cargo space by at least 5 l/min per square metre of the horizontal area of cargo spaces, either by a fixed arrangement of spraying nozzles or flooding the cargo space with water. Hoses may be used for this purpose in small cargo spaces and in small areas of larger cargo spaces at the discretion of the Administration. However, the drainage and pumping arrangements shall be such as to prevent the build-up of free surfaces. The drainage system shall be sized to remove no less than 125% of the combined capacity of both the water spraying system pumps and the required number of fire hose nozzles. The drainage system valves shall be operable from outside the protected space at a position in the vicinity of the extinguishing system controls. Bilge wells shall be of sufficient holding capacity and shall be arranged at the side shell of the ship at a distance from each other of not more than 40 m in each watertight compartment. If this is not possible, the adverse effect upon stability of the added weight and free surface of water shall be taken into account to the extent deemed necessary by the Administration in its approval of the stability information. [128]

3.1.4 Provision to flood a designated under-deck cargo space with suitable specified media may be substituted for the requirements in paragraph 3.1.3.

[128]Refer to *Recommendation on fixed fire-extinguishing systems for special cargo spaces* (resolution A.123(V)).

This gazette is also available free online at **www.gpwonline.co.za**

3.1.5 The total required capacity of the water supply shall satisfy paragraphs 3.1.2 and 3.1.3, if applicable, simultaneously calculated for the largest designated cargo space. The capacity requirements of paragraph 3.1.2 shall be met by the total capacity of the main fire pump(s) not including the capacity of the emergency fire pump, if fitted. If a drencher system is used to satisfy paragraph 3.1.3, the drencher pump shall also be taken into account in this total capacity calculation.

3.2 Sources of ignition

Electrical equipment and wiring shall not be fitted in enclosed cargo spaces or vehicle spaces unless it is essential for operational purposes in the opinion of the Administration. However, if electrical equipment is fitted in such spaces, it shall be of a certified safe type [129] for use in the dangerous environments to which it may be exposed unless it is possible to completely isolate the electrical system (e.g. by removal of links in the system, other than fuses). Cable penetrations of the decks and bulkheads shall be sealed against the passage of gas or vapour. Through runs of cables and cables within the cargo spaces shall be protected against damage from impact. Any other equipment which may constitute a source of ignition of flammable vapour shall not be permitted.

3.3 Detection system

Ro-ro spaces shall be fitted with a fixed fire detection and fire alarm system complying with the requirements of the Fire Safety Systems Code. All other types of cargo spaces shall be fitted with either a fixed fire detection and fire alarm system or a sample extraction smoke detection system complying with the requirements of the Fire Safety Systems Code. If a sample extraction smoke detection system is fitted, particular attention shall be made to paragraph 2.1.3 in chapter 10 of the Fire Safety Systems Code in order to prevent the leakage of toxic fumes into occupied areas.

3.4 Ventilation arrangement

3.4.1 Adequate power ventilation shall be provided in enclosed cargo spaces. The arrangement shall be such as to provide for at least six air changes per hour in the cargo space based on an empty cargo space and for removal of vapours from the upper or lower parts of the cargo space, as appropriate.

3.4.2 The fans shall be such as to avoid the possibility of ignition of flammable gas air mixtures. Suitable wire mesh guards shall be fitted over inlet and outlet ventilation openings.

3.4.3 Natural ventilation shall be provided in enclosed cargo spaces intended for the carriage of solid dangerous goods in bulk, where there is no provision for mechanical ventilation.

3.5 Bilge pumping

[129] Refer to recommendations of the International Electrotechnical Commission, in particular, publication IEC 60092, *Electrical installations in ships.*

This gazette is also available free online at **www.gpwonline.co.za**

3.5.1 Where it is intended to carry flammable or toxic liquids in enclosed cargo spaces, the bilge pumping system shall be designed to protect against inadvertent pumping of such liquids through machinery space piping or pumps. Where large quantities of such liquids are carried, consideration shall be given to the provision of additional means of draining those cargo spaces.

3.5.2 If the bilge drainage system is additional to the system served by pumps in the machinery space, the capacity of the system shall be not less than 10 m³/h per cargo space served. If the additional system is common, the capacity need not exceed 25 m³/h. The additional bilge system need not be arranged with redundancy.

3.5.3 Whenever flammable or toxic liquids are carried, the bilge line into the machinery space shall be isolated either by fitting a blank flange or by a closed lockable valve.

3.5.4 Enclosed spaces outside machinery spaces containing bilge pumps serving cargo spaces intended for carriage of flammable or toxic liquids should be fitted with separate mechanical ventilation giving at least 6 air changes per hour. If the space has access from another enclosed space, the door shall be self-closing.

3.5.5 If bilge drainage of cargo spaces is arranged by gravity drainage, the drainage shall be either led directly overboard or to a closed drain tank located outside the machinery spaces. The tank shall be provided with a vent pipe to a safe location on the open deck. Drainage from a cargo space into bilge wells in a lower space is only permitted if that space satisfies the same requirements as the cargo space above.

3.6 Personnel protection

3.6.1 Four sets of full protective clothing resistant to chemical attack shall be provided in addition to the fire-fighter's outfits required by regulation 10.10 and shall be selected taking into account the hazards associated with the chemicals being transported and the standards developed by the Organization according to the class and physical state [130]. The protective clothing shall cover all skin, so that no part of the body is unprotected.

3.6.2 At least two self-contained breathing apparatuses additional to those required by regulation 10 shall be provided. Two spare charges suitable for use with the breathing apparatus shall be provided for each required apparatus. Passenger ships carrying not more than 36 passengers and cargo ships that are equipped with suitably located means for fully recharging the air cylinders free from contamination, need carry only one spare charge for each required apparatus.

3.7 Portable fire extinguishers [131]

[130] For solid bulk cargoes, the protective clothing should satisfy the equipment provisions specified in the respective schedules of the IMSBC Code for the individual substances. For packaged goods, the protective clothing should satisfy the equipment provisions specified in the *Revised Emergency Response Procedures for Ships Carrying Dangerous Goods (EmS Guide)* (MSC.1/Circ.1588, as may be amended) of the Supplement to the IMDG Code for the individual substances.

[131] Refer to *Unified interpretation of SOLAS chapter II-2 on the number and arrangement of portable fire extinguishers on board ships* (MSC.1/Circ.1275 and its Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

Portable fire extinguishers with a total capacity of at least 12 kg of dry powder or equivalent shall be provided for the cargo spaces. These extinguishers shall be in addition to any portable fire extinguishers required elsewhere in this chapter.

3.8 Insulation of machinery space boundaries

Bulkheads forming boundaries between cargo spaces and machinery spaces of category A shall be insulated to "A-60" class standard, unless the dangerous goods are stowed at least 3 m horizontally away from such bulkheads. Other boundaries between such spaces shall be insulated to "A-60" class standard.

3.9 Water spray system

Each open ro-ro space having a deck above it and each space deemed to be a closed ro-ro space not capable of being sealed, shall be fitted with an approved fixed pressure water-spraying system for manual operation which shall protect all parts of any deck and vehicle platform in the space, except that the Administration may permit the use of any other fixed fire-extinguishing system that has been shown by full-scale test to be no less effective. However, the drainage and pumping arrangements shall be such as to prevent the build-up of free surfaces. The drainage system shall be sized to remove no less than 125% of the combined capacity of both the water spraying system pumps and the required number of fire hose nozzles. The drainage system valves shall be operable from outside the protected space at a position in the vicinity of the extinguishing system controls. Bilge wells shall be of sufficient holding capacity and shall be arranged at the side shell of the ship at a distance from each other of not more than 40 m in each watertight compartment. If this is not possible the adverse effect upon stability of the added weight and free surface of water shall be taken into account to the extent deemed necessary by the Administration in its approval of the stability information. [132]

3.10 Separation of ro-ro spaces

3.10.1 In ships having ro-ro spaces, a separation shall be provided between a closed ro-ro space and an adjacent open ro-ro space. The separation shall be such as to minimize the passage of dangerous vapours and liquids between such spaces. Alternatively, such separation need not be provided if the ro-ro space is considered to be a closed cargo space over its entire length and shall fully comply with the relevant special requirements of this regulation.

3.10.2 In ships having ro-ro spaces, a separation shall be provided between a closed ro-ro space and the adjacent weather deck. The separation shall be such as to minimize the passage of dangerous vapours and liquids between such spaces. Alternatively, a separation need not be provided if the arrangements of the closed ro-ro spaces are in accordance with those required for the dangerous goods carried on adjacent weather deck.

[132]Refer to *Recommendation on fixed fire-extinguishing systems for special cargo spaces* (resolution A.123(V)).

This gazette is also available free online at **www.gpwonline.co.za**

4 Document of compliance [133]

The Administration shall provide the ship with an appropriate document as evidence of compliance of construction and equipment with the requirements of this regulation. Certification for dangerous goods, except solid dangerous goods in bulk, is not required for those cargoes specified as class 6.2 and 7 and dangerous goods in limited quantities and excepted quantities.

[133]Refer to the *Document of compliance with the special requirements for ships carrying dangerous goods under the provisions of regulation II-2/19 of SOLAS 74, as amended, and paragraph 7.17 of the 2000 HSC Code, as amended* (MSC.1/Circ.1266)

This gazette is also available free online at **www.gpwonline.co.za**

Table 19.1 - *Application of the requirements to different modes of carriage of dangerous goods in ships and cargo spaces*

Where X appears in table 19.1 it means this requirement is applicable to all classes of dangerous goods as given in the appropriate line of table 19.3, except as indicated by the notes.

Regulation 19.2.2 / **Regulation 19**	Weather decks (.1 to .5) inclusive	.1 Not specially designed	.2 Container cargo spaces	.3		.4 Solid dangerous goods in bulk	.5 Ship-borne barges
				Closed ro-ro spaces [5]	Open ro-ro spaces		
3.1.1	X	X	X	X	X	For application of requirements of reg. 19 to different classes of dangerous goods, see table 19.2	X
3.1.2	X	X	X	X	X		-
3.1.3	-	X	X	X	X		X
3.1.4	-	X	X	X	X		X
3.2	-	X	X	X	X		X[4]
3.3	-	X	X	X	-		X[4]
3.4.1	-	X	X[1]	X	-		X[4]
3.4.2	-	X	X[1]	X	-		X[4]
3.5	-	X	X	X	-		-
3.6.1	X	X	X	X	X		-
3.6.2	X	X	X	X	X		-
3.7	X	X	-	-	X		-
3.8	X	X	X[2]	X	X		-
3.9	-	-	-	X[3]	X		-
3.10.1	-	-	-	X	-		-
3.10.2	-	-	-	X	-		-

Notes

[1] For classes 4 and 5.1 solids not applicable to closed freight containers. For classes 2, 3, 6.1 and 8 when carried in closed freight containers, the ventilation rate may be reduced to not less than two air changes per hour. For classes 4 and 5.1 liquids when carried in closed freight containers, the ventilation rate may be reduced to not less than two air changes per hour. For the purpose of this requirement, a portable tank is a closed freight container.

[2] Applicable to decks only.

[3] Applies only to closed ro-ro spaces, not capable of being sealed.

This gazette is also available free online at **www.gpwonline.co.za**

[4] In the special case where the barges are capable of containing flammable vapours or alternatively if they are capable of discharging flammable vapours to a safe space outside the barge carrier compartment by means of ventilation ducts connected to the barges, these requirements may be reduced or waived to the satisfaction of the Administration.

[5] Special category spaces shall be treated as closed ro-ro spaces when dangerous goods are carried.

This gazette is also available free online at **www.gpwonline.co.za**

Table 19.2 - *Application of the requirements to different classes of dangerous goods for ships and cargo spaces carrying solid dangerous goods in bulk*

Class / Regulation 19	4.1	4.2	4.3[6]	5.1	6.1	8	9
3.1.1	X	X	-	X	-	-	X
3.1.2	X	X	-	X	-	-	X
3.2	X	X[7]	X	X[8]	-	-	X[8]
3.4.1	-	X[7]	X	-	-	-	-
3.4.2	X[9]	X[7]	X	X[7, 9]	-	-	X[7, 9]
3.4.3	X	X	X	X	X	X	X
3.6	X	X	X	X	X	X	X
3.8	X	X	X	X[7]	-	-	X[10]

Notes:

[6] The hazards of substances in this class which may be carried in bulk are such that special consideration must be given by the Administration to the construction and equipment of the ship involved in addition to meeting the requirements enumerated in this table.

[7] Only applicable to Seedcake containing solvent extractions, to Ammonium nitrate and to Ammonium nitrate fertilizers.

[8] Only applicable to Ammonium nitrate and to Ammonium nitrate fertilizers. However, a degree of protection in accordance with standards contained in the International Electrotechnical Commission publication 60079, Electrical Apparatus for Explosive Gas Atmospheres, is sufficient.

[9] Only suitable wire mesh guards are required.

[10] The requirements of the International Maritime Solid Bulk Cargoes (IMSBC) Code, as amended, are sufficient.

This gazette is also available free online at **www.gpwonline.co.za**

Table 19.3 - *Application of the requirements to different classes of dangerous goods except solid dangerous goods in bulk*

Regulation 19 \ Class	1.1 to 1.6	1.4S	2.1	2.2	*2.3 flammable*[20]	*2.3 non-flammable*	3 FP[15] < 23°C	3 FP[15] ≥ 23°C to ≤ 60°C	4.1	4.2	*4.3 liquids*[21]	*4.3 solids*	5.1	5.2[16]	6.1 liquids FP[15] < 23°C	6.1 liquids FP[15] ≥ 23°C to ≤ 60°C	*6.1 liquids*	6.1 solids	8 liquids FP[15] < 23°C	8 liquids FP[15] ≥ 23°C to ≤ 60°C	*8 liquids*	8 solids	9
3.1.1	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3.1.2	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-
3.1.3	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3.1.4	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3.2	X	-	X	-	X	-	X	-	-	-	X[18]	-	-	-	X	-	-	-	X	-	-	-	X[17]
3.3	X	X	X	X	-	X	X	X	X	X	X	X	X	-	X	X	X	X	X	X	X	X	-
3.4.1	-	-	X	-	-	X	X	-	X[11]	X[11]	X	X	X[11]	-	X	X	-	X[11]	X	X	-	-	X[11]
3.4.2	-	-	X	-	-	-	X	-	-	-	-	-	-	-	X	-	-	-	X	-	-	-	X[17]
3.5	-	-	-	-	-	-	X	-	-	-	-	-	-	-	X	X	X	-	X	X[19]	X[19]	-	-
3.6	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X[14]
3.7	-	-	-	-	-	-	X	X	X	X	X	X	X	-	X	X	-	-	X	X	-	-	-
3.8	X[12]	-	X	X	X	X	X	X	X	X	X	X	X[13]	X	X	X	-	-	X	X	-	-	-
3.9	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3.10.1	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3.10.2	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

Notes:

[11] When “mechanically-ventilated spaces” are required by the IMDG Code.

[12] Stow 3 m horizontally away from the machinery space boundaries in all cases.

[13] Refer to the IMDG Code.

[14] As appropriate for the goods to be carried.

[15] FP means flashpoint.

[16] Under the provisions of the IMDG Code, stowage of class 5.2 dangerous goods under deck or in enclosed ro-ro spaces is prohibited.

[17] Only applicable to dangerous goods evolving flammable vapour listed in the IMDG Code.

[18] Only applicable to dangerous goods having a flashpoint less than 23ºC listed in the IMDG Code.

This gazette is also available free online at **www.gpwonline.co.za**

[19] Only applicable to dangerous goods having a subsidiary risk class 6.1.

[20] Under the provisions of the IMDG Code, stowage of class 2.3 having subsidiary risk class 2.1 under deck or in enclosed ro-ro spaces is prohibited.

[21] Under the provisions of the IMDG Code, stowage of class 4.3 liquids having a flashpoint less than 23ºC under deck or in enclosed ro-ro spaces is prohibited.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 20
Protection of vehicle, special category and ro-ro spaces

1 Purpose

The purpose of this regulation is to provide additional safety measures in order to address the fire safety objectives of this chapter for ships fitted with vehicle, special category and ro-ro spaces. For this purpose, the following functional requirements shall be met:

.1 fire protection systems shall be provided to adequately protect the ship from the fire hazards associated with vehicle, special category and ro-ro spaces;

.2 ignition sources shall be separated from vehicle, special category and ro-ro spaces; and

.3 vehicle, special category and ro-ro spaces shall be adequately ventilated.

2 General requirements

2.1 Application

2.1.1 In addition to complying with the requirements of regulations in parts B, C, D and E, as appropriate, vehicle, special category and ro-ro spaces shall comply with the requirements of this regulation.

2.1.2 On all ships, vehicles with fuel in their tanks for their own propulsion may be carried in cargo spaces other than vehicle, special category or ro-ro spaces, provided that all the following conditions are met:

.1 the vehicles do not use their own propulsion within the cargo spaces;

.2 the cargo spaces are in compliance with the appropriate requirements of regulation 19; and

.3 the vehicles are carried in accordance with the IMDG Code, as defined in regulation VII/1.1.

2.2 Basic principles for passenger ships

2.2.1 The basic principle underlying the provisions of this regulation is that the main vertical zoning required by regulation 9.2 may not be practicable in vehicle spaces of passenger ships and, therefore, equivalent protection must be obtained in such spaces on the basis of a horizontal zone concept and by the provision of an efficient fixed fire-extinguishing system. Based on this concept, a horizontal zone for the purpose of this regulation may include special category spaces on more than one deck provided that the total overall clear height for vehicles does not exceed 10 m.

2.2.2 The basic principle underlying the provisions of paragraph 2.2.1 are also applicable to ro-ro spaces.

2.2.3 The requirements of ventilation systems, openings in "A" class divisions and penetrations in "A" class divisions for maintaining the integrity of vertical zones in this

This gazette is also available free online at **www.gpwonline.co.za**

chapter shall be applied equally to decks and bulkheads forming the boundaries separating horizontal zones from each other and from the remainder of the ship.

3 Precaution against ignition of flammable vapours in closed vehicle spaces, closed ro-ro spaces and special category spaces

3.1 Ventilation systems [134]

3.1.1 *Capacity of ventilation systems*

There shall be provided an effective power ventilation system sufficient to give at least the following air changes:

.1	*Passenger ships*	
	Special category spaces	10 air changes per hour
	Closed ro-ro and vehicle spaces other than special category spaces for ships carrying more than 36 passengers	10 air changes per hour
	Closed ro-ro and vehicle spaces other than special category spaces for ships carrying not more than 36 passengers	6 air changes per hour
.2	*Cargo ships*	6 air changes per hour

The Administration may require an increased number of air changes when vehicles are being loaded and unloaded.

3.1.2 *Performance of ventilation systems*

3.1.2.1 In passenger ships, the power ventilation system shall be separate from other ventilation systems. The power ventilation system shall be operated to give at least the number of air changes required in paragraph 3.1.1 at all times when vehicles are in such spaces, except where an air quality control system in accordance with paragraph 3.1.2.4 is provided. Ventilation ducts serving such cargo spaces capable of being effectively sealed shall be separated for each such space. The system shall be capable of being controlled from a position outside such spaces.

3.1.2.2 In cargo ships, the ventilation fans shall normally be run continuously and give at least the number of air changes required in paragraph 3.1.1 whenever vehicles are on board, except where an air quality control system in accordance with paragraph 3.1.2.4 is provided. Where this is impracticable, they shall be operated for a limited period daily as weather permits and in any case for a reasonable period prior to discharge, after which period the ro-ro or vehicle space shall be proved gas-free. One or more portable combustible gas detecting instruments shall be carried for this purpose. The system shall be entirely separate from other ventilation systems. Ventilation ducts serving ro-ro or vehicle spaces shall be capable of being effectively

[134] Refer to *Design Guidelines and operational recommendations for ventilation systems in ro-ro cargo spaces* (MSC/Circ.729).

This gazette is also available free online at **www.gpwonline.co.za**

sealed for each cargo space. The system shall be capable of being controlled from a position outside such spaces.

3.1.2.3 The ventilation system shall be such as to prevent air stratification and the formation of air pockets.

3.1.2.4 For all ships, where an air quality control system is provided based on the guidelines developed by the Organization, [135] the ventilation system may be operated at a decreased number of air changes and/or a decreased amount of ventilation. This relaxation does not apply to spaces to which at least ten air changes per hour is required by paragraph 3.2.2 of this regulation and spaces subject to regulations 19.3.4.1 and 20-1.

3.1.3 *Indication of ventilation systems*

Means shall be provided on the navigation bridge to indicate any loss of the required ventilating capacity.

3.1.4 *Closing appliances and ducts*

3.1.4.1 Arrangements shall be provided to permit a rapid shutdown and effective closure of the ventilation system from outside of the space in case of fire, taking into account the weather and sea conditions.

3.1.4.2 Ventilation ducts, including dampers, within a common horizontal zone shall be made of steel. In passenger ships, ventilation ducts that pass through other horizontal zones or machinery spaces shall be "A-60" class steel ducts constructed in accordance with regulations 9.7.2.4.1.1 and 9.7.2.4.1.2.

3.1.5 *Permanent openings*

Permanent openings in the side plating, the ends or deckhead of the space shall be so situated that a fire in the cargo space does not endanger stowage areas and embarkation stations for survival craft and accommodation spaces, service spaces and control stations in superstructures and deckhouses above the cargo spaces.

3.2 Electrical equipment and wiring

3.2.1 Except as provided in paragraph 3.2.2, electrical equipment and wiring shall be of a type suitable for use in an explosive petrol and air mixture. [136]

3.2.2 In case of other than special category spaces below the bulkhead deck, notwithstanding the provisions in paragraph 3.2.1, above a height of 450 mm from the deck and from each platform for vehicles, if fitted, except platforms with openings of sufficient size permitting penetration of petrol gases downwards, electrical equipment of a type so enclosed and protected as to prevent the escape of sparks shall be

[135]Refer to the *Revised design guidelines and operational recommendations for ventilation systems in ro-ro cargo spaces* (MSC/Circ.1515).

[136]Refer to the recommendations of the International Electrotechnical Commission, in particular publication 60079, *Electrical apparatus for explosive gas atmospheres.*

This gazette is also available free online at **www.gpwonline.co.za**

permitted as an alternative on condition that the ventilation system is so designed and operated as to provide continuous ventilation of the cargo spaces at the rate of at least ten air changes per hour whenever vehicles are on board.

3.3 Electrical equipment and wiring in exhaust ventilation ducts

Electrical equipment and wiring, if installed in an exhaust ventilation duct, shall be of a type approved for use in explosive petrol and air mixtures and the outlet from any exhaust duct shall be sited in a safe position, having regard to other possible sources of ignition.

3.4 Other ignition sources

Other equipment which may constitute a source of ignition of flammable vapours shall not be permitted.

3.5 Scuppers and discharges

Scuppers shall not be led to machinery or other spaces where sources of ignition may be present.

4 Detection and alarm

4.1 Fixed fire detection and fire alarm systems

Except as provided in paragraph 4.3.1, there shall be provided a fixed fire detection and fire alarm system complying with the requirements of the Fire Safety Systems Code. The fixed fire detection system shall be capable of rapidly detecting the onset of fire. The type of detectors and their spacing and location shall be to the satisfaction of the Administration taking into account the effects of ventilation and other relevant factors. After being installed the system shall be tested under normal ventilation conditions and shall give an overall response time to the satisfaction of the Administration.

4.2 Sample extraction smoke detection systems

Except open ro-ro spaces, open vehicle spaces and special category spaces, a sample extraction smoke detection system complying with the requirements of the Fire Safety Systems Code may be used as an alternative of the fixed fire detection and fire alarm system required in paragraph 4.1.

4.3 Special category spaces

4.3.1 An efficient fire patrol system shall be maintained in special category spaces. However, if an efficient fire patrol system is maintained by a continuous fire watch at all times during the voyage, a fixed fire detection and fire alarm systems is not required.

4.3.2 Manually operated call points shall be spaced so that no part of the space is more than 20 m from a manually operated call point, and one shall be placed close to each exit from such spaces.

This gazette is also available free online at **www.gpwonline.co.za**

5 Structural protection

Notwithstanding the provisions of regulation 9.2.2, in passenger ships carrying more than 36 passengers, the boundary bulkheads and decks of special category spaces and ro-ro spaces shall be insulated to "A-60" class standard. However, where a category (5), (9) and (10) space, as defined in regulation 9.2.2.3, is on one side of the division the standard may be reduced to "A-0". Where fuel oil tanks are below a special category space or a ro-ro space, the integrity of the deck between such spaces, may be reduced to "A-0" standard.

6 Fire-extinction

6.1 Fixed fire-extinguishing systems

(The requirements of paragraphs 6.1.1 and 6.1.2 shall apply to ships constructed on or after 1 July 2014. Ships constructed before 1 July 2014 shall comply with the previously applicable requirements of paragraphs 6.1.1 and 6.1.2.)

6.1.1 Vehicle spaces and ro-ro spaces, which are not special category spaces and are capable of being sealed from a location outside of the cargo spaces, shall be fitted with one of the following fixed fire-extinguishing systems:

.1 a fixed gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code;

.2 a fixed high-expansion foam fire-extinguishing system complying with the provisions of the Fire Safety Systems Code; or

.3 a fixed water-based firefighting system for ro-ro spaces and special category spaces complying with the provisions of the Fire Safety Systems Code and paragraphs 6.1.2.1 to 6.1.2.4.

6.1.2 Vehicle spaces and ro-ro spaces not capable of being sealed and special category spaces shall be fitted with a fixed water-based fire-fighting system for ro-ro spaces and special category spaces complying with the provisions of the Fire Safety Systems Code which shall protect all parts of any deck and vehicle platform in such spaces. Such a water-based fire-fighting system shall have:

.1 a pressure gauge on the valve manifold;

.2 clear marking on each manifold valve indicating the spaces served;

.3 instructions for maintenance and operation located in the valve room; and

.4 a sufficient number of drainage valves to ensure complete drainage of the system.

6.1.3 The Administration may permit the use of any other fixed fire-extinguishing system [137] that has been shown that it is not less effective by a full-scale test in

[137] Refer to *Guidelines for the approval of fixed water-based fire-fighting systems for ro-ro spaces and special category spaces equivalent to that referred to in resolution A.123(V)* (MSC.1/Circ.1272) *and Revised Guidelines for the design and approval of fixed water-based fire-fighting systems for ro-ro spaces and special category spaces* (MSC.1/Circ.1430).

This gazette is also available free online at **www.gpwonline.co.za**

conditions simulating a flowing petrol fire in a vehicle space or a ro-ro space in controlling fires likely to occur in such a space.

6.1.4 The requirement of this paragraph shall apply to ships constructed on or after 1 January 2010. Ships constructed on or after 1 July 2002 and before 1 January 2010 shall comply with the previously applicable requirements of paragraph 6.1.4, as amended by resolution MSC.99(73). When fixed pressure water-spraying systems are fitted, in view of the serious loss of stability which could arise due to large quantities of water accumulating on the deck or decks during the operation of the fixed pressure water-spraying system, the following arrangements shall be provided:

.1 in passenger ships:

1.1 in the spaces above the bulkhead deck, scuppers shall be fitted so as to ensure that such water is rapidly discharged directly overboard, taking into account the guidelines developed by the Organization [138];

1.2.1 in ro-ro passenger ships, discharge valves for scuppers, fitted with positive means of closing operable from a position above the bulkhead deck in accordance with the requirements of the International Convention on Load Lines in force, shall be kept open while the ships are at sea;

1.2.2 any operation of valves referred to in paragraph 6.1.4.1.2.1 shall be recorded in the log-book;

.1.3 in the spaces below the bulkhead deck, the Administration may require pumping and drainage facilities to be provided additional to the requirements of regulation II-1/35-1. In such case, the drainage system shall be sized to remove no less than 125% of the combined capacity of both the water-spraying system pumps and the required number of fire hose nozzles, taking into account the guidelines developed by the Organization [139]. The drainage system valves shall be operable from outside the protected space at a position in the vicinity of the extinguishing system controls. Bilge wells shall be of sufficient holding capacity and shall be arranged at the side shell of the ship at a distance from each other of not more than 40 m in each watertight compartment;

.2 in cargo ships, the drainage and pumping arrangements shall be such as to prevent the build-up of free surfaces. In such case, the drainage system shall be sized to remove no less than 125% of the combined capacity of both the water-spraying system pumps and the required number of fire hose nozzles, taking into account the guidelines developed by the Organization [139]. The drainage system valves shall be operable from outside the protected space at a position in the vicinity of the extinguishing system controls. Bilge wells shall be of sufficient holding capacity and shall be arranged at the side shell of the ship at a distance from each other of not more than 40 m in each watertight compartment. If this is not possible, the adverse effect upon stability of the added weight and free surface of water shall be taken into account to the extent deemed necessary by

[138]Refer to *Guidelines for the drainage of fire-fighting water from closed vehicle and ro-ro spaces and special category spaces for passenger and cargo ships* (MSC.1/Circ.1320)

[139]Refer to *Guidelines for the drainage of fire-fighting water from closed vehicle and ro-ro spaces and special category spaces for passenger and cargo ships* (MSC.1/Circ.1320)

This gazette is also available free online at **www.gpwonline.co.za**

the Administration in its approval of the stability information [140]. Such information shall be included in the stability information supplied to the master as required by regulation II-1/5-1.

6.1.5 On all ships, for closed vehicles and ro-ro spaces and special category spaces, where fixed pressure water-spraying systems are fitted, means shall be provided to prevent the blockage of drainage arrangements, taking into account the guidelines developed by the Organization [139]. Ships constructed before 1 January 2010 shall comply with the requirements of this paragraph by the first survey after 1 January 2010.

6.2 Portable fire extinguishers

6.2.1 Portable extinguishers shall be provided at each deck level in each hold or compartment where vehicles are carried, spaced not more than 20 m apart on both sides of the space. At least one portable fire-extinguisher shall be located at each access to such a cargo space. [141]

6.2.2 In addition to the provision of paragraph 6.2.1, the following fire extinguishing appliances shall be provided in vehicle, ro-ro and special category spaces intended for the carriage of motor vehicles with fuel in their tanks for their own propulsion:

.1 at least three water-fog applicators; and

.2 one portable foam applicator unit complying with the provisions of the Fire Safety Systems Code, provided that at least two such units are available in the ship for use in such ro-ro spaces.

[140]Refer to *Recommendation on fixed fire-extinguishing systems for special cargo spaces* (resolution A.123(V)).

[141]Refer to *Unified interpretation of SOLAS chapter II-2 on the number and arrangement of portable fire extinguishers on board ships* (MSC.1/Circ.1275 and its Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 20-1

Requirements for vehicle carriers carrying motor vehicles with compressed hydrogen or natural gas in their tanks for their own propulsion as cargo

1 Purpose

The purpose of this regulation is to provide additional safety measures in order to address the fire safety objectives of this chapter for vehicle carriers with vehicle and ro-ro spaces intended for carriage of motor vehicles with compressed hydrogen or compressed natural gas in their tanks for their own propulsion as cargo.

2 Application

2.1 In addition to complying with the requirements of regulation 20, as appropriate, vehicle carriers constructed on or after 1 January 2016 intended for the carriage of motor vehicles with compressed hydrogen or compressed natural gas in their tanks for their own propulsion as cargo shall comply with the requirements in paragraphs 3 to 5 of this regulation.

2.2 In addition to complying with the requirements of regulation 20, as appropriate, vehicle carriers constructed before 1 January 2016, including those constructed before 1 July 2012 [142], shall comply with the requirements in paragraph 5 of this regulation.

3 Requirements for spaces intended for carriage of motor vehicles with compressed natural gas in their tanks for their own propulsion as cargo

3.1 Electrical equipment and wiring

All electrical equipment and wiring shall be of a certified safe type for use in an explosive methane and air mixture [143].

3.2 Ventilation arrangement

3.2.1 Electrical equipment and wiring, if installed in any ventilation duct, shall be of a certified safe type for use in explosive methane and air mixtures.

3.2.2 The fans shall be such as to avoid the possibility of ignition of methane and air mixtures. Suitable wire mesh guards shall be fitted over inlet and outlet ventilation openings.

3.3 Other ignition sources

Other equipment which may constitute a source of ignition of methane and air mixtures shall not be permitted.

[142] Refer to *Recommendation on safety measures for existing vehicle carriers carrying motor vehicles with compressed hydrogen or natural gas in their tanks for their own propulsion as cargo* (MSC.1/Circ.1471).

[143] Refer to the recommendations of the International Electrotechnical Commission, in particular, publication IEC 60079.

This gazette is also available free online at **www.gpwonline.co.za**

4 Requirements for spaces intended for carriage of motor vehicles with compressed hydrogen in their tanks for their own propulsion as cargo

4.1 Electrical equipment and wiring

All electrical equipment and wiring shall be of a certified safe type for use in an explosive hydrogen and air mixture [143].

4.2 Ventilation arrangement

4.2.1 Electrical equipment and wiring, if installed in any ventilation duct, shall be of a certified safe type for use in explosive hydrogen and air mixtures and the outlet from any exhaust duct shall be sited in a safe position, having regard to other possible sources of ignition.

4.2.2 The fans shall be designed such as to avoid the possibility of ignition of hydrogen and air mixtures. Suitable wire mesh guards shall be fitted over inlet and outlet ventilation openings.

4.3 Other ignition sources

Other equipment which may constitute a source of ignition of hydrogen and air mixtures shall not be permitted.

5 Detection

When a vehicle carrier carries as cargo one or more motor vehicles with either compressed hydrogen or compressed natural gas in their tanks for their own propulsion, at least two portable gas detectors shall be provided. Such detectors shall be suitable for the detection of the gas fuel and be of a certified safe type for use in the explosive gas and air mixture.

Regulation 21
Casualty threshold, safe return to port and safe areas

1 Application

Passenger ships constructed on or after 1 July 2010 having length, as defined in regulation II-1/2.5, of 120 m or more or having three or more main vertical zones shall comply with the provisions of this regulation.

2 Purpose

The purpose of this regulation is to establish design criteria for a ship' s safe return to port under its own propulsion after a casualty that does not exceed the casualty threshold stipulated in paragraph 3 and also provides functional requirements and performance standards for safe areas.

3 Casualty threshold

This gazette is also available free online at **www.gpwonline.co.za**

The casualty threshold, in the context of a fire, includes:

.1 loss of space of origin up to the nearest "A" class boundaries, which may be a part of the space of origin, if the space of origin is protected by a fixed fire extinguishing system; or

.2 loss of the space of origin and adjacent spaces up to the nearest "A" class boundaries, which are not part of the space of origin.

4 Safe return to port [144]

When fire damage does not exceed the casualty threshold indicated in paragraph 3, the ship shall be capable of returning to port while providing a safe area as defined in regulation 3. To be deemed capable of returning to port, the following systems shall remain operational in the remaining part of the ship not affected by fire:

.1 propulsion;

.2 steering systems and steering-control systems;

.3 navigational systems;

.4 systems for fill, transfer and service of fuel oil;

.5 internal communication between the bridge, engineering spaces, safety centre, fire-fighting and damage control teams, and as required for passenger and crew notification and mustering;

.6 external communication;

.7 fire main system;

.8 fixed fire-extinguishing systems;

.9 fire and smoke detection system;

.10 bilge and ballast system;

.11 power-operated watertight and semi-watertight doors;

.12 systems intended to support "safe areas" as indicated in paragraph 5.1.2;

.13 flooding detection systems; and

.14 other systems determined by the Administration to be vital to damage control efforts.

5 Safe area(s)

5.1 Functional requirements:

.1 the safe area(s) shall generally be internal space(s); however, the use of an external space as a safe area may be allowed by the Administration taking into account any restriction due to the area of operation and relevant expected environmental conditions;

[144] Refer to *Interim Explanatory Notes for the assessment of passenger ship systems' capabilities after a fire or flooding casualty* (MSC.1/Circ.1369/Add.1).

This gazette is also available free online at **www.gpwonline.co.za**

.2 the safe area(s) shall provide all occupants with the following basic services [144] to ensure that the health of passengers and crew is maintained:

.1 sanitation;

.2 water;

.3 food;

.4 alternate space for medical care;

.5 shelter from the weather;

.6 means of preventing heat stress and hypothermia;

.7 light; and

.8 ventilation;

.3 ventilation design shall reduce the risk that smoke and hot gases could affect the use of the safe area(s); and

.4 means of access to life-saving appliances shall be provided from each area identified or used as a safe area, taking into account that a main vertical zone may not be available for internal transit.

5.2 Alternate space for medical care

Alternate space for medical care shall conform to a standard acceptable to the Administration.[145]

Regulation 22

Design criteria for systems to remain operational after a fire casualty

1 Application

Passenger ships constructed on or after 1 July 2010 having length, as defined in regulation II-1/2.5, of 120 m or more or having three or more main vertical zones shall comply with the provisions of this regulation.

2 Purpose

The purpose of this regulation is to provide design criteria for systems required to remain operational for supporting the orderly evacuation and abandonment of a ship, if the casualty threshold, as defined in regulation 21.3, is exceeded.

3 Systems [146]

3.1 In case any one main vertical zone is unserviceable due to fire, the following systems shall be so arranged and segregated as to remain operational:

[145] Refer to *Guidance on the establishment of medical and sanitation related programmes for passenger ships* (MSC/Circ.1129).

[146] Refer to *Interim Explanatory Notes for the assessment of passenger ship systems' capabilities after a fire or flooding casualty* (MSC.1/Circ.1369/Add.1).

This gazette is also available free online at **www.gpwonline.co.za**

.1 fire main;

.2 internal communications (in support of fire-fighting as required for passenger and crew notification and evacuation);

.3 means of external communications;

.4 bilge systems for removal of fire-fighting water;

.5 lighting along escape routes, at assembly stations and at embarkation stations of life-saving appliances; and

.6 guidance systems for evacuation shall be available.

3.2 The above systems shall be capable of operation for at least 3 h based on the assumption of no damage outside the unserviceable main vertical zone. These systems are not required to remain operational within the unserviceable main vertical zones.

3.3 Cabling and piping within a trunk constructed to an "A-60" standard shall be deemed to remain intact and serviceable while passing through the unserviceable main vertical zone for the purposes of paragraph 3.1. An equivalent degree of protection for cabling and piping may be approved by the Administration.

Regulation 23
Safety centre on passenger ships

1 Application

Passenger ships constructed on or after 1 July 2010 shall have on board a safety centre complying with the requirements of this regulation.

2 Purpose

The purpose of this regulation is to provide a space to assist with the management of emergency situations.

3 Location and arrangement

The safety centre shall either be a part of the navigation bridge or be located in a separate space adjacent to and having direct access to the navigation bridge, so that the management of emergencies can be performed without distracting watch officers from their navigational duties.

4 Layout and ergonomic design

The layout and ergonomic design of the safety centre shall take into account the guidelines developed by the Organization [147], as appropriate.

[147] Refer to guidelines to be developed by the Organization. Refer also to *Interim Clarifications of SOLAS chapter II-2 requirements regarding interrelation between the central control station, navigation bridge and safety centre* (MSC.1/Circ.1368).

This gazette is also available free online at **www.gpwonline.co.za**

5 Communications

Means of communication between the safety centre, the central control station, the navigation bridge, the engine control room, the storage room(s) for fire extinguishing system(s) and fire equipment lockers shall be provided.

6 Control and monitoring of safety systems

Notwithstanding the requirements set out elsewhere in the Convention, the full functionality (operation, control, monitoring or any combination thereof, as required) of the safety systems listed below shall be available from the safety centre:

.1 all powered ventilation systems;

.2 fire doors;

.3 general emergency alarm system;

.4 public address system;

.5 electrically powered evacuation guidance systems;

.6 watertight and semi-watertight doors;

.7 indicators for shell doors, loading doors and other closing appliances;

.8 water leakage of inner/outer bow doors, stern doors and any other shell door;

.9 television surveillance system;

.10 fire detection and alarm system;

.11 fixed fire-fighting local application system(s);

.12 sprinkler and equivalent systems;

.13 water-based systems for machinery spaces;

.14 alarm to summon the crew;

.15 atrium smoke extraction system;

.16 flooding detection systems; and

.17 fire pumps and emergency fire pumps.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter III

Life-saving appliances
and arrangements

304

Contents

CHAPTER III LIFE-SAVING APPLIANCES AND ARRANGEMENTS 303

PART A - GENERAL 303

Regulation 1 Application 303
Regulation 2 Exemptions 304
Regulation 3 Definitions 304
Regulation 4 Evaluation, testing and approval of life-saving appliances and arrangements 307
Regulation 5 Production tests 307

PART B - REQUIREMENTS FOR SHIPS AND LIFE-SAVING APPLIANCES 309

Section I - Passenger ships and cargo ships 309

Regulation 6 Communications 309
Regulation 7 Personal life-saving appliances 310
Regulation 8 Muster list and emergency instructions 312
Regulation 9 Operating instructions 312
Regulation 10 Manning of survival craft and supervision 313
Regulation 11 Survival craft muster and embarkation arrangements 313
Regulation 12 Launching stations 314
Regulation 13 Stowage of survival craft 314
Regulation 14 Stowage of rescue boats 316
Regulation 15 Stowage of marine evacuation systems 316
Regulation 16 Survival craft launching and recovery arrangements 317
Regulation 17 Rescue boat embarkation, launching and recovery arrangements 318
Regulation 17-1 ..... Recovery of persons from the water 318
Regulation 18 Line-throwing appliances 320
Regulation 19 Emergency training and drills 320
Regulation 20 Operational readiness, maintenance and inspections 324

Section II - Passenger ships (additional requirements) 328

Regulation 21 Survival craft and rescue boats 328
Regulation 22 Personal life-saving appliances 330
Regulation 23 Survival craft and rescue boat embarkation arrangements 331
Regulation 24 Stowage of survival craft 332

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 25 Muster stations 332
Regulation 26 Additional requirements for ro-ro passenger ships 332
Regulation 27 Information on passengers 334
Regulation 28 Helicopter landing and pick-up areas 335
Regulation 29 Decision support system for masters of passenger ships 335
Regulation 30 Drills 336
Section III - Cargo ships (additional requirements) 336
Regulation 31 Survival craft and rescue boats 336
Regulation 32 Personal life-saving appliances 339
Regulation 33 Survival craft embarkation and launching arrangements 340
Section IV - Life-saving appliances and arrangements requirements 340
Regulation 34 Compliance with LSA Code 340
Section V - Miscellaneous 340
Regulation 35 Training manual and on-board training aids 340
Regulation 36 Instructions for on-board maintenance 341
Regulation 37 Muster list and emergency instructions 342
Regulation 38 Alternative design and arrangements 343

This gazette is also available free online at **www.gpwonline.co.za**

Chapter III - Life-Saving Appliances And Arrangements

Part A - General

Regulation 1
Application

1 Unless expressly provided otherwise, this chapter shall apply to ships the keels of which are laid or which are at a similar stage of construction on or after 1 July 1998.

2 For the purpose of this chapter the term *a similar stage of construction* means the stage at which:

.1 construction identifiable with a specific ship begins; and

.2 assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less.

3 For the purpose of this chapter:

.1 the expression *ships constructed* means "ships the keels of which are laid or which are at a similar stage of construction";

.2 the expression *all ships* means ships constructed before, on or after 1 July 1998; the expressions *all passenger ships* and *all cargo ships* shall be construed accordingly;

.3 a cargo ship, whenever built, which is converted to a passenger ship shall be treated as a passenger ship constructed on the date on which such a conversion commences.

4 For ships constructed before 1 July 1998, the Administration shall:

.1 ensure that, subject to the provisions of paragraph 4.2, the requirements which are applicable under chapter III of the International Convention for the Safety of Life at Sea, 1974, in force prior to 1 July 1998 to new or existing ships as prescribed by that chapter are complied with;

.2 ensure that when life-saving appliances or arrangements on such ships are replaced or such ships undergo repairs, alterations or modifications of a major character which involve replacement of, or any addition to, their existing life-saving appliances or arrangements, such life-saving appliances or arrangements, in so far as is reasonable and practicable, comply with the requirements of this chapter. However, if a survival craft other than an inflatable liferaft is replaced without replacing its launching appliance, or vice versa, the survival craft or launching appliance may be of the same type as that replaced; and

.3 ensure that the requirements of regulations 30.3 and 37.3.9 are complied with.

This gazette is also available free online at **www.gpwonline.co.za**

5 Notwithstanding paragraph 4.2, for all ships, not later than the first scheduled dry-docking after 1 July 2014, but not later than 1 July 2019, lifeboat on-load release mechanisms not complying with paragraphs 4.4.7.6.4 to 4.4.7.6.6 of the Code shall be replaced with equipment that complies with the International Life-Saving Appliance (LSA) Code. [1]

Regulation 2
Exemptions

1 The Administration may, if it considers that the sheltered nature and conditions of the voyage are such as to render the application of any specific requirements of this chapter unreasonable or unnecessary, exempt from those requirements individual ships or classes of ships which, in the course of their voyage, do not proceed more than 20 miles from the nearest land.

2 In the case of passenger ships which are employed in special trades for the carriage of large numbers of special trade passengers, such as the pilgrim trade, the Administration, if satisfied that it is impracticable to enforce compliance with the requirements of this chapter, may exempt such ships from those requirements, provided that such ships comply fully with the provisions of:

.1 the rules annexed to the Special Trade Passenger Ships Agreement, 1971; and

.2 the rules annexed to the Protocol on Space Requirements for Special Trade Passenger Ships, 1973.

Regulation 3
Definitions

For the purpose of this chapter, unless expressly provided otherwise:

1 *Anti-exposure suit* is a protective suit designed for use by rescue boat crews and marine evacuation system parties.

2 *Certificated person* is a person who holds a certificate of proficiency in survival craft issued under the authority of, or recognized as valid by, the Administration in accordance with the requirements of the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, in force; or a person who holds a certificate issued or recognized by the Administration of a State not a Party to that Convention for the same purpose as the convention certificate.

3 *Detection* is the determination of the location of survivors or survival craft.

4 *Embarkation ladder* is the ladder provided at survival craft embarkation stations to permit safe access to survival craft after launching.

[1] Refer to *Guidelines for evaluation and replacement of lifeboat release and retrieval systems* (MSC.1/Circ.1392 and its Corr.1, as amended by MSC.1/Circ.1584).

This gazette is also available free online at **www.gpwonline.co.za**

5 *Float-free launching* is that method of launching a survival craft whereby the craft is automatically released from a sinking ship and is ready for use.

6 *Free-fall launching* is that method of launching a survival craft whereby the craft with its complement of persons and equipment on board is released and allowed to fall into the sea without any restraining apparatus.

7 *Immersion suit* is a protective suit which reduces the body heat loss of a person wearing it in cold water.

8 *Inflatable appliance* is an appliance which depends upon non-rigid, gas-filled chambers for buoyancy and which is normally kept uninflated until ready for use.

9 *Inflated appliance* is an appliance which depends upon non-rigid, gas-filled chambers for buoyancy and which is kept inflated and ready for use at all times.

10 *International Life-Saving Appliance (LSA) Code* (referred to as "the Code" in this chapter) means the International Life-Saving Appliance (LSA) Code adopted by the Maritime Safety Committee of the Organization by resolution MSC.48(66), as it may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

11 *Launching appliance or arrangement* is a means of transferring a survival craft or rescue boat from its stowed position safely to the water.

12 *Length* is 96% of the total length on a waterline at 85% of the least moulded depth measured from the top of the keel, or the length from the fore-side of the stem to the axis of the rudder stock on that waterline, if that be greater. In ships designed with a rake of keel the waterline on which this is measured shall be parallel to the designed waterline.

13 *Lightest seagoing condition* is the loading condition with the ship on even keel, without cargo, with 10% stores and fuel remaining and in the case of a passenger ship with the full number of passengers and crew and their luggage.

14 *Marine evacuation system* is an appliance for the rapid transfer of persons from the embarkation deck of a ship to a floating survival craft.

15 *Moulded depth*

.1 The *moulded depth* is the vertical distance measured from the top of the keel to the top of the freeboard deck beam at side. In wood and composite ships the distance is measured from the lower edge of the keel rabbet. Where the form at the lower part of the midship section is of a hollow character, or where thick garboards are fitted, the distance is measured from the point where the line of the flat of the bottom continued inwards cuts the side of the keel.

This gazette is also available free online at **www.gpwonline.co.za**

.2 In ships having rounded gunwales, the *moulded depth* shall be measured to the point of intersection of the moulded lines of the deck and side shell plating, the lines extending as though the gunwale were of angular design.

.3 Where the freeboard deck is stepped and the raised part of the deck extends over the point at which the moulded depth is to be determined, the *moulded depth* shall be measured to a line of reference extending from the lower part of the deck along a line parallel with the raised part.

16 *Novel life-saving appliance or arrangement* is a life-saving appliance or arrangement which embodies new features not fully covered by the provisions of this chapter or the Code but which provides an equal or higher standard of safety.

17 *Positive stability* is the ability of a craft to return to its original position after the removal of a heeling moment.

18 *Recovery time* for a rescue boat is the time required to raise the boat to a position where persons on board can disembark to the deck of the ship. Recovery time includes the time required to make preparations for recovery on board the rescue boat such as passing and securing a painter, connecting the rescue boat to the launching appliance, and the time to raise the rescue boat. Recovery time does not include the time needed to lower the launching appliance into position to recover the rescue boat.

19 *Rescue boat* is a boat designed to rescue persons in distress and to marshal survival craft.

20 *Retrieval* is the safe recovery of survivors.

21 *Ro-ro passenger ship* means a passenger ship with ro-ro cargo spaces or special category spaces as defined in regulation II-2/3.

22 *Short international voyage* is an international voyage in the course of which a ship is not more than 200 miles from a port or place in which the passengers and crew could be placed in safety. Neither the distance between the last port of call in the country in which the voyage begins and the final port of destination nor the return voyage shall exceed 600 miles. The final port of destination is the last port of call in the scheduled voyage at which the ship commences its return voyage to the country in which the voyage began.

23 *Survival craft* is a craft capable of sustaining the lives of persons in distress from the time of abandoning the ship.

24 *Thermal protective aid* is a bag or suit made of waterproof material with low thermal conductance.

25 *Requirements for maintenance, thorough examination, operational testing, overhaul and repair* means the Requirements for maintenance, thorough examination, operational testing, overhaul and repair of lifeboats and rescue boats, launching appliances and release gear, adopted by the Maritime Safety Committee of the Organization by resolution MSC.402(96), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in

This gazette is also available free online at **www.gpwonline.co.za**

accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

Regulation 4
Evaluation, testing and approval of life-saving appliances and arrangements

1 Except as provided in paragraphs 5 and 6, life-saving appliances and arrangements required by this chapter shall be approved by the Administration.

2 Before giving approval to life-saving appliances and arrangements, the Administration shall ensure that such life-saving appliances and arrangements:

.1 are tested, to confirm that they comply with the requirements of this chapter and the Code, in accordance with the recommendations of the Organization; [2] or

.2 have successfully undergone, to the satisfaction of the Administration, tests which are substantially equivalent to those specified in those recommendations.

3 Before giving approval to novel life-saving appliances or arrangements, the Administration shall ensure that such:

.1 appliances provide safety standards at least equivalent to the requirements of this chapter and the Code and have been evaluated and tested based on the guidelines developed by the Organization; [3] or

.2 arrangements have successfully undergone an engineering analysis, evaluation and approval in accordance with regulation 38.

4 Procedures adopted by the Administration for approval shall also include the conditions whereby approval would continue or would be withdrawn.

5 Before accepting life-saving appliances and arrangements that have not been previously approved by the Administration, the Administration shall be satisfied that life-saving appliances and arrangements comply with the requirements of this chapter and the Code.

6 Life-saving appliances required by this chapter for which detailed specifications are not included in the Code shall be to the satisfaction of the Administration.

Regulation 5
Production tests

[2] Refer to *Recommendation on testing of life-saving appliances* (resolution A.689(17)). For life-saving appliances installed on board on or after 1 July 1999, refer to *Revised recommendation on testing of life-saving appliances* (resolution MSC.81(70)).

[3] Refer to the guidelines to be developed by the Organization.

This gazette is also available free online at **www.gpwonline.co.za**

The Administration shall require life-saving appliances to be subjected to such production tests as are necessary to ensure that the life-saving appliances are manufactured to the same standard as the approved prototype.

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Requirements For Ships And Life-Saving Appliances

Section I - Passenger ships and cargo ships

Regulation 6
Communications

1 [Reserved [4]]

2 [Reserved [4]]

3 Distress flares

Not less than 12 rocket parachute flares, complying with the requirements of section 3.1 of the Code, shall be carried and be stowed on or near the navigation bridge.

4 On-board communications and alarm systems

4.1 An emergency means comprised of either fixed or portable equipment or both shall be provided for two-way communications between emergency control stations, muster and embarkation stations and strategic positions on board.

4.2 A general emergency alarm system complying with the requirements of paragraph 7.2.1 of the Code shall be provided and shall be used for summoning passengers and crew to muster stations and to initiate the actions included in the muster list. The system shall be supplemented by either a public address system complying with the requirements of paragraph 7.2.2 of the Code or other suitable means of communication. Entertainment sound systems shall automatically be turned off when the general emergency alarm system is activated.

4.3 The general emergency alarm system shall be audible throughout all the accommodation and normal crew working spaces. On passenger ships, the system shall also be audible on all open decks.

4.4 On ships fitted with a marine evacuation system communication between the embarkation station and the platform or the survival craft shall be ensured.

5 Public address systems on passenger ships

5.1 In addition to the requirements of regulation II-2/12.3 and of paragraph 4.2, all passenger ships shall be fitted with a public address system. With respect to passenger ships constructed before 1 July 1997 the requirements of paragraphs 5.2 and 5.4, subject to the provisions of paragraph 5.5, shall apply not later than the date of the first periodical survey after 1 July 1997.

[4] The provisions related to two-way VHF radiotelephone apparatus and search and rescue locating devices have been relocated under chapter IV (refer to resolution MSC.496(105). Paragraphs 1 and 2 were intentionally left blank to avoid renumbering of existing regulations.

This gazette is also available free online at **www.gpwonline.co.za**

5.2 The public address system shall be clearly audible above the ambient noise in all spaces, prescribed by paragraph 7.2.2.1 of the Code, and shall be provided with an override function controlled from one location on the navigation bridge and such other places on board as the Administration deems necessary, so that all emergency messages will be broadcast if any loudspeaker in the spaces concerned has been switched off, its volume has been turned down or the public address system is used for other purposes.

5.3 On passenger ships constructed on or after 1 July 1997:

.1 the public address system shall have at least two loops which shall be sufficiently separated throughout their length and have two separate and independent amplifiers; and

.2 the public address system and its performance standards shall be approved by the Administration having regard to the recommendations adopted by the Organization.[5]

5.4 The public address system shall be connected to the emergency source of electrical power required by regulation II-1/42.2.2.

5.5 Ships constructed before 1 July 1997 which are already fitted with the public address system approved by the Administration which complies substantially with those required by paragraphs 5.2 and 5.4 above and paragraph 7.2.2.1 of the Code are not required to change their system.

Regulation 7

Personal life-saving appliances

1 Lifebuoys

1.1 Lifebuoys complying with the requirements of paragraph 2.1.1 of the Code shall be:

.1 so distributed as to be readily available on both sides of the ship and as far as practicable on all open decks extending to the ship's side; at least one shall be placed in the vicinity of the stern; and

.2 so stowed as to be capable of being rapidly cast loose, and not permanently secured in any way.

1.2 At least one lifebuoy on each side of the ship shall be fitted with a buoyant lifeline complying with the requirements of paragraph 2.1.4 of the Code equal in length to not less than twice the height at which it is stowed above the waterline in the lightest seagoing condition, or 30 m, whichever is the greater.

1.3 Not less than one half of the total number of lifebuoys shall be provided with lifebuoy self-igniting lights complying with the requirements of paragraph 2.1.2 of the Code; not less than two of these shall also be provided with lifebuoy self-activating

[5] Refer to *Recommendation on performance standards for public address systems on passenger ships, including cabling* (MSC/Circ.808).

This gazette is also available free online at **www.gpwonline.co.za**

smoke signals complying with the requirements of paragraph 2.1.3 of the Code and be capable of quick release from the navigation bridge; lifebuoys with lights and those with lights and smoke signals shall be equally distributed on both sides of the ship and shall not be the lifebuoys provided with lifelines in compliance with the requirements of paragraph 1.2.

1.4 Each lifebuoy shall be marked in block capitals of the Roman alphabet with the name and port of registry of the ship on which it is carried.

2 Lifejackets

2.1 A lifejacket complying with the requirements of paragraph 2.2.1 or 2.2.2 of the Code shall be provided for every person on board the ship and, in addition:

.1 for passenger ships on voyages less than 24 h, a number of infant lifejackets equal to at least 2.5% of the number of passengers on board shall be provided;

.2 for passenger ships on voyages 24 h or greater, infant lifejackets shall be provided for each infant on board;

.3 a number of lifejackets suitable for children equal to at least 10% of the number of passengers on board shall be provided or such greater number as may be required to provide a lifejacket for each child;

.4 a sufficient number of lifejackets shall be carried for persons on watch and for use at remotely located survival craft stations. The lifejackets carried for persons on watch should be stowed on the bridge, in the engine control room and at any other manned watch station; and

.5 if the adult lifejackets provided are not designed to fit persons weighing up to 140 kg and with a chest girth of up to 1,750 mm, a sufficient number of suitable accessories shall be available on board to allow them to be secured to such persons.

2.2 Lifejackets shall be so placed as to be readily accessible and their position shall be plainly indicated. Where, due to the particular arrangements of the ship, the lifejackets provided in compliance with the requirements of paragraph 2.1 may become inaccessible, alternative provisions shall be made to the satisfaction of the Administration which may include an increase in the number of lifejackets to be carried.

2.3 The lifejackets used in totally enclosed lifeboats, except free-fall lifeboats, shall not impede entry into the lifeboat or seating, including operation of the seat belts in the lifeboat.

2.4 Lifejackets selected for free-fall lifeboats, and the manner in which they are carried or worn, shall not interfere with entry into the lifeboat, occupant safety or operation of the lifeboat.

3 Immersion suits and anti-exposure suits

An immersion suit, complying with the requirements of section 2.3 of the Code or an anti-exposure suit complying with section 2.4 of the Code, of an appropriate size, shall

This gazette is also available free online at **www.gpwonline.co.za**

be provided for every person assigned to crew the rescue boat or assigned to the marine evacuation system party. If the ship is constantly engaged in warm climates [6] where, in the opinion of the Administration thermal protection is unnecessary, this protective clothing need not be carried.

Regulation 8

Muster list and emergency instructions

1 This regulation applies to all ships.

2 Clear instructions to be followed in the event of an emergency shall be provided for every person on board. In the case of passenger ships these instructions shall be drawn up in the language or languages required by the ship' s flag State and in the English language.

3 Muster lists and emergency instructions complying with the requirements of regulation 37 shall be exhibited in conspicuous places throughout the ship including the navigation bridge, engine-room and crew accommodation spaces.

4 Illustrations and instructions in appropriate languages shall be posted in passenger cabins and be conspicuously displayed at muster stations and other passenger spaces to inform passengers of:

.1 their muster station;

.2 the essential actions they must take in an emergency; and

.3 the method of donning lifejackets.

Regulation 9

Operating instructions

1 This regulation applies to all ships.

2 Posters or signs shall be provided on or in the vicinity of survival craft and their launching controls and shall:

.1 illustrate the purpose of controls and the procedures for operating the appliance and give relevant instructions or warnings;

.2 be easily seen under emergency lighting conditions; and

.3 use symbols in accordance with the recommendations of the Organization. *[7]

[6] Refer to *Guidelines for the assessment of thermal protection* (MSC/Circ.1046).

[7] Refer to *Symbols Related to Life-Saving Appliances and Arrangements* (resolution A.760(18), as amended) and/or tables 1 and 2 of *Escape route signs and equipment location markings* (resolution A.1116(30)), as appropriate. Refer to the new symbols in tables 1 and 2 of resolution A.1116(30) where the symbols for a specific item are differently expressed in resolutions A.760(18), as amended and A.1116(30).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 10
Manning of survival craft and supervision

1 This regulation applies to all ships.

2 There shall be a sufficient number of trained persons on board for mustering and assisting untrained persons.

3 There shall be a sufficient number of crew members, who may be deck officers or certificated persons, on board for operating the survival craft and launching arrangements required for abandonment by the total number of persons on board.

4 A deck officer or certificated person shall be placed in charge of each survival craft to be used. However, the Administration, having due regard to the nature of the voyage, the number of persons on board and the characteristics of the ship, may permit persons practised in the handling and operation of liferafts to be placed in charge of liferafts in lieu of persons qualified as above. A second-in-command shall also be nominated in the case of lifeboats.

5 The person in charge of the survival craft shall have a list of the survival craft crew and shall see that the crew under his command are acquainted with their duties. In lifeboats the second-in-command shall also have a list of the lifeboat crew.

6 Every motorized survival craft shall have a person assigned who is capable of operating the engine and carrying out minor adjustments.

7 The master shall ensure the equitable distribution of persons referred to in paragraphs 2, 3 and 4 among the ship' s survival craft.

Regulation 11
Survival craft muster and embarkation arrangements

1 Lifeboats and liferafts for which approved launching appliances are required shall be stowed as close to accommodation and service spaces as possible.

2 Muster stations shall be provided close to the embarkation stations. Each muster station shall have sufficient clear deck space to accommodate all persons assigned to muster at that station, but at least 0.35 m² per person.

3 Muster and embarkation stations shall be readily accessible from accommodation and work areas.

4 Muster and embarkation stations shall be adequately illuminated by lighting supplied from the emergency source of electrical power required by regulation II-1/42 or II-1/43 as appropriate.

5 Alleyways, stairways and exits giving access to the muster and embarkation stations shall be lighted. Such lighting shall be capable of being supplied by the emergency source of electrical power required by regulation II-1/42 or II-1/43 as

This gazette is also available free online at **www.gpwonline.co.za**

appropriate. In addition to and as part of the markings required under regulation II-2/13.3.2.5.1, routes to muster stations shall be indicated with the muster station symbol, intended for that purpose, in accordance with the recommendations of the Organization. [8]

6 Davit-launched and free-fall launched survival craft muster and embarkation stations shall be so arranged as to enable stretcher cases to be placed in survival craft.

7 An embarkation ladder complying with the requirements of paragraph 6.1.6 of the Code extending, in a single length, from the deck to the waterline in the lightest seagoing condition under all conditions of trim of up to 10° and a list of up to 20° either way shall be provided at each embarkation station or at every two adjacent embarkation stations for survival craft launched down the side of the ship. However, the Administration may permit such ladders to be replaced by approved devices to afford access to the survival craft when waterborne, provided that there shall be at least one embarkation ladder on each side of the ship. Other means of embarkation enabling descent to the water in a controlled manner may be permitted for the liferafts required by regulation 31.1.4.

8 Where necessary, means shall be provided for bringing the davit-launched survival craft against the ship' s side and holding them alongside so that persons can be safely embarked.

Regulation 12
Launching stations

Launching stations shall be in such positions as to ensure safe launching having particular regard to clearance from the propeller and steeply overhanging portions of the hull and so that, as far as possible, survival craft, except survival craft specially designed for free-fall launching, can be launched down the straight side of the ship. If positioned forward, they shall be located abaft the collision bulkhead in a sheltered position and, in this respect, the Administration shall give special consideration to the strength of the launching appliance.

Regulation 13
Stowage of survival craft

1 Each survival craft shall be stowed:

.1 so that neither the survival craft nor its stowage arrangements will interfere with the operation of any other survival craft or rescue boat at any other launching station;

[8] Refer to *Symbols Related to Life-Saving Appliances and Arrangements* (resolutions A.760(18), as amended) and/or tables 1 and 2 of *Escape route signs and equipment location markings* (resolution A.1116(30)), as appropriate. Refer to the new symbols in tables 1 and 2 of resolution A.1116(30) where the symbols for a specific item are differently expressed in resolutions A.760(18), as amended and A.1116(30).

Refer also to *Guidelines for the evaluation, testing and application of low-location lighting on passenger ships* (resolution A.752(18)).

This gazette is also available free online at **www.gpwonline.co.za**

.2 as near the water surface as is safe and practicable and, in the case of a survival craft other than a liferaft intended for throw over board launching, in such a position that the survival craft in the embarkation position is not less than 2 m above the waterline with the ship in the fully loaded condition under unfavourable conditions of trim of up to 10 degrees and listed up to 20 degrees either way, or to the angle at which the ship's weather deck edge becomes submerged, whichever is less;

.3 in a state of continuous readiness so that two crew members can carry out preparations for embarkation and launching in less than 5 min;

.4 fully equipped as required by this chapter and the Code; and

.5 as far as practicable, in a secure and sheltered position and protected from damage by fire and explosion. In particular, survival craft on tankers, other than the liferafts required by regulation 31.1.4, shall not be stowed on or above a cargo tank, slop tank, or other tank containing explosive or hazardous cargoes.

2 Lifeboats for lowering down the ship' s side shall be stowed as far forward of the propeller as practicable. On cargo ships of 80 m in length and upwards but less than 120 m in length, each lifeboat shall be so stowed that the after end of the lifeboat is not less than the length of the lifeboat forward of the propeller. On cargo ships of 120 m in length and upwards and passenger ships of 80 m in length and upwards, each lifeboat shall be so stowed that the after end of the lifeboat is not less than 1.5 times the length of the lifeboat forward of the propeller. Where appropriate, the ship shall be so arranged that lifeboats, in their stowed positions, are protected from damage by heavy seas.

3 Lifeboats shall be stowed attached to launching appliances.

4.1 Every liferaft shall be stowed with its painter permanently attached to the ship.

4.2 Each liferaft or group of liferafts shall be stowed with a float-free arrangement complying with the requirements of paragraph 4.1.6 of the Code so that each floats free and, if inflatable, inflates automatically when the ship sinks.

4.3 Liferafts shall be so stowed as to permit manual release of one raft or container at a time from their securing arrangements.

4.4 Paragraphs 4.1 and 4.2 do not apply to liferafts required by regulation 31.1.4.

5 Davit-launched liferafts shall be stowed within reach of the lifting hooks, unless some means of transfer is provided which is not rendered inoperable within the limits of trim and list prescribed in paragraph 1.2 or by ship motion or power failure.

6 Liferafts intended for throw-overboard launching shall be so stowed as to be readily transferable for launching on either side of the ship unless liferafts, of the aggregate capacity required by regulation 31.1 to be capable of being launched on either side, are stowed on each side of the ship.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 14
Stowage of rescue boats

Rescue boats shall be stowed:

.1 in a state of continuous readiness for launching in not more than 5 min, and if the inflated type, in a fully inflated condition at all times;

.2 in a position suitable for launching and recovery;

.3 so that neither the rescue boat nor its stowage arrangements will interfere with the operation of any survival craft at any other launching station; and

.4 if it is also a lifeboat, in compliance with the requirements of regulation 13.

Regulation 15
Stowage of marine evacuation systems

1 The ship's side shall not have any openings between the embarkation station of the marine evacuation system and the waterline in the lightest seagoing condition and means shall be provided to protect the system from any projections.

2 Marine evacuation systems shall be in such positions as to ensure safe launching having particular regard to clearance from the propeller and steeply overhanging portions of the hull and so that, as far as practicable, the system can be launched down the straight side of the ship.

3 Each marine evacuation system shall be stowed so that neither the passage nor platform nor its stowage or operational arrangements will interfere with the operation of any other life-saving appliance at any other launching station.

4 Where appropriate, the ship shall be so arranged that the marine evacuation systems in their stowed positions are protected from damage by heavy seas.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 16

Survival craft launching and recovery arrangements

1 Unless expressly provided otherwise, launching and embarkation appliances complying with the requirements of section 6.1 of the Code shall be provided for all survival craft except those which are:

.1 boarded from a position on deck less than 4.5 m above the waterline in the lightest seagoing condition and which have a mass of not more than 185 kg; or

.2 boarded from a position on deck less than 4.5 m above the waterline in the lightest seagoing condition and which are stowed for launching directly from the stowed position under unfavourable conditions of trim of up to 10 degrees and list of up to 20 degrees either way; or

.3 carried in excess of the survival craft for 200% of the total number of persons on board the ship and which have a mass of not more than 185 kg; or

.4 carried in excess of the survival craft for 200% of the total number of persons on board the ship, are stowed for launching directly from the stowed position under unfavourable conditions of trim of up to 10 degrees and list of up to 20 degrees either way, or

.5 provided for use in conjunction with a marine evacuation system, complying with the requirements of section 6.2 of the Code and stowed for launching directly from the stowed position under unfavourable conditions of trim of up to 10 degrees and list of up to 20 degrees either way.

2 Each lifeboat shall be provided with an appliance which is capable of launching and recovering the lifeboat. In addition there shall be provision for hanging-off the lifeboat to free the release gear for maintenance.

3 Launching and recovery arrangements shall be such that the appliance operator on the ship is able to observe the survival craft at all times during launching and for lifeboats during recovery.

4 Only one type of release mechanism shall be used for similar survival craft carried on board the ship.

5 Preparation and handling of survival craft at any one launching station shall not interfere with the prompt preparation and handling of any other survival craft or rescue boat at any other station.

6 Falls, where used, shall be long enough for the survival craft to reach the water with the ship in its lightest seagoing condition, under unfavourable conditions of trim of up to 10 degrees and list of up to 20 degrees either way.

7 During preparation and launching, the survival craft, its launching appliance, and the area of water into which it is to be launched shall be adequately illuminated by lighting supplied from the emergency source of electrical power required by regulation II-1/42 or II-1/43 , as appropriate.

This gazette is also available free online at **www.gpwonline.co.za**

8 Means shall be available to prevent any discharge of water on to survival craft during abandonment.

9 If there is a danger of the survival craft being damaged by the ship' s stabilizer wings, means shall be available, powered by an emergency source of energy, to bring the stabilizer wings inboard; indicators operated by an emergency source of energy shall be available on the navigating bridge to show the position of the stabilizer wings.

10 If partially enclosed lifeboats complying with the requirements of section 4.5 of the Code are carried, a davit span shall be provided, fitted with not less than two lifelines of sufficient length to reach the water with the ship in its lightest seagoing condition, under unfavourable conditions of trim of up to 10 degrees and list of up 20 degrees either way.

Regulation 17

Rescue boat embarkation, launching and recovery arrangements

1 The rescue boat embarkation and launching arrangements shall be such that the rescue boat can be boarded and launched in the shortest possible time.

2 If the rescue boat is one of the ship' s survival craft, the embarkation arrangements and launching station shall comply with the requirements of regulations 11 and 12.

3 Launching arrangements shall comply with the requirements of regulation 16. However, all rescue boats shall be capable of being launched, where necessary utilizing painters, with the ship making headway at speeds up to 5 knots in calm water.

4 Recovery time of the rescue boat shall be not more than 5 min in moderate sea conditions when loaded with its full complement of persons and equipment. If the rescue boat is also a lifeboat, this recovery time shall be possible when loaded with its lifeboat equipment and the approved rescue boat complement of at least six persons.

5 Rescue boat embarkation and recovery arrangements shall allow for safe and efficient handling of a stretcher case. Foul weather recovery strops shall be provided for safety if heavy fall blocks constitute a danger.

Regulation 17-1

Recovery of persons from the water

1 All ships shall have ship-specific plans and procedures for recovery of persons from the water, taking into account the guidelines developed by the Organization. [9] The plans and procedures shall identify the equipment intended to be used for recovery purposes and measures to be taken to minimize the risk to shipboard personnel involved in recovery operations. Ships constructed before 1 July 2014 shall comply

[9] Refer to *Guidelines for the development of plans and procedures for recovery of persons from the water* (MSC.1/Circ.1447).

This gazette is also available free online at **www.gpwonline.co.za**

with this requirement by the first periodical or renewal safety equipment survey of the ship to be carried out after 1 July 2014, whichever comes first.

2 Ro-ro passenger ships which comply with regulation 26.4 shall be deemed to comply with this regulation.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 18
Line-throwing appliances

A line-throwing appliance complying with the requirements of section 7.1 of the Code shall be provided.

Regulation 19
Emergency training and drills

1 This regulation applies to all ships.

2 Familiarity with safety installations and practice musters

2.1 Every crew member with assigned emergency duties shall be familiar with these duties before the voyage begins.

2.2 On a ship engaged on a voyage where passengers are scheduled to be on board for more than 24 h, musters of newly-embarked passengers shall take place prior to or immediately upon departure. Passengers shall be instructed in the use of the lifejackets and the action to take in an emergency.

2.3 Whenever new passengers embark, a passenger safety briefing shall be given immediately before departure, or immediately after departure. The briefing shall include the instructions required by regulations 8.2 and 8.4, and shall be made by means of an announcement, in one or more languages likely to be understood by the passengers. The announcement shall be made on the ship's public address system, or by other equivalent means likely to be heard at least by the passengers who have not yet heard it during the voyage. The briefing may be included in the muster required by paragraph 2.2. Information cards or posters or video programmes displayed on ships video displays may be used to supplement the briefing, but may not be used to replace the announcement.

3 Drills

3.1 Drills shall, as far as practicable, be conducted as if there were an actual emergency.

3.2 Every crew member shall participate in at least one abandon ship drill and one fire drill every month. The drills of the crew shall take place within 24 h of the ship leaving a port if more than 25% of the crew have not participated in abandon ship and fire drills on board that particular ship in the previous month. When a ship enters service for the first time, after modification of a major character or when a new crew is engaged, these drills shall be held before sailing. The Administration may accept other arrangements that are at least equivalent for those classes of ships for which this is impracticable.

3.3 Crew members with enclosed space entry or rescue responsibilities shall participate in an enclosed space entry and rescue drill to be held on board the ship at least once every two months.

This gazette is also available free online at **www.gpwonline.co.za**

3.4 Abandon ship drill

3.4.1 Each abandon ship drill shall include:

.1 summoning of passengers and crew to muster stations with the alarm required by regulation 6.4.2 followed by drill announcement on the public address or other communication system and ensuring that they are made aware of the order to abandon ship;

.2 reporting to stations and preparing for the duties described in the muster list;

.3 checking that passengers and crew are suitably dressed;

.4 checking that lifejackets are correctly donned;

.5 lowering of at least one lifeboat after any necessary preparation for launching;

.6 starting and operating the lifeboat engine;

.7 operation of davits used for launching liferafts;

.8 a mock search and rescue of passengers trapped in their staterooms; and

.9 instruction in the use of radio life-saving appliances.

3.4.2 Different lifeboats shall, as far as practicable, be lowered in compliance with the requirements of paragraph 3.4.1.5 at successive drills.

3.4.3 Except as provided in paragraphs 3.4.4 and 3.4.5, each lifeboat shall be launched, and manoeuvred in the water by its assigned operating crew, at least once every three months during an abandon ship drill.

3.4.4 In the case of a lifeboat arranged for free-fall launching, at least once every three months during an abandon ship drill the crew shall board the lifeboat, properly secure themselves in their seats and commence launch procedures up to but not including the actual release of the lifeboat (i.e., the release hook shall not be released). The lifeboat shall then either be free-fall launched with only the required operating crew on board, or lowered into the water by means of the secondary means of launching with or without the operating crew on board. In both cases the lifeboat shall thereafter be manoeuvred in the water by the operating crew. At intervals of not more than six months, the lifeboat shall either be launched by free-fall with only the operating crew on board, or simulated launching shall be carried out in accordance with the guidelines developed by the Organization *[10].

3.4.5 The Administration may allow ships operating on short international voyages not to launch the lifeboats on one side if their berthing arrangements in port and their trading patterns do not permit launching of lifeboats on that side. However, all such lifeboats shall be lowered at least once every 3 months and launched at least annually.

[10] Refer to *Measures to prevent accidents with lifeboats* (MSC.1/Circ.1206/Rev.1)

This gazette is also available free online at **www.gpwonline.co.za**

3.4.6 As far as is reasonable and practicable, rescue boats other than lifeboats which are also rescue boats, shall be launched each month with their assigned crew aboard and manoeuvred in the water. In all cases this requirement shall be complied with at least once every 3 months.

3.4.7 If lifeboat and rescue boat launching drills are carried out with the ship making headway, such drills shall, because of the dangers involved, be practised in sheltered waters only and under the supervision of an officer experienced in such drills.

3.4.8 If a ship is fitted with marine evacuation systems, drills shall include exercising of the procedures required for the deployment of such a system up to the point immediately preceding actual deployment of the system. This aspect of drills should be augmented by regular instruction using the on-board training aids required by regulation 35.4. Additionally every system party member shall, as far as practicable, be further trained by participation in a full deployment of a similar system into water, either on board a ship or ashore, at intervals of not longer than 2 years, but in no case longer than 3 years. This training can be associated with the deployments required by regulation 20.8.2.

3.4.9 Emergency lighting for mustering and abandonment shall be tested at each abandon ship drill.

3.5 Fire drills

3.5.1 Fire drills should be planned in such a way that due consideration is given to regular practice in the various emergencies that may occur depending on the type of ships and the cargo.

3.5.2 Each fire drill shall include:

- **.1** reporting to stations and preparing for the duties described in the muster list required by regulation 8;
- **.2** starting of a fire pump, using at least the two required jets of water to show that the system is in proper working order;
- **.3** checking of fireman' s outfit and other personal rescue equipment;
- **.4** checking of relevant communication equipment;
- **.5** checking the operation of watertight doors, fire doors, fire dampers and main inlets and outlets of ventilation systems in the drill area; and
- **.6** checking the necessary arrangements for subsequent abandoning of the ship.

3.5.3 The equipment used during drills shall immediately be brought back to its fully operational condition and any faults and defects discovered during the drills shall be remedied as soon as possible.

3.6 Enclosed space entry and rescue drills

This gazette is also available free online at **www.gpwonline.co.za**

3.6.1 Enclosed space entry and rescue drills should be planned and conducted in a safe manner, taking into account, as appropriate, the guidance provided in the recommendations developed by the Organization [11].

3.6.2 Each enclosed space entry and rescue drill shall include:

.1 checking and use of personal protective equipment required for entry;

.2 checking and use of communication equipment and procedures;

.3 checking and use of instruments for measuring the atmosphere in enclosed spaces;

.4 checking and use of rescue equipment and procedures; and

.5 instructions in first aid and resuscitation techniques.

4 On-board training and instructions

4.1 On-board training in the use of the ship' s life-saving appliances, including survival craft equipment, and in the use of the ship' s fire-extinguishing appliances shall be given as soon as possible but not later than 2 weeks after a crew member joins the ship. However, if the crew member is on a regularly scheduled rotating assignment to the ship, such training shall be given not later than 2 weeks after the time of first joining the ship. Instructions in the use of the ship' s fire-extinguishing appliances, life-saving appliances, and in survival at sea shall be given at the same interval as the drills. Individual instruction may cover different parts of the ship' s life-saving and fire-extinguishing appliances, but all the ship' s life-saving and fire-extinguishing appliances shall be covered within any period of 2 months.

4.2 Every crew member shall be given instructions which shall include but not necessarily be limited to:

.1 operation and use of the ship' s inflatable liferafts;

.2 problems of hypothermia, first-aid treatment for hypothermia and other appropriate first-aid procedures;

.3 special instructions necessary for use of the ship' s life-saving appliances in severe weather and severe sea conditions;

.4 operation and use of fire-extinguishing appliances; and

.5 risks associated with enclosed spaces and onboard procedures for safe entry into such spaces which should take into account, as appropriate, the guidance provided in recommendations developed by the Organization [12].

4.3 On-board training in the use of davit-launched liferafts shall take place at intervals of not more than 4 months on every ship fitted with such appliances. Whenever practicable this shall include the inflation and lowering of a liferaft. This liferaft may be a special liferaft intended for training purposes only, which is not part of the ship' s life-saving equipment; such a special liferaft shall be conspicuously marked.

---

[11] Refer to the *Revised Recommendations for entering enclosed spaces aboard ships* (resolution A.1050(27)).

[12] Refer to the *Revised Recommendations for entering enclosed spaces aboard ships*, adopted by the Organization by resolution A.1050(27).

This gazette is also available free online at **www.gpwonline.co.za**

5 Records

The date when musters are held, details of abandon ship drills and fire drills, enclosed space entry and rescue drills, drills of other life-saving appliances and on board training shall be recorded in such log-book as may be prescribed by the Administration. If a full muster, drill or training session is not held at the appointed time, an entry shall be made in the log-book stating the circumstances and the extent of the muster, drill or training session held.

Regulation 20
Operational readiness, maintenance and inspections

1 This regulation applies to all ships. The requirements of paragraphs 3.2, 3.3 and 6.2 shall be complied with, as far as is practicable, on ships constructed before 1 July 1986.

2 Operational readiness

Before the ship leaves port and at all times during the voyage, all life-saving appliances shall be in working order and ready for immediate use.

3 Maintenance

3.1 Maintenance, testing and inspections of life-saving appliances shall be carried out in a manner having due regard to ensuring reliability of such appliances.

3.2 Instructions for on-board maintenance of life-saving appliances complying with regulation 36 shall be provided and maintenance shall be carried out accordingly.

3.3 The Administration may accept, in compliance with the requirements of paragraph 3.2, a shipboard planned maintenance programme, which includes the requirements of regulation 36.

4 Maintenance of falls

Falls used in launching shall be inspected periodically [13] with special regard for areas passing through sheaves, and renewed when necessary due to deterioration of the falls or at intervals of not more than 5 years, whichever is the earlier.

5 Spares and repair equipment

Spares and repair equipment shall be provided for life-saving appliances and their components which are subject to excessive wear or consumption and need to be replaced regularly.

6 Weekly inspection

[13] Refer to *Measures to prevent accidents with lifeboats* (MSC.1/Circ.1206/Rev.1)

This gazette is also available free online at **www.gpwonline.co.za**

The following tests and inspections shall be carried out weekly and a report of the inspection shall be entered in the log-book:

.1 all survival craft, rescue boats and launching appliances shall be visually inspected to ensure that they are ready for use. The inspection shall include, but is not limited to, the condition of hooks, their attachment to the lifeboat and the on-load release gear being properly and completely reset;

.2 all engines in lifeboats and rescue boats shall be run for a total period of not less than 3 min, provided the ambient temperature is above the minimum temperature required for starting and running the engine. During this period of time, it should be demonstrated that the gear box and gear box train are engaging satisfactorily. If the special characteristics of an outboard motor fitted to a rescue boat would not allow it to be run other than with its propeller submerged for a period of 3 min, a suitable water supply may be provided. In special cases, the Administration may waive this requirement for ships constructed before 1 July 1986;

.3 lifeboats, except free-fall lifeboats, on cargo ships shall be moved from their stowed position, without any persons on board, to the extent necessary to demonstrate satisfactory operation of launching appliances, if weather and sea conditions so allow; and

.4 the general emergency alarm shall be tested.

7 Monthly inspections

7.1 All lifeboats, except free-fall lifeboats, shall be turned out from their stowed position, without any persons on board if weather and sea conditions so allow.

7.2 Inspection of the life-saving appliances, including lifeboat equipment, shall be carried out monthly using the checklist required by regulation 36.1 to ensure that they are complete and in good order. A report of the inspection shall be entered in the log-book.

8 Servicing of inflatable liferafts, inflatable lifejackets, marine evacuation systems and maintenance and repair of inflated rescue boats

8.1 Every inflatable liferaft, inflatable lifejacket, and marine evacuation system shall be serviced:

.1 at intervals not exceeding 12 months, provided where in any case this is impracticable, the Administration may extend this period to 17 months; and

.2 at an approved servicing station which is competent to service them, maintains proper servicing facilities and uses only properly trained personnel. [14]

8.2 Rotational deployment of marine evacuation systems

[14] Refer to Recommendation on Conditions for the Approval of Servicing Stations for Inflatable Liferafts (resolution A.761(18), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

In addition to or in conjunction with the servicing intervals of marine evacuation systems required by paragraph 8.1, each marine evacuation system should be deployed from the ship on a rotational basis at intervals to be agreed by the Administration provided that each system is to be deployed at least once every six years.

8.3 An Administration which approves new and novel inflatable liferaft arrangements pursuant to regulation 4 may allow for extended service intervals on the following conditions:

8.3.1 The new and novel liferaft arrangement has proved to maintain the same standard, as required by testing procedure, during extended service intervals.

8.3.2 The liferaft system shall be checked on board by certified personnel according to paragraph 8.1.1.

8.3.3 Service at intervals not exceeding 5 years shall be carried out in accordance with the recommendations of the Organization. [15]

8.4 All repairs and maintenance of inflated rescue boats shall be carried out in accordance with the manufacturer's instructions. Emergency repairs may be carried out on board the ship; however, permanent repairs shall be effected at an approved servicing station.

8.5 An Administration which permits extension of liferaft service intervals in accordance with paragraph 8.3 shall notify the Organization of such action in accordance with regulation I/5(b).

9 Periodic servicing of hydrostatic release units

Hydrostatic release units, other than disposable hydrostatic release units, shall be serviced:

.1 at intervals not exceeding 12 months, provided where in any case this is impracticable, the Administration may extend this period to 17 months; [16] and

.2 at a servicing station which is competent to service them, maintains proper servicing facilities and uses only properly trained personnel.

10 Marking of stowage locations

Containers, brackets, racks, and other similar stowage locations for life-saving equipment shall be marked with symbols in accordance with the recommendations of the Organization, [17] indicating the devices stowed in that location for that purpose. If

[15] Refer to *Recommendation on Conditions for the Approval of Servicing Stations for Inflatable Liferafts* (resolution A.761(18), as amended).

[16] Refer to *Servicing of life-saving appliances and radiocommunication equipment under the harmonized system of survey and certification* (HSSC) (MSC/Circ. 955).

[17] Refer to *Symbols related to life-saving appliances and arrangements* (resolution A.760(18), as amended) and/or tables 1 and 2 of *Escape route signs and equipment location markings* (resolution A.1116(30)), as appropriate. Refer to the

This gazette is also available free online at **www.gpwonline.co.za**

more than one device is stowed in that location, the number of devices shall also be indicated.

11 Maintenance, thorough examination, operational testing, overhaul and repair of lifeboats, rescue boats and fast rescue boats, launching appliances and release gear

11.1 Launching appliances shall be:

.1 subject to a thorough examination at the annual surveys required by regulations I/7 or I/8, as applicable; and

.2 upon completion of the examination referred to in paragraph 11.1.1, subjected to a dynamic test of the winch brake at maximum lowering speed. The load to be applied shall be the mass of the survival craft or rescue boat without persons on board, except that, at intervals of at least once every five years, the test shall be carried out with a proof load equal to 1.1 times the weight of the survival craft or rescue boat and its full complement of persons and equipment.

11.2 Lifeboat and rescue boat release gear, including fast rescue boat release gear and free-fall lifeboat release systems, shall be:

.1 subject to a thorough examination and operational test during the annual surveys required by regulations I/7 and I/8;

.2 in case of on-load release gear, operationally tested under a load of 1.1 times the total mass of the boat when loaded with its full complement of persons and equipment whenever the release gear is overhauled. Such overhauling and operational test shall be carried out at least once every five years; [18] and

.3 notwithstanding paragraph 11.2.2, the operational testing of free-fall lifeboat release systems shall be performed either by free fall launch with only the operating crew on board or by a test without launching the lifeboat carried out based on Requirements for maintenance, thorough examination, operational testing, overhaul and repair.

11.3 Davit-launched liferaft automatic release hooks shall be:

.1 subject to a thorough examination and operational test during the annual surveys required by regulations I/7 and I/8; and

.2 operationally tested under a load of 1.1 times the total mass of the liferaft when loaded with its full complement of persons and equipment whenever the automatic release hook is overhauled. Such overhauling and operational test shall be carried out at least once every five years. [18]

new symbols in tables 1 and 2 of resolution A.1116(30) where the symbols for a specific item are differently expressed in resolutions A.760(18), as amended and A.1116(30).

[18] Refer to *Recommendation on testing of life-saving appliances* (resolution A.689(17)), as amended. For life-saving appliances installed on board on or after 1 July 1999, refer to *Revised Recommendations on testing of life-saving appliances* (resolution MSC.81(70)), as amended.

This gazette is also available free online at **www.gpwonline.co.za**

11.4 Lifeboats and rescue boats, including fast rescue boats, shall be subject to a thorough examination and operational test during the annual surveys required by regulations I/7 and I/8.

11.5 The thorough examination, operational testing and overhaul required by paragraphs 11.1 to 11.4 and the maintenance and repair of equipment specified in paragraphs 11.1 to 11.4 shall be carried out in accordance with the Requirements for maintenance, thorough examination, operational testing, overhaul and repair, and the instructions for onboard maintenance as required by regulation 36.

Section II - Passenger ships (additional requirements)

Regulation 21

Survival craft and rescue boats

1 Survival craft

1.1 Passenger ships engaged on international voyages which are not short international voyages shall carry:

.1 partially or totally enclosed lifeboats complying with the requirements of section 4.5 or 4.6 of the Code on each side of such aggregate capacity as will accommodate not less than 50% of the total number of persons on board. The Administration may permit the substitution of lifeboats by liferafts of equivalent total capacity provided that there shall never be less than sufficient lifeboats on each side of the ship to accommodate 37.5% of the total number of persons on board. The inflatable or rigid liferafts shall comply with the requirements of section 4.2 or 4.3 of the Code and shall be served by launching appliances equally distributed on each side of the ship; and

.2 in addition, inflatable or rigid liferafts complying with the requirements of section 4.2 or 4.3 of the Code of such aggregate capacity as will accommodate at least 25% of the total number of persons on board. These liferafts shall be served by at least one launching appliance on each side which may be those provided in compliance with the requirements of paragraph 1.1.1 or equivalent approved appliances capable of being used on both sides. However, stowage of these liferafts need not comply with the requirements of regulation 13.5.

1.2 Passenger ships engaged on short international voyages shall carry:

.1 partially or totally enclosed lifeboats complying with the requirements of section 4.5 or 4.6 of the Code of such aggregate capacity as will accommodate at least 30% of the total number of persons on board. The lifeboats shall, as far as practicable, be equally distributed on each side of the ship. In addition inflatable or rigid liferafts complying with the requirements of section 4.2 or 4.3 of the Code shall be carried of such aggregate capacity that, together with the lifeboat capacity, the survival craft will accommodate the total number of persons on board. The liferafts shall

This gazette is also available free online at **www.gpwonline.co.za**

be served by launching appliances equally distributed on each side of the ship; and

.2 in addition, inflatable or rigid liferafts complying with the requirements of section 4.2 or 4.3 of the Code of such aggregate capacity as will accommodate at least 25% of the total number of persons on board. These liferafts shall be served by at least one launching appliance on each side which may be those provided in compliance with the requirements of paragraph 1.2.1 or equivalent approved appliances capable of being used on both sides. However, stowage of these liferafts need not comply with the requirements of regulation 13.5.

1.3 All survival craft required to provide for abandonment by the total number of persons on board shall be capable of being launched with their full complement of persons and equipment within a period of 30 min from the time the abandon ship signal is given, after all persons have been assembled, with lifejackets donned.

1.4 In lieu of meeting the requirements of paragraph 1.1, 1.2 or 1.3, passenger ships of less than 500 gross tonnage where the total number of persons on board is less than 200, may comply with the following:

.1 they shall carry on each side of the ship, inflatable or rigid liferafts complying with the requirements of section 4.2 or 4.3 of the Code and of such aggregate capacity as will accommodate the total number of persons on board;

.2 unless the liferafts required by paragraph 1.5.1 are stowed in a position providing for easy side-to-side transfer at a single open deck level, additional liferafts shall be provided so that the total capacity available on each side will accommodate 150% of the total number of persons on board;

.3 if the rescue boat required by paragraph 2.2 is also a partially or totally enclosed lifeboat complying with the requirements of section 4.5 or 4.6 of the Code, it may be included in the aggregate capacity required by paragraph 1.5.1, provided that the total capacity available on either side of the ship is at least 150% of the total number of persons on board; and

.4 in the event of any one survival craft being lost or rendered unserviceable, there shall be sufficient survival craft available for use on each side, including those which are stowed in a position providing for easy side-to-side transfer at a single open deck level, to accommodate the total number of persons on board.

1.5 A marine evacuation system or systems complying with section 6.2 of the Code may be substituted for the equivalent capacity of liferafts and launching appliances required by paragraph 1.1.1 or 1.2.1.

2 Rescue boats

2.1 Passenger ships of 500 gross tonnage and over shall carry at least one rescue boat complying with the requirements of section 5.1 of the Code on each side of the ship.

333

2.2 Passenger ships of less than 500 gross tonnage shall carry at least one rescue boat complying with the requirements of section 5.1 of the Code.

2.3 A lifeboat may be accepted as a rescue boat provided that it and its launching and recovery arrangements also comply with the requirements for a rescue boat.

3 Marshalling of liferafts

3.1 The number of lifeboats and rescue boats that are carried on passenger ships shall be sufficient to ensure that in providing for abandonment by the total number of persons on board not more than six liferafts need be marshalled by each lifeboat or rescue boat.

3.2 The number of lifeboats and rescue boats that are carried on passenger ships engaged on short international voyages shall be sufficient to ensure that in providing for abandonment by the total number of persons on board not more than nine liferafts need be marshalled by each lifeboat or rescue boat.

Regulation 22

Personal life-saving appliances

1 Lifebuoys

1.1 A passenger ship shall carry not less than the number of lifebuoys complying with the requirements of regulation 7.1 and section 2.1 of the Code prescribed in the following table:

Length of ship in metres:	**Minimum number of lifebuoys:**
Under 60	8
60 and under 120	12
120 and under 180	18
180 and under 240	24
240 and over	30

1.2 Notwithstanding regulation 7.1.3, passenger ships of under 60 m in length shall carry not less than six lifebuoys provided with self-igniting lights.

2 Lifejackets

2.1 In addition to the lifejackets required by regulation 7.2, every passenger ship shall carry lifejackets for not less than 5% of the total number of persons on board. These lifejackets shall be stowed in conspicuous places on deck or at muster stations.

2.2 Where lifejackets for passengers are stowed in staterooms which are located remotely from direct routes between public spaces and muster stations, the additional lifejackets for these passengers required under regulation 7.2.2, shall be stowed either in the public spaces, the muster stations, or on direct routes between them. The

This gazette is also available free online at **www.gpwonline.co.za**

lifejackets shall be stowed so that their distribution and donning does not impede orderly movement to muster stations and survival craft embarkation stations.

3 Lifejacket lights

3.1 On all passenger ships each lifejacket shall be fitted with a light complying with the requirements of paragraph 2.2.3 of the Code.

3.2 Lights fitted on lifejackets on board passenger ships prior to 1 July 1998 and not complying fully with paragraph 2.2.3 of the Code may be accepted by the Administration until the lifejacket light would normally be replaced or until the first periodical survey after 1 July 2002, whichever is the earliest.

4 Immersion suits and thermal protective aids

4.1 All passenger ships shall carry for each lifeboat on the ship at least three immersion suits complying with the requirements of section 2.3 of the Code and, in addition, a thermal protective aid complying with the requirements of section 2.5 of the Code for every person to be accommodated in the lifeboat and not provided with an immersion suit. These immersion suits and thermal protective aids need not be carried:

.1 for persons to be accommodated in totally or partially enclosed lifeboats; or

.2 if the ship is constantly engaged on voyages in warm climates [19] where, in the opinion of the Administration, they are unnecessary.

4.2 The provisions of paragraph 4.1.1 also apply to partially or totally enclosed lifeboats not complying with the requirements of section 4.5 or 4.6 of the Code, provided they are carried on ships constructed before 1 July 1986.

Regulation 23
Survival craft and rescue boat embarkation arrangements

1 On passenger ships, survival craft embarkation arrangements shall be designed for:

.1 all lifeboats to be boarded and launched either directly from the stowed position or from an embarkation deck but not both; and

.2 davit-launched liferafts to be boarded and launched from a position immediately adjacent to the stowed position or from a position to which, in compliance with the requirements of regulation 13.5, the liferaft is transferred prior to launching.

2 Rescue boat arrangements shall be such that the rescue boat can be boarded and launched directly from the stowed position with the number of persons assigned to crew the rescue boat on board. Notwithstanding the requirements of paragraph 1.1, if the rescue boat is also a lifeboat and the other lifeboats are boarded and launched

[19] Refer to *Guidelines for assessment of thermal protection* (MSC/Circ.1046).

This gazette is also available free online at **www.gpwonline.co.za**

from an embarkation deck, the arrangements shall be such that the rescue boat can also be boarded and launched from the embarkation deck.

Regulation 24
Stowage of survival craft

The stowage height of a survival craft on a passenger ship shall take into account the requirements of regulation 13.1.2, the escape provisions of regulation II-2/13, the size of the ship, and the weather conditions likely to be encountered in its intended area of operation. For a davit-launched survival craft, the height of the davit head with the survival craft in embarkation position, shall, as far as practicable, not exceed 15 m to the waterline when the ship is in its lightest seagoing condition.

Regulation 25
Muster stations

Every passenger ship shall, in addition to complying with the requirements of regulation 11, have passenger muster stations which shall:

.1 be in the vicinity of, and permit ready access for the passengers to, the embarkation stations unless in the same location; and

.2 have ample room for marshalling and instruction of the passengers, but at least 0.35 m^2 per passenger.

Regulation 26
Additional requirements for ro-ro passenger ships

1 This regulation applies to all ro-ro passenger ships. Ro-ro passenger ships constructed:

.1 on or after 1 July 1998 shall comply with the requirements of paragraphs 2.3, 2.4, 3.1, 3.2, 3.3, 4 and 5;

.2 on or after 1 July 1986 and before 1 July 1998 shall comply with the requirements of paragraph 5 not later than the first periodical survey after 1 July 1998 and with the requirements of paragraphs 2.3, 2.4, 3 and 4 not later than the first periodical survey after 1 July 2000; and

.3 before 1 July 1986 shall comply with the requirements of paragraph 5 not later than the first periodical survey after 1 July 1998 and with the requirements of paragraphs 2.1, 2.2, 2.3, 2.4, 3 and 4 not later than the first periodical survey after 1 July 2000.

.4 before 1 July 2004 shall comply with the requirements of paragraph 2.5 not later than the first survey on or after that date.

2 Liferafts

This gazette is also available free online at **www.gpwonline.co.za**

2.1 The ro-ro passenger ship' s liferafts shall be served by marine evacuation systems complying with the requirements of section 6.2 of the Code or launching appliances complying with the requirements of paragraph 6.1.5 of the Code, equally distributed on each side of the ship.

2.2 Every liferaft on ro-ro passenger ships shall be provided with float-free stowage arrangements complying with the requirements of regulation 13.4.

2.3 Every liferaft on ro-ro passenger ships shall be of a type fitted with a boarding ramp complying with the requirements of paragraph 4.2.4.1 or 4.3.4.1 of the Code, as appropriate.

2.4 Every liferaft on ro-ro passenger ships shall either be automatically self-righting or be a canopied reversible liferaft which is stable in a seaway and is capable of operating safely whichever way up it is floating. Alternatively, the ship shall carry automatically self-righting liferafts or canopied reversible liferafts, in addition to its normal complement of liferafts, of such aggregate capacity as will accommodate at least 50% of the persons not accommodated in lifeboats. This additional liferaft capacity shall be determined on the basis of the difference between the total number of persons on board and the number of persons accommodated in lifeboats. Every such liferaft shall be approved by the Administration having regard to the recommendations adopted by the Organization. [20]

2.5 Liferafts carried on ro-ro passenger ships shall be fitted with a search and rescue locating device in the ratio of one search and rescue locating device for every four liferafts. The search and rescue locating device shall be mounted inside the liferaft so its antenna is more than one metre above the sea level when the liferaft is deployed, except that for canopied reversible liferafts the search and rescue locating device shall be so arranged as to be readily accessed and erected by survivors. Each search and rescue locating device shall be arranged to be manually erected when the liferaft is deployed. Containers of liferafts fitted with search and rescue locating devices shall be clearly marked.

3 Fast rescue boats

3.1 At least one of the rescue boats on a ro-ro passenger ship shall be a fast rescue boat complying with section 5.1.4 of the Code having regard to the recommendations adopted by the Organization. [21]

3.2 Each fast rescue boat shall be served by a suitable launching appliance complying with section 6.1.7 of the Code.[21]

3.3 At least two crews of each fast rescue boat shall be trained and drilled regularly having regard to the Seafarers Training, Certification and Watchkeeping (STCW) Code

[20] Refer to *Recommendation for canopied reversible liferafts, automatically self-righting liferafts and fast rescue boats, including testing, on ro-ro passenger ships* (MSC/Circ.809).

[21] Refer to Recommendation for canopied reversible liferafts, automatically self-righting liferafts and fast rescue boats, including testing, on ro-ro passenger ships (MSC/Circ.809).

337

and recommendations adopted by the Organization, [22] including all aspects of rescue, handling, manoeuvring, operating these craft in various conditions, and righting them after capsize.

3.4 In the case where the arrangement or size of a ro-ro passenger ship, constructed before 1 July 1997, is such as to prevent the installation of the fast rescue boat required by paragraph 3.1, the fast rescue boat may be installed in place of an existing lifeboat which is accepted as a rescue boat or, in the case of ships constructed prior to 1 July 1986, boats for use in an emergency, provided that all of the following conditions are met:

.1 the fast rescue boat installed is served by a launching appliance complying with the provisions of paragraph 3.2;

.2 the capacity of the survival craft lost by the above substitution is compensated by the installation of liferafts capable of carrying at least an equal number of persons served by the lifeboat replaced; and

.3 such liferafts are served by the existing launching appliances or marine evacuation systems.

4 Means of rescue [23]

4.1 Each ro-ro passenger ship shall be equipped with efficient means for rapidly recovering survivors from the water and transferring survivors from rescue units or survival craft to the ship.

4.2 The means of transfer of survivors to the ship may be part of a marine evacuation system, or may be part of a system designed for rescue purposes.

4.3 If the slide of a marine evacuation system is intended to provide the means of transfer of survivors to the deck of the ship, the slide shall be equipped with handlines or ladders to aid in climbing up the slide.

5 Lifejackets

5.1 Notwithstanding the requirements of regulations 7.2 and 22.2, a sufficient number of lifejackets shall be stowed in the vicinity of the muster stations so that passengers do not have to return to their cabins to collect their lifejackets.

5.2 In ro-ro passenger ships, each lifejacket shall be fitted with a light complying with the requirements of paragraph 2.2.3 of the Code.

Regulation 27

Information on passengers

1 All persons on board all passenger ships shall be counted prior to departure.

[22] Refer to Recommendation on training requirements for crews of fast rescue boats (resolution A.771(18)) and to section A-VI/2, table A-VI/2-2, Specification of the minimum standard of competence in fast rescue boats, of the STCW Code.

[23] Refer to *Recommendation on means of rescue on ro-ro passenger ships* (MSC/Circ. 810).

This gazette is also available free online at **www.gpwonline.co.za**

2 Details of persons who have declared a need for special care or assistance in emergency situations shall be recorded and communicated to the master prior to departure.

3 In addition, not later than 1 January 1999, the names and gender of all persons on board, distinguishing between adults, children and infants shall be recorded for search and rescue purposes.

4 The information required by paragraphs 1, 2 and 3 shall be kept ashore and made readily available to search and rescue services when needed.

5 Administrations may exempt passenger ships from the requirements of paragraph 3, if the scheduled voyages of such ships render it impracticable for them to prepare such records.

Regulation 28

Helicopter landing and pick-up areas

1 All ro-ro passenger ships shall be provided with a helicopter pick- up area approved by the Administration having regard to the recommendations adopted by the Organization. [24]

2 Ro-Ro [25] passenger ships of 130 m in length and upwards, constructed on or after 1 July 1999, shall be fitted with a helicopter landing area approved by the Administration having regard to the recommendations adopted by the Organization. [26]

Regulation 29

Decision support system for masters of passenger ships

1 This regulation applies to all passenger ships. Passenger ships constructed before 1 July 1997 shall comply with the requirements of this regulation not later than the date of the first periodical survey after 1 July 1999.

2 In all passenger ships, a decision support system for emergency management shall be provided on the navigation bridge.

3 The system shall, as a minimum, consist of a printed emergency plan or plans. [27] All foreseeable emergency situations shall be identified in the emergency plan or plans, including, but not limited to, the following main groups of emergencies:

---

[24] Refer to the *International Aeronautical and Maritime Search and Rescue Manual (IAMSAR Manual)*.

[25] Refer to *Application of SOLAS regulation III/28.2 concerning helicopter landing areas on non-ro-ro passenger ships* (MSC/Circ.907).

[26] Refer to *Recommendations on helicopter landing areas on ro-ro passenger ships* (MSC/Circ.895, as amended by MSC.1/Circ.1524) and *Guidelines for approval of helicopter foam fire-fighting appliances* (MSC.1/Circ.1431).

[27] Refer to Revised Guidelines for a structure of an integrated system of contingency planning for shipboard emergencies (resolution A.1072(28) and Corr.1).

This gazette is also available free online at **www.gpwonline.co.za**

.1 fire;

.2 damage to ship;

.3 pollution;

.4 unlawful acts threatening the safety of the ship and the security of its passengers and crew;

.5 personnel accidents;

.6 cargo-related accidents; and

.7 emergency assistance to other ships.

4 The emergency procedures established in the emergency plan or plans shall provide decision support to masters for handling any combination of emergency situations.

5 The emergency plan or plans shall have a uniform structure and be easy to use. Where applicable, the actual loading condition as calculated for the passenger ship' s voyage stability shall be used for damage control purposes.

6 In addition to the printed emergency plan or plans, the Administration may also accept the use of a computer-based decision support system on the navigation bridge which provides all the information contained in the emergency plan or plans, procedures, checklists, etc., which is able to present a list of recommended actions to be carried out in foreseeable emergencies.

Regulation 30

Drills

1 This regulation applies to all passenger ships.

2 On passenger ships, an abandon ship drill and fire drill shall take place weekly. The entire crew need not be involved in every drill, but each crew member must participate in an abandon ship drill and a fire drill each month as required in regulation 19.3.2. Passengers shall be strongly encouraged to attend these drills.

3 Damage control drills shall be conducted as required in regulation II-1/19-1.

Section III - Cargo ships (additional requirements)

Regulation 31

Survival craft and rescue boats

1 Survival craft

1.1 Cargo ships shall carry:

This gazette is also available free online at **www.gpwonline.co.za**

.1 one or more totally enclosed lifeboats complying with the requirements of section 4.6 of the Code of such aggregate capacity on each side of the ship as will accommodate the total number of persons on board; and

.2 in addition, one or more inflatable or rigid liferafts, complying with the requirements of section 4.2 or 4.3 of the Code, of a mass of less than 185 kg and stowed in a position providing for easy side-to-side transfer at a single open deck level, and of such aggregate capacity as will accommodate the total number of persons on board. If the liferaft or liferafts are not of a mass of less than 185 kg and stowed in a position providing for easy side-to-side transfer at a single open deck level, the total capacity available on each side shall be sufficient to accommodate the total number of persons on board.

1.2 In lieu of meeting the requirements of paragraph 1.1, cargo ships may carry:

.1 one or more free-fall lifeboats, complying with the requirements of section 4.7 of the Code, capable of being free-fall launched over the stern of the ship of such aggregate capacity as will accommodate the total number of persons on board; and

.2 in addition, one or more inflatable or rigid liferafts complying with the requirements of section 4.2 or 4.3 of the Code, on each side of the ship, of such aggregate capacity as will accommodate the total number of persons on board. The liferafts on at least one side of the ship shall be served by launching appliances.

1.3 In lieu of meeting the requirements of paragraph 1.1 or 1.2, cargo ships of less than 85 m in length other than oil tankers, chemical tankers and gas carriers, may comply with the following:

.1 they shall carry on each side of the ship, one or more inflatable or rigid liferafts complying with the requirements of section 4.2 or 4.3 of the Code and of such aggregate capacity as will accommodate the total number of persons on board;

.2 unless the liferafts required by paragraph 1.3.1 are of a mass of less than 185 kg and stowed in a position providing for easy side-to-side transfer at a single open deck level, additional liferafts shall be provided so that the total capacity available on each side will accommodate 150% of the total number of persons on board;

.3 if the rescue boat required by paragraph 2 is also a totally enclosed lifeboat complying with the requirements of section 4.6 of the Code, it may be included in the aggregate capacity required by paragraph 1.3.1, provided that the total capacity available on either side of the ship is at least 150% of the total number of persons on board; and

.4 in the event of any one survival craft being lost or rendered unserviceable, there shall be sufficient survival craft available for use on each side, including any which are of a mass of less than 185 kg and stowed in a position providing for easy side-to-side transfer at a single open deck level, to accommodate the total number of persons on board.

This gazette is also available free online at **www.gpwonline.co.za**

1.4 Cargo ships where the horizontal distance from the extreme end of the stem or stern of the ship to the nearest end of the closest survival craft is more than 100 m shall carry, in addition to the liferafts required by paragraphs 1.1.2 and 1.2.2, a liferaft stowed as far forward or aft, or one as far forward and another as far aft, as is reasonable and practicable. Such liferaft or liferafts may be securely fastened so as to permit manual release and need not be of the type which can be launched from an approved launching device.

1.5 With the exception of the survival craft referred to in regulation 16.1.1, all survival craft required to provide for abandonment by the total number of persons on board shall be capable of being launched with their full complement of persons and equipment within a period of 10 min from the time the abandon ship signal is given.

1.6 Chemical tankers and gas carriers carrying cargoes emitting toxic vapours or gases [28] shall carry, in lieu of totally enclosed lifeboats complying with the requirements of section 4.6 of the Code, lifeboats with a self-contained air support system complying with the requirements of section 4.8 of the Code.

1.7 Oil tankers, chemical tankers and gas carriers carrying cargoes having a flashpoint not exceeding 60 degrees C (closed cup test) shall carry, in lieu of totally enclosed lifeboats complying with the requirements of section 4.6 of the Code, fire-protected lifeboats complying with the requirements of section 4.9 of the Code.

1.8 Notwithstanding the requirements of paragraph 1.1, bulk carriers as defined in regulation IX/1.6 constructed on or after 1 July 2006 shall comply with the requirements of paragraph 1.2

2 Rescue boats

Cargo ships shall carry at least one rescue boat complying with the requirements of section 5.1 of the Code. A lifeboat may be accepted as a rescue boat, provided that it and its launching and recovery arrangements also comply with the requirements for a rescue boat.

3 In addition to their lifeboats, all cargo ships constructed before 1 July 1986 shall carry:

.1 one or more liferafts capable of being launched on either side of the ship and of such aggregate capacity as will accommodate the total number of persons on board. The liferaft or liferafts shall be equipped with a lashing or an equivalent means of securing the liferaft which will automatically release it from a sinking ship; and

.2 where the horizontal distance from the extreme end of the stem or stern of the ship to the nearest end of the closest survival craft is more than 100 m, in addition to the liferafts required by paragraph 3.1, a liferaft stowed as far forward or aft, or one as far forward and another as far aft, as is reasonable and practicable. Notwithstanding the requirements of paragraph 3.1, such liferaft or liferafts may be securely fastened so as to permit manual release.

[28] Refer to products for which emergency escape respiratory protection is required in chapter 17 of the IBC Code (resolution MSC.4(48), as amended) and in chapter 19 of the IGC Code (resolution MSC.5(48), as amended.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 32
Personal life-saving appliances

1 Lifebuoys

1.1 Cargo ships shall carry not less than the number of lifebuoys complying with the requirements of regulation 7.1 and section 2.1 of the Code prescribed in the following table:

Length of ship in metres:	Minimum number of
Under 100	8
100 and under 150	10
150 and under 200	12
200 and over	14

1.2 Self-igniting lights for lifebuoys on tankers required by regulation 7.1.3 shall be of an electric battery type.

2 Lifejacket lights

2.1 This paragraph applies to all cargo ships.

2.2 On cargo ships, each lifejacket shall be fitted with a lifejacket light complying with the requirements of paragraph 2.2.3 of the Code.

2.3 Lights fitted on lifejackets on board cargo ships prior to 1 July 1998 and not complying fully with paragraph 2.2.3 of the Code may be accepted by the Administration until the lifejacket light would normally be replaced or until the first periodical survey after 1 July 2001, whichever is the earliest.

3 Immersion suits

3.1 This paragraph applies to all cargo ships. However, with respect to cargo ships constructed before 1 July 2006, paragraphs 3.2 to 3.5 shall be complied with not later than the first safety equipment survey on or after 1 July 2006.

3.2 An immersion suit of an appropriate size, complying with the requirements of section 2.3 of the Code shall be provided for every person on board the ship. However, for ships other than bulk carriers, as defined in regulation IX/1, these immersion suits

This gazette is also available free online at **www.gpwonline.co.za**

need not be required if the ship is constantly engaged on voyages in warm climates [29] where, in the opinion of the Administration, immersion suits are unnecessary.

3.3 If a ship has any watch or work stations which are located remotely from the place or places where immersion suits are normally stowed, including remotely located survival craft carried in accordance with regulation 31.1.4, additional immersion suits of an appropriate size shall be provided at these locations for the number of persons normally on watch or working at those locations at any time.

3.4 Immersion suits shall be so placed as to be readily accessible and their position shall be plainly indicated.

3.5 The immersion suits required by this regulation may be used to comply with the requirements of regulation 7.3.

Regulation 33
Survival craft embarkation and launching arrangements

1 Cargo ship survival craft embarkation arrangements shall be so designed that lifeboats can be boarded and launched directly from the stowed position and davit-launched liferafts can be boarded and launched from a position immediately adjacent to the stowed position or from a position to which the liferaft is transferred prior to launching in compliance with the requirements of regulation 13.5.

2 On cargo ships of 20,000 gross tonnage and upwards, davit-launched lifeboats shall be capable of being launched, utilizing painters where necessary, with the ship making headway at speeds up to 5 knots in calm water.

Section IV - Life-saving appliances and arrangements requirements

Regulation 34
Compliance with LSA Code

All life-saving appliances and arrangements shall comply with the applicable requirements of the Code.

Section V - Miscellaneous

Regulation 35
Training manual and on-board training aids

1 This regulation applies to all ships.

[29] Refer to *Guidelines for the assessment of thermal protection* (MSC/Circ.1046).

This gazette is also available free online at **www.gpwonline.co.za**

2 A training manual complying with the requirements of paragraph 3 shall be provided in each crew mess room and recreation room or in each crew cabin.

3 The training manual, which may comprise several volumes, shall contain instructions and information, in easily understood terms illustrated wherever possible, on the life-saving appliances provided in the ship and on the best methods of survival. Any part of such information may be provided in the form of audio-visual aids in lieu of the manual. The following shall be explained in detail:

- **.1** donning of lifejackets, immersion suits and anti-exposure suits, as appropriate;
- **.2** muster at the assigned stations;
- **.3** boarding, launching, and clearing the survival craft and rescue boats, including, where applicable, use of marine evacuation systems;
- **.4** method of launching from within the survival craft;
- **.5** release from launching appliances;
- **.6** methods and use of devices for protection in launching areas, where appropriate;
- **.7** illumination in launching areas;
- **.8** use of all survival equipment;
- **.9** use of all detection equipment;
- **.10** with the assistance of illustrations, the use of radio life- saving appliances;
- **.11** use of drogues;
- **.12** use of engine and accessories;
- **.13** recovery of survival craft and rescue boats including stowage and securing;
- **.14** hazards of exposure and the need for warm clothing;
- **.15** best use of the survival craft facilities in order to survive;
- **.16** methods of retrieval, including the use of helicopter rescue gear (slings, baskets, stretchers), breeches-buoy and shore life-saving apparatus and ship' s line-throwing apparatus;
- **.17** all other functions contained in the muster list and emergency instructions; and
- **.18** instructions for emergency repair of the life-saving appliances.

4 Every ship fitted with a marine evacuation system shall be provided with on-board training aids in the use of the system.

5 The training manual shall be written in the working language of the ship.

Regulation 36

Instructions for on-board maintenance

345

Instructions for on-board maintenance of life-saving appliances shall be easily understood, illustrated wherever possible, and, as appropriate, shall include the following for each appliance:

.1 a checklist for use when carrying out the inspections required by regulation 20.7;

.2 maintenance and repair instructions;

.3 schedule of periodic maintenance;

.4 diagram of lubrication points with the recommended lubricants;

.5 list of replaceable parts;

.6 list of sources of spare parts; and

.7 log for records of inspections and maintenance.

Regulation 37

Muster list and emergency instructions

1 The muster list shall specify details of the general emergency alarm and public address system prescribed by section 7.2 of the Code and also action to be taken by crew and passengers when this alarm is sounded. The muster list shall also specify how the order to abandon ship will be given.

2 Each passenger ship shall have procedures in place for locating and rescuing passengers trapped in their staterooms.

3 The muster list shall show the duties assigned to the different members of the crew including:

.1 closing of the watertight doors, fire doors, valves, scuppers, sidescuttles, skylights, portholes and other similar openings in the ship;

.2 equipping of the survival craft and other life-saving appliances;

.3 preparation and launching of survival craft;

.4 general preparations of other life-saving appliances;

.5 muster of passengers;

.6 use of communication equipment;

.7 manning of fire parties assigned to deal with fires;

.8 special duties assigned in respect to the use of fire-fighting equipment and installations; and

.9 for passenger ships only, damage control for flooding emergencies.

4 The muster list shall specify which officers are assigned to ensure that life-saving and fire appliances are maintained in good condition and are ready for immediate use.

This gazette is also available free online at **www.gpwonline.co.za**

5 The muster list shall specify substitutes for key persons who may become disabled, taking into account that different emergencies may call for different actions.

6 The muster list shall show the duties assigned to members of the crew in relation to passengers in case of emergency. These duties shall include:

.1 warning the passengers;

.2 seeing that they are suitably clad and have donned their lifejackets correctly;

.3 assembling passengers at muster stations;

.4 keeping order in the passageways and on the stairways and generally controlling the movements of the passengers; and

.5 ensuring that a supply of blankets is taken to the survival craft.

7 The muster list shall be prepared before the ship proceeds to sea. After the muster list has been prepared, if any change takes place in the crew which necessitates an alteration in the muster list, the master shall either revise the list or prepare a new list.

8 The format of the muster list used on passenger ships shall be approved.

Regulation 38
Alternative design and arrangements

1 Purpose

The purpose of this regulation is to provide a methodology for alternative design and arrangements for life-saving appliances and arrangements.

2 General

2.1 Life-saving appliances and arrangements may deviate from the requirements set out in part B, provided that the alternative design and arrangements meet the intent of the requirements concerned and provide an equivalent level of safety to this chapter.

2.2 When alternative design or arrangements deviate from the prescriptive requirements of part B, an engineering analysis, evaluation and approval of the design and arrangements shall be carried out in accordance with this regulation.

3 Engineering analysis

The engineering analysis shall be prepared and submitted to the Administration, based on the guidelines developed by the Organization [30] and shall include, as a minimum, the following elements:

[30] Refer to *Revised Guidelines on alternative design and arrangements for SOLAS chapters II-1 and III* (MSC.1/Circ.1212/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

.1 determination of the ship type and the life-saving appliance and arrangements concerned;

.2 identification of the prescriptive requirement(s) with which the life-saving appliance and arrangements will not comply;

.3 identification of the reason the proposed design will not meet the prescriptive requirements supported by compliance with other recognized engineering or industry standards;

.4 determination of the performance criteria for the ship and the life-saving appliance and arrangements concerned addressed by the relevant prescriptive requirement(s):

.1 performance criteria shall provide a level of safety not inferior to the relevant prescriptive requirements contained in part B; and

.2 performance criteria shall be quantifiable and measurable;

.5 detailed description of the alternative design and arrangements, including a list of the assumptions used in the design and any proposed operational restrictions or conditions;

.6 technical justification demonstrating that the alternative design and arrangements meet the safety performance criteria; and

.7 risk assessment based on identification of the potential faults and hazards associated with the proposal.

4 Evaluation of the alternative design and arrangements

4.1 The engineering analysis required in paragraph 3 shall be evaluated and approved by the Administration, taking into account the guidelines developed by the Organization. [31]

4.2 A copy of the documentation, as approved by the Administration, indicating that the alternative design and arrangements comply with this regulation, shall be carried on board the ship.

5 Exchange of information

The Administration shall communicate to the Organization pertinent information concerning alternative design and arrangements approved by them for circulation to all Contracting Governments.

6 Re-evaluation due to change of conditions

If the assumptions and operational restrictions that were stipulated in the alternative design and arrangements are changed, the engineering analysis shall be carried out under the changed condition and shall be approved by the Administration.

[31] Refer to *Revised Guidelines on alternative design and arrangements for SOLAS chapters II-1 and III* (MSC.1/Circ.1212/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

Chapter IV

Radiocommunications

349

CONTINUES ON PAGE 514 OF BOOK 5

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**



Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 5 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845

9 771682 584003 55299

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

Contents

CHAPTER IV RADIOCOMMUNICATIONS 347
PART A - GENERAL 347
Regulation 1 Application 347
Regulation 2 Terms and definitions 347
Regulation 3 Exemptions 350
Regulation 4 Functional requirements 350
Regulation 4-1 GMDSS satellite providers 351
PART B - UNDERTAKINGS BY CONTRACTING GOVERNMENTS 352
Regulation 5 Provision of radiocommunication services 352
Regulation 5-1 Global Maritime Distress and Safety System identities 352
PART C - SHIP REQUIREMENTS 353
Regulation 6 Radio installations 353
Regulation 7 Radio equipment: General 354
Regulation 8 Radio equipment: Sea area A1 355
Regulation 9 Radio equipment: Sea area A2 357
Regulation 10 Radio equipment: Sea area A3 357
Regulation 11 Radio equipment: Sea area A4 360
Regulation 12 Watches 360
Regulation 13 Sources of energy 361
Regulation 14 Performance standards 364
Regulation 15 Maintenance requirements 364
Regulation 16 Radio personnel 367
Regulation 17 Radio records 367
Regulation 18 Position-updating 367

This gazette is also available free online at **www.gpwonline.co.za**

Chapter IV - Radiocommunications

Part A - General

Regulation 1
Application

6 Unless expressly provided otherwise, this chapter applies to all ships to which the present regulations apply and to cargo ships of 300 gross tonnage and upwards.

7 This chapter does not apply to ships to which the present regulations would otherwise apply while such ships are being navigated within the Great Lakes of North America and their connecting and tributary waters as far east as the lower exit of the St. Lambert Lock at Montreal in the Province of Quebec, Canada. [1]

8 No provision in this chapter shall prevent the use by any ship, survival craft or person in distress, of any means at their disposal to attract attention, make known their position and obtain help.

Regulation 2
Terms and definitions

1 For the purpose of this chapter, the following terms shall have the meanings defined below:

.1 *AIS-SART* means an automatic identification system search and rescue transmitter capable of operating on frequencies dedicated for AIS (161.975 MHz (AIS1) and 162.025 MHz (AIS2)).

.2 *Bridge-to-bridge communications means* safety communications between ships from the position from which the ships are normally navigated.

.3 *Continuous radio watch* means that the radio and listening watch concerned shall not be interrupted other than for brief intervals when the ship's receiving capability is impaired or blocked by its own communications or when the facilities are under periodical maintenance or checks.

.4 *Digital selective calling (DSC)* means a technique using digital codes which enables a radio station to establish contact with, and transfer information to, another station or group of stations, and complying with the relevant recommendations of the International Telecommunication Union Radiocommunication Sector (ITU-R).

.5 *Emergency position-indicating radio beacon (EPIRB)* means a transmitter operating in the frequency band 406.0-406.1 MHz capable of transmitting a distress alert via satellite to a rescue coordination centre and transmitting signals for on-scene locating.

[1] Such ships are subject to special requirements relative to radio for safety purposes, as contained in the relevant agreement between Canada and the United States of America.

This gazette is also available free online at www.gpwonline.co.za

.6 *General radiocommunications* means communications other than distress, urgency and safety communications.

.7 *Global Maritime Distress and Safety System (GMDSS)* means a system that performs the functions set out in regulation 4.1.1.

.8 *GMDSS identities* means information which may be transmitted to uniquely identify the ship or its associated rescue boats and survival craft. These identities are the ship's call sign, Maritime Mobile Service Identity (MMSI), EPIRB hexadecimal identity, recognized mobile satellite service identities and equipment serial numbers.

.9 *Locating* means the finding of ships, aircraft, survival craft or persons in distress.

.10 *Maritime safety information (MSI)* [2] means navigational and meteorological warnings, meteorological forecasts and other urgent safety-related messages broadcast to ships.

.11 *Radar SART* means a search and rescue transponder operating on radar frequencies in the frequency band 9.2-9.5 GHz.

.12 *Radio Regulations* means the Radio Regulations complementing the Constitution and Convention of the International Telecommunication Union which is in force at any given time.

.13 *Recognized mobile satellite service* means any service which operates through a satellite system and is recognized by the Organization, for use in GMDSS.

.14 *Satellite service on 406 MHz* means a service operating through a satellite system having global availability designed to detect EPIRBs transmitting in the frequency band 406.0-406.1 MHz.

.15 *Sea area A1* means an area within the radiotelephone coverage of at least one very high frequency (VHF) coast station in which continuous DSC alerting is available, as may be defined by a Contracting Government. [3]

.16 *Sea area A2* means an area, excluding sea area A1, within the radiotelephone coverage of at least one medium frequency (MF) coast station in which continuous DSC alerting is available, as may be defined by a Contracting Government. [3]

.17 *Sea area A3* means an area, excluding sea areas A1 and A2, within the coverage of a recognized mobile satellite service supported by the ship earth station carried on board, in which continuous alerting is available.

.18 Sea area A4 means an area outside of sea areas A1, A2 and A3.

2 All other terms and abbreviations which are used in this chapter and which are defined in the Radio Regulations and in the International Convention on Maritime Search and Rescue, 1979, as may be amended, shall have the meanings as defined in those Regulations and the SAR Convention.

---

[2] Refer to *Joint IMO/IHO/WMO Manual on Maritime Safety Information (MSI)* (MSC.1/Circ.1310, as revised).

[3] Refer to *Provision of radio services for the Global Maritime Distress and Safety System (GMDSS)* (resolution MSC.509(105).

This gazette is also available free online at **www.gpwonline.co.za**

353

Regulation 3
Exemptions

16 The Contracting Governments consider it highly desirable not to deviate from the requirements of this chapter; nevertheless the Administration may grant partial or conditional exemptions to individual ships from the requirements of regulations 7 to 11 provided:

.1 such ships comply with the functional requirements of regulation 4; and

.2 the Administration has taken into account the effect such exemptions may have upon the general efficiency of the service for the safety of all ships.

17 An exemption may be granted under paragraph 1 only:

.1 if the conditions affecting safety are such as to render the full application of regulations 7 to 11 unreasonable or unnecessary; or

.2 in exceptional circumstances, for a single voyage outside the sea area or sea areas for which the ship is equipped.

18 Each Administration shall report to the Organization on all exemptions granted under paragraphs 1 and 2 giving the reasons for granting such exemptions. [4]

Regulation 4
Functional requirements [5]

1 Every ship, while at sea, shall be capable of:

.1 performing the GMDSS functions, which are as follows:

.1 transmitting ship-to-shore distress alerts by at least two separate and independent means, each using a different radiocommunication service;

.2 receiving shore-to-ship distress alert relays;

.3 transmitting and receiving ship-to-ship distress alerts;

.4 transmitting and receiving search and rescue coordinating communications;

.5 transmitting and receiving on-scene communications;

.6 transmitting and receiving signals for locating; [6]

.7 receiving MSI; [7]

[4] Exemptions should be reported through the Organization's Global Integrated Shipping Information System (GISIS) with reference to Issue of Exemption Certificates under the 1974 SOLAS Convention and Amendments thereto (SLS.14/Circ.115, as amended).

[5] It should be noted that ships performing GMDSS functions should use *Guidance for the avoidance of false distress alerts* (resolution A.814(19)).

[6] Refer also to regulations V/19.2.3.2 and V/19.2.4, as appropriate.

[7] It should be noted that ships may have a need for reception of certain maritime safety information while in port.

This gazette is also available free online at **www.gpwonline.co.za**

.8 transmitting and receiving urgency and safety communications; and

.9 transmitting and receiving bridge-to-bridge communications; and

.2 transmitting and receiving general radiocommunications.

Regulation 4-1
GMDSS satellite providers

The Maritime Safety Committee shall determine the criteria, procedures and arrangements for the evaluation, recognition, review and oversight of the provision of recognized mobile satellite services in the GMDSS pursuant to the provisions of this chapter. [8]

[8] Refer to *Criteria for the provision of mobile satellite communication systems in the Global Maritime Distress and Safety System (GMDSS)* (resolution A.1001(25)) and *Guidance to prospective GMDSS satellite service providers* (MSC.1/Circ.1414).

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Undertaking By Contracting Governments [9]

Regulation 5
Provision of radiocommunication services

6 Each Contracting Government undertakes to make available, as it deems practical and necessary, either individually or in cooperation with other Contracting Governments, appropriate shore-based facilities for the mobile satellite service and maritime mobile service having due regard to the recommendations of the Organization. [10] These services are:

.1 recognized mobile satellite services;

.2 a satellite service on 406 MHz;

.3 the maritime mobile service in the bands between 156 MHz and 174 MHz;

.4 the maritime mobile service in the bands between 4 000 kHz and 27 500 kHz; and

.5 the maritime mobile service in the bands between 415 kHz and 535 kHz [11] and between 1,605 kHz and 4,000 kHz.

7 Each Contracting Government undertakes to provide the Organization with pertinent information concerning the shore-based facilities in the mobile satellite service and maritime mobile service, established for sea areas which it has designated off its coasts. [12] Each Contracting Government also undertakes to provide the Organization with timely and adequate notice prior to the planned withdrawal of any of these services or any particular shore-based facilities.

Regulation 5-1
GMDSS identities

4 This regulation applies to all ships on all voyages.

5 Each Contracting Government undertakes to ensure that suitable arrangements are made for registering Global Maritime Distress and Safety System (GMDSS) identities and for making information on these identities available to rescue coordination centres on a 24-hour basis. Where appropriate, international organizations maintaining a registry of these identities, such as the ITU Maritime Mobile Access and Retrieval System (MARS), shall be notified by the Contracting Government of these identity assignments.

---

[9] 1 Each Contracting Government is not required to provide all radiocommunication services.
2 Provision No. 48.1 of the Radio Regulations applies to the operation of coast stations and coast earth stations.

[10] Refer to *Provision of radio services for the Global Maritime Distress and Safety System (GMDSS)* (resolution MSC.509(105)).

[11] Refer to *Implementation of the NAVTEX system as a component of the World-Wide Navigational Warning Service* (resolution A.617(15))

[12] Information communicated by Contracting Governments is made available through GISIS.

This gazette is also available free online at **www.gpwonline.co.za**

Part C - Ship Requirements

Regulation 6
Radio installations

1 Every ship shall be provided with radio installations capable of complying with the functional requirements prescribed by regulation 4 throughout its intended voyage and, unless exempted under regulation 3, complying with the requirements of regulation 7 and, as appropriate for the sea area or areas through which it will pass during its intended voyage, the requirements of either regulation 8, 9, 10 or 11.

2 Every radio installation shall be:

.1 located in such a way that no harmful interference of mechanical, electrical or other origin affects its proper use, and that electromagnetic compatibility is ensured and harmful interaction avoided with other equipment and systems;

.2 so located as to ensure the greatest possible degree of safety and operational availability;

.3 protected against harmful effects of water, extremes of temperature and other adverse environmental conditions;

.4 provided with reliable, permanently arranged electrical lighting, independent of the main and emergency sources of electrical power, for the adequate illumination of the radio controls for operating the radio installation; and

.5 clearly marked with the GMDSS identities, as applicable, for use by the radio installation operator.

3 Control of the VHF radiotelephone channels, required for navigational safety, shall be immediately available on the navigation bridge convenient to the conning position and, where necessary, facilities should be available to permit radiocommunications from the wings of the navigation bridge. Portable VHF equipment may be used to meet the latter provision.

4 In passenger ships, a distress panel shall be installed at the conning position, which shall:

.1 contain either one single button which, when pressed, initiates a distress alert using all radio installations required on board for that purpose or one button for each individual installation;

.2 clearly and visually indicate whenever any button or buttons have been pressed; and

.3 be provided with means to prevent inadvertent activation of the button or buttons referred to in paragraphs 4.1 and 4.2.

5 In passenger ships, if an EPIRB is used as the secondary means of distress alerting and is not remotely activated from the distress panel, it shall be acceptable to have an additional EPIRB installed in the wheelhouse near the conning position.

This gazette is also available free online at **www.gpwonline.co.za**

6 In passenger ships, a distress alarm panel shall be installed at the conning position, which:

.1 shall provide visual and aural indication of any distress alert or alerts received on board;

.2 shall indicate through which radiocommunication service the distress alerts have been received; and

.3 may be combined with the distress panel referred to in paragraph 4.

Regulation 7

Radio equipment: General

1 Every ship shall be provided with:

.1 a VHF radio installation capable of transmitting and receiving, for distress, urgency and safety communications purposes:

.1 DSC on the frequency 156.525 MHz (channel 70). It shall be possible to initiate the transmission of distress alerts on channel 70 from the position from which the ship is normally navigated; and

.2 radiotelephony on the frequencies 156.300 MHz (channel 6), 156.650 MHz (channel 13) and 156.800 MHz (channel 16);

.2 a radio installation capable of maintaining a continuous DSC watch on VHF channel 70 which may be separate from, or combined with, that required by paragraph 1.1;

.3 a radar SART or an AIS-SART, which:

.1 shall be so stowed that it can be easily utilized; and

.2 may be one of those required by paragraphs 2.1 or 3.1;

.4 a receiver or receivers capable of receiving MSI and search and rescue related information throughout the entire voyage in which the ship is engaged; [13]

.5 an EPIRB [14] which shall be:

.1 installed in an easily accessible position;

.2 ready to be manually released and capable of being carried by one person into a survival craft;

.3 capable of floating free if the ship sinks and of being automatically activated when afloat; and

.4 capable of being activated manually; and

.6 a radio installation capable of transmitting and receiving general radiocommunications operating on working frequencies in the band

[13] Refer to *Guidance for the reception of maritime safety information and search and rescue related information as required in the Global Maritime Distress and Safety System (GMDSS)* (MSC.1/Circ.1645).

[14] Refer to *Search and rescue homing capability* (resolution A.616(15)).

This gazette is also available free online at **www.gpwonline.co.za**

between 156 MHz and 174 MHz. This requirement may be fulfilled by the addition of this capability in the equipment required by paragraph 1.1.

2 Every cargo ship of 300 gross tonnage and upwards but less than 500 gross tonnage shall be provided with at least:

.1 one radar SART or AIS-SART; and

.2 two two-way VHF radiotelephone apparatuses.

3 Every passenger ship and every cargo ship of 500 gross tonnage and upwards shall be provided with at least:

.1 one radar SART or AIS-SART on each side of the ship; and

.2 three two-way VHF radiotelephone apparatuses.

4 The two-way VHF radiotelephone apparatuses required by paragraphs 2.2 and 3.2 may be portable or fitted in survival craft. The portable apparatus may be stored on the bridge.

5 The radar SARTs or AIS-SARTs required by paragraphs 2.1 or 3.1 shall be stowed in such locations that they can be rapidly placed in any survival craft other than a liferaft required by regulation III/31.1.4. Alternatively, one radar SART or AIS-SART shall be stowed in each survival craft other than a liferaft required by regulation III/31.1.4. On ships carrying at least two radar SARTs or AIS-SARTs and equipped with free-fall lifeboats, one of the radar SARTs or AIS-SARTs shall be stowed in a free-fall lifeboat and the other shall be located in the immediate vicinity of the navigating bridge so that it can be utilized on board and ready for transfer to any of the other survival craft, other than a liferaft required by regulation III/31.1.4.

6 Every passenger ship shall be provided with means for two-way on-scene radiocommunications for search and rescue purposes using the aeronautical frequencies 121.5 MHz and 123.1 MHz from the position from which the ship is normally navigated. These means may be portable.

Regulation 8
Radio equipment: Sea area A1

1 In addition to meeting the requirements of regulation 7, every ship engaged on voyages in sea area A1 shall be provided with a radio installation capable of initiating the transmission of ship-to-shore distress alerts from the position from which the ship is normally navigated, operating either:

.1 through the satellite service on 406 MHz; or

.2 if the ship is engaged on voyages within coverage of MF coast stations equipped with DSC, on MF using DSC; or

.3 on high frequency (HF) using DSC; or

.4 through a recognized mobile satellite service ship earth station.

This gazette is also available free online at **www.gpwonline.co.za**

2 The requirement in paragraph 1.1 may be fulfilled by installing:

.1 the EPIRB required by regulation 7.1.5 close to the position from which the ship is normally navigated, but in a location whereby it can still float free of the ship in an emergency; or

.2 the EPIRB required by regulation 7.1.5 elsewhere on the ship, provided that this EPIRB has a means of remote activation which is installed near the position from which the ship is normally navigated; or

.3 a second EPIRB near the position from which the ship is normally navigated.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 9
Radio equipment: Sea area A2

1 In addition to meeting the requirements of regulation 7, every ship engaged on voyages within sea area A2 shall be provided with:

.1 an MF radio installation capable of transmitting and receiving, for distress, urgency and safety communications purposes, on the frequencies:

.1 2,187.5 kHz using DSC; and

.2 2,182 kHz using radiotelephony;

.2 a radio installation capable of maintaining a continuous DSC watch on the frequency 2 187.5 kHz which may be separate from, or combined with, that required by paragraph 1.1; and

.3 a secondary means of initiating the transmission of ship-to-shore distress alerts by a radio service other than MF operating either:

.1 through the satellite service on 406 MHz; or

.2 on HF using DSC; or

.3 through a recognized mobile satellite service ship earth station.

2 It shall be possible to initiate transmission of distress alerts by the radio installations specified in paragraphs 1.1 and 1.3 from the position from which the ship is normally navigated.

3 The requirement in paragraph 1.3.1 may be fulfilled by installing:

.1 the EPIRB required by regulation 7.1.5 close to the position from which the ship is normally navigated, but in a location whereby it can still float free of the ship in an emergency; or

.2 the EPIRB required by regulation 7.1.5 elsewhere on the ship, provided that this EPIRB has a means of remote activation which is installed near the position from which the ship is normally navigated; or

.3 a second EPIRB near the position from which the ship is normally navigated.

4 The ship shall, in addition, be capable of transmitting and receiving general radiocommunications by either:

.1 a radio installation operating on working frequencies in the bands between 1 605 kHz and 4 000 kHz or between 4 000 kHz and 27 500 kHz. This requirement may be fulfilled by the addition of this capability in the equipment required by paragraph 1.1; or

.2 a recognized mobile satellite service ship earth station.

Regulation 10
Radio equipment: Sea area A3

This gazette is also available free online at **www.gpwonline.co.za**

1 In addition to meeting the requirements of regulation 7, every ship engaged on voyages within sea area A3 shall be provided with:

.1 a recognized mobile satellite service ship earth station capable of:

.1 transmitting and receiving distress, urgency and safety communications;

.2 initiating and receiving distress priority calls; and

.3 maintaining watch for shore-to-ship distress alert relays, including those directed to specifically defined geographical areas;

.2 an MF radio installation capable of transmitting and receiving, for distress, urgency and safety communications purposes, on the frequencies:

.1 2,187.5 kHz using DSC; and

.2 2,182 kHz using radiotelephony;

.3 a radio installation capable of maintaining a continuous DSC watch on the frequency 2 187.5 kHz which may be separate from, or combined with, that required by paragraph 1.2; and

.4 a secondary means of initiating the transmission of ship-to-shore distress alerts by a radio service operating either:

.1 through the satellite service on 406 MHz; or

.2 on HF using DSC; or

.3 through any recognized mobile satellite service on an additional ship earth station.

2 It shall be possible to initiate transmission of distress alerts by the radio installations specified in paragraphs 1.1, 1.2 and 1.4 from the position from which the ship is normally navigated.

3 The requirement in paragraph 1.4.1 may be fulfilled by installing:

.1 the EPIRB required by regulation 7.1.5 close to the position from which the ship is normally navigated, but in a location whereby it can still float free of the ship in an emergency; or

.2 the EPIRB required by regulation 7.1.5 elsewhere on the ship, provided that this EPIRB has a means of remote activation which is installed near the position from which the ship is normally navigated; or

.3 a second EPIRB near the position from which the ship is normally navigated.

4 The ship shall, in addition, be capable of transmitting and receiving general radiocommunications by either:

.1 a recognized mobile satellite service ship earth station; or

.2 a radio installation operating on working frequencies in the bands between 1 605 kHz and 4 000 kHz or between 4 000 kHz and 27 500 kHz.

5 The requirements in paragraphs 4.1 and 4.2 may be fulfilled by the addition of this capability in the equipment required by paragraph 1.1 or 1.2, respectively.

362

363

Regulation 11
Radio equipment: Sea area A4

1 In addition to meeting the requirements of regulation 7, every ship engaged on voyages within sea area A4 shall be provided with:

.1 an MF/HF radio installation capable of transmitting and receiving, for distress, urgency and safety communications purposes, on all distress, urgency and safety frequencies in the bands between 1 605 kHz and 4 000 kHz and between 4 000 kHz and 27 500 kHz:

.1 using DSC; and

.2 using radiotelephony;

.2 equipment capable of maintaining DSC watch on 2 187.5 kHz, 8 414.5 kHz and on at least one of the DSC frequencies 4 207.5 kHz, 6 312 kHz, 12 577 kHz or 16 804.5 kHz; it shall be possible at any time to select any of these DSC frequencies for distress, urgency and safety communications purposes. This equipment may be separate from, or combined with, the equipment required by paragraph 1.1; and

.3 a secondary means of initiating the transmission of ship-to-shore distress alert through the satellite service on 406 MHz.

2 The ship shall, in addition, be capable of transmitting and receiving general radiocommunications by a radio installation operating on working frequencies in the bands between 1 605 kHz and 4 000 kHz and between 4 000 kHz and 27 500 kHz. This requirement may be fulfilled by the addition of this capability in the equipment required by paragraph 1.1.

3 It shall be possible to initiate transmission of distress alerts by the radio installations specified in paragraphs 1.1 and 1.3 from the position from which the ship is normally navigated.

4 The requirement in paragraph 1.3 may be fulfilled by installing:

.1 the EPIRB required by regulation 7.1.5 close to the position from which the ship is normally navigated, but in a location whereby it can still float free of the ship in an emergency; or

.2 the EPIRB required by regulation 7.1.5 elsewhere on the ship, provided that this EPIRB has a means of remote activation which is installed near the position from which the ship is normally navigated; or

.3 a second EPIRB near the position from which the ship is normally navigated.

Regulation 12
Watches

1 Every ship, while at sea, shall maintain a continuous radio watch for distress, urgency and safety communications purposes:

.1 on VHF DSC channel 70;

This gazette is also available free online at **www.gpwonline.co.za**

.2 on DSC frequency 2 187.5 kHz, if the ship, in accordance with the requirements of regulation 9.1.1 or 10.1.2, is fitted with an MF radio installation;

.3 on DSC frequencies 2 187.5 kHz and 8 414.5 kHz and also on at least one of the DSC frequencies 4 207.5 kHz, 6 312 kHz, 12 577 kHz or 16 804.5 kHz, appropriate to the time of day and the geographical position of the ship, if the ship, in accordance with the requirements of regulation 11.1.2, is fitted with an MF/HF radio installation. This watch may be kept by means of a scanning receiver; and

.4 for satellite shore-to-ship distress alert relays, if the ship, in accordance with the requirements of regulation 10.1.1, is fitted with a recognized mobile satellite service ship earth station.

2 Every ship, while at sea, shall maintain a radio watch for broadcasts of MSI and search and rescue related information on the appropriate frequency or frequencies on which such information is broadcast for the area in which the ship is navigating.

3 Every ship, while at sea, shall maintain, when practicable, a continuous listening watch, which shall be kept at the position from which the ship is normally navigated, on:

.1 VHF channel 16; and

.2 other appropriate frequencies for urgency and safety communications for the area in which the ship is navigating.

Regulation 13
Sources of energy

1 While the ship is at sea, a supply of electrical energy shall be available at all times sufficient to operate the radio installations and to charge any batteries used as part of a reserve source or sources of energy for the radio installations.

2 A reserve source or sources of energy shall be provided on every ship, to supply radio installations, for the purpose of conducting distress, urgency and safety communications, in the event of failure of the ship's main and emergency sources of electrical power. The reserve source or sources of energy shall be capable of simultaneously operating the VHF radio installation required by regulation 7.1.1 and, as appropriate for the sea area or sea areas for which the ship is equipped, either the MF radio installation required by regulation 9.1.1 or 10.1.2, the MF/HF radio installation required by regulation 11.1.1, or the ship earth station required by regulation 10.1.1 and any of the additional loads mentioned in paragraphs 4, 5 and 8 for a period of at least:

.1 one hour on ships provided with an emergency source of electrical power, if such source of power complies fully with all relevant provisions of regulation II-1/42 or 43, including the supply of such power to the radio installations; and

This gazette is also available free online at **www.gpwonline.co.za**

.2 six hours on ships not provided with an emergency source of electrical power complying fully with all relevant provisions of regulation II-1/42 or 43, including the supply of such power to the radio installations. [15]

The reserve source or sources of energy need not supply independent HF and MF radio installations at the same time.

3 The reserve source or sources of energy shall be independent of the propelling power of the ship and the ship's electrical system.

4 Where, in addition to the VHF radio installation, two or more of the other radio installations referred to in paragraph 2 can be connected to the reserve source or sources of energy, they shall be capable of simultaneously supplying, for the period specified, as appropriate, in paragraph 2.1 or 2.2, the VHF radio installation and:

.1 all other radio installations which can be connected to the reserve source or sources of energy at the same time; or

.2 whichever of the other radio installations will consume the most power, if only one of the other radio installations can be connected to the reserve source or sources of energy at the same time as the VHF radio installation.

5 The reserve source or sources of energy may be used to supply the electrical lighting required by regulation 6.2.4.

6 Where a reserve source of energy consists of a rechargeable accumulator battery or batteries:

.1 a means of automatically charging such batteries shall be provided which shall be capable of recharging them to minimum capacity requirements within 10 hours; and

.2 the capacity of the battery or batteries shall be checked, using an appropriate method, [16] at intervals not exceeding 12 months, when the ship is not at sea.

7 The siting and installation of accumulator batteries which provide a reserve source of energy shall be such as to ensure:

.1 the highest degree of service;

.2 a reasonable lifetime;

.3 reasonable safety;

.4 that battery temperatures remain within the manufacturer’s specifications whether under charge or idle; and

.5 that when fully charged, the batteries will provide at least the minimum required hours of operation under all weather conditions.

[15] For guidance, the following formula is recommended for determining the electrical load to be supplied by the reserve source of energy for each radio installation required for distress conditions: 1/2 of the current consumption necessary for transmission + the current consumption necessary for reception + the current consumption of any additional loads.

[16] One method of checking the capacity of an accumulator battery is to fully discharge and recharge the battery, using normal operating current and period. Assessment of the charge condition can be made at any time, but it should be done without significant discharge of the battery when the ship is at sea.

This gazette is also available free online at **www.gpwonline.co.za**

8 If an uninterrupted input of information from the ship's navigational or other equipment to a radio installation required by this chapter, including the navigation receiver referred to in regulation 18, is needed to ensure its proper performance, means shall be provided to ensure the continuous supply of such information in the event of failure of the ship's main or emergency source of electrical power.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 14
Performance standards

1 All equipment to which this chapter applies shall be of a type approved by the Administration. Such equipment shall conform to appropriate performance standards not inferior to those adopted by the Organization. [17]

Regulation 15
Maintenance requirements

1 Equipment shall be so designed that the main units can be replaced readily, without elaborate recalibration or readjustment.

[17] Refer to the following resolutions adopted by the Organization:

General requirements

.1 *General requirements for shipborne radio equipment forming part of the Global Maritime Distress and Safety System (GMDSS) and for electronic navigational aids* (resolution A.694(17));

.2 *Performance standards for the presentation of navigation-related information on shipborne navigational displays* (resolution MSC.191(79), as amended);

.3 *Performance standards for bridge alert management* (resolution MSC.302(87));

VHF equipment

.4 *Performance standards for shipborne VHF radio installations capable of voice communication and digital selective calling (resolution MSC.511(105));*

.5 *Performance standards for survival craft portable two-way VHF radiotelephone apparatus (resolution MSC.515(105));*

.6 *Recommendation on Performance standards for on-scene (aeronautical) portable two-way VHF radiotelephone apparatus (annex 1 to resolution MSC.80(70), as amended);*

MF and HF equipment

.7 *System performance standard for the promulgation and coordination of maritime safety information using high-frequency narrow-band direct-printing (resolution MSC.507(105));*

.8 *Performance standards for shipborne MF and MF/HF radio installations capable of voice communication, digital selective calling and reception of maritime safety information and search and rescue related information (resolution MSC.512(105));*

.9 *Performance standards for the reception of maritime safety information and search and rescue related information by MF (NAVTEX) and HF (resolution MSC.508(105));*

Ship earth stations and enhanced group call (EGC) equipment

.10 *Performance standards for Inmarsat-C ship earth stations capable of transmitting and receiving direct-printing communications (resolution MSC.513(105));*

.11 *Revised performance standards for enhanced group call (EGC) equipment (resolution MSC.306(87), as amended);*

.12 *Performance standards for a ship earth station for use in the GMDSS (resolution MSC.434(98));*

Integrated radiocommunication systems

.13 *Performance standards for a shipborne integrated communication system (ICS) when used in the Global Maritime Distress and Safety System (GMDSS) (resolution MSC.517(105));*

Emergency position-indicating radio beacons

.14 *Performance standards for float-free release and activation arrangements for emergency radio equipment (resolution A.662(16));*

.15 *Performance standards for float-free emergency position-indicating radio beacons (EPIRBs) operating on 406 MHz (resolution MSC.471(101));*

Search and rescue transmitters and transponders

.16 *Performance standards for search and rescue radar transponders (resolution MSC.510(105)); and*

.17 *Performance standards for survival craft AIS search and rescue transmitters (AIS-SART) for use in search and rescue operations (resolution MSC.246(83)).*

This gazette is also available free online at **www.gpwonline.co.za**

2 Where applicable, equipment shall be so constructed and installed that it is readily accessible for inspection and on-board maintenance purposes.

3 Adequate information shall be provided to enable the equipment to be properly operated and maintained, taking into account the recommendations of the Organization.[18]

4 Adequate tools and spares shall be provided to enable the equipment to be maintained.

5 The Administration shall ensure that radio equipment required by this chapter is maintained to provide the availability of the functional requirements specified in regulation 4 and to meet the recommended performance standards of such equipment.

6 On ships engaged on voyages in sea areas A1 or A2, the availability shall be ensured by using such methods as duplication of equipment, shore-based maintenance or at-sea electronic maintenance capability, or a combination of these, as may be approved by the Administration.

7 On ships engaged on voyages in sea areas A3 or A4, the availability shall be ensured by using a combination of at least two methods such as duplication of equipment, shore-based maintenance or at-sea electronic maintenance capability, as may be approved by the Administration.

8 While all reasonable steps shall be taken to maintain the equipment in efficient working order to ensure compliance with all the functional requirements specified in regulation 4, malfunction of the equipment for providing the general radiocommunications required by regulation 4.1.2 shall not be considered as making a ship unseaworthy or as a reason for delaying the ship in ports where repair facilities are not readily available, provided the ship is capable of performing all distress, urgency and safety functions.

9 EPIRBs shall be:

.1 annually tested, either on board the ship [19] or at an approved testing station, for all aspects of operational efficiency, with special emphasis on checking the emission on operational frequencies, coding and registration, at intervals as specified below:

.1 on passenger ships, within three months before the expiry date of the Passenger Ship Safety Certificate; and

.2 on cargo ships, within three months before the expiry date, or within three months before or after the anniversary date, of the Cargo Ship Safety Radio Certificate; and

[18] Refer to *Recommendation on general requirements for shipborne radio equipment forming part of the global maritime distress and safety system and for electronic navigational aids* (resolution A.694(17)), *General requirements for electromagnetic compatibility (EMC) for all electrical and electronic ship's equipment* (resolution A.813(19)), and *Clarifications of certain requirements in IMO performance standards for GMDSS equipment* (MSC/Circ.862).

[19] Refer to *Guidelines on annual testing of emergency position-indicating radio beacons (EPIRBs)* (MSC.1/Circ.1040/Rev.2) and *Guidelines for the avoidance of false distress alerts* (resolution MSC.514(105)).

This gazette is also available free online at **www.gpwonline.co.za**

.2 subject to maintenance at intervals not exceeding five years, to be performed at an approved shore-based maintenance facility. [20]

[20] Refer to *Guidelines for shore-based maintenance of emergency position-indicating radio beacons (EPIRBs)* (MSC.1/Circ.1039/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 16
Radio personnel

1 Every ship shall carry personnel qualified for distress, urgency and safety communications purposes to the satisfaction of the Administration. [21] The personnel shall be holders of the appropriate certificates specified in the Radio Regulations; one of the personnel shall be designated as having primary responsibility for communications during distress incidents.

2 In passenger ships, at least one person qualified in accordance with paragraph 1 shall be assigned to perform only communications duties during distress incidents.

Regulation 17
Radio records

A record shall be kept on board, to the satisfaction of the Administration and as required by the Radio Regulations, of all incidents connected with the radiocommunication services which appear to be of importance to safety of life at sea.

Regulation 18
Position-updating

1 All two-way communication equipment carried on board a ship to which this chapter applies which is capable of automatically including the ship's position in the distress alert shall be automatically provided with this information from an internal or external navigation receiver. [22]

2 In case of malfunction of the internal or external navigation receiver, the ship's position and the time at which the position was determined shall be manually updated at intervals not exceeding four hours, while the ship is under way, so that it is always ready for transmission by the equipment.

[21] Refer to the STCW Code, chapter IV, section B-IV/2.

[22] Requirements for automatic update of the ship's position are given in resolutions MSC.511(105), MSC.512(105) and MSC.513(105).

This gazette is also available free online at **www.gpwonline.co.za**

Chapter V

Safety of navigation

372

Contents

CHAPTER V SAFETY OF NAVIGATION 371

Regulation 1 Application 371
Regulation 2 Definitions 371
Regulation 3 Exemptions and equivalents 372
Regulation 4 Navigational warnings 372
Regulation 5 Meteorological services and warnings 374
Regulation 6 Ice Patrol Service 375
Regulation 7 Search and rescue services 376
Regulation 8 Life-saving signals 377
Regulation 9 Hydrographic services 378
Regulation 10 Ships' routeing 378
Regulation 11 Ship reporting systems 379
Regulation 12 Vessel traffic services 382
Regulation 13 Establishment and operation of aids to navigation 382
Regulation 14 Ships' manning 382
Regulation 15 Principles relating to bridge design, design and arrangement of navigational systems and equipment and bridge procedures 383
Regulation 16 Maintenance of equipment 384
Regulation 17 Electromagnetic compatibility 384
Regulation 18 Approval, surveys and performance standards of navigational systems and equipment and voyage data recorder 385
Regulation 19 Carriage requirements for shipborne navigational systems and equipment 387
Regulation 19-1 ..... Long-range identification and tracking of ships 394
Regulation 20 Voyage data recorders 398
Regulation 21 International Code of Signals and IAMSAR Manual 398
Regulation 22 Navigation bridge visibility 399
Regulation 23 Pilot transfer arrangements 400
Regulation 24 Use of heading and/or track control systems 403
Regulation 25 Operation of steering gear 404
Regulation 26 Steering gear: testing and drills 404
Regulation 27 Nautical charts and nautical publications 405

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 28 Records of navigational activities and daily reporting 405
Regulation 29 Life-saving signals to be used by ships, aircraft or persons in distress 407
Regulation 30 Operational limitations 407
Regulation 31 Danger messages 407
Regulation 32 Information required in danger messages 408
Regulation 33 Distress situations: obligations and procedures 410
Regulation 34 Safe navigation and avoidance of dangerous situations 411
Regulation 34-1 ..... Master's discretion 412
Regulation 35 Misuse of distress signals 412
[Appendix Rules for the management, operation and financing of the North Atlantic Ice Patrol ..... 413]

This gazette is also available free online at **www.gpwonline.co.za**

Chapter V - Safety Of Navigation

Regulation 1
Application

9 Unless expressly provided otherwise, this chapter shall apply to all ships on all voyages, except:

.1 warships, naval auxiliaries and other ships owned or operated by a Contracting Government and used only on government non-commercial service; and

.2 ships solely navigating the Great Lakes of North America and their connecting and tributary waters as far east as the lower exit of the St Lambert Lock at Montreal in the Province of Quebec, Canada.

However, warships, naval auxiliaries or other ships owned or operated by a Contracting Government and used only on government non-commercial service are encouraged to act in a manner consistent, so far as reasonable and practicable, with this chapter.

10 The Administration may decide to what extent this chapter shall apply to ships operating solely in waters landward of the baselines which are established in accordance with international law.

11 A rigidly connected composite unit of a pushing vessel and associated pushed vessel, when designed as a dedicated and integrated tug and barge combination, shall be regarded as a single ship for the purpose of this chapter.

12 The Administration shall determine to what extent the provisions of regulations 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27 and 28 do not apply to the following categories of ships:

.1 ships below 150 gross tonnage engaged on any voyage;

.2 ships below 500 gross tonnage not engaged on international voyages; and

.3 fishing vessels.

Regulation 2
Definitions

For the purpose of this chapter:

3 *Constructed* in respect of a ship means a stage of construction where:

.1 the keel is laid; or

.2 construction identifiable with a specific ship begins; or

.3 assembly of the ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all *structural material*, whichever is less.

This gazette is also available free online at **www.gpwonline.co.za**

4 *Nautical chart or nautical publication* is a special-purpose map or book, or a specially compiled database from which such a map or book is derived, that is issued officially by or on the authority of a Government, authorized Hydrographic Office or other relevant government institution and is designed to meet the requirements of marine navigation. [1]

5 *All ships* means any ship, vessel or craft irrespective of type and purpose.

6 *Length* of a ship means its length overall.

7 *Search and rescue service.* The performance of distress monitoring, communication, coordination and search and rescue functions, including provision of medical advice, initial medical assistance, or medical evacuation, through the use of public and private resources including cooperating aircraft, ships, vessels and other craft and installations.

8 *High-speed craft* means a craft as defined in regulation X/1.3.

9 *Mobile offshore drilling unit* means a mobile offshore drilling unit as defined in regulation XI-2/1.1.5.

Regulation 3
Exemptions and equivalents

19 The Administration may grant general exemptions from the requirements of regulations 15, 17, 18, 19 (except 19.2.1.7), 20, 22, 24, 25, 26, 27 and 28 to ships without mechanical means of propulsion.

20 The Administration may grant to individual ships exemptions or equivalents of a partial or conditional nature, when any such ship is engaged on a voyage where the maximum distance of the ship from the shore, the length and nature of the voyage, the absence of general navigational hazards, and other conditions affecting safety are such as to render the full application of this chapter unreasonable or unnecessary, provided that the Administration has taken into account the effect such exemptions and equivalents may have upon the safety of all other ships.

21 Each Administration shall submit to the Organization, as soon as possible after 1 January in each year, a report summarizing all new exemptions and equivalents granted under paragraph 2 of this regulation during the previous calendar year and giving the reasons for granting such exemptions and equivalents. The Organization shall circulate such particulars to other Contracting Governments for information.

Regulation 4
Navigational warnings

[1] Refer to appropriate resolutions and recommendations of the International Hydrographic Organization concerning the authority and responsibilities of coastal States in the provision of charting in accordance with regulation 9.

This gazette is also available free online at **www.gpwonline.co.za**

Each Contracting Government shall take all steps necessary to ensure that, when intelligence of any dangers is received from whatever reliable source, it shall be promptly brought to the knowledge of those concerned and communicated to other interested Governments. [2]

[2] Refer to *Guidance on the IMO/IHO World-Wide Navigational Warning Service* (resolution A.706(17), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 5

Meteorological services and warnings

1 Contracting Governments undertake to encourage the collection of meteorological data by ships at sea and to arrange for their examination, dissemination and exchange in the manner most suitable for the purpose of aiding navigation. [3] Administrations shall encourage the use of meteorological instruments of a high degree of accuracy and shall facilitate the checking of such instruments upon request. Arrangements may be made by appropriate national meteorological services for this checking to be undertaken, free of charge to the ship.

2 In particular, Contracting Governments undertake to carry out, in cooperation, the following meteorological arrangements:

.1 To warn ships of gales, storms and tropical cyclones by the issue of information in text and, as far as practicable, graphic form, using the appropriate shore-based facilities for terrestrial and space radiocommunications services.

.2 To issue, at least twice daily, by terrestrial and space radiocommunication services, [4] as appropriate, weather information suitable for shipping containing data, analyses, warnings and forecasts of weather, waves and ice. Such information shall be transmitted in text and, as far as practicable, graphic form, including meteorological analysis and prognosis charts transmitted by facsimile or in digital form for reconstitution on board the ship's data processing system.

.3 To prepare and issue such publications as may be necessary for the efficient conduct of meteorological work at sea and to arrange, if practicable, for the publication and making available of daily weather charts for the information of departing ships.

.4 To arrange for a selection of ships to be equipped with tested marine meteorological instruments (such as a barometer, a barograph, a psychrometer and suitable apparatus for measuring sea temperature) for use in this service, and to take, record and transmit meteorological observations at the main standard times for surface synoptic observations (i.e. at least four times daily, whenever circumstances permit) and to encourage other ships to take, record and transmit observations in a modified form, particularly when in areas where shipping is sparse.

.5 To encourage companies to involve as many of their ships as practicable in the making and recording of weather observations; these observations to be transmitted using the ship's terrestrial or space radiocommunications facilities for the benefit of the various national meteorological services.

.6 The transmission of these weather observations is free of charge to the ships concerned.

.7 When in the vicinity of a tropical cyclone, or of a suspected tropical cyclone, ships should be encouraged to take and transmit their observations at more

[3] Refer to *Recommendation on weather routeing* (resolution A.528(13)).

[4] Refer to regulations IV/7.1.4 and IV/7.1.5.

This gazette is also available free online at **www.gpwonline.co.za**

frequent intervals whenever practicable, bearing in mind navigational preoccupations of ships' officers during storm conditions.

.8 To arrange for the reception and transmission of weather messages from and to ships, using the appropriate shore-based facilities for terrestrial and space radiocommunications services.

.9 To encourage masters to inform ships in the vicinity and also shore stations whenever they experience a wind speed of 50 knots or more (force 10 on the Beaufort scale).

.10 To endeavour to obtain a uniform procedure in regard to the international meteorological services already specified, and as far as practicable, to conform to the technical regulations and recommendations made by the World Meteorological Organization, to which Contracting Governments may refer, for study and advice, any meteorological question which may arise in carrying out the present Convention.

3 The information provided for in this regulation shall be furnished in a form for transmission and be transmitted in the order of priority prescribed by the Radio Regulations. During transmission "to all stations" of meteorological information, forecasts and warnings, all ship stations must conform to the provisions of the Radio Regulations.

4 Forecasts, warnings, synoptic and other meteorological data intended for ships shall be issued and disseminated by the national meteorological service in the best position to serve various coastal and high seas areas, in accordance with mutual arrangements made by Contracting Governments, in particular as defined by the World Meteorological Organization's system for the preparation and dissemination of meteorological forecasts and warnings for the high seas under the Global Maritime Distress and Safety System (GMDSS).

Regulation 6

Ice Patrol Service

8 The Ice Patrol contributes to safety of life at sea, safety and efficiency of navigation and protection of the marine environment in the North Atlantic. Ships transiting the region of icebergs guarded by the Ice Patrol during the ice season are required to make use of the services provided by the Ice Patrol.

9 The Contracting Governments undertake to continue an ice patrol and a service for study and observation of ice conditions in the North Atlantic. During the whole of the ice season, i.e. for the period from 15 February through 1 July of each year, the south-eastern, southern and south-western limits of the region of icebergs in the vicinity of the Grand Banks of Newfoundland shall be guarded for the purpose of informing passing ships of the extent of this dangerous region; for the study of ice conditions in general; and for the purpose of affording assistance to ships and crews requiring aid within the limits of operation of the patrol ships and aircraft. During the rest of the year the study and observation of ice conditions shall be maintained as advisable.

This gazette is also available free online at **www.gpwonline.co.za**

10 Ships and aircraft used for the Ice Patrol Service and the study and observation of ice conditions may be assigned other duties provided that such other duties do not interfere with the primary purpose or increase the cost of this service.

11 The Government of the United States of America agrees to continue the overall management of the Ice Patrol Service and the study and observation of ice conditions, including the dissemination of information therefrom.

12 The terms and conditions governing the management, operation and financing of the Ice Patrol are set forth in the Rules for the management, operation and financing of the North Atlantic Ice Patrol appended to this chapter, which shall form an integral part of this chapter.

13 If, at any time, the United States and/or Canadian Governments should desire to discontinue providing these services, it may do so and the Contracting Governments shall settle the question of continuing these services in accordance with their mutual interests. The United States and/or Canadian Governments shall provide 18 months' written notice to all Contracting Governments whose ships entitled to fly their flag and whose ships are registered in territories to which those Contracting Governments have extended this regulation benefit from these services before discontinuing providing these services.

Regulation 7
Search and rescue services

6 Each Contracting Government undertakes to ensure that necessary arrangements are made for distress communication and coordination in their area of responsibility and for the rescue of persons in distress at sea around its coasts. These arrangements shall include the establishment, operation and maintenance of such search and rescue facilities as are deemed practicable and necessary, having regard to the density of the seagoing traffic and the navigational dangers, and shall, so far as possible, provide adequate means of locating and rescuing such persons. [5]

7 Each Contracting Government undertakes to make available information to the Organization concerning its existing search and rescue facilities and the plans for changes therein, if any.

8 Passenger ships to which chapter I applies shall have on board a plan for co-operation with appropriate search and rescue services in event of an emergency. The plan shall be developed in co-operation between the ship, the company, as defined in regulation IX/1 and the search and rescue services. The plan shall include provisions

[5] Refer to the International Convention on Maritime Search and Rescue (SAR), 1979, and to the following resolutions adopted by the Organization:
Homing capability of search and rescue (SAR) aircraft (resolution A.225(VII)),
Use of radar transponders for search and rescue purposes (resolution A.530(13)),
Search and rescue homing capability (resolution A.616(15)) and
International Aeronautical and Maritime Search and Rescue (IAMSAR) Manual (resolution A.894(21), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

for periodic exercises to be undertaken to test its effectiveness. The plan shall be developed based on the guidelines developed by the Organization [6].

Regulation 8
Life-saving signals

Contracting Governments undertake to arrange that life-saving signals are used by search and rescue facilities engaged in search and rescue operations when communicating with ships or persons in distress.

[6] See MSC.1/Circ.1079/Rev.1 *Guidelines for preparing plans for cooperation between search and rescue services and passenger ships* (in accordance with SOLAS regulation V/7.3)

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 9
Hydrographic services

1 Contracting Governments undertake to arrange for the collection and compilation of hydrographic data and the publication, dissemination and keeping up to date of all nautical information necessary for safe navigation.

2 In particular, Contracting Governments undertake to cooperate in carrying out, as far as possible, the following nautical and hydrographic services, in the manner most suitable for the purpose of aiding navigation:

.1 to ensure that hydrographic surveying is carried out, as far as possible, adequate to the requirements of safe navigation;

.2 to prepare and issue nautical charts, sailing directions, lists of lights, tide tables and other nautical publications, where applicable, satisfying the needs of safe navigation;

.3 to promulgate notices to mariners in order that nautical charts and publications are kept, as far as possible, up to date; and

.4 to provide data management arrangements to support these services.

3 Contracting Governments undertake to ensure the greatest possible uniformity in charts and nautical publications and to take into account, whenever possible, relevant international resolutions and recommendations. [7]

4 Contracting Governments undertake to coordinate their activities to the greatest possible degree in order to ensure that hydrographic and nautical information is made available on a world-wide scale as timely, reliably, and unambiguously as possible.

Regulation 10
Ships' routeing

3 Ships' routeing systems contribute to safety of life at sea, safety and efficiency of navigation and/or protection of the marine environment. Ships' routeing systems are recommended for use by, and may be made mandatory for, all ships, certain categories of ships or ships carrying certain cargoes, when adopted and implemented in accordance with the guidelines and criteria developed by the Organization. [8]

4 The Organization is recognized as the only international body for developing guidelines, criteria and regulations on an international level for ships' routeing systems. Contracting Governments shall refer proposals for the adoption of ships' routeing systems to the Organization. The Organization will collate and disseminate to Contracting Governments all relevant information with regard to any adopted ships' routeing systems.

[7] Refer to the appropriate resolutions and recommendations adopted by the International Hydrographic Organization.
[8] Refer to *General provisions on ships' routeing* (resolution A.572(14), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

5 The initiation of action for establishing a ships' routeing system is the responsibility of the Government or Governments concerned. In developing such systems for adoption by the Organization, the guidelines and criteria developed by the Organization [8] shall be taken into account.

6 Ships' routeing systems should be submitted to the Organization for adoption. However, a Government or Governments implementing ships' routeing systems not intended to be submitted to the Organization for adoption or which have not been adopted by the Organization are encouraged to take into account, wherever possible, the guidelines and criteria developed by the Organization.[9]

7 Where two or more Governments have a common interest in a particular area, they should formulate joint proposals for the delineation and use of a routeing system therein on the basis of an agreement between them. Upon receipt of such proposal and before proceeding with consideration of it for adoption, the Organization shall ensure that details of the proposal are disseminated to the Governments which have a common interest in the area, including countries in the vicinity of the proposed ships' routeing system.

8 Contracting Governments shall adhere to the measures adopted by the Organization concerning ships' routeing. They shall promulgate all information necessary for the safe and effective use of adopted ships' routeing systems. A Government or Governments concerned may monitor traffic in those systems. Contracting Governments shall do everything in their power to secure the appropriate use of ships routeing systems adopted by the Organization.

9 A ship shall use a mandatory ships' routeing system adopted by the Organization as required for its category or cargo carried and in accordance with the relevant provisions in force unless there are compelling reasons not to use a particular ships' routeing system. Any such reason shall be recorded in the ships' log.

10 Mandatory ships' routeing systems shall be reviewed by the Contracting Government or Governments concerned in accordance with the guidelines and criteria developed by the Organization. **Error! Bookmark not defined.**

11 All adopted ships' routeing systems and actions taken to enforce compliance with those systems shall be consistent with international law, including the relevant provisions of the 1982 United Nations Convention on the Law of the Sea.

12 Nothing in this regulation nor its associated guidelines and criteria shall prejudice the rights and duties of Governments under international law or the legal regimes of straits used for international navigation and archipelagic sea lanes.

Regulation 11

Ship reporting systems [10]

[9] Refer to *General Provisions on Ships' Routeing* (resolution A.572(14)), as amended).

[10] This regulation does not address ship reporting systems established by Governments for search and rescue purposes, which are covered by chapter 5 of the 1979 SAR Convention, as amended.

This gazette is also available free online at **www.gpwonline.co.za**

5 Ship reporting systems contribute to safety of life at sea, safety and efficiency of navigation and/or protection of the marine environment. A ship reporting system, when adopted and implemented in accordance with the guidelines and criteria developed by the Organization [11] pursuant to this regulation, shall be used by all ships or certain categories of ships or ships carrying certain cargoes in accordance with the provisions of each system so adopted.

6 The Organization is recognized as the only international body for developing guidelines, criteria and regulations on an international level for ship reporting systems. Contracting Governments shall refer proposals for the adoption of ship reporting systems to the Organization. The Organization will collate and disseminate to Contracting Governments all relevant information with regard to any adopted ship reporting system.

7 The initiation of action for establishing a ship reporting system is the responsibility of the Government or Governments concerned. In developing such systems, provision of the guidelines and criteria developed by the Organization [12] shall be taken into account.

8 Ship reporting systems not submitted to the Organization for adoption do not necessarily need to comply with this regulation. However, Governments implementing such systems are encouraged to follow, wherever possible, the guidelines and criteria developed by the Organization. [12] Contracting Governments may submit such systems to the Organization for recognition.

9 Where two or more Governments have a common interest in a particular area, they should formulate proposals for a coordinated ship reporting system on the basis of agreement between them. Before proceeding with a proposal for adoption of a ship reporting system, the Organization shall disseminate details of the proposal to those Governments which have a common interest in the area covered by the proposed system. Where a coordinated ship reporting system is adopted and established, it shall have uniform procedures and operations.

10 After adoption of a ship reporting system in accordance with this regulation, the Government or Governments concerned shall take all measures necessary for the promulgation of any information needed for the efficient and effective use of the system. Any adopted ship reporting system shall have the capability of interaction and the ability to assist ships with information when necessary. Such systems shall be operated in accordance with the guidelines and criteria developed by the Organization [12] pursuant to this regulation.

---

[11] Refer to revised *Guidelines and criteria for ship reporting systems* (MSC.433(98)) and *General principles for ship reporting systems and ship reporting requirements, including guidelines for reporting incidents involving dangerous goods, harmful substances and/or marine pollutants* (resolution A.851(20), as amended).

[12] Refer to revised *Guidelines and criteria for ship reporting systems* (MSC.433(98)) and *General principles for ship reporting systems and ship reporting requirements, including guidelines for reporting incidents involving dangerous goods, harmful substances and/or marine pollutants* (resolution A.851(20), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

11 The master of a ship shall comply with the requirements of adopted ship reporting systems and report to the appropriate authority all information required in accordance with the provisions of each such system.

12 All adopted ship reporting systems and actions taken to enforce compliance with those systems shall be consistent with international law, including the relevant provisions of the United Nations Convention on the Law of the Sea.

13 Nothing in this regulation or its associated guidelines and criteria shall prejudice the rights and duties of Governments under international law or the legal regimes of straits used for international navigation and archipelagic sea lanes.

14 The participation of ships in accordance with the provisions of adopted ship reporting systems shall be free of charge to the ships concerned.

15 The Organization shall ensure that adopted ship reporting systems are reviewed under the guidelines and criteria developed by the Organization.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 12
Vessel traffic services

6 Vessel traffic services (VTS) contribute to safety of life at sea, safety and efficiency of navigation and protection of the marine environment, adjacent shore areas, work sites and offshore installations from possible adverse effects of maritime traffic.

7 Contracting Governments undertake to arrange for the establishment of VTS where, in their opinion, the volume of traffic or the degree of risk justifies such services.

8 Contracting Governments planning and implementing VTS shall, wherever possible, follow the guidelines developed by the Organization. [13] The use of VTS may only be made mandatory in sea areas within the territorial seas of a coastal State.

9 Contracting Governments shall endeavour to secure the participation in, and compliance with, the provisions of vessel traffic services by ships entitled to fly their flag.

10 Nothing in this regulation or the guidelines adopted by the Organization shall prejudice the rights and duties of Governments under international law or the legal regimes of straits used for international navigation and archipelagic sea lanes.

Regulation 13
Establishment and operation of aids to navigation

5 Each Contracting Government undertakes to provide, as it deems practical and necessary, either individually or in cooperation with other Contracting Governments, such aids to navigation as the volume of traffic justifies and the degree of risk requires.

6 In order to obtain the greatest possible uniformity in aids to navigation, Contracting Governments undertake to take into account the international recommendations and guidelines [14] when establishing such aids.

7 Contracting Governments undertake to arrange for information relating to aids to navigation to be made available to all concerned. Changes in the transmissions of position-fixing systems which could adversely affect the performance of receivers fitted in ships shall be avoided as far as possible and only be effected after timely and adequate notice has been promulgated.

Regulation 14
Ships' manning

[13] Refer to *Guidelines on vessel traffic services* (resolution A.1158(32)).

[14] Refer to the appropriate recommendations and guidelines of IALA and to Maritime Buoyage System (SN.1/Circ.297).

This gazette is also available free online at **www.gpwonline.co.za**

4 Contracting Governments undertake, each for its national ships, to maintain, or, if it is necessary, to adopt, measures for the purpose of ensuring that, from the point of view of safety of life at sea, all ships shall be sufficiently and efficiently manned. [15]

5 For every ship to which chapter I applies, the Administration shall:

.1 establish appropriate minimum safe manning following a transparent procedure, taking into account the relevant guidance adopted by the Organization; [16] and

.2 issue an appropriate minimum safe manning document or equivalent as evidence of the minimum safe manning considered necessary to comply with the provisions of paragraph 1.

6 On all ships, to ensure effective crew performance in safety matters, a working language shall be established and recorded in the ship's logbook. The company, as defined in regulation IX/1, or the master, as appropriate, shall determine the appropriate working language. Each seafarer shall be required to understand and, where appropriate, give orders and instructions and to report back in that language. If the working language is not an official language of the State whose flag the ship is entitled to fly, all plans and lists required to be posted shall include a translation into the working language.

7 On ships to which chapter I applies, English shall be used on the bridge as the working language for bridge-to-bridge and bridge-to-shore safety communications as well as for communications on board between the pilot and bridge watchkeeping personnel, [17] unless those directly involved in the communication speak a common language other than English.

Regulation 15

Principles relating to bridge design, design and arrangement of navigational systems and equipment and bridge procedures

All decisions which are made for the purpose of applying the requirements of regulations 19, 22, 24, 25, 27 and 28 and which affect bridge design, the design and arrangement of navigational systems and equipment on the bridge and bridge procedures [18] shall be taken with the aim of:

.3 facilitating the tasks to be performed by the bridge team and the pilot in making full appraisal of the situation and in navigating the ship safely under all operational conditions;

.4 promoting effective and safe bridge resource management;

[15] Refer to *Principles of minimum safe manning* (resolution A.1047(27)).

[16] Refer to *Principles of minimum safe manning* (resolution A.1047(27)).

[17] Refer to the *IMO Standard Marine Communication Phrases* (resolution A.918(22), as amended).

[18] Refer to *Guidelines on ergonomic criteria for bridge equipment and layout* (MSC/Circ.982) and *Guidelines for bridge equipment and systems, their arrangement and integration* (BES) (SN.1/Circ.288) and, for INS, to revised *Recommendation on performance standards for an integrated navigational system* (resolution MSC.252(83), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

.5 enabling the bridge team and the pilot to have convenient and continuous access to essential information which is presented in a clear and unambiguous manner, using standardized symbols and coding systems for controls and displays;

.6 indicating the operational status of automated functions and integrated components, systems and/or sub-systems;

.7 allowing for expeditious, continuous and effective information processing and decision-making by the bridge team and the pilot;

.8 preventing or minimizing excessive or unnecessary work and any conditions or distractions on the bridge which may cause fatigue or interfere with the vigilance of the bridge team and the pilot; and

.9 minimizing the risk of human error and detecting such error, if it occurs, through monitoring and alarm systems, in time for the bridge team and the pilot to take appropriate action.

Regulation 16
Maintenance of equipment

2 The Administration shall be satisfied that adequate arrangements are in place to ensure that the performance of the equipment required by this chapter is maintained.

3 Except as provided in regulations I/7(b)(ii), I/8 and I/9, while all reasonable steps shall be taken to maintain the equipment required by this chapter in efficient working order, malfunctions of that equipment shall not be considered as making the ship unseaworthy or as a reason for delaying the ship in ports where repair facilities are not readily available, provided suitable arrangements are made by the master to take the inoperative equipment or unavailable information into account in planning and executing a safe voyage to a port where repairs can take place.

Regulation 17
Electromagnetic compatibility

1 Administrations shall ensure that all electrical and electronic equipment on the bridge or in the vicinity of the bridge, on ships constructed on or after 1 July 2002, is tested for electromagnetic compatibility, taking into account the recommendations developed by the Organization. [19]

2 Electrical and electronic equipment shall be so installed that electromagnetic interference does not affect the proper function of navigational systems and equipment.

3 Portable electrical and electronic equipment shall not be operated on the bridge if it may affect the proper function of navigational systems and equipment.

[19] Refer to *General requirements for electromagnetic compatibility for all electrical and electronic ship's equipment* (resolution A.813(19)).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 18

Approval, surveys and performance standards of navigational systems and equipment and voyage data recorder

3 Systems and equipment required to meet the requirements of regulations 19 and 20 shall be of a type approved by the Administration.

This gazette is also available free online at **www.gpwonline.co.za**

4 Systems and equipment, including associated back-up arrangements, where applicable, installed on or after 1 July 2002 to perform the functional requirements of regulations 19 and 20 shall conform to appropriate performance standards not inferior to those adopted by the Organization. [20]

5 When systems and equipment are replaced or added to on ships constructed before 1 July 2002, such systems and equipment shall, in so far as is reasonable and practicable, comply with the requirements of paragraph 2.

6 Systems and equipment installed prior to the adoption of performance standards by the Organization may subsequently be exempted from full compliance with such standards at the discretion of the Administration, having due regard to the recommended criteria adopted by the Organization. However, for an electronic chart

---

[20] Refer to:

Recommendations on general requirements for shipborne radio equipment forming part of the global maritime distress and safety system (GMDSS) and for electronic navigational aids (resolution A.694(17));

Recommendation on performance standards for gyro-compasses (resolution A.424(XI));

Recommendation on performance standards for radar equipment (resolution MSC.64(67), annex 4);

Revised Recommendation on performance standards for radar equipment (resolution MSC.192(79));

Performance standards for automatic radar plotting aids (ARPAs) (resolution A.823(19));

Recommendation on performance standards for electronic chart display and information systems (ECDIS) (resolution A.817(19), as amended);

Recommendation on performance standards for shipborne Loran-C and Chayka receivers (resolution A.818(19));

Recommendation on performance standards for shipborne global positioning system (GPS) receiver equipment (resolution A.819(19), as amended);

Recommendation on performance standards for shipborne GLONASS receiver equipment (resolution MSC.53(66), as amended);

Recommendation on performance standards for shipborne DGPS and DGLONASS maritime radio beacon receiver equipment (resolution MSC.64(67), annex 2, as amended);

Recommendation on performance standards for shipborne combined GPS/GLONASS receiver equipment (resolution MSC.74(69), annex 1, as amended);

Performance standards for shipborne Galileo receiver equipment (resolution MSC.233(82));

Performance standards for shipborne Beidou Satellite Navigation System (BDS) receiver equipment (resolution MSC.379(93));

Performance standards for multi-system shipborne radionavigation receivers (resolution MSC.401(95), as amended);

Performance standards for shipborne Indian Regional Navigation Satellite System (IRNSS) receiver equipment (resolution MSC.449(99));

Recommendation on performance standards for heading control systems (resolution MSC.64(67), annex 3);

Recommendation on performance standards for track control systems (resolution MSC.74(69), annex 2);

Recommendation on performance standards for a universal shipborne automatic identification system (AIS) (resolution MSC.74 (69), annex 3);

Recommendation on performance standards for echo-sounding equipment (resolution A.224(VII), as amended);

Recommendation on performance standards for devices to indicate speed and distance (resolution A.824(19), as amended);

Performance standards for rate-of-turn indicators (resolution A.526(13));

Recommendation on performance standards for radar reflectors (resolution A.384(X), as amended);

Recommendation on performance standards for magnetic compasses (resolution A.382(X));

Recommendation on performance standards for daylight signalling lamps (resolution MSC.95(72));

Recommendation on performance standards for sound reception systems (resolution MSC.86(70), annex 1);

Recommendation on performance standards for shipborne voyage data recorders (VDRs) (resolution MSC.333(90));

Recommendation on performance standards for shipborne simplified voyage data recorders (S-VDRs) (resolution MSC.163(78), as amended);

Recommendations on performance standards for marine transmitting heading devices (THDs) (resolution MSC.116(73));

Performance standards for a bridge navigational watch alarm system (BNWAS) (resolution MSC.128(75)).

This gazette is also available free online at **www.gpwonline.co.za**

display and information system (ECDIS) to be accepted as satisfying the chart carriage requirement of regulation 19.2.1.4, that system shall conform to the relevant performance standards not inferior to those adopted by the Organization in effect on the date of installation, or, for systems installed before 1 January 1999, not inferior to the performance standards adopted by the Organization on 23 November 1995. [21]

7 The Administration shall require that the manufacturers have a quality control system audited by a competent authority to ensure continuous compliance with the type approval conditions. Alternatively, the Administration may use final product verification procedures where the compliance with the type approval certificate is verified by a competent authority before the product is installed on board ships.

8 Before giving approval to systems or equipment embodying new features not covered by this chapter, the Administration shall ensure that such features support functions at least as effective as those required by this chapter.

9 When equipment, for which performance standards have been developed by the Organization, is carried on ships in addition to those items of equipment required by regulations 19 and 20, such equipment shall be subject to approval and shall, as far as practicable, comply with performance standards not inferior to those adopted by the Organization.

10 The voyage data recorder system, including all sensors, shall be subjected to an annual performance test. The test shall be conducted by an approved testing or servicing facility to verify the accuracy, duration and recoverability of the recorded data. In addition, tests and inspections shall be conducted to determine the serviceability of all protective enclosures and devices fitted to aid location. A copy of the certificate of compliance issued by the testing facility, stating the date of compliance and the applicable performance standards, shall be retained on board the ship.

11 The automatic identification system (AIS) shall be subjected to an annual test. The test shall be conducted by an approved surveyor or an approved testing or servicing facility. The test shall verify the correct programming of the ship static information, correct data exchange with connected sensors as well as verifying the radio performance by radio frequency measurement and on-air test using, e.g., a Vessel Traffic Service (VTS). A copy of the test report shall be retained on board the ship.

Regulation 19
Carriage requirements for shipborne navigational systems and equipment

1 Application and requirements

Subject to the provisions of regulation 1.4:

[21] Refer to *Recommendation on performance standards for shipborne simplified voyage data recorders (S-VDRs)* (resolution MSC.163(78), as amended), *Revised performance standards for electronic chart display and information systems (ECDIS)* (resolution MSC.232(82)), *Recommendation on performance standards for electronic chart display and information systems (ECDIS)* (resolution A.817(19), as amended), and *Revised performance standards and functional requirements for the long-range identification and tracking of ships* (resolution MSC.263(84), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

1.1 Ships constructed on or after 1 July 2002 shall be fitted with navigational systems and equipment which will fulfil the requirements prescribed in paragraphs 2.1 to 2.9.

1.2 Ships constructed before 1 July 2002 shall:

.1 subject to the provisions of paragraphs 1.2.2, 1.2.3 and 1.2.4, unless they comply fully with this regulation, continue to be fitted with equipment which fulfils the requirements prescribed in regulations V/11, V/12 and V/20 of the International Convention for the Safety of Life at Sea, 1974 in force prior to 1 July 2002;

.2 be fitted with the equipment or systems required in paragraph 2.1.6 not later than the first survey [22] after 1 July 2002, at which time the radio direction-finding apparatus referred to in V/12(p) of the International Convention for the Safety of Life at Sea, 1974 in force prior to 1 July 2002 shall no longer be required;

.3 be fitted with the system required in paragraph 2.4 not later than the dates specified in paragraphs 2.4.2 and 2.4.3;

.4 .be fitted with the system required in paragraph 2.2.3, as follows:

.1 passenger ships irrespective of size, not later than the first survey [22] after 1 January 2016;

.2 cargo ships of 3,000 gross tonnage and upwards, not later than the first survey [22] after 1 January 2016;

.3 cargo ships of 500 gross tonnage and upwards but less than 3,000 gross tonnage, not later than the first survey [22] after 1 January 2017; and

.4 cargo ships of 150 gross tonnage and upwards but less than 500 gross tonnage, not later than the first survey [22] after 1 January 2018.

The bridge navigational watch alarm system shall be in operation whenever the ship is underway at sea.

The provisions of paragraph 2.2.4 shall also apply to ships constructed before 1 July 2002.

1.3 Administrations may exempt ships from the application of the requirement of paragraph 1.2.4 when such ships will be taken permanently out of service within two years after the implementation date specified in subparagraphs 1.2.4.1 to 1.2.4.4.

2 Shipborne navigational equipment and systems

2.1 All ships, irrespective of size, shall have:

.1 a properly adjusted standard magnetic compass, or other means, independent of any power supply, to determine the ship's heading and display the reading at the main steering position;

[22] Refer to *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

This gazette is also available free online at **www.gpwonline.co.za**

.2 a pelorus or compass bearing device, or other means, independent of any power supply, to take bearings over an arc of the horizon of 360°;

.3 means of correcting heading and bearings to true at all times;

.4 nautical charts and nautical publications to plan and display the ship's route for the intended voyage and to plot and monitor positions throughout the voyage. An electronic chart display and information system (ECDIS) is also accepted as meeting the chart carriage requirements of this subparagraph. Ships to which paragraph 2.10 applies shall comply with the carriage requirements for ECDIS detailed therein;

.5 back-up arrangements to meet the functional requirements of subparagraph .4, if this function is partly or fully fulfilled by electronic means; [23]

.6 a receiver for a global navigation satellite system or a terrestrial radionavigation system, or other means, suitable for use at all times throughout the intended voyage to establish and update the ship's position by automatic means;

.7 if less than 150 gross tonnage and if practicable, a radar reflector, or other means, to enable detection by ships navigating by radar at both 9 and 3 GHz;

.8 when the ship's bridge is totally enclosed and unless the Administration determines otherwise, a sound reception system, or other means, to enable the officer in charge of the navigational watch to hear sound signals and determine their direction; and

.9 a telephone, or other means, to communicate heading information to the emergency steering position, if provided.

2.2 All ships of 150 gross tonnage and upwards and passenger ships irrespective of size shall, in addition to the requirements of paragraph 2.1, be fitted with:

.1 a spare magnetic compass, interchangeable with the magnetic compass as referred to in paragraph 2.1.1, or other means to perform the function referred to in paragraph 2.1.1 by means of replacement or duplicate equipment;

.2 a daylight signalling lamp, or other means, to communicate by light during day and night using an energy source of electrical power not solely dependent upon the ship's power supply;

.3 a bridge navigational watch alarm system (BNWAS), as follows:

.1 cargo ships of 150 gross tonnage and upwards and passenger ships irrespective of size constructed on or after 1 July 2011;

.2 passenger ships irrespective of size constructed before 1 July 2011, not later than the first survey [24] after 1 July 2012;

[23] Refer to appendix 6, Back-up requirements, of *Performance standards for electronic chart display and information systems (ECDIS)* (resolution A.817(19), as amended). An appropriate folio of paper nautical charts may be used as a back-up arrangement for ECDIS. Other back-up arrangements for ECDIS are acceptable.

[24] Refer to *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

This gazette is also available free online at **www.gpwonline.co.za**

.3 cargo ships of 3,000 gross tonnage and upwards constructed before 1 July 2011, not later than the first survey [24] after 1 July 2012;

.4 cargo ships of 500 gross tonnage and upwards but less than 3,000 gross tonnage constructed before 1 July 2011, not later than the first survey [24] after 1 July 2013; and

.5 cargo ships of 150 gross tonnage and upwards but less than 500 gross tonnage constructed before 1 July 2011, not later than the first survey [24] after 1 July 2014.

The bridge navigational watch alarm system shall be in operation whenever the ship is underway at sea;

.4 a bridge navigational watch alarm system (BNWAS) installed prior to 1 July 2011 may subsequently be exempted from full compliance with the standards adopted by the Organization, at the discretion of the Administration.

2.3 All ships of 300 gross tonnage and upwards and passenger ships irrespective of size shall, in addition to meeting the requirements of paragraph 2.2, be fitted with:

.1 an echo-sounding device, or other electronic means, to measure and display the available depth of water;

.2 a 9 GHz radar, or other means, to determine and display the range and bearing of radar transponders and of other surface craft, obstructions, buoys, shorelines and navigational marks to assist in navigation and in collision avoidance;

.3 an electronic plotting aid, or other means, to plot electronically the range and bearing of targets to determine collision risk;

.4 speed and distance measuring device, or other means, to indicate speed and distance through the water;

.5 a properly adjusted transmitting heading device, or other means, to transmit heading information for input to the equipment referred to in paragraphs 2.3.2, 2.3.3 and 2.4.

2.4 All ships of 300 gross tonnage and upwards engaged on international voyages and cargo ships of 500 gross tonnage and upwards not engaged on international voyages and passenger ships irrespective of size shall be fitted with an automatic identification system (AIS), as follows:

.1 ships constructed on or after 1 July 2002;

.2 ships engaged on international voyages constructed before 1 July 2002:

.1 in the case of passenger ships, not later than 1 July 2003;

.2 in the case of tankers, not later than the first survey [25] for safety equipment [26] on or after 1 July 2003;

[25] Refer to Unified interpretation of the term "first survey" referred to in SOLAS regulations (MSC.1/Circ.1290).

[26] Refer to regulation I/8.

This gazette is also available free online at **www.gpwonline.co.za**

.3 in the case of ships, other than passenger ships and tankers, of 50,000 gross tonnage and upwards, not later than 1 July 2004;

.4 in the case of ships, other than passenger ships and tankers, of 300 gross tonnage and upwards but less than 50,000 gross tonnage, not later than the first safety equipment survey [27] after 1 July 2004 or by 31 December 2004, whichever occurs earlier; and

.3 ships not engaged on international voyages constructed before 1 July 2002, not later than 1 July 2008;

.4 the Administration may exempt ships from the application of the requirements of this paragraph when such ships will be taken permanently out of service within two years after the implementation date specified in subparagraphs .2 and .3;

.5 AIS shall:

.1 provide automatically to appropriately equipped shore stations, other ships and aircraft information, including the ship's identity, type, position, course, speed, navigational status and other safety-related information;

.2 receive automatically such information from similarly fitted ships;

.3 monitor and track ships; and

.4 exchange data with shore-based facilities;

.6 the requirements of paragraph 2.4.5 shall not be applied to cases where international agreements, rules or standards provide for the protection of navigational information; and

.7 AIS shall be operated taking into account the guidelines adopted by the Organization. [28] Ships fitted with AIS shall maintain AIS in operation at all times except where international agreements, rules or standards provide for the protection of navigational information.

2.5 All ships of 500 gross tonnage and upwards shall, in addition to meeting the requirements of paragraph 2.3, with the exception of paragraphs 2.3.3 and 2.3.5, and the requirements of paragraph 2.4, have:

.1 a gyro-compass, or other means, to determine and display their heading by shipborne non-magnetic means, being clearly readable by the helmsman at the main steering position. These means shall also transmit heading information for input to the equipment referred to in paragraphs 2.3.2, 2.4 and 2.5.5;

.2 a gyro-compass heading repeater, or other means, to supply heading information visually at the emergency steering position if provided;

[27] *The first safety equipment survey* means the first annual survey, the first periodical survey or the first renewal survey for safety equipment, whichever is due first after 1 July 2004, and, in addition, in the case of ships under construction, the initial survey.

[28] Refer to *Revised guidelines for the onboard operational use of shipborne Automatic Identification Systems (AIS)* (resolution A.1106(29)).

This gazette is also available free online at **www.gpwonline.co.za**

.3 a gyro-compass bearing repeater, or other means, to take bearings, over an arc of the horizon of 360°, using the gyro-compass or other means referred to in subparagraph .1. However, ships of less than 1,600 gross tonnage shall be fitted with such means as far as possible;

.4 rudder, propeller, thrust, pitch and operational mode indicators, or other means, to determine and display rudder angle, propeller revolutions, the force and direction of thrust and, if applicable, the force and direction of lateral thrust and the pitch and operational mode, all to be readable from the conning position; and

.5 an automatic tracking aid, or other means, to plot automatically the range and bearing of other targets to determine collision risk.

2.6 On all ships of 500 gross tonnage and upwards, failure of one piece of equipment should not reduce the ship's ability to meet the requirements of paragraphs 2.1.1, 2.1.2 and 2.1.4.

2.7 All ships of 3,000 gross tonnage and upwards shall, in addition to meeting the requirements of paragraph 2.5, have:

.1 a 3 GHz radar or, where considered appropriate by the Administration, a second 9 GHz radar, or other means, to determine and display the range and bearing of other surface craft, obstructions, buoys, shorelines and navigational marks to assist in navigation and in collision avoidance, which are functionally independent of those referred to in paragraph 2.3.2; and

.2 a second automatic tracking aid, or other means, to plot automatically the range and bearing of other targets to determine collision risk which are functionally independent of those referred to in paragraph 2.5.5.

2.8 All ships of 10,000 gross tonnage and upwards shall, in addition to meeting the requirements of paragraph 2.7 with the exception of paragraph 2.7.2, have:

.1 an automatic radar plotting aid, or other means, to plot automatically the range and bearing of at least 20 other targets, connected to a device to indicate speed and distance through the water, to determine collision risks and simulate a trial manoeuvre; and

.2 a heading or track control system, or other means, to automatically control and keep to a heading and/or straight track.

2.9 All ships of 50,000 gross tonnage and upwards shall, in addition to meeting the requirements of paragraph 2.8, have:

.1 a rate-of-turn indicator, or other means, to determine and display the rate of turn; and

.2 a speed and distance measuring device, or other means, to indicate speed and distance over the ground in the forward and athwartships direction.

2.10 Ships engaged on international voyages shall be fitted with an electronic chart display and information system (ECDIS) as follows:

This gazette is also available free online at **www.gpwonline.co.za**

.1 passenger ships of 500 gross tonnage and upwards constructed on or after 1 July 2012;

.2 tankers of 3,000 gross tonnage and upwards constructed on or after 1 July 2012;

.3 cargo ships, other than tankers, of 10,000 gross tonnage and upwards constructed on or after 1 July 2013;

.4 cargo ships, other than tankers, of 3,000 gross tonnage and upwards but less than 10,000 gross tonnage constructed on or after 1 July 2014;

.5 passenger ships of 500 gross tonnage and upwards constructed before 1 July 2012, not later than the first survey [29] on or after 1 July 2014;

.6 tankers of 3,000 gross tonnage and upwards constructed before 1 July 2012, not later than the first survey [29] on or after 1 July 2015;

.7 cargo ships, other than tankers, of 50,000 gross tonnage and upwards constructed before 1 July 2013, not later than the first survey [29] on or after 1 July 2016;

.8 cargo ships, other than tankers, of 20,000 gross tonnage and upwards but less than 50,000 gross tonnage constructed before 1 July 2013, not later than the first survey [29] on or after 1 July 2017; and

.9 cargo ships, other than tankers, of 10,000 gross tonnage and upwards but less than 20,000 gross tonnage constructed before 1 July 2013, not later than the first survey [29] on or after 1 July 2018.

2.11 Administrations may exempt ships from the application of the requirements of paragraph 2.10 when such ships will be taken permanently out of service within two years after the implementation date specified in subparagraphs .5 to .9 of paragraph 2.10.

3 When "other means" are permitted under this regulation, such means must be approved by the Administration in accordance with regulation 18.

4 The navigational equipment and systems referred to in this regulation shall be so installed, tested and maintained as to minimize malfunction.

5 Navigational equipment and systems offering alternative modes of operation shall indicate the actual mode of use.

6 Integrated bridge systems [30] shall be so arranged that failure of one sub-system is brought to the immediate attention of the officer in charge of the navigational watch by audible and visual alarms and does not cause failure to any other sub-system. In case of failure in one part of an integrated navigational system, [31] it shall be possible to operate each other individual item of equipment or part of the system separately.

---

[29] Refer to *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

[30] Refer to *Guidelines for bridge equipment and systems, their arrangement and integration* (BES) (SN.1/Circ.288).

[31] Refer to revised *Recommendation on performance standards for an integrated navigational system* (resolution MSC.252(83), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 19-1
Long-range identification and tracking of ships [32]

1 Nothing in this regulation or the provisions of performance standards and functional requirements [33] adopted by the Organization in relation to the long-range identification and tracking of ships shall prejudice the rights, jurisdiction or obligations of States under international law, in particular, the legal regimes of the high seas, the exclusive economic zone, the contiguous zone, the territorial seas or the straits used for international navigation and archipelagic sea lanes.

2.1 Subject to the provisions of paragraphs 4.1 and 4.2, this regulation shall apply to the following types of ships [34] engaged on international voyages:

.1 passenger ships, including high-speed passenger craft;

.2 cargo ships, including high-speed craft, of 300 gross tonnage [35] and upwards; and

.3 mobile offshore drilling units.

2.2 The term ship, when used in paragraphs 3 to 11.2, includes the passenger and cargo ships, the highspeed craft and the mobile offshore drilling units which are subject to the provisions of this regulation.

3 This regulation establishes provisions to enable Contracting Governments to undertake the long-range identification and tracking of ships.

4.1 Ships [36] shall be fitted with a system to automatically transmit the information specified in paragraph 5 as follows:

.1 ships constructed on or after 31 December 2008;

.2 ships constructed before 31 December 2008 and certified for operations:

.1 in sea areas A1 and A2, as defined in regulations IV/2.1.15 and IV/2.1.16; or

.2 in sea areas AI, A2 and A3, as defined in regulations IV/2.1.15, IV/2.1.16 and IV/2.1.14;

[32] Refer to *Guidance on the implementation of the LRIT system* (MSC.1/Circ.1298).

[33] Refer to *Revised performance standards and functional requirements for the long-range identification and tracking of ships* (resolution MSC.263(84), as amended).

[34] Refer to *Guidance in relation to certain types of ships which are required to transmit LRIT information on exemptions and equivalents and on certain operational matters* (MSC.1/Circ.1295).

[35] The *gross tonnage* to be used for determining whether a cargo ship or high-speed craft is required to comply with the provisions of this regulation shall be that determined under the provisions of the International Convention on Tonnage Measurement of Ships, 1969 irrespective of the date on which the ship or high-speed craft has been or is being constructed.

[36] Refer to *Guidance on the survey and certification of compliance of ships with the requirement to transmit LRIT information* (MSC.1/Circ.1307/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

not later than the first survey [37] of the radio installation after 31 December 2008;

.3 ships constructed before 31 December 2008 and certified for operations in sea areas AI, A2, A3 and A4, as defined in regulations IV/2.1.12, IV/2.1.15, IV/2.1.16, IV/2.1.17 and IV/2.1.18, not later than the first survey [37] of the radio installation after 1 July 2009. However, these ships shall comply with the provisions of subparagraph .2 above whilst they operate within sea areas A1, A2 and A3.

4.2 Ships, irrespective of the date of construction, fitted with an automatic identification system (AIS), as defined in regulation 19.2.4, and operated exclusively within sea area A1, as defined in regulation IV/2.1.15, shall not be required to comply with the provisions of this regulation.

5 Subject to the provisions of paragraph 4.1, ships shall automatically transmit the following long-range identification and tracking information:

.1 the identity of the ship;

.2 the position of the ship (latitude and longitude); and

.3 the date and time of the position provided.

6 Systems and equipment used to meet the requirements of this regulation shall conform to performance standards and functional requirements [38] [39] not inferior to those adopted by the Organization. Any shipboard equipment shall be of a type approved [40] by the Administration.

7 Systems and equipment used to meet the requirements of this regulation shall be capable of being switched off on board or be capable of ceasing the distribution of long-range identification and tracking information:

.1 where international agreements, rules or standards provide for the protection of navigational information; or

.2 in exceptional circumstances and for the shortest duration possible where the operation is considered by the master to compromise the safety or security of the ship. In such a case, the master shall inform the Administration without undue delay and make an entry in the record of navigational activities and incidents maintained in accordance with regulation 28 setting out the reasons for the decision and indicating the period during which the system or equipment was switched off.

[37] Refer to *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

[38] Refer to *Revised performance standards and functional requirements for the long-range identification and tracking of ships* (resolution MSC.263(84), as amended).

[39] Refer to *LRIT technical documentation (part I)* (MSC.1/Circ.1259, as revised).

[40] Refer to *Guidance on the survey and certification of compliance of ships with the requirement to transmit LRIT information* (MSC.1/Circ.1307/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

8.1 Subject to the provisions of paragraphs 8.2 to 11.2, Contracting Governments shall be able to receive long-range identification and tracking information about ships, for security and other purposes [41] as agreed by the Organization, as follows:

.1 the Administration shall be entitled to receive such information about ships entitled to fly its flag irrespective of where such ships may be located;

.2 a Contracting Government shall be entitled to receive such information about ships which have indicated their intention to enter a port facility, as defined in regulation XI-2/1.1.9, or a place under the jurisdiction of that Contracting Government, irrespective of where such ships may be located provided they are not located within the waters landward of the baselines, established in accordance with international law, of another Contracting Government;

.3 a Contracting Government shall be entitled to receive such information about ships entitled to fly the flag of other Contracting Governments, not intending to enter a port facility or a place under the jurisdiction of that Contracting Government, navigating within a distance not exceeding 1,000 nautical miles of its coast provided such ships are not located within the waters landward of the baselines, established in accordance with international law, of another Contracting Government; and

.4 Contracting Government shall not be entitled to receive, pursuant to subparagraph .3, such information about a ship located within the territorial sea of the Contracting Government whose flag the ship is entitled to fly.

8.2 Contracting Governments shall specify and communicate [42] to the Organization relevant details, taking into account the performance standards and functional requirements adopted by the Organization, [43] to enable long-range identification and tracking information to be made available pursuant to the provisions of paragraph 8.1. The Contracting Government concerned may, at any time thereafter, amend or withdraw such communication. The Organization shall inform all Contracting Governments upon receipt of such communication together with the particulars thereof.

9.1 Notwithstanding the provisions of paragraph 8.1.3, the Administration shall be entitled, in order to meet security or other concerns, at any time, to decide that long-range identification and tracking information about ships entitled to fly its flag shall not be provided pursuant to the provisions of paragraph 8.1.3 to Contracting Governments. The Administration concerned may, at any time thereafter, amend, suspend or annul such decisions.

9.2 The Administration concerned shall communicate, pursuant to paragraph 9.1, such decisions to the Organization. The Organization shall inform all Contracting Governments upon receipt of such communication together with the particulars thereof.

---

[41] Refer to *Use of the long-range identification and tracking information for maritime safety and marine environment protection purposes* (resolution MSC.242(83)).

[42] Refer to *Guidance on the implementation of the LRIT system* (MSC.1/Circ.1298).

[43] Refer to *Revised performance standards and functional requirements for the long-range identification and tracking of ships* (resolution MSC.263(84), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

9.3 The rights, duties and obligations, under international law, of the ships whose Administration invoked the provisions of paragraph 9.1 shall not be prejudiced as a result of such decisions.

10 Contracting Governments shall, at all times:

.1 recognize the importance of long-range identification and tracking information;

.2 recognize and respect the commercial confidentiality and sensitivity of any long-range identification and tracking information they may receive;

.3 protect the information they may receive from unauthorized access or disclosure; and

.4 use the information they may receive in a manner consistent with international law.

11.1 Contracting Governments shall bear all costs associated with any long-range identification and tracking information they request and receive. Notwithstanding the provisions of paragraph 11.2, Contracting Governments shall not impose any charges on ships in relation to the long-range identification and tracking information they may seek to receive.

11.2 Unless the national legislation of the Administration provides otherwise, ships entitled to fly its flag shall not incur any charges for transmitting long-range identification and tracking information in compliance with the provisions of this regulation.

12 Notwithstanding the provisions of paragraph 8.1, the search and rescue services [44] of Contracting Governments shall be entitled to receive, free of any charges, long-range identification and tracking information in relation to the search and rescue of persons in distress at sea.

13 Contracting Governments may report to the Organization any case where they consider that provisions of this regulation or of any other related requirements established by the Organization have not been or are not being observed or adhered to.

14 The Maritime Safety Committee shall determine the criteria, procedures and arrangements for the establishment, review and audit [45] of the provision of long-range identification and tracking information to Contracting Governments pursuant to the provisions of this regulation.

---

[44] Refer to *Guidance to search and rescue services in relation to requesting and receiving LRIT information* (MSC.1/Circ.1338, as revised).

[45] Refer to *Appointment of the LRIT Coordinator* (resolution MSC.275(85)), *Revised performance standards and functional requirements for the long-range identification and tracking of ships* (resolution MSC.263(84), as amended) and *Principles and guidelines relating to the review and audit of the performance of LRIT Data Centres and the International LRIT Data Exchange* (MSC.1/Circ.1412, as revised).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 20

Voyage data recorders [46]

1 To assist in casualty investigations, ships, when engaged on international voyages, subject to the provisions of regulation 1.4, shall be fitted with a voyage data recorder (VDR) as follows:

.1 passenger ships constructed on or after 1 July 2002;

.2 ro-ro passenger ships constructed before 1 July 2002, not later than the first survey [47] on or after 1 July 2002;

.3 passenger ships, other than ro-ro passenger ships, constructed before 1 July 2002, not later than 1 January 2004; and

.4 ships, other than passenger ships, of 3,000 gross tonnage and upwards constructed on or after 1 July 2002.

2 To assist in casualty investigations, cargo ships, when engaged on international voyages, shall be fitted with a VDR which may be a simplified voyage data recorder (S-VDR) [48] as follows:

.1 in the case of cargo ships of 20,000 gross tonnage and upwards constructed before 1 July 2002, at the first scheduled dry-docking after 1 July 2006 but not later than 1 July 2009;

.2 in the case of cargo ships of 3,000 gross tonnage and upwards but less than 20,000 gross tonnage constructed before 1 July 2002, at the first scheduled dry-docking after 1 July 2007 but not later than 1 July 2010; and

.3 Administrations may exempt cargo ships from the application of the requirements of subparagraphs .1 and .2 when such ships will be taken permanently out of service within two years after the implementation date specified in subparagraphs .1 and .2 above.

3 Administrations may exempt ships, other than ro-ro passenger ships, constructed before 1 July 2002 from being fitted with a VDR where it can be demonstrated that interfacing a VDR with the existing equipment on the ship is unreasonable and impracticable.

Regulation 21

International Code of Signals and IAMSAR Manual

1 All ships which, in accordance with the present Convention, are required to carry a radio installation shall carry the International Code of Signals as may be amended

[46] Refer to *Performance Standards for Shipborne Voyage Data Recorders (VDRs)* (resolution A.861(20), as amended), *Recommendation on Performance Standards for Shipborne Voyage Data Recorders (VDRs)* (resolution MSC.333(90)) and *Guidelines on voyage data recorder (VDR) ownership and recovery* (MSC/Circ.1024).

[47] Refer to *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

[48] Refer to *Performance standards for shipborne simplified voyage data recorders (S-VDRs)* (resolution MSC.163(78), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

by the Organization. The Code shall also be carried by any other ship which, in the opinion of the Administration, has a need to use it.

2 All ships shall carry an up-to-date copy of Volume III of the International Aeronautical and Maritime Search and Rescue (IAMSAR) Manual.

Regulation 22
Navigation bridge visibility

1 Ships of not less than 55 m in length, as defined in regulation 2.4, constructed on or after 1 July 1998, shall meet the following requirements:

.1 The view of the sea surface from the conning position shall not be obscured by more than two ship lengths, or 500 m, whichever is less, forward of the bow to 10 degrees on either side under all conditions of draught, trim and deck cargo;

.2 No blind sector, caused by cargo, cargo gear or other obstructions outside of the wheelhouse forward of the beam which obstructs the view of the sea surface as seen from the conning position, shall exceed 10 degrees. The total arc of blind sectors shall not exceed 20 degrees. The clear sectors between blind sectors shall be at least 5 degrees. However, in the view described in .1, each individual blind sector shall not exceed 5 degrees;

.3 The horizontal field of vision from the conning position shall extend over an arc of not less than 225 degrees, that is from right ahead to not less than 22.5 degrees abaft the beam on either side of the ship;

.4 From each bridge wing, the horizontal field of vision shall extend over an arc of at least 225 degrees, that is from at least 45 degrees on the opposite bow through right ahead and then from right ahead to right astern through 180 degrees on the same side of the ship;

.5 From the main steering position, the horizontal field of vision shall extend over an arc from right ahead to at least 60 degrees on each side of the ship;

.6 The ship's side shall be visible from the bridge wing;

.7 The height of the lower edge of the navigation bridge front windows above the bridge deck shall be kept as low as possible. In no case shall the lower edge present an obstruction to the forward view as described in this regulation;

.8 The upper edge of the navigation bridge front windows shall allow a forward view of the horizon, for a person with a height of eye of 1,800 mm above the bridge deck at the conning position, when the ship is pitching in heavy seas. The Administration, if satisfied that a 1,800 mm height of eye is unreasonable and impractical, may allow reduction of the height of eye but not to less than 1,600 mm;

.9 Windows shall meet the following requirements:

This gazette is also available free online at **www.gpwonline.co.za**

.1 To help avoid reflections, the bridge front windows shall be inclined from the vertical plane top out, at an angle of not less than 10 degrees and not more than 25 degrees;

.2 Framing between navigation bridge windows shall be kept to a minimum and not be installed immediately forward of any work station;

.3 Polarized and tinted windows shall not be fitted;

.4 A clear view through at least two of the navigation bridge front windows and, depending on the bridge configuration, an additional number of clear-view windows shall be provided at all times, regardless of weather conditions.

2 Ships constructed before 1 July 1998 shall, where practicable, meet the requirements of paragraphs 1.1 and 1.2. However, structural alterations or additional equipment need not be required.

3 On ships of unconventional design which, in the opinion of the Administration, cannot comply with this regulation, arrangements shall be provided to achieve a level of visibility that is as near as practical to that prescribed in this regulation.

4 Notwithstanding the requirements of paragraphs 1.1, 1.3, 1.4 and 1.5, ballast water exchange may be undertaken provided that:

.1 the master has determined that it is safe to do so and takes into consideration any increased blind sectors or reduced horizontal fields of vision resulting from the operation to ensure that a proper lookout is maintained at all times;

.2 the operation is conducted in accordance with the ship's ballast water management plan, taking into account the recommendations on ballast water exchange adopted by the Organization; and

.3 the commencement and termination of the operation are recorded in the ship's record of navigational activities pursuant to regulation 28.

Regulation 23

Pilot transfer arrangements

1 Application

1.1 Ships engaged on voyages in the course of which pilots may be employed shall be provided with pilot transfer arrangements.

1.2 Equipment and arrangements for pilot transfer which are installed [49] on or after 1 July 2012 shall comply with the requirements of this regulation, and due regard shall be paid to the standards adopted by the Organization. [50]

[49] Refer to *Unified interpretation of SOLAS regulation V/23* (MSC.1/Circ.1375).

[50] Refer to *Pilot transfer arrangements* (resolution A.1045(27), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

1.3 Except as provided otherwise, equipment and arrangements for pilot transfer which are provided on ships before 1 July 2012 shall at least comply with the requirements of regulation 17 [51] or 23, as applicable, of the Convention in force prior to that date, and due regard shall be paid to the standards adopted by the Organization prior to that date.

1.4 Equipment and arrangements installed on or after 1 July 2012, which are a replacement of equipment and arrangements provided on ships before 1 July 2012, shall, in so far as is reasonable and practicable, comply with the requirements of this regulation.

1.5 With respect to ships constructed before 1 January 1994, paragraph 5 shall apply not later than the first survey [52] on or after 1 July 2012.

1.6 Paragraph 6 applies to all ships.

2 General

2.1 All arrangements used for pilot transfer shall efficiently fulfil their purpose of enabling pilots to embark and disembark safely. The appliances shall be kept clean, properly maintained and stowed and shall be regularly inspected to ensure that they are safe to use. They shall be used solely for the embarkation and disembarkation of personnel.

2.2 The rigging of the pilot transfer arrangements and the embarkation of a pilot shall be supervised by a responsible officer having means of communication with the navigation bridge and who shall also arrange for the escort of the pilot by a safe route to and from the navigation bridge. Personnel engaged in rigging and operating any mechanical equipment shall be instructed in the safe procedures to be adopted and the equipment shall be tested prior to use.

2.3 A pilot ladder shall be certified by the manufacturer as complying with this regulation or with an international standard acceptable to the Organization. [53] Ladders shall be inspected in accordance with regulations I/6, 7 and 8.

2.4 All pilot ladders used for pilot transfer shall be clearly identified with tags or other permanent marking so as to enable identification of each appliance for the purposes of survey, inspection and record keeping. A record shall be kept on the ship as to the date the identified ladder is placed into service and any repairs effected.

2.5 Reference in this regulation to an accommodation ladder includes a sloping ladder used as part of the pilot transfer arrangements.

3 Transfer arrangements

[51] Refer to resolution MSC.99(73), renumbering previous regulation 17 as regulation 23, which entered into force on 1 July 2002.

[52] Refer to *Unified interpretation of the term "first survey" referred to in SOLAS regulations* (MSC.1/Circ.1290).

[53] Refer to the recommendations by the International Organization for Standardization, in particular publication ISO 799-1:2019, *Ships and marine technology – Pilot ladders*.

This gazette is also available free online at **www.gpwonline.co.za**

3.1 Arrangements shall be provided to enable the pilot to embark and disembark safely on either side of the ship.

3.2 In all ships, where the distance from sea level to the point of access to, or egress from, the ship exceeds 9 m, and when it is intended to embark and disembark pilots by means of the accommodation ladder, [54] or other equally safe and convenient means in conjunction with a pilot ladder, the ship shall carry such equipment on each side, unless the equipment is capable of being transferred for use on either side.

3.3 Safe and convenient access to, and egress from, the ship shall be provided by either:

.1 a pilot ladder requiring a climb of not less than 1.5 m and not more than 9 m above the surface of the water so positioned and secured that:

.1 it is clear of any possible discharges from the ship;

.2 it is within the parallel body length of the ship and, as far as is practicable, within the mid-ship half length of the ship;

.3 each step rests firmly against the ship's side; where constructional features, such as rubbing bands, would prevent the implementation of this provision, special arrangements shall, to the satisfaction of the Administration, be made to ensure that persons are able to embark and disembark safely;

.4 the single length of pilot ladder is capable of reaching the water from the point of access to, or egress from, the ship and due allowance is made for all conditions of loading and trim of the ship, and for an adverse list of 15°; the securing strong point, shackles and securing ropes shall be at least as strong as the side ropes; or

.2 an accommodation ladder in conjunction with the pilot ladder (i.e. a combination arrangement), or other equally safe and convenient means, whenever the distance from the surface of the water to the point of access to the ship is more than 9 m. The accommodation ladder shall be sited leading aft. When in use, means shall be provided to secure the lower platform of the accommodation ladder to the ship's side, so as to ensure that the lower end of the accommodation ladder and the lower platform are held firmly against the ship's side within the parallel body length of the ship and, as far as is practicable, within the mid-ship half length and clear of all discharges;

.1 when a combination arrangement is used for pilot access, means shall be provided to secure the pilot ladder and manropes to the ship's side at a point of nominally 1.5 m above the bottom platform of the accommodation ladder. In the case of a combination arrangement using an accommodation ladder with a trapdoor in the bottom platform (i.e. embarkation platform), the pilot ladder and manropes shall be rigged through the trapdoor extending above the platform to the height of the handrail.

[54] Refer to regulation II-1/3-9 on *Means of embarkation on and disembarkation from ships*.

This gazette is also available free online at **www.gpwonline.co.za**

4 Access to the ship's deck

Means shall be provided to ensure safe, convenient and unobstructed passage for any person embarking on, or disembarking from, the ship between the head of the pilot ladder, or of any accommodation ladder or other appliance, and the ship's deck. Where such passage is by means of:

.1 a gateway in the rails or bulwark, adequate handholds shall be provided;

.2 a bulwark ladder, two handhold stanchions rigidly secured to the ship's structure at or near their bases and at higher points shall be fitted. The bulwark ladder shall be securely attached to the ship to prevent overturning.

5 Shipside doors

Shipside doors used for pilot transfer shall not open outwards.

6 Mechanical pilot hoists

Mechanical pilot hoists shall not be used.

7 Associated equipment

7.1 The following associated equipment shall be kept at hand ready for immediate use when persons are being transferred:

.1 two manropes of not less than 28 mm and not more than 32 mm in diameter properly secured to the ship if required by the pilot; manropes shall be fixed at the rope end to the ring plate fixed on deck and shall be ready for use when the pilot disembarks, or upon request from a pilot approaching to board (the manropes shall reach the height of the stanchions or bulwarks at the point of access to the deck before terminating at the ring plate on deck);

.2 a lifebuoy equipped with a self-igniting light;

.3 a heaving line.

7.2 When required by paragraph 4 above, stanchions and bulwark ladders shall be provided.

8 Lighting

Adequate lighting shall be provided to illuminate the transfer arrangements overside and the position on deck where a person embarks or disembarks.

Regulation 24

Use of heading and/or track control systems

1 In areas of high traffic density, in conditions of restricted visibility and in all other hazardous navigational situations where heading and/or track control systems are in use, it shall be possible to establish manual control of the ship's steering immediately.

This gazette is also available free online at **www.gpwonline.co.za**

2 In circumstances as above, the officer in charge of the navigational watch shall have available without delay the services of a qualified helmsperson who shall be ready at all times to take over steering control.

3 The change-over from automatic to manual steering and vice versa shall be made by, or under the supervision of, a responsible officer.

4 The manual steering shall be tested after prolonged use of heading and/or track control systems and before entering areas where navigation demands special caution.

Regulation 25
Operation of steering gear

In areas where navigation demands special caution, ships shall have more than one steering gear power unit in operation when such units are capable of simultaneous operation.

Regulation 26
Steering gear: testing and drills

1 Within 12 hours before departure, the ship's steering gear shall be checked and tested by the ship's crew. The test procedure shall include, where applicable, the operation of the following:

.1 the main steering gear;

.2 the auxiliary steering gear;

.3 the remote steering gear control systems;

.4 the steering positions located on the navigation bridge;

.5 the emergency power supply;

.6 the rudder angle indicators in relation to the actual position of the rudder;

.7 the remote steering gear control system power failure alarms;

.8 the steering gear power unit failure alarms; and

.9 automatic isolating arrangements and other automatic equipment.

2 The checks and tests shall include:

.1 the full movement of the rudder according to the required capabilities of the steering gear;

.2 a visual inspection of the steering gear and its connecting linkage; and

.3 the operation of the means of communication between the navigation bridge and steering gear compartment.

3.1 Simple operating instructions with a block diagram showing the change-over procedures for remote steering gear control systems and steering gear power units

This gazette is also available free online at **www.gpwonline.co.za**

shall be permanently displayed on the navigation bridge and in the steering compartment.

3.2 All ships' officers concerned with the operation and/or maintenance of steering gear shall be familiar with the operation of the steering systems fitted on the ship and with the procedures for changing from one system to another.

4 In addition to the routine checks and tests prescribed in paragraphs 1 and 2, emergency steering drills shall take place at least once every three months in order to practise emergency steering procedures. These drills shall include direct control within the steering gear compartment, the communications procedure with the navigation bridge and, where applicable, the operation of alternative power supplies.

5 The Administration may waive the requirements to carry out the checks and tests prescribed in paragraphs 1 and 2 for ships which regularly engage on voyages of short duration. Such ships shall carry out these checks and tests at least once every week.

6 The date upon which the checks and tests prescribed in paragraphs 1 and 2 are carried out and the date and details of emergency steering drills carried out under paragraph 4 shall be recorded.

Regulation 27
Nautical charts and nautical publications

Nautical charts and nautical publications, such as sailing directions, lists of lights, notices to mariners, tide tables and all other nautical publications necessary for the intended voyage, shall be adequate and up to date.

Regulation 28
Records of navigational activities and daily reporting

1 All ships engaged on international voyages shall keep on board a record of navigational activities and incidents which are of importance to safety of navigation and which must contain sufficient detail to restore a complete record of the voyage, taking into account the recommendations adopted by the Organization. [55] When such information is not maintained in the ship's logbook, it shall be maintained in another form approved by the Administration.

2 Each ship of 500 gross tonnage and above, engaged on international voyages exceeding 48 hours, shall submit a daily report to its company, as defined in regulation IX/1, which shall retain it and all subsequent daily reports for the duration of the voyage. Daily reports may be transmitted by any means, provided that they are transmitted to the company as soon as practicable after determination of the position named in the report. Automated reporting systems may be used, provided that they include a recording function of their transmission and that those functions and interfaces with

[55] Refer to *Guidelines for the recording of events related to navigation* (resolution A.916(22)).

This gazette is also available free online at **www.gpwonline.co.za**

position-fixing equipment are subjected to regular verification by the ship's master. The report shall contain the following:

.1 ship's position;

.2 ship's course and speed; and

.3 details of any external or internal conditions that are affecting the ship's voyage or the normal safe operation of the ship.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 29
Life-saving signals to be used by ships, aircraft or persons in distress

An illustrated table describing the life-saving signals [56] shall be readily available to the officer of the watch of every ship to which this chapter applies. The signals shall be used by ships or persons in distress when communicating with life-saving stations, maritime rescue units and aircraft engaged in search and rescue operations.

Regulation 30
Operational limitations

1 This regulation applies to all passenger ships to which chapter I applies.

2 A list of all limitations on the operation of a passenger ship, including exemptions from any of these regulations, restrictions in operating areas, weather restrictions, sea state restrictions, restrictions in permissible loads, trim, speed and any other limitations, whether imposed by the Administration or established during the design or the building stages, shall be compiled before the passenger ship is put in service. The list, together with any necessary explanations, shall be documented in a form acceptable to the Administration, which shall be kept on board readily available to the master. The list shall be kept updated. If the language used is not English or French, the list shall be provided in one of the two languages.

Regulation 31
Danger messages

1 The master of every ship which meets with dangerous ice, a dangerous derelict, or any other direct danger to navigation, or a tropical storm, or encounters sub-freezing air temperatures associated with gale force winds causing severe ice accretion on superstructures, or winds of force 10 or above on the Beaufort scale for which no storm warning has been received, is bound to communicate the information by all means at his disposal to ships in the vicinity, and also to the competent authorities. The form in which the information is sent is not obligatory. It may be transmitted either in plain language (preferably English) or by means of the International Code of Signals.

2 Each Contracting Government will take all steps necessary to ensure that when intelligence of any of the dangers specified in paragraph 1 is received, it will be promptly brought to the knowledge of those concerned and communicated to other interested Governments.

3 The transmission of messages regarding the dangers specified is free of cost to the ships concerned.

[56] Such life-saving signals are described in the International Aeronautical and Maritime Search and Rescue (IAMSAR) Manual, Volume III, Mobile Facilities, and illustrated in the International Code of Signals, as amended.

This gazette is also available free online at **www.gpwonline.co.za**

4 All radio messages issued under paragraph 1 shall be preceded by the safety signal, using the procedure as prescribed by the Radio Regulations as defined in regulation IV/2.

Regulation 32
Information required in danger messages

The following information is required in danger messages:

1 Ice, derelicts and other direct dangers to navigation:

.1 The kind of ice, derelict or danger observed.

.2 The position of the ice, derelict or danger when last observed.

.3 The time and date (Universal Coordinated Time) when the danger was last observed.

2 Tropical cyclones (storms): [57]

.1 A statement that a tropical cyclone has been encountered. This obligation should be interpreted in a broad spirit, and information transmitted whenever the master has good reason to believe that a tropical cyclone is developing or exists in the neighbourhood.

.2 Time, date (Universal Coordinated Time) and position of ship when the observation was taken.

.3 As much of the following information as is practicable should be included in the message:

- barometric pressure, [58] preferably corrected (stating millibars, millimetres, or inches, and whether corrected or uncorrected);
- barometric tendency (the change in barometric pressure during the past 3 hours);
- true wind direction;
- wind force (Beaufort scale);
- state of the sea (smooth, moderate, rough, high);
- swell (slight, moderate, heavy) and the true direction from which it comes. Period or length of swell (short, average, long) would also be of value;
- true course and speed of ship.

Subsequent observations

[57] The term *tropical cyclone* is the generic term used by national meteorological services of the World Meteorological Organization. The terms *hurricane*, *typhoon*, *cyclone*, *severe tropical storm*, etc., may also be used, depending on the geographical location.

[58] The standard international unit for barometric pressure is the hectopascal (hPa), which is numerically equivalent to the millibar (mbar).

This gazette is also available free online at **www.gpwonline.co.za**

3 When a master has reported a tropical cyclone or other dangerous storm, it is desirable, but not obligatory, that further observations be made and transmitted hourly, if practicable, but in any case, at intervals of not more than 3 hours, so long as the ship remains under the influence of the storm.

4 Winds of force 10 or above on the Beaufort scale for which no storm warning has been received. This is intended to deal with storms other than the tropical cyclones referred to in paragraph 2; when such a storm is encountered, the message should contain similar information to that listed under the paragraph but excluding the details concerning sea and swell.

5 Sub-freezing air temperatures associated with gale force winds causing severe ice accretion on superstructures:

.1 Time and date (Universal Coordinated Time).

.2 Air temperature.

.3 Sea temperature (if practicable).

.4 Wind force and direction.

Examples

Ice

TTT ICE. LARGE BERG SIGHTED IN 4506 N, 4410 W, AT 0800 UTC. MAY 15.

Derelicts

TTT DERELICT. OBSERVED DERELICT ALMOST SUBMERGED IN 4006 N, 1243 W, AT 1630 UTC. APRIL 21.

Danger to navigation

TTT NAVIGATION. ALPHA LIGHTSHIP NOT ON STATION. 1800 UTC. JANUARY 3.

Tropical cyclone

TTT STORM. 0030 UTC. AUGUST 18. 2004 N, 11354 E. BAROMETER CORRECTED 994 MILLIBARS, TENDENCY DOWN 6 MILLIBARS. WIND NW, FORCE 9, HEAVY SQUALLS. HEAVY EASTERLY SWELL. COURSE 067, 5 KNOTS.

TTT STORM. APPEARANCES INDICATE APPROACH OF HURRICANE. 1300 UTC. SEPTEMBER 14. 2200 N, 7236 W. BAROMETER CORRECTED 29.64 INCHES, TENDENCY DOWN .015 INCHES. WIND NE, FORCE 8, FREQUENT RAIN SQUALLS. COURSE 035, 9 KNOTS.

TTT STORM. CONDITIONS INDICATE INTENSE CYCLONE HAS FORMED. 0200 UTC. MAY 4. 1620 N, 9203 E. BAROMETER UNCORRECTED 753 MILLIMETRES, TENDENCY DOWN 5 MILLIMETRES. WIND S BY W, FORCE 5. COURSE 300, 8 KNOTS.

This gazette is also available free online at **www.gpwonline.co.za**

TTT STORM. TYPHOON TO SOUTHEAST. 0300 UTC. JUNE 12. 1812 N, 12605 E. BAROMETER FALLING RAPIDLY. WIND INCREASING FROM N.

TTT STORM. WIND FORCE 11, NO STORM WARNING RECEIVED. 0300 UTC. MAY 4. 4830 N, 30 W. BAROMETER CORRECTED 983 MILLIBARS, TENDENCY DOWN 4 MILLIBARS. WIND SW, FORCE 11 VEERING. COURSE 260, 6 KNOTS.

Icing

TTT EXPERIENCING SEVERE ICING. 1400 UTC. MARCH 2. 69 N, 10 W. AIR TEMPERATURE 18°F (-7.8°C). SEA TEMPERATURE 29°F (-1.7°C). WIND NE, FORCE 8.

Regulation 33

Distress situations: obligations and procedures

1 The master of a ship at sea which is in a position to be able to provide assistance, on receiving information from any source that persons are in distress at sea, is bound to proceed with all speed to their assistance, if possible informing them or the search and rescue service that the ship is doing so. This obligation to provide assistance applies regardless of the nationality or status of such persons or the circumstances in which they are found. If the ship receiving the distress alert is unable or, in the special circumstances of the case, considers it unreasonable or unnecessary to proceed to their assistance, the master must enter in the logbook the reason for failing to proceed to the assistance of the persons in distress, taking into account the recommendation of the Organization to inform the appropriate search and rescue service accordingly.

1-1 Contracting Governments shall coordinate and cooperate to ensure that masters of ships providing assistance by embarking persons in distress at sea are released from their obligations with minimum further deviation from the ships' intended voyage, provided that releasing the master of the ship from the obligations under the current regulation does not further endanger the safety of life at sea. The Contracting Government responsible for the search and rescue region in which such assistance is rendered shall exercise primary responsibility for ensuring such coordination and cooperation occurs, so that survivors assisted are disembarked from the assisting ship and delivered to a place of safety, taking into account the particular circumstances of the case and guidelines developed by the Organization. [59] In these cases the relevant Contracting Governments shall arrange for such disembarkation to be effected as soon as reasonably practicable.

2 The master of a ship in distress or the search and rescue service concerned, after consultation, so far as may be possible, with the masters of ships which answer the distress alert, has the right to requisition one or more of those ships as the master of the ship in distress or the search and rescue service considers best able to render assistance, and it shall be the duty of the master or masters of the ship or ships

[59] Refer to *Guidelines on the treatment of persons rescued at sea* (resolution MSC.167(78)).

This gazette is also available free online at **www.gpwonline.co.za**

requisitioned to comply with the requisition by continuing to proceed with all speed to the assistance of persons in distress.

3 Masters of ships shall be released from the obligation imposed by paragraph 1 on learning that their ships have not been requisitioned and that one or more other ships have been requisitioned and are complying with the requisition. This decision shall, if possible, be communicated to the other requisitioned ships and to the search and rescue service.

4 The master of a ship shall be released from the obligation imposed by paragraph 1 and, if his ship has been requisitioned, from the obligation imposed by paragraph 2 on being informed by the persons in distress or by the search and rescue service or by the master of another ship which has reached such persons that assistance is no longer necessary.

5 The provisions of this regulation do not prejudice the Convention for the Unification of Certain Rules of Law relating to Assistance and Salvage at Sea, signed at Brussels on 23 September 1910, particularly the obligation to render assistance imposed by article 11 of that Convention. [60]

6 Masters of ships who have embarked persons in distress at sea shall treat them with humanity, within the capabilities and limitations of the ship.

Regulation 34

Safe navigation and avoidance of dangerous situations

1 Prior to proceeding to sea, the master shall ensure that the intended voyage has been planned using the appropriate nautical charts and nautical publications for the area concerned, taking into account the guidelines and recommendations developed by the Organization. [61]

2 The voyage plan shall identify a route which:

.1 takes into account any relevant ships' routeing systems;

.2 ensures sufficient sea room for the safe passage of the ship throughout the voyage;

.3 anticipates all known navigational hazards and adverse weather conditions; and

.4 takes into account the marine environmental protection measures that apply, and avoids, as far as possible, actions and activities which could cause damage to the environment.

[60] Refer to the International Convention on Salvage, 1989, done at London on 28 April 1989, entered into force on 14 July 1996.

[61] Refer to *Guidelines for voyage planning* (resolution A.893(21)).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 34-1
Master's discretion

The owner, the charterer, the company operating the ship as defined in regulation IX/1, or any other person shall not prevent or restrict the master of the ship from taking or executing any decision which, in the master's professional judgement, is necessary for safety of life at sea and protection of the marine environment.

Regulation 35
Misuse of distress signals

The use of an international distress signal, except for the purpose of indicating that a person or persons are in distress, and the use of any signal which may be confused with an international distress signal are prohibited.

This gazette is also available free online at **www.gpwonline.co.za**

[Appendix to chapter V - Rules for the management, operation and financing of the North Atlantic Ice Patrol

1 In these Rules:

.1 *Ice season* means the annual period between 15 February and 1 July.

.2 *Region of icebergs guarded by the Ice Patrol* means the south-eastern, southern and south-western limits of the region of icebergs in the vicinity of the Grand Banks of Newfoundland.

.3 *Routes passing through regions of icebergs guarded by the Ice Patrol* means:

.1 routes between Atlantic coast ports of Canada (including inland ports approached from the North Atlantic through the Gut of Canso and Cabot Straits) and ports of Europe, Asia or Africa approached from the North Atlantic through or north of the Straits of Gibraltar (except routes which pass south of the extreme limits of ice of all types);

.2 routes via Cape Race, Newfoundland, between Atlantic coast ports of Canada (including inland ports approached from the North Atlantic through the Gut of Canso and Cabot Straits) west of Cape Race, Newfoundland, and Atlantic coast ports of Canada north of Cape Race, Newfoundland;

.3 routes between Atlantic and Gulf Coast ports of the United States of America (including inland ports approached from the North Atlantic through the Gut of Canso and Cabot Straits) and ports of Europe, Asia or Africa approached from the North Atlantic through or north of the Straits of Gibraltar (except routes which pass south of the extreme limits of ice of all types);

.4 routes via Cape Race, Newfoundland, between Atlantic and Gulf Coast ports of the United States of America (including inland ports approached from the North Atlantic through the Gut of Canso and Cabot Straits) and Atlantic Coast ports of Canada north of Cape Race, Newfoundland.

.4 *Extreme limits of ice of all types* in the North Atlantic Ocean is defined by a line connecting the following points:

A – 42° 23′.00 N,	**59° 25′.00 W**	**J**	**–**	**39° 49′.00 N,**	**41° 00′.00 W**
B – 41° 23′.00 N,	**57° 00′.00 W**	**K**	**–**	**40° 39′.00 N,**	**39° 00′.00 W**
C – 40° 47′.00 N,	**55° 00′.00 W**	**L**	**–**	**41° 19′.00 N,**	**38° 00′.00 W**
D – 40° 07′.00 N,	**53° 00′.00 W**	**M**	**–**	**43° 00′.00 N,**	**37° 27′.00 W**
E – 39° 18′.00 N,	**49° 39′.00 W**	**N**	**–**	**44° 00′.00 N,**	**37° 29′.00 W**

417

F – 38° 00′.00 N, 00′.00 N,	**37° 55′.00 W**	**47° 35′.00 W**	**O**	**–**	**46°**
G – 37° 41′.00 N, 00′.00 N,	**38° 28′.00 W**	**46° 40′.00 W**	**P**	**–**	**48°**
H – 38° 00′.00 N, 00′.00 N,	**39° 07′.00 W**	**45° 33′.00 W**	**Q**	**–**	**50°**
I – 39° 05′.00 N, 25′.00 N,	**39° 45′.00 W.**	**43° 00′.00 W**	**R**	**–**	**51°**

.5 *Managing and operating* means maintaining, administering and operating the Ice Patrol, including the dissemination of information received therefrom.

.6 *Contributing Government* means a Contracting Government undertaking to contribute to the costs of the Ice Patrol Service pursuant to these Rules.

2 Each Contracting Government specially interested in these services whose ships pass through the region of icebergs during the ice season undertakes to contribute to the Government of the United States of America its proportionate share of the costs for the management and operation of the Ice Patrol Service. The contribution to the Government of the United States of America shall be based on the ratio which the average annual gross tonnage of that contributing Government's ships passing through the region of icebergs guarded by the Ice Patrol during the previous three ice seasons bears to the combined average annual gross tonnage of all ships that passed through the region of icebergs guarded by the Ice Patrol during the previous three ice seasons.

3 All contributions shall be calculated by multiplying the ratio described in paragraph 2 by the average actual annual cost incurred by the Governments of the United States of America and Canada of managing and operating ice patrol services during the previous three years. This ratio shall be computed annually, and shall be expressed in terms of a lump sum per-annum fee.

4 Each of the contributing Governments has the right to alter or discontinue its contribution, and other interested Governments may undertake to contribute to the expense. The contributing Government which avails itself of this right will continue to be responsible for its current contribution up to 1 September following the date of giving notice of intention to alter or discontinue its contribution. To take advantage of the said right it must give notice to the managing Government at least six months before the said 1 September.

5 Each contributing Government shall notify the Secretary-General of its undertaking pursuant to paragraph 2, who shall notify all Contracting Governments.

6 The Government of the United States of America shall furnish annually to each contributing Government a statement of the total cost incurred by the Governments of the United States of America and Canada of managing and operating the Ice Patrol for that year and of the average percentage share for the past three years of each contributing Government.

418

7 The managing Government shall publish annual accounts including a statement of costs incurred by the Governments providing the services for the past three years and the total gross tonnage using the service for the past three years. The accounts shall be publicly available. Within three months after having received the cost statement, contributing Governments may request more detailed information regarding the costs incurred in managing and operating the Ice Patrol.

8 These Rules shall be operative beginning with the ice season of 2002.]

This gazette is also available free online at **www.gpwonline.co.za**

Chapter VI

Carriage of cargoes and oil fuels

420

Contents

CHAPTER VII CARRIAGE OF CARGOES AND OIL FUELS 418
PART A - GENERAL PROVISIONS 418
Regulation 1 Application 418
Regulation 1-1 Definitions 418
Regulation 1-2 Requirements for the carriage of solid bulk cargoes other than grain 419
Regulation 2 Cargo information 419
Regulation 3 Oxygen analysis and gas detection equipment 420
Regulation 4 The use of pesticides in ships 420
Regulation 5 Stowage and securing 421
Regulation 5-1 Material safety data sheets 421
Regulation 5-2 Prohibition of the blending of bulk liquid cargoes and production processes during sea voyages 422
PART B - SPECIAL PROVISIONS FOR SOLID BULK CARGOES 423
Regulation 6 Acceptability for shipment 423
Regulation 7 Loading, unloading and stowage of solid bulk cargoes 423
PART C - CARRIAGE OF GRAIN 425
Regulation 8 Definitions 425
Regulation 9 Requirements for cargo ships carrying grain 425

This gazette is also available free online at **www.gpwonline.co.za**

Chapter VI - Carriage Of Cargoes And Oil Fuels

Part A - General Provisions

Regulation 1
Application

1 Unless expressly provided otherwise, this chapter applies to the carriage of cargoes (except liquids in bulk, gases in bulk and those aspects of carriage covered by other chapters) which, owing to their particular hazards to ships or persons on board, may require special precautions in all ships to which the present regulations apply and in cargo ships of less than 500 gross tonnage. However, for cargo ships of less than 500 gross tonnage, the Administration, if it considers that the sheltered nature and conditions of voyage are such as to render the application of any specific requirements of part A or B of this chapter unreasonable or unnecessary, may take other effective measures to ensure the required safety for these ships.

2 To supplement the provisions of parts A and B of this chapter, each Contracting Government shall ensure that appropriate information on cargo and its stowage and securing is provided, specifying, in particular, precautions necessary for the safe carriage of such cargoes. [1]

Regulation 1-1
Definitions

For the purpose of this chapter, unless expressly provided otherwise, the following definitions shall apply:

1 *IMSBC Code* means the International Maritime Solid Bulk Cargoes (IMSBC) Code adopted by the Maritime Safety Committee of the Organization by resolution MSC.268(85), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I

2 *Solid bulk cargo* means any cargo, other than liquid or gas, consisting of a combination of particles, granules or any larger pieces of material generally uniform in composition, which is loaded directly into the cargo spaces of a ship without any intermediate form of containment.

[1] Refer to:

.1 the Code of Safe Practice for Cargo Stowage and Securing (resolution A.714(17), as amended);

.2 the Code of Safe Practice for Ships Carrying Timber Deck Cargoes, 2011 (2011 TDC Code) (resolution A.1048(27)), Guidance note on precautions to be taken by the masters of ships of below 100 metres in length engaged in the carriage of logs (MSC/Circ.525), and Guidance note on precautions to be taken by masters of ships engaged in the carriage of timber cargoes (MSC/Circ.548); and

.3 the IMSBC Code (resolution MSC.268(85), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 1-2
Requirements for the carriage of solid bulk cargoes other than grain

The carriage of solid bulk cargoes other than grain shall be in compliance with the relevant provisions of the IMSBC Code.

Regulation 2
Cargo information

1 The shipper shall provide the master or his representative with appropriate information on the cargo sufficiently in advance of loading to enable the precautions which may be necessary for proper stowage and safe carriage of the cargo to be put into effect. Such information [2] shall be confirmed in writing [3] and by appropriate shipping documents prior to loading the cargo on the ship. For the purpose of this regulation the cargo information required in subchapter 1.9 of the Code of Safe Practice for Cargo Stowage and Securing, adopted by the Organization by resolution A.714(17), as may be amended, shall be provided. Any such amendment to subchapter 1.9 shall be adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I.

2 The cargo information shall include:

.1 in the case of general cargo, and of cargo carried in cargo units, a general description of the cargo, the gross mass of the cargo or of the cargo units, and any relevant special properties of the cargo. For the purpose of this regulation the cargo information required in sub-chapter 1.9 of the Code of Safe Practice for Cargo Stowage and Securing, adopted by the Organization by resolution A.714(17), as may be amended, shall be provided. Any such amendment to sub-chapter 1.9 shall be adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I;

.2 in the case of solid bulk cargo, information as required by section 4 of the IMSBC Code.

3 Prior to loading cargo units on board ships, the shipper shall ensure that the gross mass of such units is in accordance with the gross mass declared on the shipping documents.

4 In the case of cargo carried in a container, [4] except for containers carried on a chassis or a trailer when such containers are driven on or off a ro-ro ship engaged in

[2] Refer to *Form for cargo information* (MSC/Circ.663).

[3] Reference to documents in this regulation does not preclude the use of electronic data processing (EDP) and electronic data interchange (EDI) transmission techniques as an aid to paper documentation.

[4] The term *container* should be considered as having the same meaning as defined and applied in the International Convention for Safe Containers (CSC), 1972, as amended, taking into account *Guidelines for the approval of offshore*

This gazette is also available free online at **www.gpwonline.co.za**

short international voyages as defined in regulation III/3, the gross mass according to paragraph 2.1 of this regulation shall be verified by the shipper, either by:

.1 weighing the packed container using calibrated and certified equipment; or

.2 weighing all packages and cargo items, including the mass of pallets, dunnage and other securing material to be packed in the container and adding the tare mass of the container to the sum of the single masses, using a certified method approved by the competent authority of the State in which packing of the container was completed.

5 The shipper of a container shall ensure the verified gross mass [5] is stated in the shipping document. The shipping document shall be:

.1 signed by a person duly authorized by the shipper; and

.2 submitted to the master or his representative and to the terminal representative sufficiently in advance, as required by the master or his representative, to be used in the preparation of the ship stowage plan.[6]

6 If the shipping document, with regard to a packed container, does not provide the verified gross mass and the master or his representative and the terminal representative have not obtained the verified gross mass of the packed container, it shall not be loaded on to the ship.

Regulation 3

Oxygen analysis and gas detection equipment

1 When transporting a solid bulk cargo which is liable to emit a toxic or flammable gas, or cause oxygen depletion in the cargo space, an appropriate instrument for measuring the concentration of gas or oxygen in the air shall be provided together with detailed instructions for its use. Such an instrument shall be to the satisfaction of the Administration.

2 The Administration shall take steps to ensure that crews of ships are trained in the use of such instruments.

Regulation 4

The use of pesticides in ships [7]

containers handled in open seas (MSC/Circ.860) and *Revised recommendations on harmonized interpretation and implementation of the International Convention for Safe Containers, 1972, as amended* (CSC.1/Circ.138/Rev.1).

[5] Refer to *Guidelines regarding the verified gross mass of a container carrying cargo* (MSC.1/Circ.1475).

[6] This document may be presented by means of EDP or EDI transmission techniques. The signature may be an electronic signature or may be replaced by the name, in capitals, of the person authorized to sign.

[7] Refer to:
.1 *Revised recommendations on the safe use of pesticides in ships* (MSC.1/Circ.1358);
.2 *Revised Recommendations on the safe use of pesticides in ships applicable to the fumigation of cargo holds* (MSC.1/Circ.1264, as amended); and
.3 *Revised recommendations on the safe use of pesticides in ships applicable to the fumigation of cargo transport units* (MSC.1/Circ.1361).

This gazette is also available free online at **www.gpwonline.co.za**

Appropriate precautions shall be taken in the use of pesticides in ships, in particular for the purposes of fumigation.

Regulation 5
Stowage and securing

1 Cargo, cargo units [8] and cargo transport units [9] carried on or under deck shall be so loaded, stowed and secured as to prevent as far as is practicable, throughout the voyage, damage or hazard to the ship and the persons on board, and loss of cargo overboard.

2 Cargo units and cargo transport units shall be so packed and secured within the unit as to prevent, throughout the voyage, damage or hazard to the ship and the persons on board.

3 Appropriate precautions shall be taken during loading and transport of heavy cargoes or cargoes with abnormal physical dimensions to ensure that no structural damage to the ship occurs and to maintain adequate stability throughout the voyage.

4 Appropriate precautions shall be taken during loading and transport of cargo units and cargo transport units on board ro-ro ships, especially with regard to the securing arrangements on board such ships and on the cargo units and cargo transport units and with regard to the strength of the securing points and lashings.

5 Freight containers shall not be loaded to more than the maximum gross weight indicated on the Safety Approval Plate under the International Convention for Safe Containers (CSC), as amended.

6 All cargoes, other than solid and liquid bulk cargoes, cargo units and cargo transport units, shall be loaded, stowed and secured throughout the voyage in accordance with the Cargo Securing Manual approved by the Administration. In ships with ro-ro spaces, as defined in regulation II-2/3.41, all securing of such cargoes, cargo units, and cargo transport units, in accordance with the Cargo Securing Manual, shall be completed before the ship leaves the berth. The Cargo Securing Manual shall be drawn up to a standard at least equivalent to relevant guidelines developed by the Organization. [10]

Regulation 5-1
Material safety data sheets

Ships carrying oil or oil fuel, as defined in regulation 1 of Annex I of the International Convention for the Prevention of Pollution from Ships, 1973, as modified by the Protocol of 1978 relating thereto, shall be provided with material safety data sheets,

[8] Refer to the *Code of Safe Practice for Cargo Stowage and Securing* (resolution A.714(17), as amended).

[9] Refer to the *International Maritime Dangerous Goods* (IMDG) *Code* (resolution MSC.122(75), as amended).

[10] Refer to *Revised guidelines for the preparation of the Cargo Securing Manual* (MSC.1/Circ.1353).

This gazette is also available free online at **www.gpwonline.co.za**

based on the recommendations developed by the Organization,[11] prior to the loading of such oil as cargo in bulk or bunkering of oil fuel.

Regulation 5-2

Prohibition of the blending of bulk liquid cargoes and production processes during sea voyages

1 The physical blending of bulk liquid cargoes during sea voyages is prohibited. Physical blending refers to the process whereby the ship's cargo pumps and pipelines are used to internally circulate two or more different cargoes with the intent to achieve a cargo with a new product designation. This prohibition does not preclude the master from undertaking cargo transfers for the safety of the ship or protection of the marine environment.

2 The prohibition in paragraph 1 does not apply to the blending of products for use in the search and exploitation of seabed mineral resources on board ships used to facilitate such operations.

3 Any production process on board a ship during sea voyages is prohibited. Production processes refer to any deliberate operation whereby a chemical reaction between a ship's cargo and any other substance or cargo takes place.

4 The prohibition in paragraph 3 does not apply to the production processes of cargoes for use in the search and exploitation of seabed mineral resources on board ships used to facilitate such operations. [12]

[11] Refer to *Recommendations for material safety data sheets (MSDS) for MARPOL Annex I oil cargo and oil fuel* (resolution MSC.286(86), as may be amended).

[12] Refer to *Guidelines for the transport and handling of limited amounts of hazardous and noxious liquid substances in bulk in offshore support vessels* (resolution A.673(16), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Special Provisions For Solid Bulk Cargoes

Regulation 6
Acceptability for shipment

1 Prior to loading a solid bulk cargo, the master shall be in possession of comprehensive information on the ship's stability and on the distribution of cargo for the standard loading conditions. The method of providing such information shall be to the satisfaction of the Administration. [13]

Regulation 7
Loading, unloading and stowage of solid bulk cargoes [14]

1 For the purpose of this regulation, "*terminal representative*" means a person appointed by the terminal or other facility, where the ship is loading or unloading, who has responsibility for operations conducted by that terminal or facility with regard to the particular ship.

2 To enable the master to prevent excessive stresses in the ship's structure, the ship shall be provided with a booklet, which shall be written in a language with which the ship's officers responsible for cargo operations are familiar. If this language is not English, the ship shall be provided with a booklet written also in the English language. The booklet shall, as a minimum, include:

.1 stability data, as required by regulation II-1/5-1;

.2 ballasting and deballasting rates and capacities;

.3 maximum allowable load per unit surface area of the tank top plating;

.4 maximum allowable load per hold;

.5 general loading and unloading instructions with regard to the strength of the ship's structure including any limitations on the most adverse operating conditions during loading, unloading, ballasting operations and the voyage;

.6 any special restrictions such as limitations on the most adverse operating conditions imposed by the Administration or organization recognized by it, if applicable; and

.7 where strength calculations are required, maximum permissible forces and moments on the ship's hull during loading, unloading and the voyage.

3 Before a solid bulk cargo is loaded or unloaded, the master and the terminal representative shall agree on a plan [14] which shall ensure that the permissible forces and moments on the ship are not exceeded during loading or unloading, and shall include the sequence, quantity and rate of loading or unloading, taking into consideration the speed of loading or unloading, the number of pours and the

[13] Refer to regulation II-1/5-1 on *Stability information to be supplied to the master.*

[14] Refer to the *Code of Practice for the Safe Loading and Unloading of Bulk Carriers* (*BLU Code*) (resolution A.862(20), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

deballasting or ballasting capability of the ship. The plan and any subsequent amendments thereto shall be lodged with the appropriate authority of the port State.

4 The master and terminal representative shall ensure that loading and unloading operations are conducted in accordance with the agreed plan.

5 If during loading or unloading any of the limits of the ship referred to in paragraph 2 are exceeded or are likely to become so if the loading or unloading continues, the master has the right to suspend operation and the obligation to notify accordingly the appropriate authority of the port State with which the plan has been lodged. The master and the terminal representative shall ensure that corrective action is taken. When unloading cargo, the master and terminal representative shall ensure that the unloading method does not damage the ship's structure.

6 The master shall ensure that ship's personnel continuously monitor cargo operations. Where possible, the ship's draught shall be checked regularly during loading or unloading to confirm the tonnage figures supplied. Each draught and tonnage observation shall be recorded in a cargo logbook. If significant deviations from the agreed plan are detected, cargo or ballast operations or both shall be adjusted to ensure that the deviations are corrected.

This gazette is also available free online at **www.gpwonline.co.za**

Part C - Carriage Of Grain

Regulation 8
Definitions

For the purpose of this part, unless expressly provided otherwise:

1 *International Grain Code* means the International Code for the Safe Carriage of Grain in Bulk adopted by the Maritime Safety Committee of the Organization by resolution MSC.23(59) as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

2 The term *grain* includes wheat, maize (corn), oats, rye, barley, rice, pulses, seeds and processed forms thereof whose behaviour is similar to that of grain in its natural state.

Regulation 9
Requirements for cargo ships carrying grain

1 In addition to any other applicable requirements of the present regulations, a cargo ship carrying grain shall comply with the requirements of the International Grain Code, and hold a document of authorization as required by that Code. For the purpose of this regulation, the requirements of the Code shall be treated as mandatory.

2 A ship without such a document shall not load grain until the master satisfies the Administration, or the Contracting Government of the port of loading on behalf of the Administration, that the ship will comply with the requirements of the International Grain Code in its proposed loaded condition.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter VII

Carriage of dangerous goods

430

Contents

CHAPTER VII CARRIAGE OF DANGEROUS GOODS.....428

PART A - CARRIAGE OF DANGEROUS GOODS IN PACKAGED FORM 428

Regulation 1 Definitions 428
Regulation 2 Application.....428
Regulation 3 Requirements for the carriage of dangerous goods 430
Regulation 4 Documents 430
Regulation 5 Cargo Securing Manual.....430
Regulation 6 Reporting of incidents involving dangerous goods 430

PART A-1 - CARRIAGE OF DANGEROUS GOODS IN SOLID FORM IN BULK 431

Regulation 7 Definitions 431
Regulation 7-1 Application.....431
Regulation 7-2 Documents 431
Regulation 7-3 Stowage and segregation requirements 432
Regulation 7-4 Reporting of incidents involving dangerous goods.....432
Regulation 7-5 Requirements for the carriage of dangerous goods in solid form in bulk 432

PART B - CONSTRUCTION AND EQUIPMENT OF SHIPS CARRYING DANGEROUS LIQUID CHEMICALS IN BULK.....433

Regulation 8 Definitions 433
Regulation 9 Application to chemical tankers.....433
Regulation 10 Requirements for chemical tankers 435

PART C - CONSTRUCTION AND EQUIPMENT OF SHIPS CARRYING LIQUEFIED GASES IN BULK.....436

Regulation 11 Definitions 436
Regulation 12 Application to gas carriers 436
Regulation 13 Application to gas carriers 438

PART D - SPECIAL REQUIREMENTS FOR THE CARRIAGE OF PACKAGED IRRADIATED NUCLEAR FUEL, PLUTONIUM AND HIGH-LEVEL RADIOACTIVE WASTES ON BAORD SHIPS 439

Regulation 14 Definitions 439
Regulation 15 Application to ships carrying INF cargo 439
Regulation 16 Requirements for ships carrying INF cargo 440

This gazette is also available free online at **www.gpwonline.co.za**

Chapter VII - Carriage Of Dangerous Goods

Part A - Carriage Of Dangerous Goods In Packaged Form

Regulation 1
Definitions

For the purpose of this chapter, unless expressly provided otherwise:

1 *IMDG Code* means the International Maritime Dangerous Goods (IMDG) Code adopted by the Maritime Safety Committee of the Organization by resolution MSC.122(75), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

2 *Dangerous goods* mean the substances, materials and articles covered by the IMDG Code.

3 *Packaged form* means the form of containment specified in the IMDG Code.

Regulation 2
Application [1]

1 Unless expressly provided otherwise, this part applies to the carriage of dangerous goods in packaged form in all ships to which the present regulations apply and in cargo ships of less than 500 gross tonnage.

2 The provisions of this part do not apply to ships' stores and equipment.

3 The carriage of dangerous goods in packaged form is prohibited except in accordance with the provisions of this chapter.

4 To supplement the provisions of this part, each Contracting Government shall issue, or cause to be issued, detailed instructions on emergency response and medical first aid relevant to incidents involving dangerous goods in packaged form, taking into account the guidelines developed by the Organization. [2]

---

[1] Refer to:

.1 part D, which contains special requirements for the carriage of INF cargo; and

.2 regulation II-2/19, which contains special requirements for ships carrying dangerous goods.

[2] Refer to:

.1 the Revised Emergency Response Procedures for Ships Carrying Dangerous Goods (EmS Guide) (MSC.1/Circ.1588); and

.2 the Medical First Aid Guide for Use in Accidents Involving Dangerous Goods (MFAG) which is reproduced in the Supplement to the IMDG Code published by the Organization.

This gazette is also available free online at **www.gpwonline.co.za**

433

Regulation 3
Requirements for the carriage of dangerous goods

The carriage of dangerous goods in packaged form shall be in compliance with the relevant provisions of the IMDG Code.

Regulation 4
Documents

1 Transport information relating to the carriage of dangerous goods in packaged form and the container/vehicle packing certificate shall be in accordance with the relevant provisions of the IMDG Code and shall be made available to the person or organization designated by the port State authority.

2 Each ship carrying dangerous goods in packaged form shall have a special list, manifest or stowage plan setting forth, in accordance with the relevant provisions of the IMDG Code, the dangerous goods on board and the location thereof. A copy of one of these documents shall be made available before departure to the person or organization designated by the port State authority.

Regulation 5
Cargo Securing Manual

Cargo, cargo units [3] and cargo transport units shall be loaded, stowed and secured throughout the voyage in accordance with the Cargo Securing Manual approved by the Administration. The Cargo Securing Manual shall be drawn up to a standard at least equivalent to the guidelines developed by the Organization. [4]

Regulation 6
Reporting of incidents involving dangerous goods

1 When an incident takes place involving the loss or likely loss overboard of dangerous goods in packaged form into the sea, the master, or other person having charge of the ship, shall report the particulars of such an incident without delay and to the fullest extent possible to the nearest coastal State. The report shall be drawn up based on general principles and guidelines developed by the Organization. [5]

2 In the event of the ship referred to in paragraph 1 being abandoned, or in the event of a report from such a ship being incomplete or unobtainable, the company, as defined in regulation IX/1.2, shall, to the fullest extent possible, assume the obligations placed upon the master by this regulation.

[3] As defined in the *Code of Safe Practice for Cargo Stowage and Securing* (resolution A.714(17), as amended).

[4] Refer to *Revised guidelines for the preparation of the Cargo Securing Manual* (MSC/Circ.1353).

[5] Refer to *General principles for ship reporting systems and ship reporting requirements, including guidelines for reporting incidents involving dangerous goods, harmful substances and/or marine pollutants* (resolution A.851(20), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

Part A-1 - Carriage Of Dangerous Goods In Solid Bulk Form

Regulation 7
Definitions

Dangerous goods in solid form in bulk means any material, other than liquid or gas, consisting of a combination of particles, granules or any larger pieces of material, generally uniform in composition, which is covered by the IMDG Code and is loaded directly into the cargo spaces of a ship without any intermediate form of containment, and includes such materials loaded in a barge on a barge-carrying ship.

Regulation 7-1
Application [6]

1 Unless expressly provided otherwise, this part applies to the carriage of dangerous goods in solid form in bulk in all ships to which the present regulations apply and in cargo ships of less than 500 gross tonnage.

2 The carriage of dangerous goods in solid form in bulk is prohibited except in accordance with the provisions of this part.

3 To supplement the provisions of this part, each Contracting Government shall issue, or cause to be issued, which shall include instructions on emergency response and medical first aid relevant to incidents involving dangerous goods in solid form in bulk, taking into account the guidelines developed by the Organization. [7]

Regulation 7-2
Documents

1 In all documents relating to the carriage of dangerous goods in solid form in bulk by sea, the bulk cargo shipping name of the goods shall be used (trade names alone shall not be used).

2 Each ship carrying dangerous goods in solid form in bulk shall have a special list or manifest setting forth the dangerous goods on board and the location thereof. A detailed stowage plan, which identifies by class and sets out the location of all dangerous goods on board, may be used in place of such a special list or manifest. A copy of one of these documents shall be made available before departure to the person or organization designated by the port State authority.

[6] Refer to regulation II-2/19, which contains special requirements for ships carrying dangerous goods.

[7] Refer to the *Medical First Aid Guide for Use in Accidents involving Dangerous Goods* (MFAG) which is reproduced in the Supplement to the IMDG Code published by the Organization.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 7-3
Stowage and segregation requirements

2 Dangerous goods in solid form in bulk shall be loaded and stowed safely and appropriately in accordance with the nature of the goods. Incompatible goods shall be segregated from one another.

3 Dangerous goods in solid form in bulk, which are liable to spontaneous heating or combustion, shall not be carried unless adequate precautions have been taken to minimize the likelihood of the outbreak of fire.

4 Dangerous goods in solid form in bulk, which give off dangerous vapours, shall be stowed in a well-ventilated cargo space.

Regulation 7-4
Reporting of incidents involving dangerous goods

1 When an incident takes place involving the loss or likely loss overboard of dangerous goods in solid form in bulk into the sea, the master, or other person having charge of the ship, shall report the particulars of such an incident without delay and to the fullest extent possible to the nearest coastal State. The report shall be drawn up based on general principles and guidelines developed by the Organization. [8]

2 In the event of the ship referred to in paragraph 1 being abandoned, or in the event of a report from such a ship being incomplete or unobtainable, the company, as defined in regulation IX/1.2, shall, to the fullest extent possible, assume the obligations placed upon the master by this regulation.

Regulation 7-5
Requirements for the carriage of dangerous goods in solid form in bulk

The carriage of dangerous goods in solid form in bulk shall be in compliance with the relevant provisions of the IMSBC Code, as defined in regulation VI/1-1.1.

[8] Refer to *General principles for ship reporting systems and ship reporting requirements, including guidelines for reporting incidents involving dangerous goods, harmful substances and/or marine pollutants* (resolution A.851(20), as amended).

This gazette is also available free online at **www.gpwonline.co.za**

Part B - Construction And Equipment Of Ships Carrying Dangerous Liquid Chemicals In Bulk

Regulation 8
Definitions

For the purpose of this part, unless expressly provided otherwise:

1 *International Bulk Chemical Code* means the International Code for the Construction and Equipment of Ships Carrying Dangerous Chemicals in Bulk adopted by the Maritime Safety Committee of the Organization by resolution MSC.4(48), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

2 *Chemical tanker* means a cargo ship constructed or adapted and used for the carriage in bulk of any liquid product listed in chapter 17 of the International Bulk Chemical Code.

3 For the purpose of regulation 9, *ship constructed* means a ship the keel of which is laid or which is at a similar stage of construction.

4 *At a similar stage of construction* means the stage at which:

.1 construction identifiable with a specific ship begins; and

.2 assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less.

Regulation 9
Application to chemical tankers

1 Unless expressly provided otherwise, this part applies to chemical tankers constructed on or after 1 July 1986 including those of less than 500 gross tonnage. Such tankers shall comply with the requirements of this part in addition to any other applicable requirements of the present regulations.

2 Any chemical tanker, irrespective of the date of construction, which undergoes repairs, alterations, modifications and outfitting related thereto shall continue to comply with at least the requirements previously applicable to the ship. Such a ship, if constructed before 1 July 1986, shall, as a rule, comply with the requirements for a ship constructed on or after that date to at least the same extent as before undergoing such repairs, alterations, modifications or outfitting. Repairs, alterations and modifications of a major character, and outfitting related thereto, shall meet the requirements for a ship constructed on or after 1 July 1986 in so far as the Administration deems reasonable and practicable.

This gazette is also available free online at **www.gpwonline.co.za**

3 A ship, irrespective of the date of construction, which is converted to a chemical tanker shall be treated as a chemical tanker constructed on the date on which such conversion commenced.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 10

Requirements for chemical tankers

1 A chemical tanker shall comply with the requirements of the International Bulk Chemical Code and shall, in addition to the requirements of regulation I/8, I/9, and I/10, as applicable, be surveyed and certified as provided for in that Code.

2 A chemical tanker holding a certificate issued pursuant to the provisions of paragraph 1 shall be subject to the control established in regulation I/19. For this purpose such certificate shall be treated as a certificate issued under regulation I/12 or I/13.

This gazette is also available free online at **www.gpwonline.co.za**

Part C - Construction And Equipment Of Ships Carrying Liquefied Gases In Bulk

Regulation 11
Definitions

For the purpose of this part, unless expressly provided otherwise:

1 *International Gas Carrier Code* means the International Code for the Construction and Equipment of Ships Carrying Liquefied Gases in Bulk as adopted by the Maritime Safety Committee of the Organization by resolution MSC.5(48), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

2 *Gas carrier* means a cargo ship constructed or adapted and used for the carriage in bulk of any liquefied gas or other product listed in chapter 19 of the International Gas Carrier Code.

3 For the purpose of regulation 12, *ship constructed* means a ship the keel of which is laid or which is at a similar stage of construction.

4 *At a similar stage of construction* means the stage at which:

.1 construction identifiable with a specific ship begins; and

.2 assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less.

Regulation 12
Application to gas carriers

1 Unless expressly provided otherwise, this part applies to gas carriers constructed on or after 1 July 1986 including those of less than 500 gross tonnage. Such gas carriers shall comply with the requirements of this part in addition to any other applicable requirements of the present regulations.

2 Any gas carrier, irrespective of the date of construction, which undergoes repairs, alterations, modifications and outfitting related thereto shall continue to comply with at least the requirements previously applicable to the ship. Such a ship if constructed before 1 July 1986 shall, as a rule, comply with the requirements for a ship constructed on or after that date to at least the same extent as before undergoing such repairs, alterations, modifications or outfitting. Repairs, alterations and modifications of a major character, and outfitting related thereto, shall meet the requirements for a ship constructed on or after 1 July 1986 in so far as the Administration deems reasonable and practicable.

This gazette is also available free online at **www.gpwonline.co.za**

3 A ship, irrespective of the date of construction, which is converted to a gas carrier shall be treated as a gas carrier constructed on the date on which such conversion commenced.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 13

Requirements for gas carriers

1 A gas carrier shall comply with the requirements of the International Gas Carrier Code and shall, in addition to the requirements of regulation I/8, I/9 and I/10, as applicable, be surveyed and certified as provided for in that Code. For the purpose of this regulation, the requirements of the Code shall be treated as mandatory.

2 A gas carrier holding a certificate issued pursuant to the provisions of paragraph 1 shall be subject to the control established in regulation I/19. For this purpose such certificate shall be treated as a certificate issued under regulation I/12 or I/13.

This gazette is also available free online at **www.gpwonline.co.za**

Part D - Special Requirements For The Carriage Of Packaged Irradiated Nuclear Fuel, Plutonium And High-Level Radioactive Wastes On Board Ships

Regulation 14
Definitions

For the purpose of this part, unless expressly provided otherwise:

1 *INF Code* means the International Code for the Safe Carriage of Packaged Irradiated Nuclear Fuel, Plutonium and High-Level Radioactive Wastes on Board Ships, adopted by the Maritime Safety Committee of the Organization by resolution MSC.88(71), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

2 *INF cargo* means packaged irradiated nuclear fuel, plutonium and high-level radioactive wastes carried as cargo in accordance with class 7 of the IMDG Code.

3 *Irradiated nuclear fuel* means material containing uranium, thorium and/or plutonium isotopes which has been used to maintain a self-sustaining nuclear chain reaction.

4 *Plutonium* means the resultant mixture of isotopes of that material extracted from irradiated nuclear fuel from reprocessing.

5 *High-level radioactive wastes* means liquid wastes resulting from the operation of the first stage extraction system or the concentrated wastes from subsequent extraction stages, in a facility for reprocessing irradiated nuclear fuel, or solids into which such liquid wastes have been converted.

Regulation 15
Application to ships carrying INF cargo

1 Except as provided for in paragraph 2, this part shall apply to all ships regardless of the date of construction and size, including cargo ships of less than 500 gross tonnage, engaged in the carriage of INF cargo.

2 This part and the INF Code do not apply to warships, naval auxiliary or other vessels owned or operated by a Contracting Government and used, for the time being, only on government non-commercial service; however, each Administration shall ensure, by the adoption of appropriate measures not impairing operations or operational capabilities of such ships owned or operated by it, that such ships carrying INF cargo act in a manner consistent, so far as reasonable and practicable, with this part and the INF Code.

This gazette is also available free online at **www.gpwonline.co.za**

3 Nothing in this part or the INF Code shall prejudice the rights and duties of governments under international law and any action taken to enforce compliance shall be consistent with international law.

Regulation 16
Requirements for ships carrying INF cargo

1 A ship carrying INF cargo shall comply with the requirements of the INF Code in addition to any other applicable requirements of the present regulations and shall be surveyed and certified as provided for in that Code.

2 A ship holding a certificate issued pursuant to the provisions of paragraph 1 shall be subject to the control established in regulations I/19 and XI-1/4. For this purpose, such certificate shall be treated as a certificate issued under regulation I/12 or I/13.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter VIII

Nuclear ships

445

Contents

Chapter VIII Nuclear ships 443
Regulation 1 Application 443
Regulation 2 Application of other chapters 443
Regulation 3 Exemptions 443
Regulation 4 Approval of reactor installation 443
Regulation 5 Suitability of reactor installation for service on board ship 443
Regulation 6 Radiation safety 443
Regulation 7 Safety assessment 444
Regulation 8 Operating manual 444
Regulation 9 Surveys 444
Regulation 10 Certificates 444
Regulation 11 Special control 445
Regulation 12 Casualties 445

446

Chapter VIII - Nuclear ships

Regulation 1
Application

This chapter applies to all nuclear ships except ships of war.

Regulation 2
Application of other chapters

The regulations contained in the other chapters of the present Convention apply to nuclear ships except as modified by this chapter. [1]

Regulation 3
Exemptions

A nuclear ship shall not, in any circumstances, be exempted from compliance with any regulations of this Convention.

Regulation 4
Approval of reactor installation

The design, construction and standards of inspection and assembly of the reactor installation shall be subject to the approval and satisfaction of the Administration and shall take account of the limitations which will be imposed on surveys by the presence of radiation.

Regulation 5
Suitability of reactor installation for service on board ship

The reactor installation shall be designed having regard to the special conditions of service on board ship both in normal and exceptional circumstances of navigation.

Regulation 6
Radiation safety

The Administration shall take measures to ensure that there are no unreasonable radiation or other nuclear hazards, at sea or in port, to the crew, passengers or public, or to the waterways or food or water resources.

[1] Refer to the *Code of Safety for Nuclear Merchant Ships* (resolution A.491(XII)), which supplements the requirements of this chapter.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 7
Safety assessment

(a) A safety assessment shall be prepared to permit evaluation of the nuclear power plant and safety of the ship to ensure that there are no unreasonable radiation or other hazards, at sea or in port, to the crew, passengers or public, or to the waterways or food or water resources. The Administration, when satisfied, shall approve such safety assessment which shall always be kept up-to-date.

(b) The safety assessment shall be made available sufficiently in advance to the Contracting Governments of the countries which a nuclear ship intends to visit so that they may evaluate the safety of the ship.

Regulation 8
Operating manual

A fully detailed operating manual shall be prepared for the information and guidance of the operating personnel in their duties on all matters relating to the operation of the nuclear power plant and having an important bearing on safety. The Administration, when satisfied, shall approve such operating manual and a copy shall be kept on board the ship. The operating manual shall always be kept up to date.

Regulation 9
Surveys

Survey of nuclear ships shall include the applicable requirements of regulation 7 of chapter I, or of regulations 8, 9 and 10 of chapter I, except in so far as surveys are limited by the presence of radiation. In addition, the surveys shall include any special requirements of the safety assessment. They shall in all cases, notwithstanding the provisions of regulations 8 and 10 of chapter I, be carried out not less frequently than once a year.

Regulation 10
Certificates

(a) The provisions of paragraph (a) of regulation 12 of chapter I and of regulation 14 of chapter I shall not apply to nuclear ships.

(b) A certificate, called a Nuclear Passenger Ship Safety Certificate shall be issued after inspection and survey to a nuclear passenger ship which complies with the requirements of chapters II-1, II-2, III, IV and VIII, and any other relevant requirements of the present regulations.

(c) A certificate, called a Nuclear Cargo Ship Safety Certificate shall be issued after inspection and survey to a nuclear cargo ship which satisfies the requirements for

This gazette is also available free online at **www.gpwonline.co.za**

cargo ships on survey set out in regulation 10 of chapter I, and complies with the requirements of chapters II-1, II-2, III, IV and VIII and any other relevant requirements of the present regulations.

(d) Nuclear Passenger Ship Safety Certificates and Nuclear Cargo Ship Safety Certificates shall state: "That the ship, being a nuclear ship, complied with all requirements of chapter VIII of the Convention and conformed to the Safety Assessment approved for the ship".

(e) Nuclear Passenger Ship Safety Certificates and Nuclear Cargo Ship Safety Certificates shall be valid for a period of not more than 12 months.

(f) Nuclear Passenger Ship Safety Certificates and Nuclear Cargo Ship Safety Certificates shall be issued either by the Administration or by any person or organization duly authorized by it. In every case, that Administration assumes full responsibility for the certificate.

Regulation 11
Special control [2]

In addition to the control established by regulation 19 of chapter I, nuclear ships shall be subject to special control before entering the ports and in the ports of Contracting Governments, directed towards verifying that there is on board a valid Nuclear Ship Safety Certificate and that there are no unreasonable radiation or other hazards at sea or in port, to the crew, passengers or public, or to the waterways or food or water resources.

Regulation 12
Casualties

In the event of any accident likely to lead to an environmental hazard the master of a nuclear ship shall immediately inform the Administration. The master shall also immediately inform the competent governmental authority of the country in whose waters the ship may be, or whose waters the ship approaches in a damaged condition.

[2] Refer to the IMO/IAEA *Safety Recommendations on the Use of Ports by Nuclear Merchant Ships*.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter IX

Management for the safe operation of ships

450

Contents

Chapter IX Management for the safe operation of ships 448

Regulation 1 Definitions 448
Regulation 2 Application 448
Regulation 3 Safety management requirements 449
Regulation 4 Certification 449
Regulation 5 Maintenance of conditions 450
Regulation 6 Verification and control 450

This gazette is also available free online at **www.gpwonline.co.za**

Chapter IX - Management for the safe operation of ships

Regulation 1
Definitions

For the purpose of this chapter, unless expressly provided otherwise:

1 *International Safety Management (ISM) Code* means the International Management Code for the Safe Operation of Ships and for Pollution Prevention adopted by the Organization by resolution A.741(18), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

2 *Company* means the owner of the ship or any other organization or person such as the manager, or the bareboat charterer, who has assumed the responsibility for operation of the ship from the owner of the ship and who on assuming such responsibility has agreed to take over all the duties and responsibilities imposed by the International Safety Management Code.

3 *Oil tanker* means an oil tanker as defined in regulation II-1/2.22.

4 *Chemical tanker* means a chemical tanker as defined in regulation VII/8.2.

5 *Gas carrier* means a gas carrier as defined in regulation VII/11.2.

6 *Bulk carrier* means a ship which is constructed generally with single deck, top-side tanks and hopper side tanks in cargo spaces, and is intended primarily to carry dry cargo in bulk, and includes such types as ore carriers and combination carriers. [1]

7 *Mobile offshore drilling unit (MODU)* means a vessel capable of engaging in drilling operations for the exploration for or exploitation of resources beneath the sea-bed such as liquid or gaseous hydrocarbons, sulphur or salt.

8 *High-speed craft* means a craft as defined in regulation X/1.

Regulation 2
Application

1 This chapter applies to ships, regardless of the date of construction, as follows:

.1 passenger ships including passenger high-speed craft, not later than 1 July 1998;

[1] Refer to *Interpretation of the provisions of SOLAS chapter XII on additional safety measures for bulk carriers* (resolution MSC.79(70)) and *Clarification of the term "bulk carrier" and guidance for application of regulations in SOLAS to ships which occasionally carry dry cargoes in bulk and are not determined as bulk carriers in accordance with regulation XII/1.1 and chapter II-1* (resolution MSC.277(85)).

This gazette is also available free online at **www.gpwonline.co.za**

.2 oil tankers, chemical tankers, gas carriers, bulk carriers and cargo high-speed craft of 500 gross tonnage and upwards, not later than 1 July 1998; and

.3 other cargo ships and mobile offshore drilling units of 500 gross tonnage and upwards, not later than 1 July 2002. [2]

2 This chapter does not apply to government-operated ships used for non-commercial purposes.

Regulation 3
Safety management requirements [3]

1 The company and the ship shall comply with the requirements of the International Safety Management Code. For the purpose of this regulation, the requirements of the Code shall be treated as mandatory.

2 The ship shall be operated by a company holding a Document of Compliance referred to in regulation 4.

Regulation 4
Certification [4]

1 A Document of Compliance shall be issued to every company which complies with the requirements of the International Safety Management Code. This document shall be issued by the Administration, by an organization recognized by the Administration [5], or at the request of the Administration by another Contracting Government.

2 A copy of the Document of Compliance shall be kept on board the ship in order that the master can produce it on request for verification.

3 A Certificate, called a Safety Management Certificate, shall be issued to every ship by the Administration or an organization recognized by the Administration. The Administration or organization recognized by it shall, before issuing the Safety Management Certificate, verify that the company and its shipboard management operate in accordance with the approved safety management system.

[2] The Maritime Safety Committee, at its sixty-sixth session, decided that mobile offshore drilling units not propelled by mechanical means need not comply with the requirements of the chapter.

[3] Refer to *Revised guidelines for the operational implementation of the ISM Code by Companies (MSC-MEPC.7/Circ.8); Implementation of the ISM Code – Guidance to companies operating muti-flagged fleets and supplementary guidelines to Administrations* (MSC/Circ.762).

[4] Refer to *Unified interpretation of the date of completion of the survey and verification on which the certificates are based* (MSC-MEPC.5/Circ.3) and *Unified interpretation on the expiration date of statutory certificates* (MSC-MEPC.5/Circ.13).

[5] Refer to the *Code for Recognized Organizations (RO Code)* (MSC.349(92) and MEPC.237(65)); *Communication of information on the authorization of recognized organizations (ROs)* (MSC/Circ.1010-MEPC/Circ.382) and the information collected via the Global Integrated Shipping Information System (GISIS).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 5
Maintenance of conditions

The safety management system shall be maintained in accordance with the provisions of the International Safety Management Code.

Regulation 6
Verification and control [6]

1 The Administration, another Contracting Government at the request of the Administration or an organization recognized by the Administration shall periodically verify the proper functioning of the ship's safety management system.

2 A ship required to hold a certificate issued pursuant to the provisions of regulation 4.3 shall be subject to control in accordance with the provisions of regulation XI/4. For this purpose such certificate shall be treated as a certificate issued under regulation I/12 or I/13.

[6] Refer to 2023 *Guidelines on implementation of the International Safety Management (ISM) Code by Administrations* (resolution A.1188(33)), *Procedures concerning observed ISM Code major non-conformities* (MSC/Circ.1059 - MEPC/Circ.401) and *IMO requirements on carriage of publications on board ships* (MSC-MEPC.2/Circ.2).

This gazette is also available free online at **www.gpwonline.co.za**

Chapter X

Special measures for
high-speed craft

455

Contents

Chapter X Special measures for high-speed craft 453

Regulation 1 Definitions 453

Regulation 2 Application 453

Regulation 3 Requirements for high-speed craft 454

This gazette is also available free online at **www.gpwonline.co.za**

Chapter X - Special measures for high-speed craft

Regulation 1
Definitions

1 *High-Speed Craft Code, 1994 (1994 HSC Code)* means the International Code of Safety for High-Speed Craft adopted by the Maritime Safety Committee of the Organization by resolution MSC.36(63), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I.

2 *High-Speed Craft Code, 2000 (2000 HSC Code)* means the International Code of Safety for High-Speed Craft, 2000, adopted by the Maritime Safety Committee of the Organization by resolution MSC.97(73), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I.

3 *High-speed craft* is a craft capable of a maximum speed, in metres per second (m/s), equal to or exceeding:

$$3.7 \times \nabla^{0.1667}$$

where: ∇ = volume of displacement corresponding to the design waterline (m^3),

excluding craft the hull of which is supported completely clear above the water surface in non-displacement mode by aerodynamic forces generated by ground effect.

4 *Craft constructed* means a craft the keel of which is laid or which is at a similar stage of construction.

5 *Similar stage of construction* means a stage at which:

.1 construction identifiable with a specific craft begins; and

.2 assembly of that craft has commenced comprising at least 50 tonnes or 3% of the estimated mass of all structural material, whichever is less.

Regulation 2
Application

3 This chapter applies to high-speed craft constructed on or after 1 January 1996, as follows:

.4 passenger craft which do not proceed in the course of their voyage more than 4 h at operational speed from a place of refuge when fully laden; and

.5 cargo craft of 500 gross tonnage and upwards which do not proceed in the course of their voyage more than 8 h at operational speed from a place of refuge when fully laden.

This gazette is also available free online at **www.gpwonline.co.za**

4 Any craft, irrespective of the date of construction, which undergoes repairs, alterations, modifications and outfitting related thereto shall continue to comply with at least the requirements previously applicable to the craft. Such a craft, if constructed before 1 July 2002, shall, as a rule, comply with the requirements for a craft constructed on or after that date to at least the same extent as it did before undergoing such repairs, alterations, modifications or outfitting. Repairs, alterations and modifications of a major character, and outfitting related thereto, shall meet the requirements for a craft constructed on or after 1 July 2002 in so far as the Administration deems reasonable and practicable.

Regulation 3

Requirements for high-speed craft

1 Notwithstanding the provisions of chapters I to IV and regulations V/18, 19 and 20:

.1 a high-speed craft constructed on or after 1 January 1996 but before 1 July 2002 which complies with the requirements of the High-Speed Craft Code, 1994 in its entirety and which has been surveyed and certified as provided in that Code shall be deemed to have complied with the requirements of chapters I to IV and regulations V/18, 19 and 20. For the purpose of this regulation, the requirements of that Code shall be treated as mandatory;

.2 a high-speed craft constructed on or after 1 July 2002 which complies with the requirements of the High-Speed Craft Code, 2000 in its entirety and which has been surveyed and certified as provided in that Code shall be deemed to have complied with the requirements of chapters I to IV and regulations V/18, 19 and 20.

2 The certificates and permits issued under the High-Speed Craft Code shall have the same force and the same recognition as the certificates issued under chapter I.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XI-1

Special measures to enhance
maritime safety

459

Contents

Chapter XI-2 Special measures to enhance maritime safety 457

Regulation 1 Authorization of recognized organizations 457
Regulation 2 Enhanced surveys 457
Regulation 2-1 Harmonization of survey periods of cargo ships not subject to the ESP Code 457
Regulation 3 Ship identification number 458
Regulation 3-1 Company and registered owner identification number 459
Regulation 4 Port State control on operational requirements 459
Regulation 5 Continuous Synopsis Record 460
Regulation 6 Additional requirements for the investigation of marine casualties and incidents 463
Regulation 7 Atmosphere testing instrument for enclosed spaces 463

460

Chapter XI-2 - Special measures to enhance maritime safety

Regulation 1

Authorization of recognized organizations [1]

The Administration shall authorize organizations, referred to in regulation I/6, including classification societies, in accordance with the provisions of the present Convention and with the Code for Recognized Organizations (RO Code), consisting of part 1 and part 2 (the provisions of which shall be treated as mandatory) and part 3 (the provisions of which shall be treated as recommendatory), as adopted by the Organization by resolution MSC.349(92), as may be amended by the Organization, provided that:

(a) amendments to part 1 and part 2 of the RO Code are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention;

(b) amendments to part 3 of the RO Code are adopted by the Maritime Safety Committee in accordance with its Rules of Procedure; and

(c) any amendments adopted by the Maritime Safety Committee and the Marine Environment Protection Committee are identical and come into force or take effect at the same time, as appropriate.

Regulation 2

Enhanced surveys [2]

Bulk carriers as defined in regulation IX/1.6 and oil tankers as defined in regulation II-1/2.22 shall be subject to an enhanced programme of inspections in accordance with the International Code on the Enhanced Programme of Inspections during Surveys of Bulk Carriers and Oil Tankers, 2011 (2011 ESP Code), adopted by the Assembly of the Organization by resolution A.1049(27), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

Regulation 2-1

Harmonization of survey periods of cargo ships not subject to the ESP Code

For cargo ships not subject to enhanced surveys under regulation XI-1/2, notwithstanding any other provisions, the intermediate and renewal surveys included

[1] Refer to IMO Instruments Implementation Code (III Code) (resolution A.1070(28)); Model agreement for the authorization of recognized organizations acting on behalf of the Administration (MSC-MEPC.5/Circ.16, as may be amended); Communication of information on the authorization of recognized organizations (ROs) (MSC/Circ.1010-MEPC/Circ.382); Guidelines for Administrations to ensure the adequacy of transfer of class-related matters between Recognized Organizations (ROs) (MSC-MEPC.5/Circ.2); and Notification and circulation through the Global Integrated Shipping Information System (GISIS) (resolution A.1074(28)).

[2] Refer to *Guidance for planning the enhanced programme of inspections during surveys of bulk carriers and oil tankers* (MSC/Circ.655) and *Guidelines on the means of access to structures for inspection and maintenance of oil tankers and bulk carriers* (MSC/Circ.686/Rev.1).

This gazette is also available free online at **www.gpwonline.co.za**

in regulation I/10 may be carried out and completed over the corresponding periods as specified in the 2011 ESP Code, as may be amended, and the guidelines developed by the Organization, [3] as appropriate.

Regulation 3

Ship identification number

(Paragraphs 4 and 5 apply to all ships to which this regulation applies. For ships constructed before 1 July 2004, the requirements of paragraphs 4 and 5 shall be complied with not later than the first scheduled dry-docking of the ship after 1 July 2004)

1 This regulation applies to all passenger ships of 100 gross tonnage and upwards and to all cargo ships of 300 gross tonnage and upwards.

2 Every ship shall be provided with an identification number which conforms to the IMO ship identification number scheme adopted by the Organization. [4]

3 The ship's identification number shall be inserted [5] on the certificates and certified copies thereof issued under regulation I/12 or regulation I/13.

4 The ship's identification number shall be permanently marked:

.1 in a visible place either on the stern of the ship or on either side of the hull, amidships port and starboard, above the deepest assigned load line or either side of the superstructure, port and starboard or on the front of the superstructure or, in the case of passenger ships, on a horizontal surface visible from the air; and

.2 in an easily accessible place either on one of the end transverse bulkheads of the machinery spaces, as defined in regulation II-2/3.30, or on one of the hatchways or, in the case of tankers, in the pump-room or, in the case of ships with ro-ro spaces, as defined in regulation II-2/3.41, on one of the end transverse bulkheads of the ro-ro spaces.

5.1 The permanent marking shall be plainly visible, clear of any other markings on the hull and shall be painted in a contrasting colour.

5.2 The permanent marking referred to in paragraph 4.1 shall be not less than 200 mm in height. The permanent marking referred to in paragraph 4.2 shall not be less than 100 mm in height. The width of the marks shall be proportionate to the height.

[3] Refer to the *Survey guidelines under the Harmonized System of Survey and Certification (HSSC), 2021* (resolution A.1156(32), as may be amended.

[4] Refer to the *IMO ship identification number scheme* (resolution A.1117(30)) and *Implementation of resolution A.1078(28) - IMO ship identification number scheme* (Circular letter No.1886/Rev.6), as may be amended.

[5] Refer to *Marking the ship's plans, manuals and other documents with the IMO ship identification number* (MSC/Circ.1142-MEPC/Circ.425).

This gazette is also available free online at **www.gpwonline.co.za**

5.3 The permanent marking may be made by raised lettering or by cutting it in or by centre-punching it or by any other equivalent method of marking the ship identification number which ensures that the marking is not easily expunged.

5.4 On ships constructed of material other than steel or metal, the Administration shall approve the method of marking the ship identification number.

Regulation 3-1
Company and registered owner identification number

1 This regulation applies to Companies and registered owners of ships to which chapter I applies.

2 For the purpose of this regulation, registered owner shall be as specified by the Administration and Company as defined in regulation IX/I.

3 Every Company and registered owner shall be provided with an identification number which conforms to the IMO Unique Company and Registered Owner Identification Number Scheme adopted by the Organization. [6]

4 The Company identification number shall be inserted on the certificates and certified copies thereof issued under regulation IX/4 and section A/19.2 or A/19.4 of the ISPS Code.

5 This regulation shall take effect when the certificates referred to in paragraph 4 are issued or renewed on or after 1 January 2009.

Regulation 4
Port State control on operational requirements [7]

1 A ship when in a port of another Contracting Government is subject to control by officers duly authorized by such Government concerning operational requirements in respect of the safety of ships, when there are clear grounds for believing that the master or crew are not familiar with essential shipboard procedures relating to the safety of ships.

2 In the circumstances defined in paragraph 1 of this regulation, the Contracting Government carrying out the control shall take such steps as will ensure that the ship shall not sail until the situation has been brought to order in accordance with the requirements of the present Convention.

3 Procedures relating to the port State control prescribed in regulation I/19 shall apply to this regulation.

[6] Refer to *Adoption of the IMO unique company and registered owner identification number scheme* (resolution MSC.160(78)) and *Implementation of IMO unique company and registered owner identification number scheme (resolution MSC.160(78))* (Circular Letter No.2554/Rev.3), as may be amended.

[7] Refer to *Procedures for port State control, 2019* (resolution A.1138(31)).

This gazette is also available free online at **www.gpwonline.co.za**

4 Nothing in the present regulation shall be construed to limit the rights and obligations of a Contracting Government carrying out control over operational requirements specifically provided for in the regulations.

Regulation 5

Continuous Synopsis Record

1 Every ship to which chapter I applies shall be issued with a Continuous Synopsis Record.

2.1 The Continuous Synopsis Record is intended to provide an on-board record of the history of the ship with respect to the information recorded therein.

2.2 For ships constructed before 1 July 2004, the Continuous Synopsis Record shall, at least, provide the history of the ship as from 1 July 2004.

3 The Continuous Synopsis Record shall be issued by the Administration to each ship that is entitled to fly its flag and it shall contain, at least, the following information (the Continuous Synopsis Record shall contain the information in paragraphs 3.7 and 3.10 when it is issued or updated on or after 1 January 2009):

.1 the name of the State whose flag the ship is entitled to fly;

.2 the date on which the ship was registered with that State;

.3 the ship's identification number in accordance with regulation 3;

.4 the name of the ship;

.5 the port at which the ship is registered;

.6 the name of the registered owner(s) and their registered address(es);

.7 the registered owner identification number;

.8 the name of the registered bareboat charterer(s) and their registered address(es), if applicable;

.9 the name of the Company, as defined in regulation IX/1, its registered address and the address(es) from where it carries out the safety management activities;

.10 the Company identification number;

.11 the name of all classification society(ies) with which the ship is classed;

.12 the name of the Administration or of the Contracting Government or of the recognized organization which has issued the Document of Compliance (or the Interim Document of Compliance), specified in the ISM Code as defined in regulation IX/1, to the Company operating the ship and the name of the body which has carried out the audit on the basis of which the Document was issued, if other than that issuing the Document;

.13 the name of the Administration or of the Contracting Government or of the recognized organization that has issued the Safety Management Certificate

This gazette is also available free online at **www.gpwonline.co.za**

(or the Interim Safety Management Certificate), specified in the ISM Code as defined in regulation IX/1, to the ship and the name of the body which has carried out the audit on the basis of which the Certificate was issued, if other than that issuing the Certificate;

.14 the name of the Administration or of the Contracting Government or of the recognized security organization that has issued the International Ship Security Certificate (or an Interim International Ship Security Certificate), specified in part A of the ISPS Code as defined in regulation XI-2/1, to the ship and the name of the body which has carried out the verification on the basis of which the Certificate was issued, if other than that issuing the Certificate; and

.15 the date on which the ship ceased to be registered with that State.

4.1 Any changes relating to the entries referred to in paragraphs 3.4 to 3.12 shall be recorded in the Continuous Synopsis Record so as to provide updated and current information together with the history of the changes.

4.2 In case of any changes relating to the entries referred to in paragraph 4.1, the Administration shall issue, as soon as is practically possible but not later than three months from the date of the change, to the ships entitled to fly its flag either a revised and updated version of the Continuous Synopsis Record or appropriate amendments thereto.

4.3 In case of any changes relating to the entries referred to in paragraph 4.1, the Administration, pending the issue of a revised and updated version of the Continuous Synopsis Record, shall authorize and require either the Company as defined in regulation IX/1 or the master of the ship to amend the Continuous Synopsis Record to reflect the changes. In such cases, after the Continuous Synopsis Record has been amended, the Company shall, without delay, inform the Administration accordingly.

5.1 The Continuous Synopsis Record shall be in English, French or Spanish language. Additionally, a translation of the Continuous Synopsis Record into the official language or languages of the Administration may be provided.

5.2 The Continuous Synopsis Record shall be in the format developed by the Organization and shall be maintained in accordance with guidelines developed by the Organization. [8] Any previous entries in the Continuous Synopsis Record shall not be modified, deleted or, in any way, erased or defaced.

6 Whenever a ship is transferred to the flag of another State or the ship is sold to another owner (or is taken over by another bareboat charterer) or another Company assumes the responsibility for the operation of the ship, the Continuous Synopsis Record shall be left on board.

7 When a ship is to be transferred to the flag of another State, the Company shall notify the Administration of the name of the State under whose flag the ship is to be

[8] Refer to *Format and guidelines for the maintenance of the Continuous Synopsis Record (CSR)* (resolution A.959(23), as amended by MSC.198(80)) and *Guidance to port State control officers on the non-security related elements of the 2002 SOLAS amendments* (MSC/Circ.1113).

This gazette is also available free online at **www.gpwonline.co.za**

transferred so as to enable the Administration to forward to that State a copy of the Continuous Synopsis Record covering the period during which the ship was under its jurisdiction.

8 When a ship is transferred to the flag of another State the Government of which is a Contracting Government, the Contracting Government of the State whose flag the ship was flying hitherto shall transmit to the Administration, as soon as possible after the transfer takes place a copy of the relevant Continuous Synopsis Record covering the period during which the ship was under their jurisdiction together with any Continuous Synopsis Records previously issued to the ship by other States.

9 When a ship is transferred to the flag of another State, the Administration shall append the previous Continuous Synopsis Records to the Continuous Synopsis Record the Administration will issue to the ship so to provide the continuous history record intended by this regulation.

10 The Continuous Synopsis Record shall be kept on board the ship and shall be available for inspection at all times.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 6

Additional requirements for the investigation of marine casualties and incidents [9]

Taking into account regulation I/21, each Administration shall conduct investigations of marine casualties and incidents, in accordance with the provisions of the present Convention, as supplemented by the provisions of the Code of the International Standards and Recommended Practices for a Safety Investigation into a Marine Casualty or Marine Incident (Casualty Investigation Code) adopted by resolution MSC.255(84), and:

.1 the provisions of parts I and II of the Casualty Investigation Code shall be fully complied with;

.2 the related guidance and explanatory material contained in part III of the Casualty Investigation Code should be taken into account to the greatest possible extent in order to achieve a more uniform implementation of the Casualty Investigation Code;

.3 amendments to parts I and II of the Casualty Investigation Code shall be adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I; and

.4 part III of the Casualty Investigation Code shall be amended by the Maritime Safety Committee in accordance with its rules of procedure.

Regulation 7

Atmosphere testing instrument for enclosed spaces

Every ship to which chapter I applies shall carry an appropriate portable atmosphere testing instrument or instruments [10]. As a minimum, these shall be capable of measuring concentrations of oxygen, flammable gases or vapours, hydrogen sulphide

[9] Refer to the following resolutions:

IMO Instruments Implementation Code (III Code) (resolution A.1070(28));

Guidelines to assist investigators in the implementation of the Casualty Investigation Code (resolution MSC.255(84)) (resolution A.1075(28));

Recommendation on the conclusion of agreements and arrangements between States on the question of access and employment of foreign seaborne salvage equipment in territorial waters (resolution A.203(VII));

Guidelines on fair treatment of seafarers in the event of a maritime accident (resolution A.987(24));

Promotion as widely as possible of the application of the 2006 guidelines on fair treatment of seafarers in the event of a maritime accident (resolution A.1056(27)); and

Notification and circulation through the Global Integrated Shipping Information System (GISIS) (resolution A.1074(28)).

Refer also to:

Revised harmonized reporting procedures – Reports required under SOLAS regulations I/21 and XI-1/6, and MARPOL, articles 8 and 12 (MSC-MEPC.3/Circ.4/Rev.1);

Provision of preliminary information on serious and very serious casualties by rescue coordination centres (MSC/Circ.802-MEPC/Circ.332);

Guidance on near-miss reporting (MSC-MEPC.7/Circ.7); and

Reporting near misses (MSC.Circ.1015).

[10] Refer to the *Guidelines to facilitate the selection of portable atmosphere testing instruments for enclosed spaces as required by SOLAS regulation XI-1/7* (MSC.1/Circ.1477).

This gazette is also available free online at **www.gpwonline.co.za**

and carbon monoxide prior to entry into enclosed spaces [11]. Instruments carried under other requirements may satisfy this regulation. Suitable means shall be provided for the calibration of all such instruments.

[11] Refer to the *Revised recommendations for entering enclosed spaces aboard ships* (resolution A.1050(27)).

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XI-2

Special measures to enhance
maritime security

469

Contents

Chapter XI-2 Special measures to enhance maritime security 467

Regulation 1 Definitions 467
Regulation 2 Application.....468
Regulation 3 Obligations of Contracting Governments with respect to security.....469
Regulation 4 Requirements for Companies and ships.....469
Regulation 5 Specific responsibility of Companies 470
Regulation 6 Ship security alert system 470
Regulation 7 Threats to ships.....471
Regulation 8 Master's discretion for ship safety and security 471
Regulation 9 Control and compliance measures 472
Regulation 10 Requirements for port facilities 474
Regulation 11 Alternative security agreements 475
Regulation 12 Equivalent security arrangements 475
Regulation 13 Communication of information.....476

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XI-2 - Special measures to enhance maritime security

Regulation 1
Definitions

1 For the purpose of this chapter, unless expressly provided otherwise:

.1 *Bulk carrier* means a bulk carrier as defined in regulation IX/1.6.

.2 *Chemical tanker* means a chemical tanker as defined in regulation VII/8.2.

.3 *Gas carrier* means a gas carrier as defined in regulation VII/11.2.

.4 *High-speed craft* means a craft as defined in regulation X/1.3

.5 *Mobile offshore drilling unit* means a mechanically propelled mobile offshore drilling unit, as defined in regulation IX/1 not on location.

.6 *Oil tanker* means an oil tanker as defined in regulation II-1/2.22.

.7 *Company* means a Company as defined in regulation IX/1.2.

.8 *Ship/port interface* means the interactions that occur when a ship is directly and immediately affected by actions involving the movement of persons, goods or the provisions of port services to or from the ship.

.9 *Port facility* is a location, as determined by the Contracting Government or by the Designated Authority, where the ship/port interface takes place. This includes areas such as anchorages, waiting berths and approaches from seaward, as appropriate.

.10 *Ship to ship activity* means any activity not related to a port facility that involves the transfer of goods or persons from one ship to another.

.11 *Designated Authority* means the organization(s) or the administration(s) identified, within the Contracting Government, as responsible for ensuring the implementation of the provisions of this chapter pertaining to port facility security and ship/port interface, from the point of view of the port facility.

.12 *International Ship and Port Facility Security (ISPS) Code* means the International Code for the Security of Ships and of Port Facilities consisting of part A (the provisions of which shall be treated as mandatory) and part B (the provisions of which shall be treated as recommendatory), as adopted, on 12 December 2002, by resolution 2 of the Conference of Contracting Governments to the International Convention for the Safety of Life at Sea, 1974 as may be amended by the Organization, provided that:

.1 amendments to part A of the Code are adopted, brought into force and take effect in accordance with article VIII of the present Convention concerning the amendment procedures applicable to the Annex other than chapter I; and

.2 amendments to part B of the Code are adopted by the Maritime Safety Committee in accordance with its Rules of Procedure.

.13 *Security incident* means any suspicious act or circumstance threatening the security of a ship, including a mobile offshore drilling unit and a high-speed

This gazette is also available free online at **www.gpwonline.co.za**

craft, or of a port facility or of any ship/port interface or any ship to ship activity.

.14 *Security level* means the qualification of the degree of risk that a security incident will be attempted or will occur.

.15 *Declaration of Security* means an agreement reached between a ship and either a port facility or another ship with which it interfaces, specifying the security measures each will implement.

.16 *Recognized security organization* means an organization with appropriate expertise in security matters and with appropriate knowledge of ship and port operations authorized to carry out an assessment, or a verification, or an approval or a certification activity, required by this chapter or by part A of the ISPS Code.

2 The term "*ship"*, when used in regulations 3 to 13, includes mobile offshore drilling units and high-speed craft.

3 The term "*all ships"*, when used in this chapter, means any ship to which this chapter applies.

4 The term "*Contracting Government"*, when used in regulations 3, 4, 7, 10, 11, 12 and 13 includes a reference to the Designated Authority.

Regulation 2
Application

1 This chapter applies to:

.1 the following types of ships engaged on international voyages:

.1 passenger ships, including high-speed passenger craft;

.2 cargo ships, including high-speed craft, of 500 gross tonnage and upwards; and

.3 mobile offshore drilling units; and

.2 port facilities serving such ships engaged on international voyages.

2 Notwithstanding the provisions of paragraph 1.2, Contracting Governments shall decide the extent of application of this chapter and of the relevant sections of part A of the ISPS Code to those port facilities within their territory which, although used primarily by ships not engaged on international voyages, are required, occasionally, to serve ships arriving or departing on an international voyage.

2.1 Contracting Governments shall base their decisions, under paragraph 2, on a port facility security assessment carried out in accordance with the provisions of part A of the ISPS Code.

This gazette is also available free online at **www.gpwonline.co.za**

2.2 Any decision which a Contracting Government makes, under paragraph 2, shall not compromise the level of security intended to be achieved by this chapter or by part A of the ISPS Code.

3 This chapter does not apply to warships, naval auxiliaries or other ships owned or operated by a Contracting Government and used only on government non-commercial service.

4 Nothing in this chapter shall prejudice the rights or obligations of States under international law.

Regulation 3
Obligations of Contracting Governments with respect to security

1 Administrations shall set security levels and ensure the provision of security level information to ships entitled to fly their flag. When changes in security level occur, security-level information shall be updated as the circumstance dictates.

2 Contracting Governments shall set security levels and ensure the provision of security-level information to port facilities within their territory, and to ships prior to entering a port or whilst in a port within their territory. When changes in security level occur, security-level information shall be updated as the circumstance dictates.

Regulation 4
Requirements for Companies and ships

5 Companies shall comply with the relevant requirements of this chapter and of part A of the ISPS Code, taking into account the guidance given in part B of the ISPS Code.

6 Ships shall comply with the relevant requirements of this chapter and of part A of the ISPS Code, taking into account the guidance given in part B of the ISPS Code, and such compliance shall be verified and certified as provided for in part A of the ISPS Code.

7 Prior to entering a port or whilst in a port within the territory of a Contracting Government, a ship shall comply with the requirements for the security level set by that Contracting Government, if such security level is higher than the security level set by the Administration for that ship.

8 Ships shall respond without undue delay to any change to a higher security level.

9 Where a ship is not in compliance with the requirements of this chapter or of part A of the ISPS Code, or cannot comply with the requirements of the security level set by the Administration or by another Contracting Government and applicable to that ship, then the ship shall notify the appropriate competent authority prior to conducting any ship/port interface or prior to entry into port, whichever occurs earlier.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 5
Specific responsibility of Companies

The Company shall ensure that the master has available on board, at all times, information through which officers duly authorized by a Contracting Government can establish:

.1 who is responsible for appointing the members of the crew or other persons currently employed or engaged on board the ship in any capacity on the business of that ship;

.2 who is responsible for deciding the employment of the ship; and

.3 in cases where the ship is employed under the terms of charter party(ies), who are the parties to such charter party(ies).

Regulation 6
Ship security alert system [1]

1 All ships shall be provided with a ship security alert system, as follows:

.1 ships constructed on or after 1 July 2004;

.2 passenger ships, including high-speed passenger craft, constructed before 1 July 2004, not later than the first survey of the radio installation after 1 July 2004;

.3 oil tankers, chemical tankers, gas carriers, bulk carriers and cargo high-speed craft, of 500 gross tonnage and upwards constructed before 1 July 2004, not later than the first survey of the radio installation after 1 July 2004; and

.4 other cargo ships of 500 gross tonnage and upward and mobile offshore drilling units constructed before 1 July 2004, not later than the first survey of the radio installation after 1 July 2006.

2 The ship security alert system, when activated, shall:

.1 initiate and transmit a ship-to-shore security alert to a competent authority designated by the Administration, which in these circumstances may include the Company, identifying the ship, its location and indicating that the security of the ship is under threat or it has been compromised;

.2 not send the ship security alert to any other ships;

.3 not raise any alarm on board the ship; and

.4 continue the ship security alert until deactivated and/or reset.

3 The ship security alert system shall:

[1] Refer to *Performance standards for a ship security alert system* (resolution MSC.136(76)) and *Revised performance standards for ship security alert systems* (resolution MSC.147(77)).

This gazette is also available free online at **www.gpwonline.co.za**

.1 be capable of being activated from the navigation bridge and in at least one other location; and

.2 conform to performance standards not inferior to those adopted by the Organization.

4 The ship security alert system activation points shall be designed so as to prevent the inadvertent initiation of the ship security alert.

5 The requirement for a ship security alert system may be complied with by using the radio installation fitted for compliance with the requirements of chapter IV, provided all requirements of this regulation are complied with.

6 When an Administration receives notification of a ship security alert, that Administration shall immediately notify the State(s) in the vicinity of which the ship is presently operating.

7 When a Contracting Government receives notification of a ship security alert from a ship which is not entitled to fly its flag, that Contracting Government shall immediately notify the relevant Administration and, if appropriate, the State(s) in the vicinity of which the ship is presently operating.

Regulation 7
Threats to ships

1 Contracting Governments shall set security levels and ensure the provision of security-level information to ships operating in their territorial sea or having communicated an intention to enter their territorial sea.

2 Contracting Governments shall provide a point of contact through which such ships can request advice or assistance and to which such ships can report any security concerns about other ships, movements or communications.

3 Where a risk of attack has been identified, the Contracting Government concerned shall advise the ships concerned and their Administrations of:

.1 the current security level;

.2 any security measures that should be put in place by the ships concerned to protect themselves from attack, in accordance with the provisions of part A of the ISPS Code; and

.3 security measures that the coastal State has decided to put in place, as appropriate.

Regulation 8
Master's discretion for ship safety and security

1 The master shall not be constrained by the Company, the charterer or any other person from taking or executing any decision which, in the professional judgement of

This gazette is also available free online at **www.gpwonline.co.za**

CONTINUES ON PAGE 642 OF BOOK 6

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**



Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 6 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845

9 771682 584003 55299

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

the master, is necessary to maintain the safety and security of the ship. This includes denial of access to persons (except those identified as duly authorized by a Contracting Government) or their effects and refusal to load cargo, including containers or other closed cargo transport units.

2 If, in the professional judgement of the master, a conflict between any safety and security requirements applicable to the ship arises during its operations, the master shall give effect to those requirements necessary to maintain the safety of the ship. In such cases, the master may implement temporary security measures and shall forthwith inform the Administration and, if appropriate, the Contracting Government in whose port the ship is operating or intends to enter. Any such temporary security measures under this regulation shall, to the highest possible degree, be commensurate with the prevailing security level. When such cases are identified, the Administration shall ensure that such conflicts are resolved and that the possibility of recurrence is minimized.

Regulation 9
Control and compliance measures

1 Control of ships in port

1.1 For the purpose of this chapter, every ship to which this chapter applies is subject to control when in a port of another Contracting Government by officers duly authorized by that Government, who may be the same as those carrying out the functions of regulation I/19. Such control shall be limited to verifying that there is onboard a valid International Ship Security Certificate or a valid Interim International Ship Security Certificate issued under the provisions of part A of the ISPS Code ("Certificate"), which if valid shall be accepted, unless there are clear grounds for believing that the ship is not in compliance with the requirements of this chapter or part A of the ISPS Code.

1.2 When there are such clear grounds, or where no valid Certificate is produced when required, the officers duly authorized by the Contracting Government shall impose any one or more control measures in relation to that ship as provided in paragraph 1.3. Any such measures imposed must be proportionate, taking into account the guidance given in part B of the ISPS Code.

1.3 Such control measures are as follows: inspection of the ship, delaying the ship, detention of the ship, restriction of operations, including movement within the port, or expulsion of the ship from port. Such control measures may additionally or alternatively include other lesser administrative or corrective measures.

2 Ships intending to enter a port of another Contracting Government

2.1 For the purpose of this chapter, a Contracting Government may require that ships intending to enter its ports provide the following information to officers duly authorized by that Government to ensure compliance with this chapter prior to entry into port with the aim of avoiding the need to impose control measures or steps:

This gazette is also available free online at **www.gpwonline.co.za**

.1 that the ship possesses a valid Certificate and the name of its issuing authority;

.2 the security level at which the ship is currently operating;

.3 the security level at which the ship operated in any previous port where it has conducted a ship/port interface within the timeframe specified in paragraph 2.3;

.4 any special or additional security measures that were taken by the ship in any previous port where it has conducted a ship/port interface within the timeframe specified in paragraph 2.3;

.5 that the appropriate ship security procedures were maintained during any ship to ship activity within the timeframe specified in paragraph 2.3; or

.6 other practical security related information (but not details of the ship security plan), taking into account the guidance given in part B of the ISPS Code.

If requested by the Contracting Government, the ship or the Company shall provide confirmation, acceptable to that Contracting Government, of the information required above.

2.2 Every ship to which this chapter applies intending to enter the port of another Contracting Government shall provide the information described in paragraph 2.1 on the request of the officers duly authorized by that Government. The master may decline to provide such information on the understanding that failure to do so may result in denial of entry into port.

2.3 The ship shall keep records of the information referred to in paragraph 2.1 for the last 10 calls at port facilities.

2.4 If, after receipt of the information described in paragraph 2.1, officers duly authorized by the Contracting Government of the port in which the ship intends to enter have clear grounds for believing that the ship is in non-compliance with the requirements of this chapter or part A of the ISPS Code, such officers shall attempt to establish communication with and between the ship and the Administration in order to rectify the non-compliance. If such communication does not result in rectification, or if such officers have clear grounds otherwise for believing that the ship is in non-compliance with the requirements of this chapter or part A of the ISPS Code, such officers may take steps in relation to that ship as provided in paragraph 2.5. Any such steps taken must be proportionate, taking into account the guidance given in part B of the ISPS Code.

2.5 Such steps are as follows:

.1 a requirement for the rectification of the non-compliance;

.2 a requirement that the ship proceed to a location specified in the territorial sea or internal waters of that Contracting Government;

.3 inspection of the ship, if the ship is in the territorial sea of the Contracting Government the port of which the ship intends to enter; or

.4 denial of entry into port.

This gazette is also available free online at **www.gpwonline.co.za**

Prior to initiating any such steps, the ship shall be informed by the Contracting Government of its intentions. Upon this information the master may withdraw the intention to enter that port. In such cases, this regulation shall not apply.

3 Additional provisions

3.1 In the event:

.1 of the imposition of a control measure, other than a lesser administrative or corrective measure, referred to in paragraph 1.3; or

.2 any of the steps referred to in paragraph 2.5 are taken,

an officer duly authorized by the Contracting Government shall forthwith inform in writing the Administration specifying which control measures have been imposed or steps taken and the reasons thereof. The Contracting Government imposing the control measures or steps shall also notify the recognized security organization which issued the Certificate relating to the ship concerned and the Organization when any such control measures have been imposed or steps taken.

3.2 When entry into port is denied or the ship is expelled from port, the authorities of the port State should communicate the appropriate facts to the authorities of the State of the next appropriate ports of call, when known, and any other appropriate coastal States, taking into account guidelines to be developed by the Organization. Confidentiality and security of such notification shall be ensured.

3.3 Denial of entry into port, pursuant to paragraphs 2.4 and 2.5, or expulsion from port, pursuant to paragraphs 1.1 to 1.3, shall only be imposed where the officers duly authorized by the Contracting Government have clear grounds to believe that the ship poses an immediate threat to the security or safety of persons, or of ships or other property and there are no other appropriate means for removing that threat.

3.4 The control measures referred to in paragraph 1.3 and the steps referred to in paragraph 2.5 shall only be imposed, pursuant to this regulation, until the non-compliance giving rise to the control measures or steps has been corrected to the satisfaction of the Contracting Government, taking into account actions proposed by the ship or the Administration, if any.

3.5 When Contracting Governments exercise control under paragraph 1 or take steps under paragraph 2:

.1 all possible efforts shall be made to avoid a ship being unduly detained or delayed. If a ship is thereby unduly detained, or delayed, it shall be entitled to compensation for any loss or damage suffered; and

.2 necessary access to the ship shall not be prevented for emergency or humanitarian reasons and for security purposes.

Regulation 10

Requirements for port facilities

This gazette is also available free online at **www.gpwonline.co.za**

1 Port facilities shall comply with the relevant requirements of this chapter and part A of the ISPS Code, taking into account the guidance given in part B of the ISPS Code.

2 Contracting Governments with a port facility or port facilities within their territory, to which this regulation applies, shall ensure that:

.1 port facility security assessments are carried out, reviewed and approved in accordance with the provisions of part A of the ISPS Code; and

.2 port facility security plans are developed, reviewed, approved and implemented in accordance with the provisions of part A of the ISPS Code.

3 Contracting Governments shall designate and communicate the measures required to be addressed in a port facility security plan for the various security levels, including when the submission of a Declaration of Security will be required.

Regulation 11

Alternative security agreements

1 Contracting Governments may, when implementing this chapter and part A of the ISPS Code, conclude in writing bilateral or multilateral agreements with other Contracting Governments on alternative security arrangements covering short international voyages on fixed routes between port facilities located within their territories.

2 Any such agreement shall not compromise the level of security of other ships or of port facilities not covered by the agreement.

3 No ship covered by such an agreement shall conduct any ship-to-ship activities with any ship not covered by the agreement.

4 Such agreements shall be reviewed periodically, taking into account the experience gained as well as any changes in the particular circumstances or the assessed threats to the security of the ships, the port facilities or the routes covered by the agreement.

Regulation 12

Equivalent security arrangements

1 An Administration may allow a particular ship or a group of ships entitled to fly its flag to implement other security measures equivalent to those prescribed in this chapter or in part A of the ISPS Code, provided such security measures are at least as effective as those prescribed in this chapter or part A of the ISPS Code. The Administration which allows such security measures shall communicate to the Organization particulars thereof.

2 When implementing this chapter and part A of the ISPS Code, a Contracting Government may allow a particular port facility or a group of port facilities located within

This gazette is also available free online at **www.gpwonline.co.za**

its territory, other than those covered by an agreement concluded under regulation 11, to implement security measures equivalent to those prescribed in this chapter or in part A of the ISPS Code, provided such security measures are at least as effective as those prescribed in this chapter or part A of the ISPS Code. The Contracting Government which allows such security measures shall communicate to the Organization particulars thereof.

Regulation 13

Communication of information

1 Contracting Governments shall, not later than 1 July 2004, communicate to the Organization and shall make available for the information of Companies and ships:

.1 the names and contact details of their national authority or authorities responsible for ship and port facility security;

.2 the locations within their territory covered by approved port facility security plans;

.3 the names and contact details of those who have been designated to be available at all times to receive and act upon the ship-to-shore security alerts referred to in regulation 6.2.1;

.4 the names and contact details of those who have been designated to be available at all times to receive and act upon any communications from Contracting Governments exercising control and compliance measures referred to in regulation 9.3.1; and

.5 the names and contact details of those who have been designated to be available at all times to provide advice or assistance to ships and to whom ships can report any security concerns referred to in regulation 7.2

and thereafter update such information as and when changes relating thereto occur. The Organization shall circulate such particulars to other Contracting Governments for the information of their officers.

2 Contracting Governments shall, not later than 1 July 2004, communicate to the Organization the names and contact details of any recognized security organizations authorized to act on their behalf together with details of the specific responsibility and conditions of authority delegated to such organizations. Such information shall be updated as and when changes relating thereto occur. The Organization shall circulate such particulars to other Contracting Governments for the information of their officers.

3 Contracting Governments shall, not later than 1 July 2004, communicate to the Organization a list showing the approved port facility security plans for the port facilities located within their territory together with the location or locations covered by each approved port facility security plan and the corresponding date of approval and thereafter shall further communicate when any of the following changes take place:

.1 changes in the location or locations covered by an approved port facility security plan are to be introduced or have been introduced. In such cases the information to be communicated shall indicate the changes in the

This gazette is also available free online at **www.gpwonline.co.za**

location or locations covered by the plan and the date as of which such changes are to be introduced or were implemented;

.2 an approved port facility security plan, previously included in the list submitted to the Organization, is to be withdrawn or has been withdrawn. In such cases, the information to be communicated shall indicate the date on which the withdrawal will take effect or was implemented. In these cases, the communication shall be made to the Organization as soon as is practically possible; and

.3 additions are to be made to the list of approved port facility security plans. In such cases, the information to be communicated shall indicate the location or locations covered by the plan and the date of approval.

4 Contracting Governments shall, at five year intervals after 1 July 2004, communicate to the Organization a revised and updated list showing all the approved port facility security plans for the port facilities located within their territory together with the location or locations covered by each approved port facility security plan and the corresponding date of approval (and the date of approval of any amendments thereto) which will supersede and replace all information communicated to the Organization, pursuant to paragraph 3, during the preceding five years.

5 Contracting Governments shall communicate to the Organization information that an agreement under regulation 11 has been concluded. The information communicated shall include:

.1 the names of the Contracting Governments which have concluded the agreement;

.2 the port facilities and the fixed routes covered by the agreement;

.3 the periodicity of review of the agreement;

.4 the date of entry into force of the agreement; and

.5 information on any consultations which have taken place with other Contracting Governments

and thereafter shall communicate, as soon as practically possible, to the Organization information when the agreement has been amended or has ended.

6 Any Contracting Government which allows, under the provisions of regulation 12, any equivalent security arrangements with respect to a ship entitled to fly its flag or with respect to a port facility located within its territory shall communicate to the Organization particulars thereof.

7 The Organization shall make available the information communicated under paragraphs 3 to 6 to other Contracting Governments upon request.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XII

Additional safety measures for bulk carriers

482

Contents

Chapter XII Additional safety measures for bulk carriers **480**

Regulation 1 Definitions 480
Regulation 2 Application 481
Regulation 3 Implementation schedule 481
Regulation 4 Damage stability requirements applicable to bulk carriers 482
Regulation 5 Structural strength of bulk carriers 483
Regulation 6 Structural and other requirements for bulk carriers 483
Regulation 7 Survey and maintenance of bulk carriers 485
Regulation 8 Information on compliance with requirements for bulk carriers 485
Regulation 9 Requirements for bulk carriers not being capable of complying with regulation 4.3 due to the design configuration of their cargo holds 486
Regulation 10 Solid bulk cargo density declaration 486
Regulation 11 Loading instrument 486
Regulation 12 Hold, ballast and dry space water ingress alarms 487
Regulation 13 Availability of pumping systems 488
Regulation 14 Restrictions from sailing with any hold empty 488

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XII - Additional safety measures for bulk carriers

Regulation 1
Definitions

For the purpose of this chapter:

5 *Bulk carrier* means a ship which is intended primarily to carry dry cargo in bulk, including such types as ore carriers and combination carriers. [1]

6 *Bulk carrier of single-side skin construction* means a bulk carrier as defined in paragraph 1, in which:

.17 any part of a cargo hold is bounded by the side shell; or

.18 where one or more cargo holds are bounded by a double-side skin, the width of which is less than 760 mm in bulk carriers constructed before 1 January 2000 and less than 1,000 mm in bulk carriers constructed on or after 1 January 2000 but before 1 July 2006, the distance being measured perpendicular to the side shell.

Such ships include combination carriers in which any part of a cargo hold is bounded by the side shell.

7 *Bulk carrier of double-side skin construction* means a bulk carrier as defined in paragraph 1, in which all cargo holds are bounded by a double-side skin, other than as defined in paragraph 2.2.

8 *Double-side skin* means a configuration where each ship side is constructed by the side shell and a longitudinal bulkhead connecting the double bottom and the deck. Hopper side tanks and top-side tanks may, where fitted, be integral parts of the double-side skin configuration.

9 *Length* of a bulk carrier means the length as defined in the International Convention on Load Lines in force.

10 *Solid bulk cargo* means any material, other than liquid or gas, consisting of a combination of particles, granules or any larger pieces of material, generally uniform in composition, which is loaded directly into the cargo spaces of a ship without any intermediate form of containment.

11 *Bulk carrier bulkhead and double bottom strength standards* means "Standards for the evaluation of scantlings of the transverse watertight vertically corrugated bulkhead between the two foremost cargo holds and for the evaluation of allowable

[1] Refer to:

.1 For ships constructed before 1 July 2006, resolution 6, Interpretation of the definition of "bulk carrier", as given in chapter IX of SOLAS 1974, as amended in 1994, adopted by the 1997 SOLAS Conference.

.2 *Interpretation of the provisions of SOLAS chapter XII on additional safety measures for bulk carriers* (resolution MSC.79(70)).

.3 The application provisions of annex 1 to the *Interpretation of the provisions of SOLAS chapter XII on additional safety measures for bulk carriers* (resolution MSC.89(71)).

This gazette is also available free online at **www.gpwonline.co.za**

hold loading of the foremost cargo hold" adopted by resolution 4 of the Conference of Contracting Governments to the International Convention for the Safety of Life at Sea, 1974 on 27 November 1997, as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

12 *Bulk carriers constructed* means bulk carriers the keels of which are laid or which are at a similar stage of construction.

13 *A similar stage of construction* means the stage at which:

.1 construction identifiable with a specific ship begins; and

.2 assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less.

14 *Breadth (B)* of a bulk carrier means the breadth as defined in the International Convention on Load Lines in force.

Regulation 2
Application

Bulk carriers shall comply with the requirements of this chapter in addition to the applicable requirements of other chapters.

Regulation 3
Implementation schedule

Bulk carriers constructed before 1 July 1999 to which regulations 4 or 6 apply shall comply with the provisions of such regulations according to the following schedule, with reference to the enhanced programme of inspections required by regulation XI-1/2:

.1 bulk carriers which are 20 years of age and over on 1 July 1999, by the date of the first intermediate survey or the first periodical survey [2] after 1 July 1999, whichever comes first;

.2 bulk carriers which are 15 years of age and over but less than 20 years of age on 1 July 1999, by the date of the first periodical survey [2] after 1 July 1999, but not later than 1 July 2002; and

.3 bulk carriers which are less than 15 years of age on 1 July 1999, by the date of the first periodical survey [2] after the date on which the ship reaches 15 years of age, but not later than the date on which the ship reaches 17 years of age.

[2] Refer to *Application of SOLAS regulations XII/3, XII/7 and XII/11* (MSC.1/Circ.1463).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 4

Damage stability requirements applicable to bulk carriers

10 Bulk carriers of 150 m in length and upwards of single-side skin construction, designed to carry solid bulk cargoes having a density of 1,000 kg/m^3 and above, constructed on or after 1 July 1999, shall, when loaded to the Summer Load Line, be able to withstand flooding of any one cargo hold in all loading conditions and remain afloat in a satisfactory condition of equilibrium, as specified in paragraph 4.

11 Bulk carriers of 150 m in length and upwards of double-side skin construction in which any part of longitudinal bulkhead is located within B/5 or 11.5 m, whichever is less, inboard from the ship's side at right angle to the centreline at the assigned Summer Load Line, designed to carry solid bulk cargoes having a density of 1,000 kg/m^3 and above, constructed on or after 1 July 2006, shall, when loaded to the Summer Load Line, be able to withstand flooding of any one cargo hold in all loading conditions and remain afloat in a satisfactory condition of equilibrium, as specified in paragraph 4.

12 Bulk carriers of 150 m in length and upwards of single-side skin construction, carrying solid bulk cargoes having a density of 1,780 kg/m^3 and above, constructed before 1 July 1999, shall, when loaded to the Summer Load Line, be able to withstand flooding of the foremost cargo hold in all loading conditions and remain afloat in a satisfactory condition of equilibrium, as specified in paragraph 4. This requirement shall be complied with in accordance with the implementation schedule specified in regulation 3.

13 Subject to the provisions of paragraph 7, the condition of equilibrium after flooding shall satisfy the condition of equilibrium laid down in the annex to resolution A.320(IX) – Regulation equivalent to regulation 27 of the International Convention on Load Lines, 1966, as amended by resolution A.514(13). The assumed flooding need only take into account flooding of the cargo hold space to the water level outside the ship in that flooded condition. The permeability of a loaded hold shall be assumed as 0.9 and the permeability of an empty hold shall be assumed as 0.95, unless a permeability relevant to a particular cargo is assumed for the volume of a flooded hold occupied by cargo and a permeability of 0.95 is assumed for the remaining empty volume of the hold.

14 Bulk carriers constructed before 1 July 1999, which have been assigned a reduced freeboard in compliance with regulation 27(7) of the International Convention on Load Lines, 1966, as adopted on 5 April 1966, may be considered as complying with paragraph 3 of this regulation.

15 Bulk carriers which have been assigned a reduced freeboard in compliance with the provisions of paragraph (8) of the regulation equivalent to regulation 27 of the International Convention on Load Lines, 1966, adopted by resolution A.320(IX), as amended by resolution A.514(13), may be considered as complying with paragraphs 1 or 2, as appropriate.

[

This gazette is also available free online at **www.gpwonline.co.za**

16 On bulk carriers which have been assigned reduced freeboard in compliance with the provisions of regulation 27(8) of annex B of the Protocol of 1988 relating to the International Convention on Load Lines, 1966, the condition of equilibrium after flooding shall satisfy the relevant provisions of that Protocol.]

Regulation 5

Structural strength of bulk carriers

1 Bulk carriers of 150 m in length and upwards of single-side skin construction, designed to carry solid bulk cargoes having a density of 1,000 kg/m^3 and above, constructed on or after 1 July 1999, shall have sufficient strength to withstand flooding of any one cargo hold to the water level outside the ship in that flooded condition in all loading and ballast conditions, taking also into account dynamic effects resulting from the presence of water in the hold, and taking into account the recommendations adopted by the Organization. [3]

2 Bulk carriers of 150 m in length and upwards of double-side skin construction, in which any part of longitudinal bulkhead is located within B/5 or 11.5 m, whichever is less, inboard from the ship's side at right angle to the centreline at the assigned Summer Load Line, designed to carry bulk cargoes having a density of 1,000 kg/m^3 and above, constructed on or after 1 July 2006, shall comply with the structural strength provisions of paragraph 1.

Regulation 6

Structural and other requirements for bulk carriers

8 Bulk carriers of 150 m in length and upwards of single-side skin construction, carrying solid bulk cargoes having a density of 1,780 kg/m^3 and above, constructed before 1 July 1999, shall comply with the following requirements in accordance with the implementation schedule specified in regulation 3:

.5 The transverse watertight bulkhead between the two foremost cargo holds and the double bottom of the foremost cargo hold shall have sufficient strength to withstand flooding of the foremost cargo hold, taking also into account dynamic effects resulting from the presence of water in the hold, in compliance with the bulk carrier bulkhead and double bottom strength standards. For the purpose of this regulation, the bulk carrier bulkhead and double bottom strength standards shall be treated as mandatory.

.6 In considering the need for, and the extent of, strengthening of the transverse watertight bulkhead or double bottom to meet the requirements of 1.1, the following restrictions may be taken into account:

.5 restrictions on the distribution of the total cargo weight between the cargo holds; and

[3] Refer to *Recommendation on compliance with SOLAS regulation XII/5* (resolution 3 of the 1997 SOLAS Conference).

This gazette is also available free online at **www.gpwonline.co.za**

.6 restrictions on the maximum deadweight.

.7 For bulk carriers using either of, or both, the restrictions given in 1.2.1 and 1.2.2 above for the purpose of fulfilling the requirements of 1.1, these restrictions shall be complied with whenever solid bulk cargoes having a density of 1,780 kg/m3 and above are carried.

9 Bulk carriers of 150 m in length and upwards constructed on or after 1 July 2006, in all areas with double-side skin construction, shall comply with the following requirements:

.1 Primary stiffening structures of the double-side skin shall not be placed inside the cargo hold space.

.2 Subject to the provisions below, the distance between the outer shell and the inner shell at any transverse section shall not be less than 1,000 mm measured perpendicular to the side shell. The double-side skin construction shall be such as to allow access for inspection as provided in regulation II-1/3-6 and the Technical Provisions referring thereto.

.1 The clearances below need not be maintained in way of cross ties, upper and lower end brackets of transverse framing or end brackets of longitudinal framing.

.2 The minimum width of the clear passage through the double-side skin space in way of obstructions such as piping or vertical ladders shall not be less than 600 mm.

.3 Where the inner and/or outer skins are transversely framed, the minimum clearance between the inner surfaces of the frames shall not be less than 600 mm.

.4 Where the inner and outer skins are longitudinally framed, the minimum clearance between the inner surfaces of the frames shall not be less than 800 mm. Outside the parallel part of the cargo hold length this clearance may be reduced where necessitated by the structural configuration, but shall in no case be less than 600 mm.

.5 The minimum clearance referred to above shall be the shortest distance measured between assumed lines connecting the inner surfaces of the frames on the inner and outer skins.

10 The double-side skin spaces, with the exception of top-side wing tanks, if fitted, shall not be used for the carriage of cargo.

11 In bulk carriers of 150 m in length and upwards, carrying solid bulk cargoes having a density of 1,000 kg/m^3 and above, constructed on or after 1 July 2006:

.1 the structure of cargo holds shall be such that all contemplated cargoes can be loaded and discharged by standard loading/discharge equipment and procedures without damage which may compromise the safety of the structure;

.2 effective continuity between the side shell structure and the rest of the hull structure shall be assured; and

This gazette is also available free online at **www.gpwonline.co.za**

.3 the structure of cargo areas shall be such that single failure of one stiffening structural member will not lead to immediate consequential failure of other structural items potentially leading to the collapse of the entire stiffened panels.

Regulation 7
Survey and maintenance of bulk carriers

4 Bulk carriers of 150 m in length and upwards of single-side skin construction, constructed before 1 July 1999, of 10 years of age and over, shall not carry solid bulk cargoes having a density of 1,780 kg/m^3 and above unless they have satisfactorily undergone either:

.4 a periodical survey,[4] in accordance with the enhanced programme of inspections during surveys required by regulation XI-1/2; or

.5 a survey of all cargo holds to the same extent as required for periodical surveys in the enhanced programme of inspections during surveys required by regulation XI- 1/2.

5 Bulk carriers shall comply with the maintenance requirements provided in regulation II-1/3-1 and the *Standards for owners' inspection and maintenance of bulk carrier hatch covers*, adopted by the Organization by resolution MSC.169(79), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

Regulation 8
Information on compliance with requirements for bulk carriers

3 The booklet required by regulation VI/7.2 shall be endorsed by the Administration, or on its behalf, to indicate that regulations 4, 5, 6 and 7, as appropriate, are complied with.

4 Any restrictions imposed on the carriage of solid bulk cargoes having a density of 1,780 kg/m^3 and above in accordance with the requirements of regulations 6 and 14 shall be identified and recorded in the booklet referred to in paragraph 1.

5 A bulk carrier to which paragraph 2 applies shall be permanently marked on the side shell at midships, port and starboard, with a solid equilateral triangle, having sides of 500 mm and its apex 300 mm below the deck line, and painted a contrasting colour to that of the hull.

[4] Refer to *Application of SOLAS regulations XII/3, XII/7 and XII/11* (MSC.1/Circ.1463).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 9

Requirements for bulk carriers not being capable of complying with regulation 4.3 due to the design configuration of their cargo holds

For bulk carriers constructed before 1 July 1999 being within the application limits of regulation 4.3, which have been constructed with an insufficient number of transverse watertight bulkheads to satisfy that regulation, the Administration may allow relaxation from the application of regulations 4.3 and 6, on condition that they shall comply with the following requirements:

.1 for the foremost cargo hold, the inspections prescribed for the annual survey in the enhanced programme of inspections during surveys required by regulation XI-1/2 shall be replaced by the inspections prescribed therein for the intermediate survey of cargo holds;

.2 are provided with bilge well high water level alarms in all cargo holds, or in cargo conveyor tunnels, as appropriate, giving an audible and visual alarm on the navigation bridge, as approved by the Administration or an organization recognized by it in accordance with the provisions of regulation XI-1/1; and

.3 are provided with detailed information on specific cargo hold flooding scenarios. This information shall be accompanied by detailed instructions on evacuation preparedness under the provisions of section 8 of the International Safety Management (ISM) Code and be used as the basis for crew training and drills.

Regulation 10

Solid bulk cargo density declaration

1 Prior to loading bulk cargo on bulk carriers of 150 m in length and upwards, the shipper shall declare the density of the cargo, in addition to providing the cargo information required by regulation VI/2.

2 For bulk carriers to which regulation 6 applies, unless such bulk carriers comply with all relevant requirements of this chapter applicable to the carriage of solid bulk cargoes having a density of 1,780 kg/m^3 and above, any cargo declared to have a density within the range 1,250 kg/m^3 to 1,780 kg/m^3 shall have its density verified by an accredited testing organization. [5]

Regulation 11

Loading instrument

(Unless provided otherwise, this regulation applies to bulk carriers regardless of their date of construction)

[5] In verifying the density of solid bulk cargoes, reference should be made to *Uniform method of measurement of the density of bulk cargoes* (MSC/Circ.908).

This gazette is also available free online at **www.gpwonline.co.za**

5 Bulk carriers of 150 m in length and upwards shall be fitted with a loading instrument capable of providing information on hull girder shear forces and bending moments, taking into account the recommendation adopted by the Organization. [6]

6 Bulk carriers of 150 m in length and upwards constructed before 1 July 1999 shall comply with the requirements of paragraph 1 not later than the date of the first intermediate or periodical survey [7] of the ship to be carried out after 1 July 1999.

7 Bulk carriers of less than 150 m in length constructed on or after 1 July 2006 shall be fitted with a loading instrument capable of providing information on the ship's stability in the intact condition. The computer software shall be approved for stability calculations by the Administration and shall be provided with standard conditions for testing purposes relating to the approved stability information.[8]

Regulation 12

Hold, ballast and dry space water ingress alarms [9]

(This regulation applies to bulk carriers regardless of their date of construction)

3 Bulk carriers shall be fitted with water level detectors:

.1 in each cargo hold, giving audible and visual alarms, one when the water level above the inner bottom in any hold reaches a height of 0.5 m and another at a height not less than 15% of the depth of the cargo hold but not more than 2 m. On bulk carriers to which regulation 9.2 applies, detectors with only the latter alarm need be installed. The water level detectors shall be fitted in the aft end of the cargo holds. For cargo holds which are used for water ballast, an alarm overriding device may be installed. The visual alarms shall clearly discriminate between the two different water levels detected in each hold;

.2 in any ballast tank forward of the collision bulkhead required by regulation II-1/12, giving an audible and visual alarm when the liquid in the tank reaches a level not exceeding 10% of the tank capacity. An alarm overriding device may be installed to be activated when the tank is in use; and

.3 in any dry or void space other than a chain cable locker, any part of which extends forward of the foremost cargo hold, giving an audible and visual alarm at a water level of 0.1 m above the deck. Such alarms need not be provided in enclosed spaces the volume of which does not exceed 0.1% of the ship's maximum displacement volume.

---

[6] Refer to *Recommendation on loading instruments* (resolution 5 of the 1997 SOLAS Conference).

[7] Refer to *Application of SOLAS regulations XII/3, XII/7 and XII/11* (MSC.1/Circ.1463).

[8] Refer to the relevant parts of the appendix to *Guidelines for the on-board use and application of computers* (MSC/Circ.891), *Guidelines on the provision of stability-related information for bulk carriers* (MSC/Circ.1159) and *Uniform method of measurement of the density of bulk cargoes* (MSC/Circ.908).

[9] When water level detectors are installed on bulk carriers in compliance with regulation XII/12, the *Performance standards for water level detectors on bulk carriers and single hold cargo ships other than bulk carriers*, annexed to resolution MSC.188(79) adopted on 3 December 2004, should be applied.

This gazette is also available free online at **www.gpwonline.co.za**

4 The audible and visual alarms specified in paragraph 1 shall be located on the navigation bridge.

5 Bulk carriers constructed before 1 July 2004 shall comply with the requirements of this regulation not later than the date of the annual, intermediate or renewal survey of the ship to be carried out after 1 July 2004, whichever comes first.

Regulation 13
Availability of pumping systems [10]

(This regulation applies to bulk carriers regardless of their date of construction)

8 On bulk carriers, the means for draining and pumping ballast tanks forward of the collision bulkhead and bilges of dry spaces any part of which extends forward of the foremost cargo hold shall be capable of being brought into operation from a readily accessible enclosed space, the location of which is accessible from the navigation bridge or propulsion machinery control position without traversing exposed freeboard or superstructure decks. Where pipes serving such tanks or bilges pierce the collision bulkhead, valve operation by means of remotely operated actuators may be accepted, as an alternative to the valve control specified in regulation II-1/12, provided that the location of such valve controls complies with this regulation.

9 Bulk carriers constructed before 1 July 2004 shall comply with the requirements of this regulation not later than the date of the first intermediate or renewal survey of the ship to be carried out after 1 July 2004, but in no case later than 1 July 2007.

Regulation 14
Restrictions from sailing with any hold empty

Bulk carriers of 150 m in length and upwards of single-side skin construction, carrying cargoes having a density of 1,780 kg/m^3 and above, if not meeting the requirements for withstanding flooding of any one cargo hold as specified in regulation 5.1 and the *Standards and criteria for side structures of bulk carriers of single-side skin construction*, adopted by the Organization by resolution MSC.168(79), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I, shall not sail with any hold loaded to less than 10% of the hold's maximum allowable cargo weight when in the full load condition, after reaching 10 years of age. The applicable full load condition for this regulation is a load equal to or greater than 90% of the ship's deadweight at the relevant assigned freeboard.

[10] Refer to *Interpretation of SOLAS regulation XII/13* (MSC/Circ.1069).

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XIII

Verification of compliance

493

Contents

Chapter XIII Verification of compliance 491
Regulation 1 Definitions 491
Regulation 2 Application 491
Regulation 3 Verification of compliance 491

494

Chapter XIII - Verification of compliance

Regulation 1
Definitions

For the purpose of this chapter:

15 *Audit* means a systematic, independent and documented process for obtaining audit evidence and evaluating it objectively to determine the extent to which audit criteria are fulfilled.

16 *Audit Scheme* means the IMO Member State Audit Scheme established by the Organization and taking into account the guidelines developed by the Organization. [1]

17 *Code for Implementation* means the IMO Instruments Implementation Code (III Code) adopted by the Organization by resolution A.1070(28).

18 *Audit Standard* means the Code for Implementation.

Regulation 2
Application

Contracting Governments shall use the provisions of the Code for Implementation in the execution of their obligations and responsibilities [2] contained in the present Convention.

Regulation 3
Verification of compliance

1 Every Contracting Government shall be subject to periodic audits by the Organization in accordance with the audit standard to verify compliance with and implementation of the present Convention.

2 The Secretary-General of the Organization shall have responsibility for administering the Audit Scheme, based on the guidelines developed by the Organization. [3]

3 Every Contracting Government shall have responsibility for facilitating the conduct of the audit and implementation of a programme of actions to address the findings, based on the guidelines adopted by the Organization. [3]

---

[1] Refer to the *Framework and Procedures for the IMO Member State Audit Scheme* (resolution A.1067(28)).

[2] Refer to *2021 Non-exhaustive list of obligations under instruments relevant to the IMO Instruments Implementation Code (III Code)* (resolution A.1157(32)), as may be amended, and *Guidance on communication of information by Member States* (resolution A.1139(31)).

[3] Refer to the *Framework and Procedures for the IMO Member State Audit Scheme* (resolution A.1067(28)).

This gazette is also available free online at **www.gpwonline.co.za**

4 Audit of all Contracting Governments shall be:

.1 based on an overall schedule developed by the Secretary-General of the Organization, taking into account the guidelines developed by the Organization; [4] and

.2 conducted at periodic intervals, taking into account the guidelines developed by the Organization. [4]

[4] Refer to the *Framework and Procedures for the IMO Member State Audit Scheme* (resolution A.1067(28)).

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XIV

Safety measures for ships
operating in polar waters

497

Contents

Chapter XIV Safety measures for ships operating in polar waters 495

Regulation 1 Definitions 495
Regulation 2 Application 496
Regulation 3 Requirements for ships to which this chapter applies 496
Regulation 4 Alternative design and arrangement 496

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XIV - Safety measures for ships operating in polar waters

Regulation 1
Definitions

For the purpose of this chapter:

1 *Polar Code* means the International Code for Ships Operating in Polar Waters, consisting of an introduction and parts I-A and II-A and parts I-B and II-B, as adopted by resolutions MSC.385(94) and of the Marine Environment Protection Committee, [1] as may be amended, provided that:

.1 amendments to the safety-related provisions of the introduction and part I-A of the Polar Code are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I; and

.2 amendments to part I-B of the Polar Code are adopted by the Maritime Safety Committee in accordance with its Rules of Procedure.

2 *Antarctic area* means the sea area south of latitude 60° S.

3 *Arctic waters* means those waters which are located north of a line from the latitude 58°00'.0 N and longitude 042°00'.0 W to latitude 64°37'.0 N, longitude 035°27'.0 W and thence by a rhumb line to latitude 67°03'.9 N, longitude 026°33'.4 W and thence by a rhumb line to the latitude 70°49'.56 N and longitude 008°59'.61 W (Sørkapp, Jan Mayen) and by the southern shore of Jan Mayen to 73°31'.6 N and 019°01'.0 E by the Island of Bjørnøya, and thence by a great circle line to the latitude 68°38'.29 N and longitude 043°23'.08 E (Cap Kanin Nos) and hence by the northern shore of the Asian Continent eastward to the Bering Strait and thence from the Bering Strait westward to latitude 60° N as far as Il'pyrskiy and following the 60th North parallel eastward as far as and including Etolin Strait and thence by the northern shore of the North American continent as far south as latitude 60° N and thence eastward along parallel of latitude 60° N, to longitude 056°37'.1 W and thence to the latitude 58°00'.0 N, longitude 042°00'.0 W.

4 *Polar waters* means Arctic waters and/or the Antarctic area.

5 *Ship constructed* means a ship the keel of which is laid or which is at a similar stage of construction.

6 *At a similar stage of construction* means the stage at which:

.1 construction identifiable with a specific ship begins; and

.2 assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less.

[1] Refer to the resolution of adoption of the *International Code for Ships Operating in Polar Waters* (MEP.264(68)), by the Marine Environment Protection Committee.

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 2
Application

1 Unless expressly provided otherwise, this chapter applies to ships operating in polar waters, certified in accordance with chapter I. [2]

2 Ships constructed before 1 January 2017 shall meet the relevant requirements of the Polar Code by the first intermediate or renewal survey, whichever occurs first, after 1 January 2018.

3 In applying part I-A of the Polar Code, consideration should be given to the additional guidance in part I-B of the Polar Code.

4 This chapter shall not apply to ships owned or operated by a Contracting Government and used, for the time being, only in government non-commercial service. However, ships owned or operated by a Contracting Government and used, for the time being, only in government non-commercial service are encouraged to act in a manner consistent, so far as reasonable and practicable, with this chapter.

5 Nothing in this chapter shall prejudice the rights or obligations of States under international law.

Regulation 3
Requirements for ships to which this chapter applies

1 Ships to which this chapter applies shall comply with the requirements of the safety-related provision of the introduction and with part I-A of the Polar Code and shall, in addition to the requirements of regulations I/7, I/8, I/9, and I/10, as applicable, be surveyed and certified, as provided for in that Code.

2 Ships to which this chapter applies holding a certificate issued pursuant to the provisions of paragraph 1 shall be subject to the control established in regulations I/19 and XI-1/4. For this purpose, such certificates shall be treated as a certificate issued under regulation I/12 or I/13.

Regulation 4
Alternative design and arrangement

1 The goal of this regulation is to provide a methodology for alternative design and arrangements for structure, machinery, and electrical installations, fire safety and lifesaving appliances and arrangements.

[2] Refer to the *Interim safety measures for ships not certified under the SOLAS Convention operating in polar waters* (resolution A.1137(31)).

This gazette is also available free online at **www.gpwonline.co.za**

2 Structural arrangements, machinery and electrical installation, fire safety design and arrangement measures and as well as life-saving appliances and arrangements may deviate from the prescriptive requirements set out in chapters 3, 6, 7 and 8 of the Polar Code, provided that the alternative design and arrangements meet the intent of the goal and functional requirements concerned and provide an equivalent level of safety to the requirements in those chapters.

3 When alternative designs or arrangements deviate from the prescriptive requirements of chapters 3, 6, 7 and 8 of the Polar Code, an engineering analysis, evaluation and approval of the design and arrangements shall be carried out based on the guidelines approved by the Organization. [3]

4 Any alternative designs or arrangement deviating from the prescriptive requirements shall be recorded in the Polar Ship Certificate and the ship's Polar Water Operational Manual, as required by the Polar Code, also defining the technical and operational measures and conditions for the allowed deviation.

[3] Refer to the *Guidelines for the approval of alternatives and equivalents as provided for in various IMO instruments* (MSC.1/Circ.1455), the *Revised guidelines on alternative design and arrangements for SOLAS chapters II-1 and III* (MSC.1/Circ.1212/Rev.1) and the *Guidelines on alternative design and arrangements for fire safety* (MSC/Circ.1002 and its Corr.1, Corr.2 and Corr.3, as amended by MSC.1/Circ.1552), as applicable.

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XV

Safety measures for ships
carrying industrial personnel

502

Contents

Chapter XV Safety measures for ships carrying industrial personnel 500

Regulation 1 *Definitions* 500

Regulation 2 *General* 500

Regulation 3 *Application* 501

Regulation 4 *Application of other chapters* 501

Regulation 5 *Requirements* 502

This gazette is also available free online at **www.gpwonline.co.za**

Chapter XV - Safety measures for ships carrying industrial personnel

Regulation 1
Definitions

For the purpose of this chapter:

7 *Industrial personnel (IP)* means all persons transported or accommodated on board for the purpose of offshore industrial activities performed on board other ships and/or offshore facilities.

8 *IP Code* means the International Code of Safety for Ships Carrying Industrial personnel, as adopted by the Maritime Safety Committee by resolution MSC.527(106), as may be amended, provided that such amendments to the IP Code are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

9 *Offshore industrial activities* mean the construction, maintenance, decommissioning, operation or servicing of offshore facilities related, but not limited, to, exploration and exploitation of resources by the renewable or hydrocarbon energy sectors, aquaculture, ocean mining or similar activities.

10 *HSC Code* means the International Code of Safety for High-Speed Craft, 2000, adopted by the Maritime Safety Committee by resolution MSC.97(73), as may be amended, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the annex other than chapter I.

Regulation 2
General

6 Wherever in the IP Code a reference is made to the passenger ship requirements, the corresponding cargo ship requirements are deemed to be complied with.

7 For the purpose of this chapter, industrial personnel shall not be treated or considered as passengers.

8 Wherever in this chapter, or in the IP Code, the number of industrial personnel appears as a parameter, it shall be the aggregate number of industrial personnel, special personnel [1] and passengers carried on board, where the number of passengers shall not exceed 12.

9 Notwithstanding the provisions of regulation 2.1 above, for high-speed craft to which chapter X applies and notwithstanding the provisions of chapters 2 to 12 and 18

[1] Refer to the Code of Safety for Special Purpose Ships, 2008.

This gazette is also available free online at **www.gpwonline.co.za**

of the HSC Code, a ship certified in accordance with the requirements of this chapter and the IP Code shall be deemed to have complied with the requirements of chapters 2 to 12 and 18 of the HSC Code.

Regulation 3
Application

3 Unless expressly provided otherwise, this chapter applies to cargo ships and high-speed cargo craft, of 500 gross tonnage and upwards, constructed on or after 1 July 2024 which carry more than 12 industrial personnel.

4 Cargo ships constructed before 1 July 2024, authorized by the Administration to carry more than 12 industrial personnel in accordance with the recommendations developed by the Organization, [2] shall comply with regulations III/1, III/2 (except for paragraph 2.1.7), IV/7 and IV/8 of the IP Code by the first intermediate or renewal survey, whichever occurs first, after 1 July 2024.

5 High-speed cargo craft constructed before 1 July 2024, authorized by the Administration to carry more than 12 industrial personnel in accordance with the recommendations developed by the Organization, [2] shall comply with the regulations III/1, III/2 (except for paragraph 2.1.7), V/7 and V/8 of the IP Code by the third periodical or first renewal survey, whichever occurs first, after 1 July 2024.

6 Cargo ships and high-speed cargo craft, irrespective of date of construction, which prior to the 1 July 2024 have not been authorized by the Administration to carry more than 12 industrial personnel based on the recommendations developed by the Organization, [2] shall comply and be certified in accordance with this chapter and the IP Code prior to the carriage of more than 12 industrial personnel on board.

7 For the purpose of this chapter, the expression constructed refers to the description given in regulations:

.1 II-2/1.1.2.1, as complemented by regulation II-2/1.1.3 for cargo ships; and

.2 X/1.4, as complemented by regulation X/1.5 for high-speed cargo craft.

Regulation 4
Application of other chapters

5 The regulations for cargo ships contained in the other chapters of the present Convention apply to ships described in regulation 3.1 above, except as modified by this chapter.

6 Notwithstanding the provisions of regulation 4.1 above, for high-speed craft to which the HSC Code applies, the regulations for cargo craft in that Code apply except as modified by this chapter.

[2] Refer to the *Interim recommendations on the safe carriage of more than 12 industrial personnel on board vessels engaged on international voyages* (resolution MSC.418(97)).

This gazette is also available free online at **www.gpwonline.co.za**

Regulation 5
Requirements

1 Ships and high-speed craft to which this chapter applies shall:

.1 be certified as a cargo ship or high-speed cargo craft in accordance with either chapter I or chapter VIII or chapter X, as applicable;

.2 meet the requirements of the IP Code; and

.3 in addition to the requirements of regulations I/8 , I/9 and I/10 or of sections 1.5 to 1.9 of the HSC Code, as applicable, be surveyed and certified, as provided for in the IP Code.

2 Ships and high-speed craft to which this chapter applies, holding a certificate issued pursuant to the provisions of regulation 5.1 above, shall be subject to the control established in regulation I/19 or XI-1/4, and in 1.10 of the HSC Code, as applicable. For this purpose, such certificates shall be treated as a certificate issued under regulation I/12 or I/13.

This gazette is also available free online at **www.gpwonline.co.za**

DEPARTMENT OF TRANSPORT

NOTICE 4134 OF 2025

MERCHANT SHIPPING ACT, 1951 (ACT NO. 57 OF 1951)

GOVERNMENT NOTICE

MERCHANT SHIPPING (CREW ACCOMMODATION) REGULATIONS, 2026

The Minister of Transport acting in terms of section 356 (1) of the Merchant Shipping Act, 1951 (Act No. 57 of 1951), made Regulations set out in the Schedule.

MS BD CREECY (MP)
MINISTER OF TRANSPORT
DATE: 6/6/2026

This gazette is also available free online at **www.gpwonline.co.za**

SCHEDULE

MERCHANT SHIPPING ACT, 1951 (ACT NO. 57 OF 1951)

MERCHANT SHIPPING (CREW ACCOMMODATION) REGULATIONS, 2026

Arrangement of Regulations

PART I

CHAPTER I
GENERAL

1. Definitions
2. Application
3. Plans
4. Position of crew accommodation
5. Height of crew accommodation
6. Construction of bulkheads and paneling
7. Batteries
8. Overhead decks
9. Flooring
10. Heating and ventilation
11. Lighting
12. Drainage
13. Painting
14. Marking
15. Sleeping rooms
16. Berths
17: Furniture and fittings in sleeping rooms
18. Mess rooms
19. Furniture and fittings in mess rooms
20. Recreation spaces and studies
21. Office accommodation
22. Supply of drinking water
23. Laundry facilities
24. Water closets
25. Galleys
26. Dry provision storerooms
27. Cold storeroom and refrigerating equipment
28. Hospitals

This gazette is also available free online at www.gpwonline.co.za

29. Medical cabinet
30. Protection from mosquitoes
31. Maintenance and inspection of crew accommodation
32. Inspection by a Proper Officer
33. Additional exemptions
34. Repeal of Regulations
35. Short title and commencement
Annex 1 -Trunked mechanical ventilation system
Annex 2 - Marking

Definitions

1. In these Regulations, any word or expression to which a meaning has been assigned in the Act, bears the meaning so assigned and, unless the context otherwise indicates —

"IMO" means the International Maritime Organization, a specialised United Nations Organisation established on 17 March 1948 in terms of the International Maritime Organization Convention of the United Nations concluded in London, United Kingdom in 1948;

"machinery spaces" means spaces containing propulsion machinery, boilers, fuel oil units, steam and internal combustion engines, generators, major electrical machinery, oil filling stations, refrigerating, stabilising, ventilating and air conditioning machinery and similar spaces, and trunks to such spaces;

"maximum load line" means the maximum legal limit up to which a vessel may be loaded with crew, passengers, cargo, consumables and various gear;

"sanitary accommodation" means washing accommodation and accommodation containing water closets or urinals;

"sleeping room" does not include hospital accommodation;

"tons" means gross tonnage;

This gazette is also available free online at **www.gpwonline.co.za**

"trunked mechanical ventilation system" means a system of ventilation complying with the specifications set forth in the Annex 1 of these Regulations;

"washing accommodation" does not include—

(a) any sleeping room, or hospital accommodation whether or not provided with a wash-basin, bath or shower; or

(b) any room appropriated for use only as a laundry; and

"watertight, gastight, or oiltight structure" means any structure in which the openings, other than ventilation openings necessary for the admission of air from passageways to sanitary accommodation, laundries, drying rooms or galleys, are provided with means of closure which will enable such openings to be made watertight, gastight or oiltight as the case may be.

Application of these Regulations

2. (1) These Regulations apply to all commercial vessels of 25 gross tons or over, registered in the Republic or deemed to be so registered or which in terms of the Ship Registration Act, 1998 (Act No. 58 of 1998) are required to be so registered, as follows:

(a) new vessels upon promulgation of these Regulations;

(b) existing vessels, which undergo alterations or additions such alterations or additions, are to comply with these Regulations; and

(c) existing vessel registered as new upon promulgation of these Regulations.

(2) Notwithstanding the provisions of subregulation (1), these Regulations does not apply to fishing and pleasure vessels.

Plans

3. Before the construction or alteration of a vessel is commenced, a builder or owner thereof must submit in duplicate to the Authority the plans as set forth in Annex 1 of the Merchant Shipping (Construction Regulations), 1968 for approval.

Position of crew accommodation

4. (1) In every vessel the crew accommodation, other than storerooms, must be wholly situated above the maximum load line.

This gazette is also available free online at **www.gpwonline.co.za**

(2) The Authority may exempt from the requirement of subregulation (1) —

(a) any vessel of under 200 gross tons;

(b) any passenger vessel;

(c) any tug;

(d) any cable ship;

(e) any salvage ship;

(f) any crane ship;

(g) any dredger or any vessel engaged in the conveyance of the spoil of dredging; or

(h) any other vessel not being a cargo vessel:

Provided the Authority is satisfied that compliance with such requirement is unreasonable or impracticable by reason of the size or intended service of the vessel.

(3) (a) In every vessel the crew accommodation, other than storerooms, must be situated aft of the collision bulkhead.

(b) The Authority may exempt any vessel from the requirements of this subregulation to the extent to which the Authority is satisfied that compliance therewith is unreasonable or impracticable by reason of the size or intended service of the vessel: Provided that in vessels of 500 gross tons or over, crew accommodation or any part thereof, other than storerooms must not be forward of the collision bulkhead.

(4) The crew accommodation must be so situated, constructed and arranged as to exclude so far as is reasonably practicable—

(a) noise coming from other parts of the vessel; and

(b) noise coming from other parts of the crew accommodation.

(5) A sleeping room forming part of the crew accommodation of a passenger vessel must not be situated immediately beneath a working passageway.

(6) Any bulkhead, casing or deck separating a sleeping room from—

(a) a machinery space;

(b) a mess room;

(c) a recreation room;

This gazette is also available free online at **www.gpwonline.co.za**

(d) a media entertainment room;
(e) a games room; or
(f) a public room,

must be acoustically insulated in a way which will prevent the occupants of that sleeping room from being disturbed by and protected from excessive noise, in accordance with the standards adopted by the IMO.

(7) In the crew accommodation—
(a) all structures, furniture and fittings, and the means of access to and exit from the crew accommodation, must be so situated, constructed and arranged as to minimise any risk of injury to the crew; and
(b) to afford protection to the crew in rough sea conditions—
(i) handrails must be provided in passageways and stairways where necessary and must be of robust construction and strongly secured to bulkheads;
(ii) fixed furniture must be strongly secured;
(iii) means must be provided to secure portable furniture;
(iv) doors, including those to cupboards and other items of furniture, must be so secured as not to open accidentally;
(v) drawers must be so designed as not to slide open and fall out accidentally; and
(vi) tables, shelves, stowage racks and other similar fittings must be fitted with retaining lips or bars or with non-slip surfaces so that objects placed on them will not slide off.

(8) If fuel oil, lubricant oil or other flammable oil or gaseous fuel is used in any vessel, the arrangements for its storage, distribution and utilisation must be such as to minimise the risk of fire or explosion within the crew accommodation.

(9) Crew accommodation must be so situated, constructed and arranged as to ensure the exclusion from the crew accommodation of effluvia originating in other spaces in the vessel.

This gazette is also available free online at **www.gpwonline.co.za**

Height of crew accommodation

5. In every vessel the height of the crew accommodation measured from the top of the floor beams to the top of the crown beams must be in accordance with the requirements of standard A3.1.6 of the Maritime Labour Convention.

Construction of bulkheads and panelling

6.(1) (a) In every vessel all bulkheads enclosing or within any part of the crew accommodation must be properly constructed of steel or other suitable material to the satisfaction of the Authority.

(b) If bulkheads are exposed to the weather, the bulkheads must be of watertight and gastight construction, and means of closure must be provided for all openings in such bulkheads so as to enable the bulkhead and openings to be made watertight and gastight.

(2) Any bulkhead which separates any part of the crew accommodation, other than a recreation deck space, from a space used as—

(a) an area of work;

(c) a cargo or machinery space;

(d) a paint room;

(e) a storeroom not forming part of the crew accommodation, other than a dry provision store room;

(f) a chain locker;

(g) a battery locker; or

(h) a cofferdam,

must be gastight, and where necessary, must be watertight to protect crew accommodation.

(3) Any bulkhead which separates any part of the crew accommodation from a dry provision storeroom, whether or not such storeroom forms part of crew accommodation, must be gastight.

(4) Subject to the provisions of subregulation (1) of regulation 24, any bulkhead which separates any part of the crew accommodation from sanitary accommodation or from a laundry or drying room, galley or cold storeroom, whether or not such sanitary accommodation, laundry, drying room, galley or cold storeroom forms part of the crew accommodation must be gastight, and must be watertight to

This gazette is also available free online at **www.gpwonline.co.za**

such height as is necessary in accordance with standard A3.1 paragraph 6.(e) of the Maritime Labour Convention.

(5) Any bulkhead separating sanitary accommodation from any other part of the crew accommodation must, except in a doorway, be watertight to a height of at least 230 millimetres above the floor of the sanitary accommodation: Provided that the requirements of this subregulation must not apply to bulkheads separating—

(a) sanitary accommodation from other sanitary accommodation;
(b) laundry or drying room from another laundry or drying room;
(c) a galley from another galley or a pantry; or
(d) a cold storeroom from another cold storeroom.

(6) Any inside panelling in crew accommodation must be constructed of suitable material with a surface which can be easily kept clean.

(7) Bulkhead or panelling must not be constructed in such a manner or of such material likely to harbour vermin.

(8) Bulkhead surfaces and deckheads in sleeping rooms and mess rooms should be capable of being easily kept clean and light in colour with a durable non-toxic finish.

(9) Decks in all seafarer accommodation should be of suitable material and construction and should provide a non-slip surface impervious to damp and easily kept clean.

(10) Where the floorings are made of composite materials, the joints with the sides should be profiled to avoid crevices.

(11) Bulkheads which enclose any part of crew accommodation and are exposed to weather, and any part of the side of the vessel which forms a wall or part of a wall of the crew accommodation, must be so insulated as to prevent overheating or condensation unless the crew accommodation is so protected by its situation and ventilation that overheating and condensation are unlikely to occur.

This gazette is also available free online at **www.gpwonline.co.za**

(12) (a) Every bulkhead, casing or deck separating any part of crew accommodation from any space, including a cold storeroom, which is subject to abnormal heat or cold must be so insulated as to prevent condensation or discomfort to the crew.

(b) All machinery casings and all boundary bulkheads of galleys and other spaces in which heat is produced should be adequately insulated where there is a possibility of resulting heat effects in adjoining accommodation or passageways.

(13) Every bulkhead, casing or deck separating any part of the crew accommodation from any space, must be so insulated as to prevent exposure to hazardous level of noise and vibration to the crew in accordance with standard A3.1 paragraph 6(h) of the Maritime Labour Convention.

(14) (a) There must be no direct openings into sleeping rooms from cargo and machinery spaces or from galleys, storerooms, drying rooms or communal sanitary areas that are part of a bulkhead separating such places from sleeping rooms.

(b) External bulkheads must be watertight and gastight and must be efficiently constructed of steel or other suitable material to the satisfaction of the Authority.

(15) There must be no opening in any of the bulkheads referred to in subregulation (4) except that—

(a) where sanitary accommodation or changing rooms provided for the exclusive use of engine room officers and ratings are sited adjacent to the propelling machinery space, there may be an opening in the propelling machinery space bulkhead to the sanitary accommodation or changing rooms and an opening from the sanitary accommodation or changing rooms to a passageway forming part of the crew accommodation: Provided that a hinged, steel, self-closing gastight door is fitted to the opening leading from the spaces referred to in this paragraph to the propelling machinery space; and

(b) where no other arrangement is practicable, there may be an opening in a bulkhead separating a passageway in the crew accommodation from a machinery space if that opening is provided with a hinged, steel, self-closing gastight door.

This gazette is also available free online at www.gpwonline.co.za

(16) Any part of crew accommodation which adjoins a tank in which oil, fuel oil, lubricant oil or other flammable oil or gaseous fuel may be carried must be separated from that tank either—

(a) by a gastight steel division additional to the division which retains the oil, fuel oil, lubricant oil or other flammable oil or gaseous fuel; or

(b) by a division of all-welded steel construction capable of withstanding a head of water at least 2.4 metres greater than the maximum service head.

(17) A manhole or any other opening to a fuel tank must not be situated in crew accommodation.

Batteries

7. (1) Batteries of a type which emit gases must not be stored in the crew accommodation and there must be no opening from crew accommodation into a space where such batteries are stored.

(2) Precautions must be taken to ensure that fumes from batteries cannot be discharged into crew accommodation.

Overhead Decks

8. (1) In every vessel constructed of steel or other suitable material, every deck which forms the crown of any part of the crew accommodation and is exposed to the weather, must—

(a) be constructed of steel or other suitable material to the satisfaction of the Authority, and in addition, be of the following construction:

(i) the materials used to construct internal deckheads, panelling and sheeting, floors and joinings must be suitable for the purpose and conducive to a healthy environment;

(ii) external deckheads of sleeping rooms and mess rooms should be adequately insulated;

(iii) measures should also be taken to provide protection from heat effects of steam or hot-water service pipes or both;

(iv) sleeping rooms, mess rooms, recreation rooms and alleyways should be adequately insulated to prevent condensation or overheating;

This gazette is also available free online at www.gpwonline.co.za

(v) the deckhead should be of material with a surface easily kept clean and construction likely to not harbour vermin should be used;

(vi) the deckhead surfaces in sleeping rooms and mess rooms should be capable of being easily kept clean and light in colour with a durable non-toxic finish; and

(vii) the decks in all seafarer accommodation should be of approved material and construction and should provide a non-slip surface impervious to damp and easily kept clean; and

(b) be in accordance with the requirements of standard A3.1 of the Maritime Labour Convention.

Flooring

9. (1) In every vessel the decks which form the floors in the crew accommodation must be properly constructed and—

(a) must be in accordance with standard A3.1 of the Maritime Labour Convention; and

(b) where the floorings are made of composite materials, the joints with the sides should be profiled to avoid crevices.

Heating and ventilation

10. (1) In every vessel other than a vessel employed solely within the Tropics or the Persian Gulf, all sleeping rooms, mess rooms, recreation rooms, sanitary accommodation offices, studies and hospitals forming part of the crew accommodation must be provided with a heating system which must be permanently installed and capable of ensuring that the ventilation system provided for such rooms or accommodation in compliance with these Regulations is working in accordance with the requirements of standard A 3.1 paragraph 7, guideline B 3.1.1 paragraph 2 and B 3.1.3 paragraph 1, 2 and 3 of the Maritime Labour Convention.

(2) In every vessel the crew accommodation and the means of access thereto and exit therefrom must be so arranged, constructed and situated in such a position as to ensure protection from weather in accordance with the requirements of subregulation (1).

This gazette is also available free online at www.gpwonline.co.za

(3) (a) Every enclosed space, other than a cold storeroom, forming part of the crew accommodation of any vessel must be provided with a trunked mechanical ventilation system complying with the requirements specified in Annex 1.

(b) The Authority may exempt any vessel from the requirements of this subregulation, in so far as it relates to the ventilation of a storeroom for the storage of dry provisions, if the Authority is satisfied that compliance with that requirement is unnecessary by reason of the position of the storeroom. —

Lighting

11. (1) In every vessel, every part of the crew accommodation other than pantries, laundries, drying rooms, lockers and storerooms, must be properly lighted by natural and electrical light and in accordance with standard A3.1.8 and guideline B3.1.4 of the Maritime Labour Convention.

(2) Natural lighting of a sleeping room, mess room, recreation room or hospital accommodation, must be regarded to be proper for the purposes of this Regulations, if it is sufficient to enable a person of normal vision to read at any point in the room, being a point available for free movement, during daytime and in clear weather.

(3) (a) In every vessel an electrical system must be installed which is capable of providing adequate lighting in every part of the crew accommodation.

(b) The electric lights must be arranged so as to give the maximum benefit to the crew, and in particular an electric reading light must be fitted at the head of each bed and must be capable of being switched on and off from the bed.

(c) A lamp emitting at least 200 lumens must be fitted in every reading light in a sleeping room, and a lamp emitting at least 400 lumens must be fitted in every reading light in a hospital.

(d) An efficient alternative system of lighting or source of electric power must always be available for lighting the crew accommodation.

(e) The electric lighting of the spaces referred to in paragraph (h) must be regarded to be adequate if, when the lamps and paintwork are new, the illumination in the horizontal plane when measured at the

This gazette is also available free online at **www.gpwonline.co.za**

points and in the manner prescribed in paragraph (f) is steady and, subject to a tolerance of 10 per cent, is maintained at a value not less than that prescribed for every such space.

(f) The points at which illumination must be measured must be as follows:

(i) Where general measurement points are prescribed for the illumination of a space, measurements must be taken at every point midway between every 2 adjacent lamps and at every point midway between every lamp and any position on any boundary of the space: Provided always that where within any space a part of that space, being a part of that space available for free movement, is shaded from the direct rays of a lamp by a re-entrant angle formed in the boundary of the space, the central point of the part of the space so shaded must also be a general measurement point; and

(ii) where particular measurement points are also prescribed for a space, measurements must in addition be taken at every such point.

(g) In all cases referred to in this regulation, measurements must be taken at a height of 838 mm above the floor, except that in the case of passageways, companionways, and covered recreation deck spaces, measurements may be taken either at a height of 838mm above the floor or at floor level, provided that in the case of measurements taken at floor level the reflection factor of the floor surface must not be less than 40 percent illumination of provision storerooms measured when the rooms are empty.

(h) Illumination must comply with Table 1. below:

Table 1.

Sleeping Rooms and Day Rooms	
At general measurement points	50 lumens
At every mirror	200 lumens
At every seat at a writing desk portable	150 lumens
A sleeping room provided for use of more than one person	150 lumens
Mess rooms	
At general measurement points	100 lumens

This gazette is also available free online at **www.gpwonline.co.za**

At every table and sink	150 lumens
Recreation Rooms, including rooms for watching films and television, hobbies and games rooms	
At general measurement points	50 lumens
At every recreational table	100 lumens
At every seat at a writing desk or table	150 lumens
At not less than half the seats other than those in sleeping rooms or day rooms	150 lumens
Hospital Accommodation	
At general measurement points	50 lumens
At any washbasin	100 lumens
At least one fixed lamp must be installed in addition to the electric reading lamp required by Regulations 28(10) to be provided at the head of each bed.	
Offices and Studies	
At general measurement points	100 lumens
At every seat at a writing desk or table	200 lumens
Sanitary Accommodation, including sanitary accommodation in hospitals	
At general measurement points	100 lumens
At any mirror	200 lumens
Laundries	
At general measurement points	100 lumens
Drying Rooms	
At the centre of the space	50 lumens
Galleys, including bakeries and pantries	
At working positions	300 lumens
The lights must be so disposed as to ensure that food preparation tables, range tops serving tables and washing up sinks receive the maximum amount of light.	
Dry provision storerooms and cold store-rooms	
At general measurement points	100 lumens
The lights must be so disposed as to ensure that shelves and cupboards receive the maximum amount of light.	
Passageways, companionways and covered deck recreation spaces	
At general measurement points	50 lumens
At least a single light must be placed at the head of each stairway, ladder and hatchway and at least two at or near the doors of lockers provided for oilskins or working clothes	

Drainage

12. (1) In every vessel efficient drainage by pipes or channels must be provided for every part of the crew accommodation situated on an open deck wherever such drainage is necessary for clearing water shipped from the sea in accordance with standard A3.1. paragraph 6(g) of the Maritime Labour Convention.

(2) There must be no drainage from any source, not being sanitary accommodation, into the sanitary accommodation forming part of the crew accommodation.

This gazette is also available free online at **www.gpwonline.co.za**

(3) (a) Every space appropriated for use as sanitary accommodation must be served by one or more scuppers which do not serve any space other than sanitary accommodation in accordance with guideline B3.1.7 paragraph 3 of the Maritime Labour Convention.

(b) The scuppers must be at least 50mm in diameter and must be situated wherever water is likely to collect on the floor of the space.

Painting

13.(1)(a) In every vessel the interior sides and ceilings of every part of the crew accommodation must be covered with enamel paint or other suitable material.

(b) The paint enamel or other material must be of good quality and white or light in colour.

(2) Lime wash, paint or lacquers containing nitro-cellulose, highly flammable or noxious fume-producing compounds must not be applied in the crew accommodation.

(3) Crew accommodation spaces should only be coated with finishes which are fire retardant achieved through the use of woven roving glass, phenolic resin, additives to resin, fire retardant coatings or protection by non-combustible materials and intumescent coatings that may be used.

(4) The wooden parts of the furniture and fittings in the crew accommodation must be finished externally with paint, varnish, polish or by other suitable means.

(5) All paint, varnish, polish and other finishes in the crew accommodation must be capable of being easily kept clean and must be maintained in good condition.

Marking

14. (1) Every sleeping room forming part of the crew accommodation must be marked inside the room with whichever of the markings specified in Part 1 of Annex 2 is appropriate in the circumstances.

This gazette is also available free online at **www.gpwonline.co.za**

(2) Every space, other than a sleeping room or an open deck, forming part of the crew accommodation of such a vessel must be marked either inside the space or on or above the door to such space with whichever of the markings as specified in Part II of the Annex 2 is appropriate in the circumstances.

(3) (a) All markings required in terms of this regulation must be in clear characters and in a readily visible position on the vessel's structure.

(b) The markings must be cut into the structure or otherwise marked in an equally permanent manner.

(4) Spaces forming part of the crew accommodation must not be marked, whether inside or outside the space, with any marking which may be taken to indicate that the space is appropriated for use by persons differing in number or description from the persons for whose use the space has been certified by the Authority.

Sleeping rooms

15. (1)(a) In every vessel, unless the circumstances are such that no members of the crew are required to sleep on board, sleeping rooms must be provided for the crew in accordance with the provisions of this Regulations.

(b) The materials used to construct internal bulkheads, panelling and sheeting, floors and joining's must be suitable for the purpose and conducive to ensuring a healthy environment.

(c) Crew accommodation, or any part thereof, must not be shared with passengers or used by or for the benefit of passengers.

(d) In vessels other than passenger vessels, an individual sleeping room must be provided for each seafarer: Provided in the case of vessels of less than 3,000 gross tonnage or special purpose vessels, the Authority may grant an exemption from the requirements of this paragraph after consultation with the shipowners' and seafarers' organisations concerned.

(e) The maximum number of persons accommodated in sleeping rooms must be in accordance with standard A3.1 paragraph 9(h) and (j) of the Maritime Labour Convention: Provided the Authority may, after consultation with the shipowners and seafarers organizations

This gazette is also available free online at www.gpwonline.co.za

concerned, exempt vessels of less than 200 gross tonnage where it is reasonable to do so, taking account of the size of the vessel and the number of persons on board in relation to the requirements of the following provisions of this subregulation in respect of:

(i) the floor area for single berth seafarers sleeping rooms; and

(ii) the maximum capacity and floor area for sleeping rooms.

(2) (a) Each of the following classes of persons must be provided with sleeping rooms separate from those provided for the other classes:

(i) Officers; and

(ii) Ratings.

(b) Every watchkeeping ratings may be provided with sleeping rooms separate from those of other watches.

(c) Non-watchkeepers must be provided with sleeping rooms separate from those of watchkeepers.

(d) Separate sleeping rooms must be provided for men and for women.

(3) (a) Subject to the provisions of subparagraphs (b), the minimum floor area provided for each person in a sleeping room forming part of the crew accommodation must be in accordance with the requirements of standard A 3.1 paragraph 9(f), (g), (h), (i), (k) and (l) of the Maritime Labour Convention:

Provided the Authority may, after consultation with the shipowners and seafarers organisations concerned, exempt vessels of less than 200 gross tonnage where it is reasonable to do so, taking account of the size of the vessel and the number of persons on board in relation to the requirements of the following provisions of this subregulation in respect of:

(i) the floor area for single berth seafarers sleeping rooms; and

(ii) the maximum capacity and floor area for sleeping rooms.

(b) In determining the floor area of a room for the purpose of this subregulation—

(i) spaces occupied by berths, lockers, seats or chests of drawers must be taken into account and spaces which by reason of their small size or irregular shape cannot accommodate furniture

This gazette is also available free online at www.gpwonline.co.za

and do not contribute to the area available for free movement, must not be taken into account; and

(ii) sleeping rooms must be of adequate size and properly equipped so as to ensure reasonable comfort and to facilitate tidiness.

Berth

16 (1) Every sleeping room in the crew accommodation must be provided with berth and where a room is occupied by more than one person in terms of regulation 15(1)(d), each person accommodated in the room must be provided with a berth in accordance with standard A 3.1 paragraph 9(e) of the Maritime Labour Convention.

(2) (a) The framework of each berth, and the leeboards or lee-rails thereof if any, must be constructed of metal or other material which is hard and smooth and unlikely to become corroded.

(b) The framework of the berth in paragraph (a) must be so made as not to be likely to harbour vermin.

(c) In particular, if the berth in paragraph (a) is constructed with tubular frames, the frames must be completely sealed and without perforations.

(3) There must be unobstructed access to at least one side of each berth and in particular, if the adjacent sides of two berths in the same room are parallel to each other or when projected make an angle of less than 90° with each other, the distance between those sides at any point must not be less than 762 mm if both berths are in single tier or 914 mm in any other case.

(4) Where berth abut upon each other the berth must be separated by screens made of wood or other suitable material.

(5) A berth must not be placed—

(a) within 100 mm of a ventilation trunk which may be used for circulating hot air; or

This gazette is also available free online at www.gpwonline.co.za

(b) within 50 mm of a bulkhead or the vessel's side, unless the berth is so supported and the room so constructed as to avoid harbouring dirt and vermin in or near the berth, to enable the bedding to be kept clean and dry, and to minimise the soiling of paintwork in way of the berth.

(6) Berths must not be arranged in tiers of more than two.

(7) Berths placed along the vessel's side must be in single tier, except in a room in which there is no side scuttle: Provided the Authority may exempt any vessel from the requirements of this subregulation to the extent to which the Authority is satisfied that the berths in the sleeping room are clear of side scuttles and that the comfort of the crew will thereby be increased.

(8) (a) A berth must not be less than 300 mm from the floor of the room measured from the bottom of the mattress.

(b) Berths should not be arranged in tiers of more than two and in the case of berths placed along the vessel's side, there should be only a single tier where a sidelight is situated above a berth.

(c) The lower berth in a double tier should be not less than 300 mm above the floor and the upper berth should be placed approximately midway between the bottom of the lower berth and the lower side of the deckhead beams.

Furniture and Fittings in Sleeping Rooms

17. (1) Every sleeping room for ratings must be provided with the following equipment:

(a) for each person accommodated in the room—

(i) one drawer having a capacity of at least 56 litres;

(ii) one clothes locker or wardrobe, in either case with at least 475 litre capacity in internal sectional area and where the drawer is incorporated in the clothes locker, then the combined minimum volume of the clothes locker must be 500 litres: Provided that the locker or wardrobe must be fitted with a shelf and fittings on which clothes may be hung and be capable to be locked by the occupant to ensure privacy; and

This gazette is also available free online at www.gpwonline.co.za

(iii) at least one coat hook in addition to any coat hooks fitted in a locker or wardrobe;

(b) a table of fixed or drop-leaf type, or a desk, or a sliding leaf or top fitted to a chest of drawers;

(c) comfortable seating accommodation as necessary;

(d) a mirror suitable for toilet purposes;

(e) a cabinet suitable for containing toilet requisites;

(f) a book rack;

(g) a runner or a carpet of suitable material at one side of each bed or tier of beds, as the case may be;

(h) a curtain fitted to each bed, unless the room accommodates only one person; and

(i) a curtain fitted to each side scuttle, unless the side scuttle is fitted with an equivalent installation.

(2) In every sleeping room in which more than one rating is accommodated, every drawer, locker and wardrobe must be capable of being locked for privacy.

(3) Subject to the provisions of subregulation (4), every sleeping room for officers must be provided with the following equipment:

(a) For each officer accommodated in the room—

(i) at least three drawers with a total capacity of 284 litres or as near thereto as is practicable in the circumstances;

(ii) a wardrobe at least 1680 mm in height and 0.3m^2 in internal sectional area;

(iii) at least two coat hooks, in addition to any coat hooks fitted in the wardrobe;

(b) a writing desk fitted, if practicable, with drawers additional to the aforesaid drawers;

(c) a chair with arm rests;

(d) a couch at least 1830 mm in length or as near thereto as is practicable in the circumstances: Provided that the Authority may permit the couch to be dispensed with—

(i) if the Authority is satisfied that a couch of adequate dimensions cannot be placed in the room without interfering with the comfort of the occupants; or

This gazette is also available free online at www.gpwonline.co.za

(ii) in the case of a room which accommodates only one officer, if the Authority has consulted with such organisation as appears to him to be representative of the class of officer concerned and is satisfied that a fully upholstered easy chair with closed arms is provided in the room;

(e) a mirror suitable for toilet purposes;

(f) a cabinet suitable for containing toilet requisites;

(g) a wash-basin of hygienic and durable material, having hot and cold running fresh water must be fitted, except where such a washbasin is situated in the private bathroom;

(h) a splash plate or other means of protection for the wall above the wash-basin, if any;

(i) a carpet runner of suitable material;

(j) curtains fitted to each bed, unless the room accommodates only one officer;

(k) curtains fitted to each side scuttle, unless the side scuttle is fitted with equivalent installation; and

(l) a book case or book rack:

Provided the Authority may, after consultation with the shipowners and seafarers organisations concerned, exempt vessels of less than 200 gross tons where it is reasonable to do so, taking account of the size of the vessel and the number of persons on board in relation to the requirements of the following provisions of this subregulation in respect of:

(i) the floor area for single berth seafarers sleeping rooms; and

(ii) the maximum capacity and floor area for sleeping rooms.

(4) (a) Any of the equipment referred to in paragraphs (b), (c), (d) and (l) of subregulation (3) may be provided in a day room available for the sole use of the officers concerned, instead of in the sleeping room.

(b) Any of the equipment referred to in paragraphs (e) to (h) inclusive of the said paragraph may be provided in washing accommodation appropriated for the exclusive use of one officer instead of in the sleeping room of that officer.

(5) (a) Subject to the foregoing provisions of this Regulations, all lockers, wardrobes, tables, desks, the unupholstered parts of chairs and

This gazette is also available free online at www.gpwonline.co.za

couches and similar furnishings, must be made of polished hardboard, rustproof metal or other smooth and impervious material not likely to crack, warp or become corroded.

(b) All furniture provided in the sleeping rooms must be so made as not to be likely to harbour vermin.

Mess Rooms

18. (1) In every vessel, unless the circumstances are such that members of crew are not required to mess on board, mess rooms must be provided for the crew and must be of such dimensions as will be sufficient to accommodate the greatest number of persons likely to use the mess rooms, at any one time.

(2) A mess room must not be combined with a sleeping room.

(3) In every vessel of 500 gross tons or over the mess rooms provided for ratings may be separate from those provided for the master of the vessel or for officers.

(4) In every vessel of 1,000 gross tons or over a single mess room must be provided for all officers in the vessel: Provided that the officers may be accommodated in separate mess rooms if the officers' sleeping rooms are in widely separated portions of the vessel.

(5) The Authority may exempt from the requirements of this regulation to the extent to which the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances —

(a) any passenger vessel; or

(b) any special purpose vessel.

Furniture and Fittings in mess rooms

19. (1)(a) Every mess room forming part of the crew accommodation must be provided with sufficient tables to allow a space of at least 508mm measured along the edge of a table, for each person likely to use the

This gazette is also available free online at **www.gpwonline.co.za**

room at any one time in accordance with guideline B 3.1.6 paragraph 4,5,6 and 7 of the Maritime Labour Convention.

(b) Each table must be at least 600 mm wide if seats are provided on both sides of the table; and at least 380 mm wide if seats are provided only on one side of the table.

(c) The table must be of such a size and so situated as to be readily accessible.

(2) (a) Single chairs must be provided in the mess room for each person using the room at any one time.

(b) The chairs in paragraph (a) must be fitted with arm rests unless chairs with arm rests are available in a recreation room for the persons using the mess room: Provided that a couch may be substituted for chairs adjacent to a bulkhead of the vessel's side and—

(i) such couch must be at least 380 mm wide and must be fitted with upholstered or padded seats covered with material impervious to dirt and moisture and must be provided with comfortably shaped backs; and

(ii) the backs of the couch must also be padded or upholstered and must be covered with material impervious to dirt and moisture.

(3) (a) Every mess room provided for persons who do not provide their own food must be fitted with a storage locker or rack in either case capable of holding sufficient mess utensils for those persons.

(b) (i) Every mess room provided for persons who provide their own food must be fitted with a storage locker for each person which must be of sufficient size to be capable of containing each person's mess utensils together with a supply of food sufficient for the person for at least 16 hours.

(ii) All storage lockers provided in compliance with this paragraph must be—

(aa) adequately ventilated;

(bb) capable of being locked; and

(cc) so fixed as to clear the floor by at least 300 mm:

This gazette is also available free online at www.gpwonline.co.za

Provided that the lockers or racks may be fitted in a pantry, storeroom or other suitable place outside a mess room and readily accessible therefrom; and

(c) Lockers or racks intended to contain food must not be fitted in a sleeping room.

(4) (a) A means from which boiling drinking water must always be available must be fitted in each mess room, unless such equipment is fitted in a pantry readily accessible from the mess, room or, in the case of a vessel of under 1,000 gross tons, in a galley.

(b) The equipment in paragraph (a) must be adequate in size for the number of persons likely to use at any one time, the mess room provided in accordance with subregulation(1).

(c) If in the case of a mess room provided for officers or petty officers the dresser is fitted in a pantry, a sideboard must be provided in the mess room.

(d) A supply of fresh water must be laid out to the sink and boiler.

(5) (a) All tables, lockers, dressers and the unupholstered parts of chairs and couches in the mess room must be made of polished hardwood, rustproof metal or other smooth and impervious material not likely to crack, warp or become corroded.

(b) All furniture provided in the mess room must be so made as not to be likely to harbour vermin.

(6) The Authority may exempt—

(a) any passenger vessel; or

(b) any special purpose vessel,

from the requirements of this Regulations to the extent to which the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances.

Recreation spaces and studies

20.(1) In every vessel-

This gazette is also available free online at **www.gpwonline.co.za**

(a) a recreation room, must be provided, and must not be combined with a mess room in accordance with standard A 3.1 paragraph 17 and guideline B 3.1 paragraph 11 of the Maritime Labour Convention; and

(b) a smoking room may be provided.

(2) If more than two cadets or any other trainees are accommodated in one sleeping room, a separate room may be provided in the vessel for their use as a study, unless another suitable place is available to them for purposes of study.

(3) In every vessel of 500 gross tons or over, a bookcase must be provided for, and must be accessible to all members of the crew.

(4) (a) In every vessel space must be provided on an open deck for the use of the crew for recreational purposes.

(b) The space in paragraph (a) must be adequate in area, ranging from at least 9 square meters or more, in so far as the size of the vessel allows, having regard to the number of persons in the crew.

Office accommodation

21. (1) In every vessel of 3,000 gross tons or over, two separate rooms must be provided for use as offices or a common vessel's office and must be appropriately furnished for that purpose in accordance with standard A 3.1 paragraph 15 of the Maritime Labour Convention.

(2) One of the separate rooms in subregulation (1) must be appropriated for use by the Chief Navigating Officer or the officers of the deck department, and the other for use by the Chief Engineer Officer or for the officers of the engine room department.

(3) The office accommodation must be in a room not used for any other purpose except study: Provided that an office appropriated solely for use by an individual officer may be combined with the day room of that officer.

Supply of drinking water

22. (1)(a) In every vessel, a supply of drinking water must be provided in the crew accommodation from tanks, of an adequate capacity having

This gazette is also available free online at **www.gpwonline.co.za**

regard to the number of persons in the crew and the time, likely to elapse between successive replenishments of the water, or by other equally efficient means.

(b) Drinking water must be compliant with the appropriate portable standard as prescribed in the compulsory national standards for quality of portable water issued under the Water Services Act, 1997 (Act No. 108 of 1997).

(c) If service tanks are fitted for the purpose of supplying o drinking water, the service tanks must be directly connected with the vessel's main drinking water storage tanks.

(d) In vessels of 3,000 gross tons or over, any pumping necessary for the supply of drinking water in crew accommodation must be by mechanical power.

(e) In any other vessel other than a vessel not contemplated in paragraph (d), the pumping necessary for the supply of drinking water in crew accommodation must be by mechanical power.

(2) Cold drinking water must be laid on to taps in the galleys and pantries and in the mess rooms provided for those members of the crew for whose use and service pantries are not provided.

Laundry facilities

23. (1)(a) In every vessel, suitable and sufficient laundry washing facilities must be provided in accordance with the requirements of standard A3.1 paragraph 13 and guideline B 3.1 paragraph 7.4 of the Maritime Labour Convention: Provided the Authority may, after consultation with the shipowners and seafarers organisations concerned, exempt vessels of less than 200 gross tonnage where it is reasonable to do so, taking account of the size of the vessel and the number of persons on board in relation to the requirements of this subregulation.

(2) (a) In every vessel, rooms for drying the crew's clothes must be provided separate from sleeping rooms, mess rooms, recreation rooms, offices, storerooms, galleys, pantries and hospitals and must be fitted with racks or rods and provide sufficient space having regard

This gazette is also available free online at **www.gpwonline.co.za**

to the number of persons in the crew and the duration of the voyages on which the vessel is intended to be engaged.

(b) The heating of the rooms in paragraph (a) must be capable of being controlled independently of the heating of any other space in the vessel.

(c) The exhaust ventilation of the rooms in paragraph (a) must be independent of the ventilation of all other spaces in the vessel unless it is provided by a trunked mechanical ventilation system:

Provided that in vessels of under 500 gross tons, drying cabinets or other suitable facilities may be substituted for a drying room.

(3) (a) In every vessel, adequately ventilated compartments or lockers must be provided for hanging oilskins and working clothes used by the crew.

(b) Separate compartments or lockers must be provided for officers and ratings, the compartments or lockers must be situated outside the sleeping rooms of the crew and in a position readily accessible therefrom:

Provided the Authority may exempt any vessel of under 500 gross tons from any of the requirements of this subregulation.

Sanitary facilities

24. (1) In every vessel, seafarers must be provided with convenient access to sanitary facilities in accordance with standard A3.1 paragraph 11 and guideline B3.1 subregulation 7 of the Maritime Labour Convention: Provided that the Authority may, in relation to any vessel, after consultation with the shipowners and seafarers organisations concerned, exempt vessels of less than 200 gross tonnage where it is reasonable to do so, taking account of the size of the vessel and the number of persons on board in relation to the requirements of standard A3.1 paragraph 11(d).

(2) If the entrance to a water closet is from an open deck, the entrance must, if practicable, be properly screened.

(3) (a) If the means of entry into water closets forming part of the crew accommodation is from a passageway leading to other parts of the crew accommodation, a lobby must be provided at the entrance of

This gazette is also available free online at www.gpwonline.co.za

the sanitary facilities, or where a lobby is not practicable, a self-closing door.

(b) Any doors between a sanitary facility and a passageway must be close fitting and without apertures: Provided the Authority may exempt any vessel from the requirement that the doors must be close fitting and without apertures to the extent to which the Authority is satisfied that the exhaust ventilation arrangements from the sanitary facilities render compliance therewith unnecessary.

(4) Access to sanitary facilities must not be obtained directly from a mess room or sleeping room: Provided that—

(a) access to a sanitary facility may be obtained directly from not more than two sleeping rooms together accommodating not more than four persons; and

(b) if the persons so accommodated are three or four in number, the sanitary facility pedestal must be so screened as to ensure privacy.

(5) Every sanitary facility must be completely enclosed by bulkheads and must be provided with exhaust ventilation directly to the open air or to another sanitary facility which is provided with ventilation directly to the open air: Provided that a sanitary facility may be separated by a partition consisting of steel or other opaque and rigid material open at the top and bottom from—

(a) another sanitary facility;

(b) a urinal; or

(c) a shower or bath if the sanitary facility is served by a trunked mechanical ventilation system which effectively removes odours therefrom.

(6) Every sanitary facility must be so constructed as to facilitate cleaning and not to harbour dirt or vermin.

(7) Every sanitary facility must be provided with the following:

(a) A sanitary facility pedestal of single type with—

(i) a pan of hygienic or other suitable material;

(ii) a seat of polished hardwood or other suitable material, with an opening of 102 mm at the front;

This gazette is also available free online at www.gpwonline.co.za

(iii) a trap with an inspection plate; and

(iv) an efficient ventilator connected to the outlet;

(b) an adequate flush of water, which must be always available and supplied through self-closing non-concussive supply valves with a seating in material which is not likely to become corroded;

(c) a soil pipe not less than 100 mm in diameter, so constructed as to facilitate cleaning and minimise the risk of obstruction, connected to a main sewage outfall by an efficient and hygienic system: Provided the Authority may exempt vessels under 400 gross tons from the requirements of this paragraph;

(d) a device for holding toilet paper; and

(e) a handrail or grip.

(8) The provisions of this Regulations must not apply to sanitary facility forming part of a permanent hospital.

Galleys

25. (1) Every vessel must be provided with a galley for the preparation of food for the crew, unless the circumstances are such that no members of the crew are required to mess on board.

(2) The galley must be situated as near as possible to any mess room provided and all necessary equipment must be provided to enable food to be served in the mess rooms under all weather conditions.

(3) There must be no direct opening between the galley and any sleeping room.

(4) Every galley must, so far as is reasonable and practicable, be lighted by natural lighting.

(5) Every galley must be provided with at least three fixed points for artificial lighting, one of which must be situated close to a cooking range required by this Regulations.

(6) A galley situated on an open deck is prohibited.

This gazette is also available free online at **www.gpwonline.co.za**

(7) Every galley must be provided with exhaust fans fitted with grease filters which will draw off fumes from the cooking appliances therein and discharge the fumes into the open air: Provided the Authority may exempt from the requirement of this subregulation, any vessel of under 200 gross tons if the Authority is satisfied that the galley is so situated that the fumes therefrom can discharge only into the open air.

(8) (a) The floor of the galley must be provided with gutters and with scuppers which must be led to an enclosed tank for shore-side disposal in an environmentally friendly manner;

(b) The position and number of the gutters and scuppers must be such as will ensure the efficient drainage of the floor; and

(c) The material of the floor must be of approved durable material, impervious to damp.

(9) The cooking appliances in the galley must be arranged in a manner which will facilitate the cleaning of the galley.

(10) (a) All cupboards and dressers in the galley must be made of material which is impervious to dirt and moisture and can easily be kept clean.

(b) All metal parts of the cupboards and dressers must be rustproof.

(c) The cupboards and dressers must be so made not to be likely to harbour dirt or vermin.

(d) The bottoms of all cupboards and dressers in the galley must either be flush with the deck or must be so fitted as to enable the deck spaces beneath them to be readily accessible for cleaning.

(11) Every galley must be provided with such equipment as will enable food in sufficient quantity to be properly and readily prepared for the persons whom the galley is intended to serve and the cooking utensils to be hygienically cleaned.

(12) Every galley must be provided with cooking appliances in compliance with standard A3.2 paragraph 2 and guideline B 3.2. paragraph 1 of the Maritime Labour Convention.

This gazette is also available free online at **www.gpwonline.co.za**

(13) (a) Saltwater taps must not be fitted over a sink in any galley or other place in which food may be prepared for the crew.

(b) Hot and cold fresh water must be laid on to a sink in the galley for washing-up purposes.

(c) A connection must be provided on a water pipe within the galley, and must be suitable for the connection of a hose with which the floor may be scoured.

Dry provision storerooms

26. (1)(a) In every vessel in which the crew do not provide their own food, one or more storerooms must be provided for the storage of dry provisions for the crew.

(b) The storerooms in paragraph (a) must be fitted with sufficient shelves, cupboards and bins having regard to the maximum period likely to elapse between successive replenishments of stores and to the maximum number of persons for whom food is to be served.

(2) Every dry provision storeroom must be enclosed by bulkheads constructed of steel or other suitable material.

(3) Access to every dry provision storeroom must be obtained from a passageway, galley, pantry or another storeroom, or from a position on an open deck which, in so far as is reasonable and practicable in the circumstances, must be a protected position.

(4) Every dry provision storeroom must be so situated, constructed and ventilated as to avoid deterioration of the stores through heat, draught, condensation or infestation by insects or vermin.

(5) (a) Subject to subregulation (4), dry provision storeroom must not be situated over a boiler room or any other space in which heat is generated, or must adjoin a galley or machinery casing.

(b) The Authority may exempt any vessel from the requirements of this paragraph if the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances that the dry provision storeroom is adequately insulated.

This gazette is also available free online at **www.gpwonline.co.za**

(6) A dry provision storeroom, or any part thereof, must not be used for the storage of bedding or textiles.

Cold storeroom and refrigerating equipment

27.(1)(a) Every vessel, must be provided –

(i) with refrigerating equipment and cold storerooms; and

(ii) adequate capacity for the storage of perishable provisions for the crew, having regard to the period likely to elapse between successive replenishments of stores.

(b) The Authority may exempt any vessel of under 1,000 gross tons from the requirements of this subregulation if the Authority is satisfied that the vessel is provided with adequate alternative equipment for the storage of perishable provisions.

(2) Access to every cold storeroom must be obtained from a passageway, galley or pantry or from another storeroom.

(3) (a) Refrigerating machinery in which methyl chloride is used is prohibited.

(b) Refrigerating systems, including plants associated with air-conditioning systems must comply with the appropriate SANS standards and Chapter II-2 Regulations 9 of the Safety Convention.

(4) In every cold storeroom—

(a) an alarm must be connected to the navigation bridge and the outside of the opening to the cold storeroom; and

(b) each cold storeroom referred to in paragraph (a) must be capable of being opened from the inside to prevent persons being trapped.

Hospitals

28. (1)(a) Every vessel, which is intended to be at sea on any occasion for a continuous period of more than 3 days with a crew of 15 or more seafarers, must be provided with a space appropriated for use as a permanent hospital for the crew in accordance with standard A3.1 paragraph 12 and standard A4.1 of the Maritime Labour Convention

This gazette is also available free online at **www.gpwonline.co.za**

regarding medical care on board vessels and guideline B3.1 paragraph 8 of the Maritime Labour Convention for hospital accommodation.

(b) The space appropriated for the purpose referred to in paragraph (a)must not at any time be used for any purpose other than for the treatment of sick persons.

(c) The Authority may exempt from the requirement of this subregulation any vessel engaged only on coasting voyages wholly between ports within the Republic.

(2) (a) In every other vessel other than a vessel referred to in subsection (1), a room must be appropriated for use, when necessary, as a temporary hospital.

(b) When a room referred to in paragraph (a) is in use as a hospital, it must not be used for any purpose other than the treatment of sick persons.

(c) The Authority may exempt any vessel from the requirements of this subregulation if the Authority is satisfied that compliance therewith is unnecessary in the circumstances.

(3) (a) Every hospital whether permanent or temporary must be situated in a position which will ensure the greatest possible comfort for the patient.

(b) The hospital must be readily accessible, and, in the case of a vessel not carrying a duly qualified medical practitioner or duly qualified nurse exclusively so employed as a member of the crew, must be so situated to be conducive to patients receiving prompt and proper attention in all weathers.

(4) (a) The minimum width of the entrance to every permanent hospital must be 762 mm or as near thereto as is practicable in the circumstances.

(b) The hospital must be so arranged that a stretcher can easily be carried into the hospital and placed alongside at least one single-tier bed therein.

This gazette is also available free online at **www.gpwonline.co.za**

(5) The floor-covering in every permanent hospital must, as far as is practicable be free from joints.

(6) (a) Every permanent hospital must include hospital accommodation fitted on at least two sides with side scuttles at least 305 mm in diameter: Provided that, if it is not practicable to fit a side scuttle on two sides of the hospital, a sky lightof as large a size as is practicable, may be substituted for a side scuttle on one side of the hospital.

(b) All side scuttles in the hospital, and any skylight therein which is exposed to the direct rays of the sun, must be provided with curtains, or equivalent installation.

(c) The Authority may exempt from the requirements of this subregulation any vessel of under 200 gross tons.

(7) (a) In addition to any mechanical ventilation required by Regulation 10, every permanent hospital must be provided with adequate natural supply and exhaust ventilation to the open air by means of ventilators independent of the ventilators provided for any other space in the vessel.

(b) The Authority may exempt any vessel from the requirement of this subregulation if the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances.

(8) Every permanent hospital may be provided with an electric fan in addition to being served by a trunked mechanical ventilation system.

(9) Any radiators in a permanent hospital must be installed, as far as is practicable, from the heads of beds.

(10) In addition to the lighting required by regulation 11, every permanent hospital must be provided with a portable electric lamp and with such accessories as are necessary for its use.

(11) (a) In every vessel which is required by this regulation to be provided with a permanent hospital, at least one single-tier bed must be

This gazette is also available free online at www.gpwonline.co.za

provided in the hospital for every 50 members of the crew or part thereof.

(b) The Authority may exempt from the requirement of paragraph (a) any vessel carrying more than 300 persons, to the extent to which the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances.

(c) The bed referred to in paragraph (a) must, if practicable, be so arranged as to be accessible from both sides and from the foot.

(d) If any of the beds in the hospital accommodation are arranged in double tiers, the upper tier must be hinged or must be removable.

(e) Subject to the provisions of paragraphs (a) to (d) of this subregulation, the provisions of subregulations (2) to (8) and regulation 16 must apply to hospital beds as they apply to beds in a sleeping room.

(12) In every permanent hospital one of each of the following items of equipment must be provided for each bed in the hospital and must be within reach of that bed:

(a) A locker approximately 305 mm^2 by 610 mm high, and fitted with a flat top and a shelf;

(b) a water bottle; and

(c) a tumbler.

(13) In every permanent hospital the following items of equipment must be provided:

(a) Seats adequate in number, having regard to the number of beds in the hospital;

(b) a clothes locker additional to that required by subregulation (12) of this regulation, and complying with the specifications set forth in paragraph (a) (ii) of subsection (1) of regulation 17;

(c) a box cover which will conceal a bed-pan; and

(d) electric alarm bell-switch so arranged as to be within reach of each bed and communicating with the sleeping room of a person in charge of the patients and the navigation bridge.

This gazette is also available free online at **www.gpwonline.co.za**

(14) (a) A wash-basin having a capacity of at least 7 litres must be filled in every permanent hospital.

(b) In vessels of 5,000 gross tons or over a bath at least 1.4 m in internal length must be fitted in washing accommodation forming part of the hospital.

(c) The wash-basin and bath must be made of or coated with hygienic and durable material having a smooth and impervious surface not likely to crack, flake or become corroded.

(d) The wash basin must be fitted with an efficient and hygienic discharge system separate, if practicable, from any other discharge system in the vessel and in particular the waste pipes must be fitted in a manner which will facilitate cleaning.

(e) A scupper of at least 50 mm in diameter must be fitted in the lowest part of any room, other than hospital accommodation, which contains such wash-basin or bath.

(f) The Authority may exempt any vessel from the requirement of a bath in the permanent hospital, if the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances.

(15) (a) A sanitary facility pedestal must be fitted as part of every permanent hospital.

(b) The sanitary facility pedestal must be fitted either in a water closet or in washing accommodation forming part of the hospital.

(c) Access to the sanitary facility pedestal, or washing accommodation as the case may be, must be obtained easily from the bed or from a lobby forming part of the hospital.

(d) The Authority may exempt any vessel from the requirement of paragraph (c) if the Authority is satisfied that compliance therewith is impracticable in the circumstances, and that the sanitary facility forming part of the hospital is situated sufficiently near to the bed.

(e) The room in which the sanitary facility pedestal is installed must be provided with a gas-tight self-closing door unless it is served by a mechanical system of exhaust ventilation, and must be so constructed as to facilitate cleaning and not to harbour dirt or vermin.

(f) The room referred to in paragraph (e) must be ventilated in the manner specified in subregulation (7) of regulation 24.

This gazette is also available free online at **www.gpwonline.co.za**

(16) The Authority may exempt any vessel of under 200 gross tons from any of the requirements of this Regulation.

(17) The permanent hospital medical appliances provided in the vessel for the benefit of the seafarers on board must be as prescribed in the Merchant Shipping (Ship's Medicines and Medical Appliances) Regulations, 1991.

Medical Cabinet

29.(1)(a) In every vessel, a medical cabinet must be provided in a position adjacent to the permanent hospital, if any, required by regulation 28 or near to the sleeping room of the person in charge of sick persons on board.

(b) The medical cabinet must be fitted in a position in which it will remain dry and must be remote from all sources of heat.

(2) (a) The medical cabinet must be of a size, design and construction suitable for storing the medicines, and medical appliances provided in the vessel for the benefit of the seafarers on board as prescribed in the Merchant Shipping (Ship's Medicines and Medical Appliances) Regulations, 1991.

(b) In particular, the medical cabinet must be provided with the following:

(i) An outer door fitted with an efficient lock;

(ii) an inner cupboard, used solely for the storage of controlled drugs, fitted with a door and a lock which must be incapable of being opened by the key to the lock referred to in subparagraph (i);

(iii) shelves so constructed as to facilitate the identification of medicines stored thereon;

(iv) a dispensing counter or dispensing table, in either case with a surface which can easily be kept clean;

(v) at least two drawers suitable for the storage of medical stores and used solely for that purpose;

(vi) fittings which will enable hot water bottles to be carried in a hanging position;

This gazette is also available free online at www.gpwonline.co.za

(vii) a rack suitable for holding devices for measuring medicines; and

(viii) where applicable, a book of instruction as prescribed under the applicable medical regulations.

(3) The medical cabinet must be lighted by an electric light which must be inside or immediately outside the cabinet, and which will enable all the contents of the cabinet to be clearly seen in the absence of light from any other source.

(4) The medical cabinet and the place in which it is fitted must be so ventilated as to avoid deterioration of the contents of the cabinet.

(5) The Authority may exempt from any of the requirements of this regulation any vessel of under 200 gross tons, being a vessel engaged only on voyages wholly between ports within the Republic if the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances.

Protection from mosquitoes

30. (1)(a) In every vessel regularly engaged on voyages to any Port to which this regulation relates, the crew accommodation other than storerooms and recreation spaces on the open deck must be provided with protection against the admission of mosquitoes.

(b) The protection in subregulation (a) must be provided by means of screens of rust-proof wire or other suitable material which must be fitted to all side scuttles, natural ventilators, skylights, and doors leading to the open deck.

(2) Any door to which the screens referred to in subregulation (1)(b) are fitted, being a door at the entrance to a permanent or temporary hospital in a vessel to which these Regulations apply, must be of a self-closing type.

(3) The Ports in subregulation (1), to which this regulation relates are listed by the World Health Organisation.

This gazette is also available free online at **www.gpwonline.co.za**

Maintenance and inspection of crew accommodation

31. (1)(a) The crew accommodation in every vessel must be maintained in a clean and habitable condition, and all equipment and installations must be maintained in good working order.

(b) Every part of the crew accommodation, not being a storeroom, must be kept free of stores and other property not belonging to or provided for the use of persons for whom that part of the accommodation is appropriated, and in particular, cargo must not be kept in any part of the crew accommodation.

(2) The master of the vessel or an officer appointed by the master for the purpose must inspect every part of the crew accommodation at intervals not exceeding ten days, and must be accompanied on the inspection by one or more members of the crew.

(3) For purposes of subregulation (2), the master of the vessel must cause to be entered in the vessel's official logbook a record of—

(a) the time and date of the inspection;

(b) the names and ranks of the persons making the inspection; and

(c) particulars of any respects in which the crew accommodation or any part thereof was found by any of the persons making the inspection not to comply with these Regulations.

Inspection by the Proper Officer

32. A Proper Officer must inspect the crew accommodation in every vessel or cause the vessel to be inspected whenever—

(a) the vessel is registered or re-registered in the Republic;

(b) any part of the crew accommodation in the vessel undergoes substantial alterations or repairs;

(c) the number of persons accommodated in any sleeping room is increased above that marked in accordance with subregulation (1) of regulation 14;

(d) in the opinion of the proper officer there is reason to believe, whether or not in consequence of a complaint, that any of the provisions of these Regulations have been contravened in respect of that vessel, or that any condition subject to which the Authority has exempted

This gazette is also available free online at www.gpwonline.co.za

the vessel from a requirement of these Regulations has not been satisfied;

(e) a request for an inspection of the crew accommodation has been made to the Authority or to the proper officer by or on behalf of the owner of the vessel or of any organisation which appears to the Authority to be the representative of the owners of South African vessels or of the seafarer concerned; or

(f) a complaint has been lodged with the proper officer, and it complies with the requirements prescribed in the Act.

Additional Exemptions

33. (1) The Authority may, on such conditions as the Authority regarded necessary, exempt—

(a) any vessel while under construction;

(b) any vessel while undergoing trials;

(c) any vessel of under 200 gross tons;

(d) any tug;

(e) any vessel which, in the opinion of the Authority, is primarily employed in a harbour, river, estuary, lake or canal;

(f) any passenger vessel making day trips only; or

(g) any coasting vessel,

from all or any of the requirements of these Regulations to the extent to which the Authority is satisfied that compliance therewith is unreasonable or impracticable in the circumstances.

(2) The Authority may exempt from the requirements of these Regulations any vessel in which there are employed any groups of ratings necessitating the employment of a substantially greater number of ratings than would otherwise be employed, in the case of mess rooms, sanitary accommodation and hospitals, is equal or comparable in standard to the crew accommodation required by these Regulations: Provided, in the case of vessels where there is a need to take account, without discrimination, of the interests of seafarers having differing and distinctive religious and social practices, the Authority may, after consultation with the vessel owners and seafarers organisations concerned, permit fairly applied variations in respect of these Regulations, on condition that such variations do not result in overall

This gazette is also available free online at **www.gpwonline.co.za**

facilities less favourable than those which would result from the application of these Regulations.

(3) The Authority may, after consultation with the owners of the vessel, or such organisations as appear to the Authority to be representative of owners of South African vessels, and with such organisations as it would appear to the Authority to be representative of seafarers employed in South African vessels, exempt any vessel from any of the requirements of these Regulations, if the Authority is satisfied that corresponding advantages are provided in the vessel so that the crew accommodation considered as a whole, is equivalent or superior in standard to that required by these Regulations.

Repeal of regulations

34. The Crew Accommodation Regulations, 1961, published by Government Notice No. GN R. 1064 in Government Gazette 43 of 24 November 1961 in terms of the Merchant Shipping Act, 1951 (Act No. 57 of 1951), are hereby repealed.

Short title and commencement

35. These Regulations are called the Merchant Shipping (Crew Accommodation) Regulations, 2026 and come into operation on the date of final publication.

This gazette is also available free online at **www.gpwonline.co.za**

ANNEX 1

TRUNKED MECHANICAL VENTILATION SYSTEMS

(1) Trunked mechanical ventilation systems must be capable of the standards of performance set out in the table below.

(2) If any storeroom is served by a fan which provides warmed air for any other space, the store-room must be provided with ventilation trunking separate from that serving such other space.

(3) The clear area of the exhaust openings provided in conjunction with the system must be sufficient to ensure that the velocity of air at each opening does not exceed 5 metres per second when the system is in operation.

(4) The system must be quiet in operation

(5) All trunking forming part of the system must be provided with non-return flaps where such flaps are necessary for the exclusion of effluvia and the preservation of health of the crew.

(6) If the system is designed to circulate heated air as the sole means of heating the crew accommodation, the system must be sub-divided into sections which can be separately controlled to the extent necessary to enable comfortable temperature to be maintained in all parts of the crew accommodation.

Category	Description of Space	Fresh air changes per hour*	Volume of fresh air, in m^3/min, for each person likely to use the room at any one time*
	Rooms (other than rooms in category C) in deck houses above the upper or shelter deck:		
	(1) Outside rooms (Not adjoining machinery casing).	10	1.4
A	(2) Inside rooms and rooms adjoining machinery casing.	15	1.4
B	Rooms (other than rooms in category C) in side to side superstructures above the upper or shelter deck:		
	(1) Outside rooms (Not adjoining machinery casing).	12	1.4
	(2) Inside rooms and rooms adjoining machinery casing.	15	1.4

This gazette is also available free online at www.gpwonline.co.za

C	Mess rooms, smoking rooms and recreation rooms (above the upper or shelter deck) (1) Not adjoining machinery casing. (2) Adjoining the machinery casing.	 15 18	 0.7 (a) 0.7 (a)
D	Passageways adjoining machinery casings	4	-
E	Rooms in tween decks (1) Not adjoining machinery casing. (2) Abreast but not adjoining the machinery casing. (3) Adjoining machinery casings (other than mess rooms, smoking rooms and recreation rooms). (4) Mess rooms, smoking rooms and recreation rooms (Adjoining machinery rooms)	 12 12 15 18	 1.4 1.4 1.7 0.7
Cate-gory	**Description of Space**	**Fresh Air Changes per hour**	
		Supply	**Exhaust**
F	Galleys	20 (c) (d)	40 (d)
G	Sanitary accommodation, drying rooms and pantries	10	-
H	Dry Provision store-rooms	> 10 (e), but < 20	

*Notes:

(a) Whatever the number of persons likely to use the room at any one time, the total volume of fresh air per minute must not be required to be such as would result in more than 20 fresh air changes per hour.

(b) Whatever the number of persons likely to use the room at any one time, the total volume of fresh air per minute must not be required to be such as would result in more than 25 fresh air changes per hour.

(c) 15, if at least two sides of the galley are exposed to the weather.

(d) The Authority may exempt any vessel from these requirements if satisfied that compliance is unnecessary by reason of the insulation of the equipment in the galley, or by reason of the size of the galley.

(e) Subject to regulation 11.

This gazette is also available free online at www.gpwonline.co.za

ANNEX 2

MARKING

PART I

Markings for sleeping rooms

Certified for seafarer

Certified for A seafarer

Certified for seamen or A seafarer

PART II

Markings for spaces other than sleeping rooms

Certified for Chief Navigating Officer

Certified for Officers

Certified for Petty Officers

Certified for Apprentices

Certified for Crew

(1) The maximum number of seafarers who may be accommodated in the room shall be inserted in accordance with these Regulations, when it is not appropriated for use solely by such ratings as are referred to in regulation 15 (1) (e).

(2) The maximum number of seafarers who may be accommodated in the room shall be inserted in accordance with these regulation, when it is appropriated for use solely by such ratings as are referred to in regulation 15 (1) (e).

(3) In the case of a room intended for the sole use of any other officer, the rank of that officer must be substituted.

This gazette is also available free online at **www.gpwonline.co.za**

UMTHETHO WEZOKUTHUTHA NGEMIKHUMBI, WE-1951 (UMTHETHO 57 WE-1951)

ISAZISO SIKAHULUMENI

UHLAKA LWEMITHETHO YEZOKUTHUTHA NGEMIKHUMBI (INDAWO YABASEBENZI), YEZI-2026

UNgqongqoshe Wezokuthutha osebenza ngokwesigaba 356 (1) soMthetho Wokuthuthwa Kwemikhumbi, 1951 (uMthetho No. 57 ka 1951), wenza iMithethonqubo ebekwe oHlelweni.

NKSZN. BD CREECY (ILUNGU LEPHALAMENDE)
UNGQONGQOSHE WEZOKUTHUTHA
USUKU 4/6/26

This gazette is also available free online at **www.gpwonline.co.za**

ISHEDULI

UMTHETHO WEZOKUTHUTHA NGEMIKHUMBI, WE-1951 (UMTHETHO 57 WE-1951)

UHLAKA LWEMITHETHO YEZOKUTHUTHA NGEMIKHUMBI (INDAWO YABASEBENZI), YEZI-2026

Ukuhlelwa kwemithethonqubo

INGXENYE I

ISAHLUKO I
JIKELELE

1. Izincazelo
2. Isicelo
3. Izinhlelo
4. Izindawo zokuhlala abasebenzi
5. Ubude bendawo yokuhlala abasebenzi
6. Ukwakhiwa kwama-*bulkheads* kanye nama phaneli
7. Amabhetri
8. Amadekhi aphezulu
9. Iphansi
10. Ukushisa nokufaka umoya omncane
11. Ukukhanyisa
12. Indawo yokukhipha amanzi
13. Ukupenda
14. Izimpawu
15. Amagumbi okulala
16. Izindawo zokulala
17: Impahla yasendlini nokufakwa emagumbini okulala
18. Amagumbi okudlela
19. impahla yasendlini nokufakwa emagumbini okudlela
20. Izindawo zokuncebeleka nokufunda
21. Indawo yokuhlala ehhovisi
22. Ukuhlinzekwa kwamanzi okuphuza

This gazette is also available free online at **www.gpwonline.co.za**

23. Izindawo zokuwasha
24. Izindawo zamanzi
25. Imikhumbi
26. Izindlu zokugcina ukudla
27. Igumbi lokugcina impahla ebandayo kanye nemishini yokuqandisa
28. Izibhedlela
29. ikhabethe lezokwelapha
30. ukuvikelwa komiyane
31. Ukunakekelwa nokuhlolwa kwezindawo zokuhlala zabasebenzi
32. Ukuhlolwa yisikhulu esifanelekile
33. ukukhululwa okwengeziwe
34. Ukuchithwa kwemithethonqubo
35. Isihloko esifishane kanye nesiqalo
Isithasiselo1 - isistimu yokungenisa umoya eyimshini
Isithasiselo 2 -Ukubekisa

Izincazelo

1. Kule Mithethonqubo, noma yiliphi igama noma isisho esinikezwe incazelo emthethweni, sinencazelo eyabelwe futhi, ngaphandle uma ingqikithi isho ngenye indlela—

"I-IMO" ichaza iNhlangano yezasolwandle yamazwe ngamazwe, okuyinhlangano ebalulekile yenhlangano yezizwe ezihlangene eyasungulwa mhla ziyi-17 kuNdasa we-1948 ngokwengqungquthela yenhlangano yamazwe ngamazwe yasolwandle yenhlangano yezizwe ezihlangene eyaphothulwa eLondon, e-United Kingdom ngonyaka we-1948;

"izindawo zemishini" kushiwo izindawo ezinemishini yokushayela, amabhayela, amayunithi kawoyela, izinjini zesitimu nezivutha ngaphakathi, amajeneretha, imishini emikhulu kagesi, iziteshi zokugcwalisa uwoyela, imishini yokuqandisa, yokusimamisa, yokufaka umoya kanye neyokufaka umoya kanye nezikhala ezifanayo, kanye neziqu kulezo zikhala;

"intambo yomthwalo omkhulu" kushiwo inani elisemthethweni elivumelekile ukuba umkhumbi ulayishe abasebenzi, abagibeli, imithwalo, izinto ezisetshenziswayo kanye namagiya ahlukahlukene;

This gazette is also available free online at **www.gpwonline.co.za**

"indawo yokuhlala ehlanzekile" kushiwo indawo yokuwasha kanye nendawo yokulala equkethe izindawo zamanzi noma zokuchamela;

"igumbi lokulala" alibandakanyi indawo yokuhlala esibhedlela;

"amathani" kusho inqwaba yamathani;

"uhlelo lokungena komoya olungumshini" luchaza uhlelo lokungena komoya oluhambisana nemibandela ebekwe kusithasiselo 1 sale mithethonqubo;

"Izindawo zokuwashela" azibandakanyi—

(a) noma yiliphi igumbi lokulala, noma indawo yokuhlala esibhedlela kungakhathaliseki ukuthi inesitsha sokugezela, noma ishawa noma cha; noma

(b) noma yiliphi igumbi elabelwe ukusetshenziswa njengendawo yokuwasha; futhi

"isakhiwo esingangeni manzi, esingangeni umoya, noma esingangeni amafutha" kushiwo noma yisiphi isakhiwo lapho izimbobo, ngaphandle kwezintuba zokungena komoya ezidingekayo ukuze kungene umoya osuka emaphasejini uye ezindaweni zokuhlala ezihlanzekile, ezindaweni zokuhlanza izimpahla, amagumbi okomisa noma imikhumbi, zihlinzekwe ngendlela yokuvala ezokwenza ukuthi lezo zikhala zingabi namanzi, zingangenwa amanzi emathunjini noma zingashisi uwoyela njengoba kungenzeka.

Ukusetshwnziswa kwale mithethonqubo

2. (1) Le mithethonqubo isebenza kuyo yonke imikhumbi yezentengiselwano engamathani angama-25 noma ngaphezulu, ebhaliswe eRiphabhulikhi noma ethathwa njengebhalisiwe noma leyo ngokoMthetho Wokubhaliswa Kwemikhumbi, we-1998 (uMthetho 58 we-1998) okudingeka ukuthi ibhaliswe, kanje:

(a) imikhumbi emisha lapho kumenyezelwa le Mithethonqubo;

This gazette is also available free online at www.gpwonline.co.za

(b) imikhumbi ekhona, eshintshwayo noma yengezwe ngalezo zinguquko noma izengezo, kumele ihambisane nale Mithethonqubo; futhi

(c) Umkhumbi okhona ubhaliswe njengomusha ngemuva kokumenyezelwa kwale mithethonqubo.

(2) Naphezu kwemihlinzeko yesigatshana somthethonqubo (1), le mithethonqubo ayisebenzi emikhunjini yokudoba neyokuzijabulisa.

Izinhlelo

3. Ngaphambi kokuthi ukwakhiwa noma ukuguqulwa komkhumbi kuqale, umakhi noma umnikazi womkhumbi kufanele alethe ngokuphindwe kabili kubaphathimandla izinhlelo njengoba kubekiwe kuSithasiselo 1 sokhuthunyelwa komthengisi (Izimiso zokwakha), 1968 ukuze zigunyazwe.

Izindawo zokuhlala abasebenzi

4. (1) Kuyona yonke imkhumbi indawo yokuhlala yabasebenzi, ngaphandle kwezindlu zokugcina impahla, kufanele ibe ngaphezu komugqa womthwalo omkhulu.

(2) Isiphathimandla singakhululeka esimisweni somthethonqubo (1) -

(a) noma yimuphi umkhumbi ongaphansi kwamathani angama-200;

(b) noma yimuphi umkhumbi wabagibeli;

(c) noma yikuphi ukudonsa;

(d) noma yimuphi umkhumbi wekhebuli

(e) noma yimuphi umkhumbi wokuhlenga;

(f) noma yimuphi umkhumbi we-*crane*;

(g) noma yimuphi umkhumbi noma isiphi isitsha esithwala impango yokumba; noma

(h) noma yimuphi omunye umkhumbi ongewona umkhumbi wezimpahla;

Inqobo nje uma isigungu seziphathimandla sanelisekile ukuthi ukuhambisana naleso sidingo akuzwisiseki noma akwenzeki ngenxa yobukhulu noma umsebenzi ohlosiwe womkhumbi.

This gazette is also available free online at **www.gpwonline.co.za**

(3) (a) Kuwo wonke umkhumbi indawo yokuhlala yabasebenzi, ngaphandle kwezindlu zokugcina impahla, kufanele ibe seduze kodonga oluhlukanisayo oluyisivikelo.

(b) Isiphathimandla singakhulula noma yimuphi umkhumbi ezidingweni zalesi sigatshana somthetho ngokwezinga isiphathimandla esaneliseke ngalo ukuthi ukuthobela lokho akwenzeki ngenxa yobukhulu noma umsebenzi ohlosiwe womkhumbi: Kuncike ekutheni emikhunjini engamathani ayi-500 noma ngaphezulu, indawo yokuhlala abasebenzi noma iyiphi ingxenye yalokho, ngaphandle kwezindawo zokugcina izimpahla akufanele ibengaphambili kodonga lokuvikela.

(4) Indawo yokuhlala yabasebenzi kufanele ibe sendaweni, yakhiwe futhi ihlelwe ngendlela yokuthi ingahlanganisi ngoba kunokwenzeka—

(a) umsindo ovela kwezinye izingxenye zomkhumbi; futhi

(b) umsindo ovela kwezinye izingxenye zezindawo zokuhlala zabasebenzi.

(5) Igumbi lokulala eliyingxenye yendawo yokuhlala yabasebenzi basemkhunjini akufanele libe ngaphansi komgudu osetshenziswa kakhulu.

(6) Noma yiluphi udonga lokuvikela, ibhokisi noma ideki ehlukanisa igumbi lokulala kusuka—

(a) endaweni yomshini

(b) igumbi lokudlela

(c) igumbi lokungcebeleka

(d) igumbi lokuzijabulisa labezindaba

(e) igumbi lemidlalo

(f) igumbi lomphakathi

kufanele ivalwe ngempahla enciphisa umsindo ngendlela ezovimbela abahlali balelo gumbi lokulala ukuthi bangaphazanyiswa futhi bavikeleke emsindweni owedlulele, ngokuhambisana namazinga amukelwa yi-IMO.

(7) Endaweni yokuhlala yabasebenzi

(a) zonke izakhiwo, impahla yasendlini nezinto ezifakwayo, kanye nezindlela zokufinyelela nokuphuma ezindaweni okuhlaliswa kuzo

This gazette is also available free online at www.gpwonline.co.za

abasebenzi, kufanele kube sendaweni, kwakhiwe futhi kuhlelwe ngendlela enciphisa noma iyiphi ingozi engehlela abasebenzi; futhi

(b) ukuhlinzeka ngokuvikelwa kubasebenzi ezimweni zolwandle eziyingozi—

(i) izibambelelo zasodongeni kufanele zihlinzekwe ezindleleni nasezitebhisini lapho kunesidingo futhi kufanele ziqine futhi zivikeleke kakhulu odongeni oluvikelayo;

(ii) impahla yasendlini elungile kufanele ivikelwe ngokuqikelela

(iii) izindlela kumele zihlinzekwe ukuze kuvikeleke impahla ephathekayo;

(iv) iminyango, kuhlanganise naleyo yamakhabethe nenye impahla yasendlini, kufanele ivikelwe ukuze ingavuleki ngephutha;

(v) amakhabethe kufanele akhiwe ngendlela yokuthi angasheleli avuleke futhi aphume ngephutha; futhi

(vi) amatafula, amashalofu, amarege nokunye okufanayo kufanele kufakwe izinsimbi noma izindawo ezingasheleli ukuze izinto ezibekwe kuzo zingasheleli.

(8) Uma uwoyela wokubasa, uwoyela wokuthambisa noma omunye uwoyela ovuthayo noma uphethiloli wegesi usetshenziswa kunoma yimuphi umkhumbi, amalungiselelo okugcinwa kwawo, ukusatshalaliswa kwawo kanye nokusetshenziswa kwawo kufanele kube njengokunciphisa ubungozi bomlilo noma ukuqhuma ngaphakathi kwendawo yokuhlala yezisebenzi.

(9) Izindawo zokuhlala abasebenzi kumele zitholakale, zakhiwe futhi zihlelwe ngendlela eqinisekisa ukuvinjelwa kwephunga elivela kwezinye izindawo zomkhumbi ukuthi lingangeni ezindaweni zokuhlala abasebenzi.

Ubude bendawo yokuhlala abasebenzi

5. Kuso sonke isikebhe ubude bendawo yokuhlala yabasebenzi bakalwa ukusuka phezulu kwemishayo yaphansi kuya phezulu kwemishayo yomqhele kufanele buhambisane nezidingo zezinga elingu-A3.1.6 leNgqungquthela Yezemisebenzi Yasolwandle.

This gazette is also available free online at www.gpwonline.co.za

Ukwakhiwa kwama-*bulkheads* kanye namapaneli

6.(1) (a) Kuwo wonke umkhumbi wonke ama-*bulkheads* avale noma angaphakathi kwanoma iyiphi ingxenye yendawo yokuhlala abasebenzi kumele akhiwe ngendlela eyinsimbi noma enye impahla efanele ngendlela egculisa Isigungu seziPhathimandla.

(b) Uma ama-*bulkheads* echayeke esimeni sezulu, ama-*bulkheads* kumele angangeni amanzi futhi angangeni esiswini , futhi izindlela zokuvala kufanele zihlinzekwe kuzo zonke izintuba zalezo zimbobo ukuze i-*bulkhead* ingangenisi amanzi okanye umoya esiswini.

(2) Noma iyiphi i-*bulkhead* ehlukanisa noma iyiphi ingxenye yendawo yokuhlala yabasebenzi , ngaphandle kwendawo evulekile yokungcebeleka, nendawo esetshenziswa njenge—

(a) indawo yokusebenza;

(c) indawo yezimpahla noma imshini;

(d) igumbi likapende;

(e) igumbi lokugcina impahla elingeyona ingxenye yendawo yokuhlala abasebenzi, ngaphandle kwegumbi lokugcina impahla eyomile;

(f) ilokha yeketango

(g) ilokha yebhetri

(h) i-*cofferdam*

kufanele ingangeni emathunjini, futhi lapho kunesidingo, ingangeni emanzini ukuze ivikele indawo yokuhlala yabasebenzi.

(3) Noma iyiphi ingxenye yendawo yokuhlala yabasebenzi ngaphandle kwendawo yokubeka impahla eyomile, noma ngabe lelo gumbi liyingxenye yendawo yokuhlala abasebenzi, kufanele lingakhiphi igesi.

(4) Ngokuya ngemihlinzeko yesigatshana somthethonqubo (1) wesimiso somthetho 24, noma yiluphi udonga oluhlukanisa noma iyiphi ingxenye yendawo yokuhlala yabasebenzi nendawo yokuhlala ehlanzekile noma igumbi lokuwasha noma igumbi elomile, noma igumbi elibandayo, noma ngabe leyo ndawo ehlanzekile, igumbi lokuwashela, igumbi elomile noma cha futhi kufanele ingangeni emanzini ukuze ifinyelele kulokho kuphakama njengoba kudingekile ngokuhambisana nendinganiso A3.1 isigaba 6.(e) seNgqungquthela Yezemisebenzi Yasolwandle.

This gazette is also available free online at **www.gpwonline.co.za**

(5) Noma iyiphi ingxenye enkulu ehlukanisa indawo yokuhlala yezindlu zangasese kusukela kunoma iyiphi enye ingxenye yendawo yokuhlala abasebenzi kumele, ngaphandle kwasemnyango, ingangeni emanzini ibe ubude obungamamilimitha angama-230 ngaphezu kwesitezi sendawo yokulala: Kuncike ekutheni izidingo zalo mthethonqubo akumele zisebenze ezindongeni ezihlukanisa—

(a) indawo yokuhlala ehlanzekile evela kwezinye izindawo zokuhlala ezihlanzekile;

(b) Igumbi lokuwasha noma elomile elisuka kwelinye igumbi lokuwasha noma igumbi lokomisa;

(c) isikebhe esivela komunye umkhumbi noma i-pantri; noma

(d) igumbi lokugcina impahla ebandayo elisuka kwelinye igumbi lokugcina impahla ebandayo

(6) Noma yiluphi uphahla lwangaphakathi ezindlini zabasebenzi kufanele lwakhiwe ngempahla efanele engagcinwa ihlanzekile kalula.

(7) Ama-*bulkhead* noma uphahla akufanele lwakhiwe ngendlela noma ngempahla engase igcine izinambuzane.

(8) ama-*bulkhead* kanye nezindawo ezivulekile emagumbini okulala kanye namagumbi okudla kufanele zikwazi ukugcinwa kalula zihlanzekile futhi zibe nombala okhanyayo ohlala isikhathi eside ungenabo ubuthi.

(9) Amapulangwe kuzo zonke izindawo zokuhlala abantu basolwandle kufanele akhiwe ngempahla yokwakha efanele futhi angasheleli okanye angenwe umswakama futhi egcinwe ehlanzekile kalula.

(10) Uma phansi kwenziwe ngempahla yokwakha ehlanganisiwe, izihlanganisi ezinhlangothini kufanele zenziwe iphrofayili ukugwema imifantu.

(11) Izindonga ezivala noma iyiphi ingxenye yendawo yokuhlala yabasebenzi futhi ebhekene nesimo sezulu, kanye nanoma iyiphi ingxenye yohlangothi lomkhumbi olwakha udonga noma ingxenye yodonga lwendawo yokuhlala abasebenzi, kufanele ivalwe ngendlela evikela ukushisa ngokweqile noma ukufiphala ngaphandle uma indawo yokuhlala yabasebenzi ivikelwe kakhulu yisimo

This gazette is also available free online at **www.gpwonline.co.za**

sawo kanye nokungena komoya ngendlela yokuthi ukushisa ngokweqile kungenzeki futhi kufinyele.

(12) (a) Zonke izingxenye ezihlukanisa noma iyiphi ingxenye yendawo yokuhlala yabasebenzi kunoma iyiphi indawo, kuhlanganisa nendlu yokugcina impahla ebandayo, engaphansi kokushisa okungavamile noma amakhaza kufanele ivalwe ukuze kuvinjwe ukuminyana noma ukungakhululeki kubasebenzi.

(b) Zonke izembozo zemishini kanye nazo zonke izivalo zemingcele yamakhishi nezinye izindawo lapho kukhiqizwa khona ukushisa kufanele zifakwe insimbi ngokwanele lapho kunethuba lokuthola imiphumela yokushisa ezindlini noma emigwaqweni eseduze.

(13) Zonke izingxenye ezihlukanisa noma iyiphi ingxenye yendawo yokuhlala yabasebenzi kunoma iyiphi indawo, kufanele zifakwe ngendlela evimbela izinga lomsindo nokuqhaqhazela okuyingozi kubasebenzi ngokuya ngokwezinga A3.1 isigaba 6 (h) seNgqungquthela Yezisebenzi Zasolwandle.

(14) (a) Akumele kube khona izintuba eziqondile ezindlini zokulala ezisuka ezindaweni zezimpahla nemishini noma ezinqoleni, ezinqolobaneni, emagumbini okomisa noma ezindaweni zokuhlanzeka zomphakathi eziyingxenye yomthamo omkhulu ohlukanisa lezo zindawo namagumbi okulala.

(b) Izindonga zokuvikela zangaphandle kumele zingangeni amanzi futhi zingangeni umoya futhi zakhiwe kahle ngensimbi noma enye impahla efanele ngendlela egculisa isigungu seziPhathimandla.

(15) Akumele kube khona ukuvuleka kunoma yiziphi izindonga okukhulunywe ngazo kwisigatshana somthethonqubo (4) ngaphandle kwalokho—

(a) lapho izindawo zokuhlala noma izindawo zokugqoka ezilungiselelwe ukusetshenziswa kwamagosa egumbi lezinjini kanye nabasebenzi bezinga eliphezulu kuphela zitholakala eduze nendawo yemishini yokushayela, kungahle kube nokuvuleka esivalelweni sendawo yemishini yokushayela esiya endaweni yokuhlala noma ezindaweni zokugqoka kanye nokuvuleka okuvela endaweni yokuhlala noma ekamelweni lokugqoka kuya endaweni yokudlula eyingxenye yendawo yokuhlala yabasebenzi: Inqubo nje uma kufakwe

This gazette is also available free online at www.gpwonline.co.za

umnyango onesihluzo, wensimbi, osuka ezikhaleni okukhulunywe ngazo kulesi sigaba kuya endaweni yemishini edonsayo;futhi

(b) lapho kungekho okunye ukuhleleka okungenzeka, kungahle kube nesivalo odongeni oluhlukanisa indlela yokungena endaweni yokuhlala yabasebenzi nendawo yemishini uma leso sivalo sihlinzekwe ngomnyango ongangeni ngogesi, wensimbi, ovala ngokuzenzakalela.

(16) Noma iyiphi ingxenye yendawo yokuhlala yabasebenzi ehlangana nethangi lapho uwoyela, uwoyela wokubasa, uwoyela wokuthambisa noma omunye uwoyela ovuthayo noma uphethiloli wegesi okungase kuhanjiswe kuyo kufanele kuhlukaniswe kulelo thangi noma——

(a) ngokwahlukana kwegesi eyengeziwe ekuhlukaniseni ukugcina uwoyela, uwoyela wokubasa, uwoyela wokuthambisa noma omunye uwoyela ovuthayo noma uphethiloli wegesi; noma

(b) ngokuhlukaniswa kwesakhiwo sensimbi eshiselwe ngokuphelele esikwazi ukumelana nomthamo wamanzi okungenani ongamamitha angu-2,4 ngaphezu komthamo omkhulu wokusebenza.

(17) Imbobo noma enye indawo evulekile ethangini likaphethiloli akumele ibe endaweni yokuhlala abasebenzi.

Amabhetri

7. (1) Amabhethri ohlobo olukhipha igesi akumele agcinwe endaweni yabasebenzi futhi akumele kube khona ukuvuleka okusuka endaweni yabasebenzi kuya endaweni lapho kugcinwa khona lawo mabhethri.

(2) Kufanele kuthathwe izinyathelo zokuqapha ukuze kuqinisekiswe ukuthi intuthu evela kumabhethri ayifinyeleli endaweni yokuhlala abasebenzi.

amaplangwe aphezulu

8. (1) Kuwo wonke umkhumbi owakhiwe ngensimbi noma enye impahla yokwakha efanele, wonke amaplangwe akha umqhele wanoma iyiphi ingxenye yezindawo zokuhlala zabasebenzi futhi abhekene nesimo sezulu, kufanele

This gazette is also available free online at www.gpwonline.co.za

(a) zakhiwe ngensimbi noma enye impahla efanele ngendlela egculisa isigungu seziPhathimandla, futhi ngaphezu kwalokho, zakhiwe ngalendlela elandelayo:

(i) impahla yokwakha ezisetshenziselwa ukwakha amaplangwe angaphakathi, amaphaneli nama-*sheting*, phansi kanye nokuhlanganisa kumele kuhambisane nenhloso futhi kuhambisane nendawo enempilo;

(ii) Amapulangwe angaphandle amakamelo okulala namagumbi okudla kufanele abe nokuvikeleka okwanele;

(iii) izinyathelo kufanele zithathwe ukuhlinzeka ukuvikelwa emiphumeleni yokushisa yamapayipi okuhambisa umusi noma amanzi ashisayo noma kokubili;

(iv) amakamelo okulala, amagumbi okudlela, amagumbi okungcebeleka kanye nezindlela zokuhamba kufanele ivalwe ngokwanele ukuze kuvinjwe ukufiphala noma ukushisa ngokweqile;

(v) uphahla kufanele lwakhiwe ngempehla yokwakha ehlanzeka kalula futhi kufanele kusetshenziswe impahla yokwakha engabambi izinambuzane;

(vi) Uphahla ezindlini zokulala nese zindaweni zokudlela kufanele likwazi ukuhlanzwa kalula futhi libe nombala okhanyayo onokuphela okuqinile okungenabo ubuthi; futhi

(vii) Amaplangwe kuzo zonke izindawo zokuhlala abantu basolwandle kufanele akhiwe ngempahla yokwakha efanele futhi angasheleli okanye angenwe umswakama futhi ahlanzeke kalula.

(b) ihambisane nezidingo zezinga elingu-A3.1 leNgqungquthela Yezabasebenzi Yasolwandle.

Iphansi

9. (1) Kuwo wonke umkhumbi ama-*deck* akha izitezi ezindlini zabasebenzi kufanele akhiwe ngendlela efanele futhi

(a) kufanele ihambisane nezinga A 3.1 leNgqungquthela Yezabasebenzi Yasolwandle; futhi

This gazette is also available free online at **www.gpwonline.co.za**

(b) Uma phansi kwenziwe ngempahla yokwakha ehlanganisiwe, izihlanganisi ezinhlangothini kufanele zenziwe iphrofayili ukugwema imifantu.

Ukushisa nokufaka umoya omncane

10. (1) Kuyo yonke imikhumbi ngaphandle komkhumbi oqashwe kuphela ezindaweni ezishisayo noma iPersian Gulf, wonke amagumbi okulala, amagumbi okudla, amagumbi okungcebeleka, amahhovisi okuhlala ahlanzekile, izifundo kanye nezibhedlela eziyingxenye yendawo yokuhlala yabasebenzi kufanele zihlinzekwe ngohlelo lokushisisa okufanele lifakwe unomphela futhi lukwazi ukuqinisekisa ukuthi lawo makamelo ahlinzekelwe ukungena komoya noma indawo yokuhlala,isebenza ngokuvumelana nezimfuneko zezinga elingu-A 3.1 isigaba 7, umhlahlandlela B 3.1.1 isigaba 2 kanye no-B 3.1.3 isigaba 1, 2 kanye no-3 seNgqungquthela Yezemisebenzi Yasolwandle.

(2) Kuwo wonke umkhumbi indawo yokuhlala yabasebenzi kanye nezindlela zokungena nokuphuma kuyo kufanele zihlelwe, zakhiwe futhi zibekwe ngendlela yokuqinisekisa ukuvikelwa esimweni sezulu ngokuhambisana nezidingo zesigatshana sengqubomthetho (1).

(3) (a) Yonke indawo evaliwe, ngaphandle kwegumbi lokugcina izinto ezibandayo, eyingxenye yezindawo zokuhlala zabasebenzi kunoma yimuphi umkhumbi kufanele ifakwe uhlelo lokungenisa umoya oluhlanganisiwe oluhambisana nezidingo ezichazwe kuSithasiselo 1.

(b) Isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi ezidingweni zalesi sigatshana somthethonqubo, mayelana nokungena komoya endlini yokugcina izinto ezomile, uma isigungu seziPhathimandla sigculisekile ukuthi ukuhambisana naleyo mfuneko akudingekile ngenxa yesimo segumbi. —

Ukukhanyisa

11. (1) Kuwo wonke umkhumbi, yonke ingxenye yendawo yokuhlala yabasebenzi ngaphandle kwezindlu zokudla, izindlu zokuwasha, izindlu zokomisa, amakhabethe namagumbi okugcina izinto, kufanele kukhanyiswe kahle ngokukhanya kwemvelo kanye nogesi futhi ngokuhambisana nezinga elingu-A3.1.8 kanye nomhlahlandlela B3.1.4 weNgqungquthela Yezisebenzi Zasolwandle.

This gazette is also available free online at **www.gpwonline.co.za**

(2) Ukukhanyisa kwemvelo kwekamelo lokulala, igumbi lokudlela, igumbi lokungcebeleka noma indawo yokuhlala esibhedlela, kufanele kuthathwe njengokufanelekile ngokwezinjongo zale Mithethonqubo, uma kwanele ukwenza umuntu obona kahle ukuthi akwazi ukufunda noma kunini ekamelweni, kube yindawo etholakalayo yokuhamba mahhala, emini nasesimweni sezulu esicwathile.

(3) (a) Kuwo wonke umkhumbi kufanele kufakwe uhlelo lukagesi olukwazi ukunikeza ukukhanya okwanele kuzo zonke izingxenye zezindawo zokuhlala zabasebenzi.

(b) Amalambu kagesi kufanele ahlelwe ukuze anikeze izisebenzi inzuzo enkulu, futhi ikakhulukazi isibani sokufunda sikagesi kufanele sifakwe ekhanda lombhede ngamunye futhi sikwazi ukuvulwa futhi sicishwe embhedeni.

(c) Isibani esikhipha okungenani ama-*lumens* angu-200 kufanele sifakwe kuwo wonke amalambu okufunda egumbini lokulala, futhi isibani esikhipha okungenani ama-lumens angu-400 kufanele sifakwe kuwo wonke amalambu okufunda esibhedlela.

(d) Enye indlela esebenza kahle yokukhanyisa noma umthombo wamandla kagesi kufanele ibe khona njalo ukuze kukhanyiselwe indawo yokuhlala yabasebenzi.

(e) Ukukhanyisa kukagesi kwezikhala okukhulunywe ngazo endimeni (h) kufanele kuthathwe njengokwanele uma, lapho amalambu nomsebenzi wokupenda kukusha, ukukhanya endizeni evundlile lapho kulinganiswa ezindaweni nangendlela ebekwe endimeni (f) kuzinzile futhi, kuncike ekubekezeleni ngamaphesenti ayi-10, kugcinwa inani elingaphansi kwalelo nani elinqunyiwe endaweni ngayinye.

(f) Amaphuzu okufanele kulinganiswe kuwo ukukhanya kufanele abe kanje:

(i) Lapho izindawo zokulinganisa ezivamile zinqunyiwe ukuze kukhanye isikhala, izilinganiso kufanele zithathwe endaweni ngayinye phakathi nendawo phakathi kwawo wonke amalambu angu-2 aseduze nakuzo zonke izindawo maphakathi nelambu ngalinye nanoma iyiphi indawo kunoma yimuphi umngcele wendawo: Kuncike ngaso sonke isikhathi ukuthi lapho

This gazette is also available free online at **www.gpwonline.co.za**

ngaphakathi kwanoma yisiphi isikhala ingxenye yaleso sikhala, eyingxenye yaleso sikhala esitholakalayo ukuze sihambe ngokukhululeka, siyasithwa kusukela emisebeni eqondile yephoyinti eliphakathi nendawo, i-engeli ephakathi nendawo. ingxenye yesikhala esinomthunzi kanjalo kufanele futhi ibe indawo yokulinganisa evamile; futhi

(ii) lapho amaphuzu athile okulinganisa anqunyelwe isikhala, izilinganiso kufanele ngaphezu kwalokho zithathwe kuzo zonke izindawo ezinjalo.

(g) Kuzo zonke izimo okukhulunywe ngazo kulo mthethonqubo, izilinganiso kufanele zithathwe ngobude obungamamilimitha angama-838 ngaphezu kwesitezi, ngaphandle kokuthi endabeni yamaphaseji, imigwaqo ehambisanayo, kanye nezindawo zokungcebeleka ezimboziwe, izilinganiso zingathathwa zibe ubude obungamamilimitha angama-838 ngaphezu kwesitezi noma ezingeni lephansi, inqobo nje uma lapho izilinganiso zithathwa ezingeni lesitezi isilinganiso sesici esifanekisayo sendawo yokukhanya akufanele sibe ngaphansi kwamaphesenti angu-4. amagumbi awanalutho.

(h) Ukukhanyisa kufanele kuhambisane neThebula 1. ngezansi

Ithebula 1.

Amagumbi okulala kanye namagumbi osuku	
Emaphoyintini okulinganisa okuvamile	50 lumens
Kuzo zonke izibuko	200 lumens
Kuzo zonke izihlalo etafuleni lokubhalela eliphathekayo	150 lumens
Igumbi lokulala elihlinzekwe ukusetshenziswa abantu abangaphezulu koyedwa	150 lumens
Amagumbi okudlela	
Emaphoyintini okulinganisa okuvamile	100 lumens
Kuwo wonke amatafula nosinki	150 lumens
Amagumbi okungcebeleka, okuhlanganisa amagumbi okubukela amafilimu nomabonakude, amagumbi okuzilibazisa nawokudlala	
Emaphoyintini okulinganisa okuvamile	50 lumens
Kuwo wonke amatafula okuzilibazisa	100 lumens
Kuzo zonke izihlalo etafuleni lokubhalela noma etafuleni	150 lumens
Ezihlalweni ezingekho ngaphansi kukahhafu ngaphandle kwalezo ezisemagunjini okulala noma asemini	150 lumens
Indawo yokulala esibhedlela	

This gazette is also available free online at www.gpwonline.co.za

Emaphoyintini okulinganisa okuvamile	50 lumens
Kunoma iyiphi indishi yokugeza	100 lumens
Okungenani isibani esisodwa esingashintshi kufanele sifakwe ngaphezu kwesibani sokufunda sikagesi esidingwa yiMithethonqubo 28(10) ukuze sihlinzekwe enhlokweni yombhede ngamunye.	
Amahhovisi Nezifundo	
Emaphoyintini okulinganisa okuvamile	100 lumens
Kuzo zonke izihlalo etafuleni lokubhalela noma etafuleni	200 lumens
Indawo Yokuhlala Ehlanzekile, okuhlanganisa nezindawo zokuhlala ezihlanzekile ezibhedlela	
Emaphoyintini okulinganisa okuvamile	100 lumens
Kunoma yisiphi isibuko	200 lumens
Izindawo Zokuwasha	
Emaphoyintini okulinganisa okuvamile	100 lumens
Amagumbi okomisa	
Pakathi nendawo	50 lumens
Imikhumbi, okuhlanganise nezitolo zesinkwa nezindlu zokugcina izinto zokudla	
Ezikhundleni zokusebenza	300 lumens
Izibani kufanele zihlelwe ngendlela eqinisekisa ukuthi amatafula okulungiselela ukudla, amatafula okuphakela kanye nosinki bokugeza izitsha kuthola inani elikhulu lokukhanya.	
Amagumbi okugcina impahla eyomile kanye namagumbi okugcina izinto ezibandayo	
Emaphoyintini okulinganisa okuvamile	100 lumens
Izibani kufanele zihlelwe ngendlela eqinisekisa ukuthi amashalofu nama khabethe athola ukukhanya okukhulu.	
Izindlela zokudlula, izindlela ezihambisanayo nezindawo zokuzilibazisa ezimboziwe	
Emaphoyintini okulinganisa okuvamile	50 lumens
Okungenani isibani esisodwa kufanele sibekwe phezulu kwesitebhisi ngasinye, isitebhisi kanye nesango lokuphuma futhi okungenani ezimbili eminyango noma eduze kweminyango yamakhabethe ahlinzekelwe ama-oilskins noma izingubo zokusebenza	

Indawo yokukhipha amanzi

12. (1) Kuwo wonke umkhumbi ukudonsa amanzi ngendlela efanele ngamapayipi noma imigudu kufanele kuhlinzekwe kuyo yonke ingxenye yendawo yokuhlala yabasebenzi esendaweni evulekile nomaphi lapho amanzi edingeka khona ukuze kukhishwe amanzi asuka olwandle ngokuhambisana ne-standard A3.1. isigaba 6(g) seNgqugquthela Yesimisebenzi Yazolwandle

(2) Akufanele kube khona ukugeleza kwamanzi kunoma yimuphi umthombo, okungeyona indawo yokuhlala ehlanzekile, kuya endaweni ehlanzekile eyingxenye yendawo yokuhlala yabasebenzi.

This gazette is also available free online at www.gpwonline.co.za

(3) (a) Yonke indawo eyabelwe ukusetshenziswa njengendawo yokuhlala ehlanzekile kufanele inikezwe ama-*scuppers* eyodwa noma maaningi angasebenzisi kwenye indawo ngaphandle kwendawo yokuhlala ehlanzekile ngokuvumelana nesiqondiso B3.1.7 isigaba 3 seNgqungquthela Yezemisebenzi Yasolwandle .

(b) Ama-*scuppers* kumele okungenani abe ngu-50mm ububanzi futhi kumele abe lapho amanzi engase aqoqeke khona phansi esikhaleni.

Ukupenda

13.(1)(a) Kuwo wonke umkhumbi izinhlangothi zangaphakathi kanye nophahla lwazo zonke izingxenye zezindawo zokuhlala zabasebenzi kumele zimbozwe ngopende we-enamel noma enye impahla efanelekile.

(b) Upende we-enameli noma enye impahla yokusebenza kufanele ibesezingeni elifanele futhi ibe mhlophe noma ibe nombala okhanyayo

(2) Ukugeza umcako, upende noma amalakhi aqukethe i-*nitro-cellulose*, izinhlanganisela ezikhiqiza intuthu evuthayo noma enobungozi akumele zisetshenziswe endaweni yabasebenzi.

(3) Izindawo zokuhlala zabasebenzi kufanele zimbozwe kuphela izinto ezivimbela umlilo ezitholakala ngokusebenzisa ingilazi ezungezayo elukiweyo, inhlaka ye-*phenolic*, izithasiselo zenhlaka, izimbobo ezibamba umlilo noma ukuvikelwa ngezinto ezingashi kanye nezimbobo ze-*intumescent* ezingase zisetshenziswe.

(4) Izingxenye zamaplangwe zempahla yasendlini nezinto ezifakwa ezindlini zabasebenzi kumele zigcotshwe ngaphandle ngopende, i-varnish, upholisha noma ngezinye izindlela ezifanele

(5) Wonke upende, ivanishi, upholishi nezinye izinto ezisendlini yabasebenzi kufanele zikwazi ukugcinwa kalula zihlanzekile futhi kufanele zigcinwe zisesimweni esihle.

Izimpawu

This gazette is also available free online at **www.gpwonline.co.za**

14. (1) Wonke amakamelo okulala ayingxenye yendawo yokuhlala abasebenzi kufanele amakwe ngaphakathi kwegumbi ngokuthi yiluphi uphawu olubalulwe eNgxenyeni yoku-1 yesiThasiselo sesi-2 olufaneleka ngaphansi kwezimo.

(2) Yonke indawo, ngaphandle kwegumbi lokulala noma indawo yokuphumula evulekile, eyingxenye yendawo yokuhlala yabasebenzi balowo mkhumbi kufanele imakwe phakathi nendawo noma phezulu noma ngaphezu komnyango kuleyo ndawo nganoma yiziphi izimpawu ezishiwo eNgxenyeni II yeSithasiselo 2 ezifanele ezimweni.

(3) (a) Zonke izimpawu ezidingekayo ngokwalo mthethonqubo kufanele zibe nezinhlamvu ezicacile futhi zibe sesimweni esibonakala kalula esakhiweni somkhumbi.

(b) Izimpawu kufanele zisikwe esakhiweni noma zimakwe ngendlela elinganayo engasuki.

(4) Izikhala eziyingxenye yezindawo zokuhlalisa abasebenzi akumele zimakwe, kungakhathaliseki ukuthi zingaphakathi noma ngaphandle kwendawo, nganoma yiluphi uphawu olungase luthathwe ukukhombisa ukuthi indawo yabelwe ukusetshenziswa abantu abehlukene ngesibalo noma ngesimo esithile kubantu okugunyazwe ukusetshenziswa kwabo leso sigungu seziPhathimandla.

Amagumbi okulala

15. (1)(a) Kuwo wonke umkhumbi, ngaphandle uma izimo ziwukuthi awekho amalungu abasebenzi okudingeka alale emkhunjini, amakamelo okulala kufanele ahlinzekwe abasebenzi ngokuhambisana nemihlinzeko yale Mithethonqubo

(b) Izinto ezisetshenziselwa ukwakha ama-*bulkheads* angaphakathi, amaphaneli nama-*sheeting*, iphansi kanye nama-*joinings* kufanele kuhambisane nenhloso futhi kube lula ekuqinisekiseni indawo enempilo.

(c) Indawo yokuhlala yabasebenzi, nanoma iyiphi ingxenye yayo, akufanele isetshenziswe ngabagibeli noma isetshenziswe noma izuzise abagibeli.

This gazette is also available free online at **www.gpwonline.co.za**

(d) Eminye imkhumbi okungeyona eyabagibeli, kufanele kuhlinzekwe indawo yokulala yomuntu ngamunye kumgibeli wasolwandle ngamunye: Kuncike endabeni yemikhumbi enamathani amakhulu angaphansi kuka-3,000 noma imikhumbi yenjongo ekhethekile, isiPhathimandla singanikeza imvume yezimfuneko zalesi sigaba ngemva kokubonisana nabanikazi bemikhumbi kanye nezinhlangano zasolwandle ezithintekayo.

(e) Isibalo esiphezulu sabantu abalaliswayo emakamelweni okulala kumele sihambisane nezinga elingu-A3.1 isigaba 9(h) kanye no (j) seNgqungquthela Yezokusebenza Zasolwandle: Kuncike ekutheni isiphathimandla, emva kokubonisana nabanikazi bemikhumbi kanye nezinhlangano zasolwandle ezithintekayo, singayikhulula imikhumbi engaphansi kwamathani angama-200 lapho kufanele, kuthathwe isinqumo sokwenza lokho ngosayizi womkhumbi,maqondana nezidingo zalezi zinhlinzeko ezilandelayo zalo mthethonqubo maqondana nalokhu:

(i) indawo ephansi yezindlu zokulala zabagibeli bamanzi; futhi

(ii) umthamo omkhulu kanye nendawo yaphansi emagumbini okulala

(2) (a) Isigaba ngasinye salezi zigaba zabantu kufanele sihlinzekwe ngamagumbi okulala ahlukene nalawo ahlinzekelwe ezinye izigaba:

(i) Izikhulu; kanye

(ii) izilinganiso

(b) Zonke izilinganiso zokugcinwa kwewashi zingahlinzekwa ngamakamelo okulala ahlukene nawamanye amawashi.

(c) Abangebona abaqaphi kufanele bahlinzekwe ngamakamelo okulala ahlukene nalawo abaqaphi

(d) Abesilisa kanye nabesifazana kufanele bahlinzekelwe ngamagumbi okulala ahlukene.

(3) (a) Ngokuya ngemihlinzeko yesigatshana (b), ubuncane bendawo yaphansi ehlinzekelwe umuntu ngamunye egumbini lokulala eliyingxenye yendawo yokuhlala yabasebenzi kufanele ihambisane nezimfuneko zezinga A 3.1 isigaba 9(f), (g), (h), (i), (k) kanye (l) seNgqungquthela Yezemisebenzi Yasolwandle:

This gazette is also available free online at www.gpwonline.co.za

Kuncike ekutheni isigungu seziPhathimandla, ngemuva kokubonisana nabanikazi bemikhumbi kanye nezinhlangano zasolwandle ezithintekayo, singakhulula imikhumbi engamathani aphelele angaphansi kwama-200, kucatshangelwa ubukhulu bomkhumbi kanye nenani labantu abasemkhunjini maqondana nezidingo zale milinzeko elandelayo zalesi sigatshana somthethonqubo maqondana nalokhu:

(i) indawo ephansi yezindlu zokulala zabagibeli bamanzi; futhi

(ii) umthamo omkhulu kanye nendawo yaphansi emagumbini okulala

(b) Ekuthatheni isinqumo ngendawo yaphansi yegumbi ngenjongo yalesi sigatshana somthetho—

(i) izindawo ezihlala amalokha, izihlalo noma amakhabethe kufanele zibuyekezwe futhi ngenxa yobuncane bazo noma ukwakheka ngendlela engajwayelekile eyenza zingakwazi ukufaka impahla yasendlini futhi azifaki isandla endaweni evulekile yokuhamba, akufanele zicatshangwe; futhi

(ii) amagumbi okulala kufanele akhiwe kahle futhi abenosayizi owanele ukuqinisekisa ukunethezeka okufanelekile kanye nokuhlanzeka kwegumbi.

Indawo yokulala

16(1) Wonke amakamelo okulala ezindaweni zokuhlala zabasebenzi kufanele ahlinzekwe ngendawo yokulala futhi uma igumbi lihlala abantu abangaphezu koyedwa ngokwemigomo yomthetho 15(1)(d), umuntu ngamunye ohlala egumbini kumele ahlinzekwe ngendawo yokulala ngokuhambisana nomthetho A 3.1 isigaba 9 (e) seNgqungquthela Yezemisebenzi Yasolwandle.

(2) (a) Uhlaka lwendawo yokulala ngayinye, kanye namabhodi ayo noma izinsimbi zayo, uma zikhona, kufanele zakhiwe ngensimbi noma enye into eqinile futhi ebushelelezi futhi okungelula ukuthi ibole.

(b) Uhlaka lwendawo yokuhlala esigabeni (a) kumele lwenziwe ngendlela yokuthi kungabi lula ukufukamela izinambuzane.

This gazette is also available free online at www.gpwonline.co.za

(c) Ikakhulukazi, uma igumbi elingaphansi kwesigaba (a) lakhiwe ngamafreyimu amashubhu, amafreyimu kufanele avalwe ngokuphelele futhi angabi nazimbobo.

(3) Okungenani kufanele ukwazi ukufinyelela ngakolunye uhlangothi lwegumbi ngalinye ngaphandle kokuvimbeka futhi ikakhulukazi, uma izinhlangothi ezincikene zamagumbi amabili zihambisana noma zenza i-engeli engaphansi kuka-90° ngayinye, ibanga eliphakathi kwalezo zinhlangothi nganoma isiphi isikhathi akumele libe ngaphansi kuka-762 mm uma womabili amagumbi okulala esezingeni elilodwa okanye abe ngo 914 mm kunoma iyiphi enye indawo.

(4) Lapho ikamelo lihlangana phezu kwelinye igumbi lokulala kufanele lihlukaniswe ngezikrilini ezenziwe ngokhuni noma enye impahla efanele.

(5) Indawo yokulala akufanele ibe—

(a) ngaphakathi kwe-100 mm yesiqu sokungenisa umoya esingasetshenziselwa ukuzungeza umoya oshisayo; noma

(b) ngaphakathi kwamamitha angama-50 ukusuka ku-bulkhead noma ohlangothini lomkhumbi, ngaphandle uma indawo yokulala isekelwa ngendlela yokuthi igumbi lakhiwe ngendlela yokuthi kugwenywe ukungcola kanye nezinambuzane ngaphakathi noma eduze nendawo yokulala, ukuze kube nokwenzeka ukuthi umbhede ugcinwe uhlanzekile futhi womile, futhi unciphise ukungcola kokupenda endleleni eya endaweni yokulala.

(6) Izindawo zokulala akufanele zihlelwe ngokwezigaba ezingaphezu kwezimbili.

(7) Izindawo ezibekwe eceleni komkhumbi kumele zibe seqophelweni elilodwa, ngaphandle kwasegunjini lapho kungekho ama-*scuttle* aseceleni: Inqobo nje uma isiGungu seziPhathimandla singakhulula noma yimuphi umkhumbi ezidingweni zalesi sigatshana somthethonqubo kuze kufike ezingeni isiGungu esigculiseke ngaso ngokuthi izindawo zokulala egumbini lokulala azinawo ama-scuttles asemaceleni kanye nokuthi ukunethezeka kwabasebenzi kuzokwanda.

This gazette is also available free online at **www.gpwonline.co.za**

(8) (a) Igumbi lokuhlala akumele libe ngaphansi kwama-300 mm ukusuka phansi ekamelweni likalwe ukusuka phansi komatilasi

(b) Izindawo zokulala akumele zihlelwe ngokwezigaba ezingaphezu kwezimbili futhi uma kukhona izindawo zokulala ezibekwe eceleni komkhumbi, kufanele kube nesigaba esisodwa kuphela lapho ukukhanya okusemaceleni kuphezu kwegumbi lokulala

(c) Igumbi eliphansi elingaphansi kwesitezi esikabili kufanele lingabi ngaphansi kwama-300 mm ngaphezu kwesitezi futhi elingaphezulu kufanele libekwe cishe phakathi nendawo ephansi yegumbi elingaphansi kanye nohlangothi olungezansi lwemishayo yekhanda ledekhi.

Impahla Yasendlini Nokufakwa Emagunjini Okulala

17. (1) Wonke amagumbi okulala kufanele ahlinzekwe ngalezi zinsiza ezilandelayo:

(a) kumuntu ngamunye ohlaliswa egunjini—

(i) ishalofu elilodwa elinamandla okungenani amalitha angama-56;

(ii) ilokha eyodwa noma ikhabethe lokugcina izingubo, okungenani elinamandla angama-475 amalitha endaweni yangaphakathi yesigaba futhi lapho idilowa lifakwe ekhabethe lokugcina izingubo, khona-ke isisindo esihlanganisiwe esincane sekhabetha lokugcina izingubo kufanele sibe ngamalitha angama-500: Inqobo nje uma ilokha noma ikhabethe lokugcina izingubo linamashalofu nendawo yokugaxa izimpahla futhi likwazi ukukhiywa umuntu ofake izimpahla zakhe ukuqinisekisa ukuba nemfihlo: futhi kufanele

(iii) okungenani ihuku elilodwa lezimpahla ngaphezu kwanoma yiliphi ihuku lezimpahla elifakwe elokheni noma ekhabetheni lezingubo;

(b) itafula lohlobo olungaguquki noma, ideski, noma iqabunga elishelelayo noma ikhabethe lezingubo elilinganiswe kahle;

(c) indawo yokuhlala enethezekile njengoba kudingeka;

(d) Isibuko esilungele ukusetshenziswa endlini yangasese

(e) ikhabethe elilungele ukuqukatha izidingo zendlu yangasese

(f) ishalofu lokubeka izincwadi

This gazette is also available free online at www.gpwonline.co.za

(g) ukhaphethi owenziwe ngempahla efanele ohlangothini olulodwa lombhede ngamunye noma uchungechunge lwemibhede,ukuhambisana nesimo;

(h) ikhethenisi elifakwa embhedeni ngamunye, ngaphandle uma igumbi lokulala lakhelwe umuntu oyedwa

(i) ikhethenisi elifakwe ohlangothini ngalunye lwe-*scuttle*, ngaphandle uma i-*scuttle* eseceleni ifakwe ngendlela efanayo.

(2) Kuwo wonke amagumbi okulala okuhlala kuwo izilinganiso ezingaphezu kweyodwa, idilowa ngalinye, ilokha kanye newodilophu kufanele kukwazi ukukhiywa ukuze kube nemfihlo.

(3) Ngokuya ngemihlinzeko yesigatshana somthethonqubo (4), zonke izindlu zokulala zezikhulu kufanele zihlinzekwe ngalezi zinsiza ezilandelayo:

(a) Ngesikhulu ngasinye esihlaliswe egumbini

(i) okungenani amadilowa amathathu anengqikithi yamalitha angama-284 noma kuyela kuwo njengoba kungenzeka ezimweni;

(ii) iwodilophu okungenani engu-1680 mm ubude kanye no-0.3m 2 engxenyeni yangaphakathi;

(iii) okungenani amahhuku amajazi amabili, ngaphezu kwanoma yimaphi amahhuku amajazi afakwe kuwodilophu;

(b) itafula lokubhala elifakelwe, uma kungenzeka, elinamakhabethe engeziwe kulawa madrowa ashiwo ngenhla;

(c) isihlalo esinezindawo zokubeka izingalo

(d) isofa okungenani elingu-1830 mm noma kuyela lapho ngoba kunokwenzeka ezimweni: Kuncike ekutheni isiGungu seziPhathimandla singavumela ukuthi isofa lifakwe—

(i) uma iziPhathimandla zaneliseka ukuthi usofa onobukhulu obanele angeke wabekwa egumbini ngaphandle kokuthikameza ukunethezeka kwabahlali

(ii) odabeni legumbi elihlala isikhulu esisodwa kuphela, uma isigungu seziPhathimandla sixoxisane naleyo nhlangano ebonakala sengathi imele isigaba sesikhulu esithintekayo futhi sanelisekile ukuthi isihlalo esilula esinyuswe ngokuphelele esinezingalo ezivalekile sihlinzekiwe egunjini;

This gazette is also available free online at **www.gpwonline.co.za**

(e) Isibuko esilungele ukusetshenziswa endlini yangasese
(f) ikhabethe elilungele ukuqukatha izidingo zendlu yangasese
(g) kufanele kufakwe indishi yokugezela ehlanzekile futhi ehlala isikhathi eside, enamanzi ashisayo nabandayo, ngaphandle uma loluhlobo lwendishi yokuga lusendlini yokugezela yangasese;
(h) uma kukhona, ipuleti lokuchaphaza noma enye indlela yokuvikela udonga olungaphezu kwesitsha sokugezela;
(i) ukhaphethi owenziwe ngezinto ezifanele
(j) amakhethenisi afakwe embhedeni ngamunye, ngaphandle uma igumbi lihlala isikhulu esisodwa kuphela
(k) amakhethenisi afakwe ohlangothini ngalunye lwe-scuttle, ngaphandle uma i-*scuttle* eseceleni ifakwe ngendlela efanayo; futhi
(l) isikhwama sezincwadi noma ishalofu lokubeka izincwadi

Kuncike ekutheni isigungu seziPhathimandla, ngemuva kokubonisana nabanikazi bemikhumbi kanye nezinhlangano zasolwandle ezithintekayo, singakhulula imikhumbi engaphansi kwamathani angama-200, ngalokho kucatshangelwa ubukhulu bomkhumbi kanye nenani labantu abasemkhunjini maqondana nezidingo zalezi zihlinzeko ezilandelayo zalesi sigatshana somthethonqubo maqondana nalokhu:

(i) indawo ephansi yezindlu zokulala zabagibeli bamanzi; futhi
(ii) umthamo omkhulu kanye nendawo yaphansi emagumbini okulala

(4) (a) Noma iyiphi impahla okukhulunywa ngayo ezigabeni (b), (c), (d) kanye no (l) yesigatshana somthethonqubo (3) ingase ihlinzekwe ekamelweni losuku elitholakalayo ukuze lisetshenziswe izikhulu ezithintekayo kuphela, esikhundleni segumbi lokulala.

(b) Noma yiziphi izinto ezisetshenziswayo okukhulunywe ngazo ezigabeni (e) kuya ku-(h) kuhlanganisa nesigaba esishiwo zinganikezwa endaweni yokuwasha eyabelwe ukusetshenziswa ngokukhethekile yisikhulu esisodwa esikhundleni segumbi lokulala laleso sikhulu.

(5) (a) Ngokuhambisana nemibandela engenhla yale Mithethonqubo, wonke amalokha, amakhabethe ezimpahla, amatafula, amadeski, izingxenye zezihlalo namasofa ezingavalwanga nempahla efanayo,

This gazette is also available free online at **www.gpwonline.co.za**

kufanele zenziwe ngebhodi eliqinile elipholishiwe, insimbi engagqwali noma enye impahla ebushelelezi futhi engaboli engeke iqhekeke, igobeke noma igqwale.

(b) Yonke impahla yasendlini ehlinzekwe emagunjini okulala kufanele yenziwe ngendlela yokuthi kungabi namathuba okufuya izinambuzane.

Amagumbi Okudlela

18. (1) Kuwo wonke umkhumbi, ngaphandle uma izimo ziwukuthi amalungu ezisebenzi akudingekile ukuba adle emkhunjini, amagumbi okudlela kufanele ahlinzekwe abasebenzi futhi kufanele abe mukhulu ngendlela eyanela ukuhlalisa inani elikhulu labantu okungenzeka basebenzise amagumbi okudlela, nganoma yisiphi isikhathi.

(2) Igumbi lokudlela akufanele lihlanganiswe negumbi lokulala.

(3) Kuwo wonke umkhumbi onamathani angama-500 noma ngaphezulu, amagumbi okudlela ahlinzekelwe izilinganiso angahlukaniswa nalawo ahlinzekelwe umphathi womkhumbi noma izikhulu

(4) Kunoma yimuphi umkhumbi onamathani angu-1000 noma ngaphezulu, kufanele kube negumbi lokudlela elilodwa lazo zonke izikhulu ezikulo mkhumbi: Inqobo nje uma izikhulu zingahlaliswa emagumbini okudlela ahlukene uma amagumbi okulala ezikhulu ehlukaniswe kakhulu emagumbini omkhumbi.

(5) Isigungu seziPhathimandla singakhululeka ezidingweni zalo mthethonqubo kuze kufike ezingeni lapho isigungu seziPhathimandla seneliseke khona ukuthi ukuthobela lokho akwenzeki noma akwenzeki ngaphansi kwezimo—

(a) noma iyiphi imikhumbi yabagibeli; noma

(b) noma yimuphi umkhumbi onenhloso ekhethekile

Impahla Yasendlini Nokufakwa Emagumbini Okudlela

19. (1)(a) Lonke igumbi lokudlela eliyingxenye yendawo yokuhlala abasebenzi kufanele lihlinzekwe ngamatafula anele ukuvumela indawo okungenani engu-508mm ikalwe ngasemaphethelweni etafula,

This gazette is also available free online at www.gpwonline.co.za

ukuze umuntu ngamunye asebenzise igumbi nganoma isiphi isikhathi ngokuhambisana nesiqondiso B 3.1.6 isigaba 4, 5, 6 no-7 seNgqungquthela Yezabasebenzi Yasolwandle.

(b) Itafula ngalinye kufanele okungenani libe ngu-600 mm ububanzi uma izihlalo zibekwe nhlangothi zombili zetafula; futhi okungenani kube ngu-380 mm ububanzi uma izihlalo zibekwe ohlangothini olulodwa lwetafula.

(c) Itafula kufanele libe ngosayizi ofanele futhi libekwe ngendlela yokuthi kulula ukufinyelela kulo.

(2) (a) Izihlalo ezizimele kufanele zihlinzekwe egunjini lokudlela kumuntu ngamunye osebenzisa igumbi nganoma yisiphi isikhathi.

(b) Izihlalo ezisesigabeni (a) kumele zifakelwe izindawo zokuphumuza izingalo ngaphandle uma kunezihlalo ezinezindawo zokuphumuza izingalo endaweni yokungcebeleka yabantu abasebenzisa igumbi lokudlela: Kuncike ekutheni usofa ungashintshwa esikhundleni sezihlalo ezincikene nengxenye enkulu yohlangothi lomkhumbi futhi—

(i) Usofa olinjalo kufanele okungenani ube ngu-380 mm ububanzi futhi kufanele ufakwe izihlalo eziphakeme noma eziwugqinsi ezimbozwe ngento engangenwa ukungcola kanye nomswakama futhi kufanele zihlinzekwe ngento yokunqika ekahle; futhi

(ii) ingemuva losofa kufanele futhi libe wugqinsi noma liphakame futhi kufanele limbozwe ngezinto ezingangenwa ukungcola nomswakama.

(3) (a) Lonke igumbi lokudlela elihlinzekelwe abantu abangaziphatheli ukudla kwabo kufanele lifakwe ilokha noma ikhabethe lokugcina ukudla kunoma yiziphi izimo ezikwazi ukubamba izitsha ezanele zalabo bantu.

(b) (i) Igumbi ngalinye lokudlela elihlinzekwe abantu abazihlinzeka ngokudla kwabo kufanele lifakelwe ikhabethe lokugcina ukudla komuntu ngamunye okufanele ibe nobukhulu obanele ukuze ikwazi ukugcina izitsha zomuntu ngamunye kanye nokudla okwanele umuntu okungenani amahora ayi-16.

This gazette is also available free online at www.gpwonline.co.za

(ii) Wonke amakhabethe okugcina izinto ahlinzekwe ngokuhambisana nalesi sigaba kumele abe—

(aa) Angene umoya ngokwanele;

(BB) ekwazi ukukhiywa; futhi

(CC) afakwe ngendlela evumela ukuthi ubone phansi okungenani ngo 300 mm:

Inqobo nje uma amakhabethe noma amarekhi engafakwa endaweni yokugcina ukudla, indawo yokugcina impahla noma enye indawo efanele ngaphandle kwegumbi lokudlela futhi okufinyeleleka kalula kuyo; futhi

(c) amakhabethe noma amarekhi enzelwe ukugcina ukudla akufanele afakwe emagunjini okulala.

(4) (a) Indlela okufanele kuhlale kutholakala ngayo amanzi okuphuza abilayo kumele ifakwe egumbini lokudlela ngalinye, ngaphandle uma leyo mpahla ifakwe endaweni yokulala efinyeleleka kalula kusuka endaweni engcolile, ekamelweni noma, esimweni somkhumbi ongaphansi kwamathani ayi-1,000, emkhunjini.

(b) Imishini evezwe esigabeni (a) kufanele ibe ngosayizi ofanele wenani labantu okungenzeka basebenzise igumbi lokudlela ngesikhathi esisodwa, elihlinzekwe ngokuhambisana nesigatshana soMthethonqubo (1).

(c) Esimeni segumbi lokudlela elihlinzekelwe izikhulu noma izikhulu ezincane, uma ikhabethe lezimpahla lihlenzekiwe egumbini lokudla, kufanele kunikezwe ibhodi elisemaceleni ekamelweni lokudlela.

(d) Ukuhlinzekwa kwamanzi ahlanzekile kumele kube kusinki nakubhayela.

(5) (a) Onke amatafula, amalokha, amakhabethe, kanye nezingxenye zezihlalo nemibhede egunjini lokudlela kufanele zenziwe ngokhuni oluqinile olupholishiwe, insimbi engagqwali noma enye impahla ebushelelezi futhi engaboli, engaqhekeki noma engagqwali..

(b) Yonke ifenisha ehlinzekwe egumbini lokudlela kufanele yenziwe ngendlela yokuthi ifukamele izinambuzane.

(6) Iziphathimandla zingakhulula—

(a) noma iyiphi imikhumbi yabagibeli; noma

This gazette is also available free online at **www.gpwonline.co.za**

(b) noma yimuphi umkhumbi onenhloso ekhethekile,

kusukela ezidingweni zale Mithethonqubo kuze kufike ezingeni isigungu seziPhathimandla seneliseke ngaso ukuthi ukuhambisana nakho akwenzeki noma akwenzeki kulezo zimo.

Izindawo zokuncebeleka nokufunda

20.(1) Kuyo yonke imkhumbi

(a) igumbi lokungcebeleka, kufanele lihlinzekwe, futhi akufanele lihlanganiswe negumbi lokudlela ngokuhambisana nezinga A 3.1 indima 17 kanye nomhlahlandlela B 3.1 indima 11 seNgqungquthela Yezemisebenzi Yasolwandle; futhi

(b) igumbi lokubhema lingahlinzekwa.

(2) Uma amakhadethi angaphezu kwamabili noma abanye abaqeqeshwayo befakwe egunjinini elilodwa lokulala, bangase banikezwe igumbi elihlukile emkhunjini ukuze balisebenzise njengegumbi lokufunda, ngaphandle uma kunenye indawo efanelekile eyenzelwe ukufunda.

(3) Kuwo wonke umkhumbi wamathani angu-500 noma ngaphezulu, kufanele kuhlinzekwe ishalofu lezincwadi, futhi kufanele lifinyeleleke kuwo wonke amalungu eqembu.

(4) (a) Kuyo yonke imikhumbi kufanele kube nendawo evulekile ukuze izisebenzi ziyisebenzise ngenjengo zokungcebeleka.

(b) Isikhala esishiwo kusigatshana (a) kufanele sibe yindawo eyanele, okungenani engamamitha-skwele ayi-9 noma ngaphezulu, uma nje ubukhulu bomkhumbi buvumela, kucatshangelwa inani labantu abasebenza emkhunjini.

Indawo yokuhlala ehhovisi

21. (1) Kuwo wonke umkhumbi onamathani angama-3 000 noma ngaphezulu, kufanele kube namakamelo amabili ahlukene asetshenziswa njengamahhovisi noma ihhovisi elivamile lomkhumbi futhi kufanele ahlinzekelwe leyo njongo ngokuhambisana nesimiso A 3.1 isigaba 15 seNgqungquthela Yezemisebenzi Yasolwandle.

This gazette is also available free online at www.gpwonline.co.za

(2) Elinye lamagumbi ahlukene esigatshaneni somthethonqubo (1) kufanele labelwe ukuthi lisetshenziswe yiSikhulu Esiyinhloko Sokuhlwaya noma izikhulu zomnyango wedeski, kanti elinye lisetshenziswe yiSikhulu Esiphezulu Kanjiniyela noma izikhulu zomnyango wegumbi lenjini.

(3) Indawo yokuhlala ehhovisi kufanele ibe segunjini elingasetshenziselwa noma yiziphi ezinye izinjongo ngaphandle kokufunda: Kuncike ekutheni ihhovisi elabelwe ukusetshenziswa yisikhulu esisodwa kuphela lingahlanganiswa negumbi losuku laleso sikhulu.

Ukuhlinzekwa kwamanzi okuphuza

22. (1)(a) Kuwo wonke umkhumbi, amanzi okuphuza kufanele ahlinzekwe ngamathangi endaweni yokuhlala abasebenzi , uwumthamo owanele ngokuhambisana nesibalo sabantu abasemkhunjini kanye nesikhathi, okungenzeka ukuthi sidlule phakathi kokugcwaliswa kabusha kwamanzi kulandelana, noma ngezinye izindlela ezisebenza ngokulinganayo.

(b) Amanzi okuphuza kufanele ahambisane nezinga elifanele njengoba kunqunyiwe kumazinga kazwelonke ayimpoqo mayelana nokufaneleka kwamanzi aphathekayo akhishwe ngaphansi koMthetho Wezinsiza Zamanzi, we-1997 (uMthetho 108 we-1997).

(c) Uma amathangi esevisi efakelwe inhloso yokuhlinzeka ngamanzi okuphuza, amathangi esevisi kufanele axhunywe ngqo namathangi amakhulu omkhumbi okugcina amanzi okuphuza.

(d) Emikhumjini engamathani ayizi-3,000 noma ngaphezulu, noma yikuphi ukumpompa okudingekile ukuze kuhlinzekwe amanzi okuphuza lapho kuhlala khona abasebenzi kumele kwenziwe ngamandla emishini.

(e) Kunoma yimuphi omunye umkhumbi ngaphandle komkhumbi ongashiwongo esigabeni (d), ukumpompa okudingekayo ukuze kuhlinzekwe amanzi okuphuza endaweni yokuhlala yabasebenzi kufanele kwenziwi ngomishini.

(2) Amanzi abandayo okuphuza kufanele afakwe kompompi bemikhumbi nasemagunjini okugcina ukudla kanye nasemagunjini okudla ahlinzekwe labo basebenzi abangahlinzekwanga ngamagumbi abo okugcina ukudla.

This gazette is also available free online at **www.gpwonline.co.za**

Izindawo zokuwasha

23. (1)(a) Kuwo wonke umkhumbi, izindawo zokuwasha izingubo ezifanele nezanele kufanele zihlinzekwe ngokuhambisana nezimfuneko zezinga elingu-A3.1 isigaba 13 kanye nomhlahlandlela B 3.1 isigaba 7.4 seNgqungquthela Yezokusebenza Zasolwandle : Kuncike ekutheni isiGungu, ngemuva kokubonisana nabanikazi bemikhumbi kanye nezinhlangano zasolwandle ezithintekayo, singakhulula imikhumbi engaphansi kwama-200 lapho kufanele khona ukwenza lokho, kucatshangelwa ubukhulu bomkhumbi kanye nenani labantu abasemkhunjini ngokuphathelene nezidingo zalesi sigatshana somthethonqubo.

(2) (a) Kuwo wonke umkhumbi, amagumbi okomisa izingubo zabasebenzi kufanele ahlinzekwe egunjini elihlukile emagunjini okulala, amagumbi okudlela, amagumbi okungcebeleka, amahhovisi, izindawo zokugcina izimpahla, kanye nezibhedlela futhi kufanele afakwe ama-raki noma izinduku futhi anikeze indawo eyanele ngokubheka isibalo sabantu abaseqenjini kanye nesikhathi sohambo lomkhumbi okuhloswe ukuthi uhanjwe ngalo.

(b) Ukushisisa kwamagumbi esigabeni (a) kumele kukwazi ukulawulwa ngaphandle kokushisisa kwanoma iyiphi enye indawo emkhunjini.

(c) Ipayipi elikhipha umoya emagunjini esigabeni (a) kufanele lizimele ekungeneni komoya kuzo zonke ezinye izikhala emkhunjini ngaphandle uma kuhlinzekwe ngohlelo lwenqubo yokungenisa umoya ngomshini:

Kuncike ekutheni emikhunjini engaphansi kwamathani angama-500, amakhabethe okomisa noma ezinye izinto ezifanele zingashintshwa esikhundleni segumbi lokomisa

(3) (a) Kuwo wonke umkhumbi, amakhabethe noma amalokha anomoya owanele kufanele ahlinzekelwe ukuneka izikhumba ezinamafutha kanye nezimpahla zokusebenza ezisetshenziswa iqembu labasebenzi

(b) Kufanele kuhlizekwe amakhabethe okanye amalokha ahlukile ezikhulu kanye nezilinganiso, amakhabethe okanye amalokha

This gazette is also available free online at www.gpwonline.co.za

kufanele abe ngaphandle kwamagumbi okulala abasebenzi futhi abesendaweni okufinyeleleka kalula kuyona:

Kuncike ekutheni iSiphathimandla singakhulula noma yimuphi umkhumbi ongaphansi kwamathani angama-500 kunoma yiziphi izidingo zalo mthethonqubo.

Izinsiza zenhlanzeko

24. (1) Kuyo yonke imikhumbi , amatilosi kufanele akwazi ukufinyelela kalula ezindaweni zezinsiza zenhlanzeko ngokuhambisana nendinganiso A3.1 isigaba 11 kanye nesiqondiso B3.1 isigatshana somthethonqubo 7 seNgqungquthela Yezokusebenza Zasolwandle : Kuncike ekutheni isigungu, maqondana nanoma yimuphi umkhumbi, ngemva kokubonisana nabanikazi bemikhumbi kanye nezinhlangano zasolwandle ezithinta imikhumbi engaphansi kwamathani angu 200, kucatshangelwa ubukhulu bomkhumbi kanye nenani labantu abasemkhunjini maqondana nezidingo zezinga elingu- A3.1 isigaba 11(d).

(2) Uma umnyango wekhabethe lamanzi usuka endaweni evulekile, umnyango kufanele, uma kungenzeka, uhlolisiswe kahle.

(3) (a) Uma indlela yokungena emakhabetheni amanzi ayingxenye yendawo yokuhlala abasebenzi isuka ephasejini eliya kwezinye izingxenye zezindawo zokuhlala abasebenzi, indawo yokwamukela izivakashi kufanele ihlinzekwe emnyango wendawo yokuhlanzeka, noma lapho indawo yokwamukela izivakashi ingenzeki, umnyango ozivala wona.

(b) Noma yimiphi iminyango ephakathi kwendawo yokuhlanzeka kanye nephaseji kumele ivaleke futhi ingabi nezikhala: Kuncike ekutheni isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi esidingweni sokuthi izicabha kumele zibe seduze futhi zingabi nezimbobo ngendlela isigungu esigculiseke ngayo ngokuthi izinhlelo zokukhipha umoya ophuma ezikhungweni zezindlu zangasese zenza ukuhambisana nalokho kungenasidingo

(4) Ukufinyelela endaweni yezindlu zangasese akumele kusuke ngqo egunjini lokudlela noma egunjini lokulala: Kuncike ekutheni—

This gazette is also available free online at www.gpwonline.co.za

(a) ukufinyelela endaweni yezindlu zangasese kungatholakala ngokuqondile emagunjini okulala angeqile kwamabili ndawonye angahlalisa abantu abangeqile kwabane; futhi

(b) uma abantu abahlaliswe kanjalo bebathathu noma abane ngenani, indawo yezindlu zangasese kufanele ihlolwe ukuze kuqinisekiswe ubumfihlo.

(5) Yonke indawo yezindlu zangasese kufanele ivalwe ngokuphelele ngama-*bulkhead* futhi kufanele ifakelwe ipayipi lomoya ophuma ngqo endaweni evulekile noma kwenye indawo yokukhucululwa kwenhlanzeko ehlinzekwa umoya ohlanzekile ngqo emoyeni ovulekile: Kuncike ekutheni indawo yokukhucululwa kwenhlanzeko ingahlukaniswa ngohlaka oluhlanganisa insimbi noma enye impahla engacacile neqinile evulwe phezulu naphansi.

(a) enye indawo yezenhlanzeko

(b) indawo yokuchama; noma

(c) ishawa noma ibhavu uma indawo yenhlanzeko ihlinzekwa ngomshini odonsa umoya okhipha iphunga lapho.

(6) Zonke izindawo zokuhlanzeka kufanele zakhiwe ngendlela yokuthi zikwazi ukuhlanzeka futhi zingagcini ukungcola noma izinambuzane.

(7) Zonke izindawo zezinsiza zenhlanzeko kufanele zihlinzekwe ngokulandelayo:

(a) Indawo yenhlanzeko yohlobo olulodwa—

(i) ipani lenhlanzeko noma ezinyeizinto ezifanele

(ii) isihlalo sokhuni oluqinile olupholishiwe noma enye impahla efanele, enembobo eyi- 102 mm ngaphambili;

(iii) isicupho esinepuleti lokuhlola; futhi

(iv) umshini wokufaka umoya osebenza kahle oxhunywe lapho kuphuma khona umoya;

(b) amanzi agelezayo anele, okumele ahlale etholakala futhi ahlinzekwe ngamavalvu azivalayo angahlangani anendawo yokuhlala endaweni engeke igqwale

(c) ipayipi lomhlabathi elingengaphansi kwe-100 mm ububanzi, elakhelwe ukusiza ukuhlanza kanye nokunciphisa ubungozi bokuthikamezeka, elixhunywe epayipini elikhulu lendle ngohlelo

This gazette is also available free online at **www.gpwonline.co.za**

olusebenzayo noluhlanzekile: Kuncike ekutheni isigungu seziPhathimandla singayikhulula imikhumbi engaphansi kwamathani angama-400 ngokwezidingo zalesi sigaba;

(d) umshini wokubamba iphepha lasendlini yangasese; futhi

(e) insimbi yasodongeni yokubambelela noma isibambo

(8) Izinhlinzeko zale Mithethonqubo akufanele zisebenze ezindaweni zenhlanzeko eziyingxenye yesibhedlela saphakade.

Imikhumbi

25. (1) Umkhumbi ngamunye kufanele ube nekhishi lokulungiselela ukudla kwabasebenzi, ngaphandle uma izimo ziwukuthi akukho malunga abasebenzi okudingeka ukuba adle emkhunjini.

(2) Ikhishi kufanele libe seduze ngangokunokwenzeka kunoma yiliphi igumbi lokudlela elihlinzekiwe futhi kufanele kuhlinzekwe yonke imishini edingekayo ukwenzela ukuba kudliwe emagunjini kunoma yiziphi izimo zezulu ezibakhona.

(3) Akufanele kube khona umnyango phakathi kwekhishi negumbi lokulala.

(4) Zonke izindlu zokudlela kufanele, ngokwezinga elifanele nelingenzeka, zikhanyiswe ngokukhanyisa kwemvelo.

(5) Ikhishi ngalinye kufanele lihlinzekwe okungenani ngezindawo ezintathu eziqinile zokukhanyisa okufakelwayo, enye yazo kufanele ibe seduze nendawo yokupheka edingekayo kule mithetho.

(6) Awuvumelekile umkhumbi osendaweni evulekile.

(7) Yonke imikhumbi kufanele ihlinzekwe ngeziphephetha-moya ezifakelwe izisefo zikagrisi ezizomunca intuthu ezintweni zokupheka ezilapho bese zikhiphela intuthu endaweni evulekile: Kuncike ekutheni isigungu seziPhathimandla singakhululeka kwimfuneko yalesi simiso somthetho, noma yimuphi umkhumbi ongaphansi kwamathani angama-200 uma iSiphathimandla saneliseka ukuthi umkhumbi uvulekele ukukhipha intuthu endaweni evulekile kuphela.

This gazette is also available free online at www.gpwonline.co.za

(8) (a) Umkhumbi kufanele Uhlinzekwe ngogadasi okufanele baholelwe ethangini elivalekile ukuze kulahlwe ngasogwini ngendlela ehambisana nemvelo;

(b) Isikhundla kanye nenani logadasi kumele kube ngendlela ezoqinisekisa ukugeleza kwamanzi phansi okuphumelelayo; futhi

(c) Impahla esetshenziswe ukukhonka phansi kufanele kube yimpahla evumelekile ehlala isikhathi eside, ingangenwa umswakama.

(9) Imishini yokupheka ekhishini kufanele ihlelwe ngendlela ezokwenza kube lula ukuhlanzwa kwekhishi.

(10) (a) Onke amakhabethe kufanele enziwe ngempahla yokwakha engangeni ukungcola nomswakama futhi egcineka ihlanzekile kalula.

(b) Zonke izingxenye zensimbi zamakhabethe namadilowa akufanelanga zigqwale

(c) Amakhabethe namadilowa kufanele akhiwe ngendlela yokuthi awafukameli ukuncola nezinambuzane.

(d) Izingxenye ezingezansi zawo wonke amakhabethe namadilowa ekhabethe kufanele zibe ngaphansi kompheme noma kufanele zifakwe ngendlela yokuthi izikhala ezingezansi kwazo kufinyeleleka kalula kuzo ukuze zihlanzwe.

(11) Ikhishi ngalinye kufanele lihlinzekwe ngemishini eyenza ukudla okwanele ngendlela efanele futhi kulungiselelwe abantu okufanele benzelwe ukudla futhi izitsha zokupheka zihlanzwe ngendlela efanele.

(12) Wonke umkhumbi kufanele uhlinzekwe ngemishini yokupheka ngokuhambisana nesimiso A3.2 isigaba 2 nesiqondiso B 3.2. isigaba 1 seNgqungquthela Yezemisebenzi Yasolwandle.

(13) (a) Ompompi bamanzi anosawoti akufanele bafakwe phezu kosinki kunoma yimuphi umkhumbi noma enye indawo lapho kungase kulungiselelwe khona ukudla kwabasebenzi.

(b) Amanzi ashisayo nabandayo ahlanzekile kufanele abekwe kusinki ekhishini ukwenzela izinjongo zokuwasha.

This gazette is also available free online at www.gpwonline.co.za

(c) Ipayipi lamanzi kufanele lixhunywe phakathi ekhishini, futhi ipayipi kufanele lifakwe phansi lapho elingeke lisuswe khona.

Izindlu zokugcina ukudla

26. (1)(a) Kuwo wonke umkhumbi lapho abasebenzi bengaziphatheli khona ukudla kwabo, kufanele kube negumbi elilodwa noma amaningi okugcinwa kuwo ukudla kwabasebenzi.

(b) Amagumbi okugcina impahla okukhulunywa ngawo esigabeni (a) kufanele afakwe amashalofu, amakhabethe namapayipi anele ngokubheka isikhathi eside okungenzeka sidlule phakathi kokugcwaliswa ngokulandelana kwezitolo kanye nenani eliningi labantu okumele banikezwe ukudla.

(2) Yonke indawo yokugcina ukudla kufanele ivalwe ngama-*bulkhead* ensimbi noma enye impahla efanelekile

(3) Ukungena kunoma iyiphi indawo yokugcina impahla eyomile kufanele kutholakale ephasejini, ekhabetheni, egunjini lokugcina ukudla noma kwenye indawo yokugcina impahla, noma endaweni evulekile, ngokusemandleni nangokunokwenzeka ngaphansi kwezimo, kube yindawo evikelekile.

(4) Yonke indawo yokugcina impahla eyomile kufanele ibe sendaweni, yakhiwe futhi ingenise umoya ukuze kugwenywe ukonakala kwempahla ebekiwe ngenxa yokushisa, ukoma, ukuminyana noma ukuhlaselwe izinambuzane noma izilokazane.

(5) (a) Ngokuya ngesigatshana somthethonqubo (4), indawo yokugcina izinto ezomile akumele ibe phezu kwegumbi likabhayela nanoma iyiphi enye indawo lapho kukhiqizwa khona ukushisa, noma kumele ihlangane nekhishi okanye ibhokisi lemishini.

(b) Isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi ezidingweni zalesi sigaba uma isigungu seziPhathimandla sanelisekile ukuthi ukuthobela lokho akuqondakali noma akwenzeki esimweni lapho indawo yokugcina izinto ezomile igqunywe ngendlela efanele.

This gazette is also available free online at **www.gpwonline.co.za**

(6) Igumbi lokugcina impahla eyomile, noma iyiphi ingxenye yalo, akufanele lisetshenziselwe ukugcina izingubo zokulala noma izindwangu.

Igumbi lokugcina impahla ebandayo kanye nemishini yokuqandisa

27.(1)(a) Wonke umkhumbi, kufanele uhlinzekwe -

(i) ngempahla yokuqandisa nezindawo zokugcina izinto ezibandayo; futhi

(ii) umthamo owanele wokugcina izinto ezibolayo zabasebenzi, kubhekwe isikhathi okungenzeka sidlule phakathi kokugcwaliswa kabusha kwezitolo okulandelanayo.

(b) Isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi ongaphansi kwamathani ayi-1,000 isiyonke ezidingweni zalesi sigatshana somthethonqubo uma isigungu seziPhathimandla sanelisekile ukuthi umkhumbi uhlinzekwa ngenye impahla eyanele yokugcina izinhlinzeko ezibolayo.

(2) Ukungena kunoma yiliphi igumbi lokugcina impahla elibandayo kufanele kutholakale ephasejini, ekhabethe noma egumbini lokugcina ukudla noma kwelinye igumbi lokugcina impahla.

(3) (a) Imishini yokuqandisa lapho kusetshenziswa i-*methyl chloride* ayivunyelwe.

(b) Izinhlelo zokupholisa, kubandakanya nezitshalo ezihambisana nezinhlelo zokupholisa umoya kufanele zihambisane namazinga afanele e-SANS kanye neSahluko II-2 soMthethonqubo 9 weSivumelwano Sokuphepha.

(4) Kuwo wonke amagumbi okugcina impahla abandayo—

(a) i-alamu kufanele ixhunywe ebhulohweni lokuzulazula kanye nangaphandle kwendawo yokuvula endlini yokugcina izinto ebandayo; futhi

(b) Igumbi elibandayo ngalinye okukhulunywe ngalo kwisigatshana (a) kumele likwazi ukuvuleka ngaphakathi ukuze kugwenywe ukuvaleleka kwabantu.

This gazette is also available free online at **www.gpwonline.co.za**

Izibhedlela

28. (1)(a) Wonke umkhumbi, okuhloswe ukuthi ube selwandle nganoma yisiphi isikhathi esiqhubekayo esingaphezu kwezinsuku ezi-3 unabasebenzi basolwandle abayi-15 noma ngaphezulu, kufanele uhlinzekwe ngendawo eyabelwe ukusetshenziswa njengesibhedlela saphakade sabasebenzi basolwandle ngokuhambisana nezinga A3.1 isigaba 12 kanye nezinga A4.1 leNgqungquthela Yezisebenzi Zasolwandle mayelana nokunakekelwa kwezokwelapha emikhunjini kanye nesiqondiso B3.1 isigaba 8 seNgqungquthela Yezisebenzi Zasolwandle ngokulaliswa esibhedlela.

(b) Indawo eyabelwe injongo okukhulunywe ngayo esigabeni (a) akufanele noma nini isetshenziselwe enye inhloso ngaphandle kokwelapha abantu abagulayo.

(c) Isigungu seziPhathimandla singakhululeka kulokho okufunwa yilesi sigatshana somthethonqubo noma yimuphi umkhumbi osebenza ohambweni logu phakathi kwamachweba angaphakathi kweRiphabhulikhi kuphela.

(2) (a) Kuwo wonke omunye umkhumbi ngaphandle komkhumbi okukhulunywe ngawo esigatshaneni (1), kufanele kube negumbi elabelwe ukusetshenziswa, uma kunesidingo, njengesibhedlela sesikhashana.

(b) Uma igumbi okukhulunywe ngalo esigabeni (a) lisetshenziswa njengesibhedlela, akufanele lisetshenziselwe enye inhloso ngaphandle kokwelapha abantu abagulayo

(c) Isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi ezidingweni zalesi sigatshana somthethonqubo uma iSigungu seziPhathimandla sanelisekile ukuthi ukuhambisana nalokho akudingekile ngaphansi kwezimo.

(3) (a) Zonke izibhedlela kungakhathaliseki ukuthi zisebenza ngokugcwele noma ezesikhashana kufanele zibe sendaweni ezoqinisekisa ukunethezeka okukhulu ngangokunokwenzeka kwesiguli

(b) Isibhedlela kufanele kungeneke kalula kuso, futhi, esimweni somkhumbi ongenaye udokotela oqeqeshiwe noma umhlengikazi oqeqeshwe ngokufanelekile oqashwe kuphela njengelungu

This gazette is also available free online at www.gpwonline.co.za

labasebenzi, kufanele sibe sesimweni esivumela iziguli ezithola ukunakwa ngokushesha nangokufanele kuzo zonke izimo zezulu.

(4) (a) Ububanzi obuncane bomnyango wesibhedlela ngasinye kufanele bube ngu-762 mm noma bube seduze kakhulu nalokhu njengoba kungenzeka ezimweni

(b) Isibhedlela kufanele sihlelwe ngendlela yokuthi uhlaka lungathwalwa kalula luyiswe esibhedlela futhi lubekwe eceleni okungenani kombhede owodwa.

(5) Iphani kuzo zonke izibhedlela ezihlala unomphela kufanele lingabi namajoyinti

(6) (a) Zonke izibhedlela ezihlala njalo kufanele zibe nezindawo zokulala ezifakwe okungenani ezinhlangothini ezimbili ezinama-*scatter* ohlangothini okungenani angu-305 mm ubukhulu: Uma nje kungenakwenzeka ukufaka i-*scatter* eseceleni ezinhlangothini zombili zesibhedlela, isibani esiphezulu sobukhulu obukhulu ngangokunokwenzeka singathathelwa indawo i-scatter eseceleni kolunye uhlangothi lwesibhedlela.

(b) Wonke ama-scuttles aseceleni esibhedlela, nanoma yikuphi ukukhanya kwesibhakabhaka okuchayeke emisebeni yelanga eqondile, kufanele kuhlinzekwe ngamakhethini, noma ukufakwa okufanayo

(c) Isigungu seziPhathimandla singakhulula kuzimfuneko zalesi sigatshana somthethonqubo noma yimuphi umkhumbi ongaphansi kwamathani angama-200.

(7) (a) Ukwengeza kunoma yikuphi ukungeniswa komoya ngemishini okudingekile ngokoMthethonqubo 10, zonke izibhedlela kufanele zihlinzekwe ngendawo yemvelo eyanele yokukhipha umoya evulekile kusetshenziswa imishini yokuphefumula azimele ahlinzekelwe noma iyiphi enye indawo emkhunjini.

(b) Isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi ezidingweni zalesi sigatshana somthethonqubo uma isiGungu

This gazette is also available free online at **www.gpwonline.co.za**

seziPhathimandla sanelisekile ukuthi ukuthobela lokho akwenzeki noma akwenzeki kulezo zimo.

(8) Zonke izibhedlela zingase zihlinzekwe ngesiphephetha-moya sikagesi ngaphezu kokuhlinzekwa ngohlelo lokufaka umoya ngomshini.

(9) Noma yimaphi amarediyetha asesibhedlela kufanele afakwe, uma kungenzeka, kusukela emakhanda emibhede.

(10) Ngaphezu kokukhanyisa okudingwa umthethonqubo 11, zonke izibhedlela kufanele zihlinzekwe ngesibani sikagesi esiphathekayo kanye nezinto ezidingekayo ukuze zisetshenziswe.

(11) (a) Kuwo wonke umkhumbi odingwa yilo mthethonqubo ukuba uhlinzekwe ngesibhedlela esihlala unomphela, okungenani kufanele kuhlinzekwe umbhede owodwa oyisitezi esibhedlela kumalungu angama-50 abasebenzi noma ingxenye yawo.

(b) Isigungu seziPhathimandla singakhululeka kulokho okufunwa yisigaba (a) noma yimuphi umkhumbi othwele abantu abangaphezu kuka-300, ngokwezinga isigungu seziPhathimandla esaneliseke ngalo ukuthi ukuthobela lokho akwenzeki noma akwenzeki ngaphansi kwezimo

(c) Umbhede okukhulunywa ngawo esigabeni (a) kufanele, uma kungenzeka, uhlelwe ngendlela yokuthi ufinyeleleke ezinhlangothini zombili kanye nangonyawo.

(d) Uma kunemibhede emagumbini okulala esibhedlela ehlelwe ngokwezigaba ezimbili, umbhede ongenhla kufanele uxhunywe noma ususeke.

(e) Ngokuya ngemihlinzeko yezigaba (a) kuya ku-(d) yalesi sigatshana somthethonqubo, imihlinzeko yesigatshana somthethonqubo (2) kuya ku-(8) kanye nomthethonqubo 16 kufanele isebenze emibhedeni yasesibhedlela njengoba isebenza emibhedeni egumbini lokulala.

This gazette is also available free online at www.gpwonline.co.za

(12) Kuzo zonke izibhedlela, kufanele kube nenye yalezi zinto ezilandelayo embhedeni ngamunye esibhedlela futhi kufanele ibe lapho ifinyeleleka khona kusuka embhedeni:

(a) Ilokha ecishe ibe ngu-305 mm2 ngo-610 mm ukuphakama, futhi ifakwe ukhakhayi oyisicaba kanye neshalofu;

(b) ibhodlela lamanzi; kanye

(c) nesitsha

(13) Zonke izibhedlela kufanele zihlinzekwe ngalezi zinto ezilandelayo:

(a) Izihlalo ezanele ngenani, kubhekwa inani lemibhede esibhedlela;

(b) ikhabethe lezingubo elingeziwe kulelo elidingekayo ngaphansi komthethonkambiso (12) walo mthetho, futhi elihambisana nemininingwane ebekwe esigabeni (a) (ii) sesigatshana (1) somthethonqubo 17;

(c) isembozo sebhokisi esizofihla imbiza yokuzikhulula; futhi

(d) i-alamu kagesi enesivalo esishaywayo ehlelwe ngendlela yokuthi ifinyeleleke embhedeni ngamunye futhi ixhumane negumbi lokulala lomuntu ophethe iziguli kanye nebhuloho lokuhamba.

(14) (a) Isitsha sokugezela esimumatha okungenani amalitha ayi-7 kufanele sigcwaliswe kuzo zonke izibhedlela.

(b) Ezitsheni ezinamathani angu-5 000 noma ngaphezulu okugeza okungenani amamitha angu-1,4 ubude bangaphakathi kufanele afakwe ezindaweni zokuwasha eziyingxenye yesibhedlela.

(c) Isitsha sokugezela kanye nebhavu kumele kwenziwe noma kwakhiwe ngempahla ehlanzekile futhi ehlala isikhathi eside, ebushelelezi futhi engangenwa amanzi, engenakwenzeka ukuba iqhekezeke, iphihlike noma igqwale.

(d) Isitsha sokugeza kufanele sifakelwe uhlelo lokukhishwa kwamanzi olusebenzayo noluhlanzekile oluhlukanisiwe, uma kungenzeka, kunoma yiluphi olunye uhlelo lokukhishwa kwamanzi esitsheni futhi ikakhulukazi amapayipi okulahla amanzi kufanele afakwe ngendlela ezokwenza kube lula ukuba ahlanzwe.

(e) Umbhobho wokukhipha amanzi okungenani onobubanzi obungu-50 mm ububanzi kufanele ufakwe endaweni ephansi kakhulu kunoma

This gazette is also available free online at **www.gpwonline.co.za**

yiliphi igumbi, ngaphandle kwendawo yokulala esibhedlela, equkethe leso sitsha sokugezela noma ubhavu.

(f) Isiphathimandla singakhulula noma yimuphi umkhumbi esicelweni sokugeza esibhedlela unomphela, uma isigungu seziPhathimandla sanelisekile ukuthi ukuhambisana nalokhu akwenzeki noma akwenzeki ngaphansi kwezimo.

(15) (a) Isikhungo sendawo yokuhlanzeka kufanele sifakwe njengengxenye yazo zonke izibhedlela.

(b) Isikhungo sendawo yokuhlanzeka kufanele sifakwe ekhabetheni lamanzi noma endaweni yokulala eyingxenye yesibhedlela.

(c) Ukufinyelela endaweni yenhlanzeko, noma indawo yokuwasha okanye noma iyiphi phakwathi kwalezi zombili, kufanele kutholakale kalula embhedeni noma endaweni yokwamukela izivakashi eyingxenye yesibhedlela.

(d) Iziphathimandla zingakhulula noma yimuphi umkhumbi emgomweni ophawulwe esigabeni (c) uma iziphathimandla ziqiniseka ukuthi ukuhambisana nawo akunakwenzeka ngaphansi kwalezo zimo, nokuthi indawo yokuhlanzeka eyingxenye yesibhedlela iseduze nombhede ngokwanele.

(e) Igumbi okufakwe kulo izinto zokuhlanzeka kufanele lihlinzekwe ngomnyango ozivalayo ongangenisi umoya ngaphandle uma lihlinzekwa ngomshini wokukhipha umoya, futhi kufanele lakhiwe ngendlela ezokwenza kube lula ukuba lihlanzwe futhi lingafaki ukungcola noma izinambuzane.

(f) Igumbi okukhulunywe ngalo esigabeni (e) kufanele lingenise umoya ngendlela eshiwo kwisigatshana somthethonqubo (7) womthethonqubo wama-24.

(16) Iziphathimandla zingakhulula noma yimuphi umkhumbi ongaphansi kwamathani angama-200 kunoma yiziphi izidingo zalo Mthethonqubo.

(17) Imithi yokwelapha yasesibhedlela ezihlinzekwe emkhunjini ukuze kuzuze abantu abasemkhunjini kufanele ibe njengoba kunqunyiwe kuMithetho Yezokuthutha Ngemikhumbi (Imithi Yomkhumbi kanye Nempahla Yezokwelapha), yezi-1991.

This gazette is also available free online at www.gpwonline.co.za

Ikhabethe lemithi yokwelapha

29.(1)(a) Kuwo wonke umkhumbi, ikhabethe lemithi yezokwelashwa kufanele ihlinzekwe endaweni eseduze nesibhedlela, uma ikhona, edingwa ngumthethonqubo wama-28 noma eduze negumbi lokulala lomuntu ophethe abantu abagulayo abasemkhunjini.

(b) Ikhabethe lezokwelapha kufanele lifakwe endaweni lapho lizohlala lomile futhi kufanele libe kude nayo yonke imithombo yokushisa.

(2) (a) Ikhabethe lezokwelapha kufanele libe ngusayizi, idizayini kanye nokwakhiwa okufanele ukugcina imithi, kanye nempahla yezokwelapha ehlinzekwe emkhunjini ukuze kuzuze bonke abantu abahamba ngomkhumbi njengoba kunqunyiwe kuMithetho Yezokuthutha Ngemikhumbi (Imithi Yomkhumbi kanye Nempahla Yezokwelapha), yezi-1991.

(b) Ikakhulukazi, ikhabethe lezokwelapha kufanele lihlinzekwe ngokulandelayo:

(i) Isicabha sangaphandle esifakwe ingidi esebenza kahle;

(ii) ikhabethe elingaphakathi, elisetshenziselwa kuphela ukugcina izidakamizwa ezilawulwayo, elifakwe isicabha kanye nengidi okumele ingakwazi ukuvuleka ngokhiye wokhiye okukhulunywe ngawo kusigatshana (i);

(iii) amashalofu akhiwe ngendlela yokusiza ukukhombisa imithi egcinwe kuwo;

(iv) ikhawunta yokukhipha noma itafula lokuphakela, kunoma yikuphi lapho kunendawo engagcinwa kalula ihlanzekile;

(v) okungenani amadilowa amabili afanelekile ukugcina izinto zezokwelapha futhi asetshenziselwa leyo njongo kuphela;

(vi) izinsimbi ezizovumela amabhodlela amanzi ashisayo ukuba ahlale alengiswe;

(vii) irekhi efanelekile yokugcina izinto zokukala imithi; futhi

(viii) lapho kufanele khona, incwadi yemiyalelo njengoba kushiwo ngaphansi kwemithethonqubo yezokwelapha esebenzayo.

(3) Ikhabethe lezokwelapha kufanele likhanyiswe ngogesi okumele ube ngaphakathi noma ngaphandle kwekhabethe, futhi okuzokwenza ukuthi konke

This gazette is also available free online at www.gpwonline.co.za

okuqukethwe yikhabethe kubonakale ngokucacile lapho kungekho ukukhanya okuvela kunoma yimuphi omunye umthombo.

(4) Ikhabethe lezokwelapha nendawo elifakwe kuyo kufanele ingene umoya ukuze kugwenywe ukuwohloka kokuqukethwe yikhabethe

(5) Isiphathimandla singakhululeka kunoma yiziphi izidingo zalo mthethonqubo noma yimuphi umkhumbi ongaphansi kwamathani angama-200, umkhumbi ohamba kuphela phakathi kwamachweba angaphakathi kweRiphabhulikhi uma isiPhathimandla sanelisekile ukuthi ukuhambisana nalokho akwenzeki noma akunakwenzeka ezimweni.

ukuvikelwa komiyane

30. (1)(a) Kunoma yimuphi umkhumbi ovame ukuthatha uhambo oluya kunoma yiliphi ichweba okubhekiswe kulo lomthethonqubo, izindawo zokuhlala zabasebenzi ngaphandle kwezindlu zokugcina izinto nezindawo zokuzilibazisa ezisendaweni evulekile kufanele zihlinzekwe ngokuvikelwa ekungeneni komiyane.

(b) Ukuvikelwa kusigatshana somthethonqubo (a) kumele kuhlinzekwe ngezikrini zezintambo ezingagqwali noma ezinye izinto ezifanele okufanele zifakwe kuzo zonke izinsimbi eziseceleni, izimbobo zokuphefumula zemvelo, ukukhanya kwesibhakabhaka, kanye nezicabha eziholela endaweni evulekile.

(2) Noma yimuphi umnyango okufakwe kuwo izikrini okukhulunywe ngazo kwisigatshana somthethonqubo (1)(b), okuwumnyango ongenela esibhedlela sengunaphakade noma sesikhashana emkhunjini okusebenza kuwo le Mithethonqubo, kufanele ube uhlobo oluzivala ngokwawo.

(3) Izinkulumo esigatshaneni somthethonqubo (1), ezihlobene nalezi zimiso ezibhalwe ohlwini lweNhlangano Yezempilo Yomhlaba.

Ukunakekelwa nokuhlolwa kwezindawo zokuhlala zabasebenzi

31. (1)(a) Indawo yokuhlala yabasebenzi emkhunjini ngamunye kufanele igcinwe ihlanzekile futhi isesimweni esihle, futhi yonke imishini nokufakwa kwayo kufanele kugcinwe kusebenza kahle.

This gazette is also available free online at www.gpwonline.co.za

(b) Yonke ingxenye yendawo yokuhlala yabasebenzi, ngaphandle kwegumbi lokugcina impahla, kufanele igcinwe ingenazo izimpahla nezinye izimpahla ezingezona ezomuntu noma ezenzelwe ukusetshenziswa yilabo bantu abayingxenye yendawo yokuhlala eyabelwe bona, futhi ikakhulukazi, izimpahla akufanele zigcinwe kunoma iyiphi ingxenye yendawo yokuhlala yabasebenzi.

(2) Umphathi womkhumbi noma isikhulu esiqokwe umphathi wale njongo kufanele ahlole yonke ingxenye yendawo yokuhlala yezisebenzi ngezikhathi ezingeqile ezinsukwini eziyishumi, futhi kufanele aphelezelwe lapho kuhlolwa ilungu leqembu elilodwa noma ngaphezulu.

(3) Ngezinhloso zesigatshana somthethonqubo (2), umphathi womkhumbi kufanele enze ukuba kufakwe ebhukwini lokungena elisemthethweni lomkhumbi irekhodi le—

(a) isikhathi nosuku lokuhlolwa;

(b) amagama kanye namazinga abantu abenza ukuhlola; futhi

(c) imininingwane yanoma yiziphi izici lapho indawo yokuhlala yabasebenzi noma iyiphi ingxenye yayo kutholakale kunoma yibaphi abantu abahlolayo ukuthi ayihambisani nale mithetho.

Ukuhlolwa Isikhulu Esifanele

32. Isikhulu esifanelekile kufanele sihlole indawo yokuhlala yabasebenzi emkhunjini ngamunye noma siqinisekise ukuthi umkhumbi uyahlolwa noma nini lapho

(a) umkhumbi ubhalisiwe noma ubhaliswe kabusha eRiphabhulikhi;

(b) noma iyiphi ingxenye yendawo yokuhlala yabasebenzi emkhunjini yenziwa izinguquko ezinkulu noma ilungiswe;

(c) inani labantu abahlaliswa kunoma yiliphi igumbi lokulala likhuphuka ngaphezu kwalelo elimakwe ngokuhambisana nesigatshana somthethonqubo (1) womthethonqubo we-14;

(d) ngokwesikhulu esifanele kunesizathu sokukholelwa, kungakhathaliseki ukuthi ngenxa yesikhalazo noma cha, noma yimiphi imihlinzeko yale Mithethonqubo yephuliwe maqondana nalowo mkhumbi, noma ukuthi noma yiziphi izimo lapho uMnyango

This gazette is also available free online at www.gpwonline.co.za

ukhulule khona umkhumbi kunoma yimuphi umbandela walezi zimiso azizange zihlangatshezwe noma;

(e) isicelo sokuhlolwa kwezindawo zokuhlala zabasebenzi senziwe kwabasemagunyeni noma kumphathi ofanele ngumnikazi womkhumbi noma wanoma iyiphi inhlangano ebonakala kuSigungu seziPhathimandla njengemele abanikazi bemikhumbi yaseNingizimu Afrika noma abantu athintekayo; noma

(f) isikhalazo sifakwe kusiphathimandla esifanele, futhi sihambisana nezidingo ezibekwe eMthethweni.

Ukukhululwa Okungeziwe

33. (1) Ngaphansi kwalezi zimo ezibhekwa yiziphathimandla njengezidingekile, iziphathimandla zinga, khulula-

(a) noma yimuphi osakhiwa

(b) noma yimuphi umkhumbi osahlolwa

(c) noma yimuphi umkhumbi ongaphansi kwamathani angama-200;

(d) noma yikuphi ukudonsa;

(e) Ngokubona kweSigungu seziPhathimandla, noma imuphi umkhumbi, osetshenziswa kakhulu ezibukweni lasolwandle, emfuleni, echwebeni, echibini noma emiseleni;

(f) kunoma iyiphi imikhumbi yabagibeli eyenza uhambo losuku kuphela; noma

(g) noma yimuphi umkhumbi wasogwini,

kuzo zonke izimfuneko zale Mithethonqubo kuze kufike lapho iSigungu seziPhathimandla seneliseke khona ukuthi ukuhambisana nalezi mfuneko akwenzeki noma akwenzeki kulezo zimo.

(2) Iziphathimandla zingakhulula noma yimuphi umkhumbi ezidingweni zalezi ziqondiso lapho kusetshenziswa khona noma yimaphi amaqembu ezinhlobo ezenza kudingeke ukusetshenziswa kwenani elikhulu kakhulu lezinhlobo kunalokho obekungenziwa ngenye indlela, esimweni samagumbi okudla, izindawo zokuhlala ezempilo kanye nezibhedlela, elilingana noma elilingana nezinga lokuhlala kwabasebenzi elifunwa yilezi ziqondiso: Ngaphandle kokuthi, esimweni semikhumbi lapho kunesidingo sokubheka, ngaphandle kokubandlulula, izintshisekelo zabasolwandle abanemikhuba yezenkolo nezenhlalo ehlukile nehlukile, iziphathimandla zingakwazi, ngemuva kokubonisana nabanikazi bemikhumbi

This gazette is also available free online at www.gpwonline.co.za

nezinhlangano zabasolwandle abathintekayo, ukuvumela ukwehluka okusetshenziswe ngokulinganayo maqondana nalezi ziqondiso, inqobo nje uma ukwehluka okunjalo kungaholeli ezikhungweni ezingezinhle kakhulu kunalezo ezizovela ekusetshenzisweni kwalezi ziqondiso.

(3) Ngemuva kokubonisana nabanikazi bemikhumbi, noma izinhlangano ezimele abanikazi bemikhumbi yaseNingizimu Afrika, kanye nezinhlangano ezimele abasebenza basolwandle abasebenza emikhunjini yaseNingizimu Afrika, uMnyango ungakhulula noma yimuphi umkhumbi kunoma yiziphi izidingo zalezi zimiso, uma uMnyango wanelisekile ukuthi izinzuzo ezihambisanayo zinikezwe emkhunjini ukuze indawo yokuhlala yabasebenzi ithathwe iyonke, ilingane noma ibe sezingeni eliphakeme kunaleyo edingwa yilezi zimiso.

Ukuhoxiswa kwemithethonqubo

34. Imithetho Yezindawo Zokuhlala Abasebenzi,yezi-1961, eshicilelwe Isaziso Sikahulumeni GN R. 1064 kuGazethi kaHulumeni yama-43 yangomhla zingama-24 kuLwezi we-1961 ngokoMthetho Wezokuthutha Ngemikhumbi, we-1951 (uMthetho 57 we-1951), ngalokhu iyachithwa.

Isihloko esifishane kanye nesiqalo

35. Le mithetho ibizwa ngokuthi Imithetho Yezokuthutha Ngemikhumbi (Indawo Yabasebenzi), yezi-2026 futhi iqala ukusebenza ngosuku lokushicilelwa kwayo kokugcina.

This gazette is also available free online at **www.gpwonline.co.za**

Isithasiselo 1

IZINHLELO ZOKUFAKA UMOYA ZOMSHINI

(1) Izinhlelo zokufaka umoya ezenziwe ngomshini kufanele zikwazi ukuhlangabezana nezinga lokusebenza elichazwe etafuleni elingezansi.

(2) Uma noma yiliphi igumbi lokugcina impahla lihlinzekwe ngesiphephetha moya esikhipha umoya ofudumele kunoma yiliphi elinye igumbi, igumbi lokugcina impahla kufanele lihlinzekwe ngendawo yokufaka umoya wokuphefumula ohlukile kulowo osebenza kwelinye igumbi.

(3) Indawo evulekile yezimbobo zokufaka umoya ehlinzekiwe ngokuhambisana nohlelo kufanele iqinisekisa ukuthi isivinini somoya emgodini ngamunye asidluli amamitha ama-5 ngomzuzwana lapho uhlelo lusebenza.

(4) Isistimu kufanele isebenze ngokuthula

(5) Wonke ama-trunking ayingxenye yohlelo kufanele ahlinzekwe ngeziphephelo ezinganakubuyiselwa lapho iziphepho ezinjalo zidingeka khona ukuze kukhishwe ukungcola kanye nokulondoloza impilo yabasebenzi.

(6) Uma uhlelo lwenzelwe ukujikelezisa umoya oshisayo njengendlela eyodwa yokufudumeza indawo yokuhlala yabasebenzi, uhlelo kufanele luhlukaniswe ngezigaba ezingalawulwa ngokwehlukana ngokwezinga elidingekayo ukuze kugcinwe izinga lokushisa elifanele kuzo zonke izingxenye zendawo zokuhlala zabasebenzi.

Isigaba	Incazelo Yendawo	Ohlanzekile umoya ushintsha ngehora	Umthamo womuya ohlanzekile, phakathi m3\min, kumuntu ngamunye okungenzeka ukuthi asebenzise igumbi nganoma isiphi iskhathi*
	Amagumbi (ngaphandle kwamagumbi asesigabani C) ezindlini ezisemaphethelweni		
	ngaphezulu kwe dekhi noma indawo yokukhosela ephezulu		
	(1) Amagumbi angaphandle (angahlangene nebhokisi lemshini).	10	1.4
A	(2) Amagumbi angaphakathi ahlangene nebhokisi lemshini.	15	1.4

This gazette is also available free online at www.gpwonline.co.za

B	Amagumbi (ngaphandle kwamagumbi asesigabeni C) ASEMACELENI isakhiwo esingaphezu kwedekhi noma indawo yokukhosela ephezulu: (1) Amagumbi angaphandle (angahlangene nebhokisi lemshini). (2) Amagumbi angaphakathi ahlangene nebhokisi lemshini.	 12 15	 1.4 1.4
C	Amagumbi okudlela, amagumbi okubhema ukgwayi kanye namagumbi okungcebeleka (ngaphezu kwedekhi noma indawo yokukhosela engaphezulu (1) Engahlangene nebhokisi lemishini. (2) Ehlangene nebhokisi lemishini.	 15 18	 0.7 (a) 0.7 (a)
D	Amaphaseji axhumene nebhokisi lemishini.	4	-
E	Amagumbi aphakathi kwamadekhi (1) Engahlangene nebhokisi lemishini. (2)Ahambisanayo kodwa angahlangene nebhokisi lemishini. (3)Ahlangene nebhokisi lemishini(ngaphandle kwamagumbi okudlela, amagumbi okubhema kanye namagumbi okungcebeleka). (4) Amagumbi okudla, amagumbi okubhema kanye namagumbi okungcebeleka. (Ahlangene nebhoisi lemishini)	 12 12 15 18	 1.4 1.4 1.7 0.7
Isigaba	**Incazelo Yendawo**	**Izinguquko zomoya ohlanzekile ngehore**	
		Hlinzeka	**Qeda**
F	Imikhumbi	20 (c) (d)	40 (d)
G	Indawo yokuhlala amathuluzi okugcina indawo ihlanzekile, amagumbi okomisa kanye namagumbi okugcina ukudla	10	-
H	Amagumbi okugcina izinto ezomile	> 10 (e), kodwa	

Amanothi

(a) Kungakhathaliseki ukuthi bangaki abantu abangase basebenzise igumbi

This gazette is also available free online at **www.gpwonline.co.za**

nganoma isiphi isikhathi, ingqikithi yevolumu yomoya ohlanzekile ngomzuzu akumele idingeke ukuthi ibe ngendlela engabangela izinguquko zomoya ohlanzekile ezingaphezu kuka-20 ngehora.

(b) Kungakhathaliseki ukuthi bangaki abantu abangase basebenzise igumbi nganoma isiphi isikhathi, ingqikithi yevolumu yomoya ohlanzekile ngomzuzu akumele idingeke ukuthi ibe ngendlela engabangela izinguquko zomoya ohlanzekile ezingaphezu kuka-25 ngehora.

(c) 15, okungenani uma izinhlangothi ezimbili zomkhumbi zibheke ngakwisimo sezulu

(d) Isigungu seziPhathimandla singakhulula noma yimuphi umkhumbi kulezi zidingo uma senelisekile ukuthi ukuthobela umthetho akudingekile ngenxa yokwakuniswa kwempahla emkhumbini, noma ngenxa yobukhulu bomkhumbi.

(e) Ngokuya ngomthethonqubo we-11

This gazette is also available free online at **www.gpwonline.co.za**

ISITHASISELO 2

IZIMPAWU

INGXENYE I

Izimpawu zamagumbi okulala

Igunyazelwe umkhumbi

Igunyazelwe amatilosi

Igunyazelwe usolwandle noma amatilosi

INGXENYE II

Izimpawu zezindawo ngaphandle kwamagumbi okulala

Igunyazelwe Isikhulu Esiyinhloko Yokuhlola

Igunyazelwe Izikhulu

Igunyazelwe Izikhulu ezincane

Igunyazelwe Abafundi

Igunyazelwe Abasebenzi

(1) Isibalo esiphezulu sabasebenzi basolwandle abangahlaliswa egumbini siyofakwa ngokuhambisana nale Mithethonqubo, lapho singabelwanga ukusetshenziswa kuphela ngalezo zilinganiso ezishiwo kumthethonqubo we-15 (1) (e).

(2) Isibalo esiphezulu sabasebenzi basolwandle abangahlaliswa egumbini siyofakwa ngokuhambisana nale mithethonqubo, uma sabelwe ukusetshenziswa kuphela ngalezo zilinganiso ezishiwo kumthethonqubo we-15 (1) (e).

(3) Endabeni yegumbi okuhloswe ngalo ukusetshenziswa yinoma yisiphi esinye isikhulu kuphela, isikhundla saleso sikhulu kumele sishintshwe.

This gazette is also available free online at www.gpwonline.co.za

BOARD NOTICES • RAADSKENNISGEWINGS

BOARD NOTICE 984 OF 2026

HEALTH PROFESSIONS COUNCIL OF SOUTH AFRICA

HEALTH PROFESSIONS ACT, 1974 (ACT NO. 56 OF 1974)

RULES RELATING TO THE REGISTRATION BY MEDICAL PRACTITIONERS AND DENTISTS OF ADDITIONAL QUALIFICATIONS: AMENDMENT

The Health Professions Council of South Africa intends, under section 61A of the Health Professions Act, 1974 (Act No. 56 of 1974), to make the rules in the schedule.

Interested persons are invited to submit any substantiated comments or representations in writing on the proposed amendments to the Registrar, Health Professions Council of South Africa by e-mail at: ntsanem@hpcsa.co.za for the attention of the Legal Advisor: Legislative drafting within three months from the date of publication of this notice.

SCHEDULE

Definitions

1. In these rules **"the rules"** means the rules relating to the registration by medical practitioners and dentists of additional qualifications published as Board Notice 35 of 1999 published under Government Gazette No: 19890 of 31 March 1999 as amended by Board Notices. 46 of 2005 published under Government Gazette No: 27592 of 20 May 2005, 34 of 2006 published under Government Gazette No: 28779 of 05 May 2006, 22 of 2007 published under Government Gazette No: 29689 of 16 March 2007, 130 of 2010 published under Government Gazette No: 33540 of 17 September 2010, 109 of 2011 published under Government Gazette No: 34362 of 17 June 2011, 122 of 2012 published under Government Gazette No: 35517 of 20 July 2012, 31 of 2013 published under Government Gazette No: 36225 of 15 March 2013, 28 of 2014 published under Government Gazette No: 37421 of 14 March 2014, 85 of 2014 published under Government Gazette No: 37872 of 01 August 2014, 164 of 2015 published under Government Gazette No: 39127 of 21 August 2015, 4 of 2016 published under Government Gazette No: 39736 of 26 February 2016, 172 published under Government Gazette No: 42037 of 16 November 2018, 224 published under Government Gazette No:

CONTINUES ON PAGE 770 OF BOOK 7

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**



Government Gazette
Staatskoerant

REPUBLIC OF SOUTH AFRICA
REPUBLIEK VAN SUID AFRIKA

Vol. 735 4 September / September 2026 No. 55299

PART 7 OF 7

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes

ISSN 1682-5845

9 771682 584003 55299

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

46032 of 11 March 2022, 363 published under Government Gazette No: 47489 of 11 November 2022, and 687 published under Government No: 51526 of 08 November 2024, any word or expression to which a meaning has been assigned in the rules shall have that meaning, unless the context otherwise indicates.

Amendment of Rule 2 of the rules

2. Rule 2 of the rules is hereby amended by –

(a) the substitution in paragraph (b), for Diploma in Tropical Medicine and Hygiene (DTM & H) Witwatersrand, of the following qualification: -

Witwatersrand, University of	Postgraduate Diploma in Tropical Medicine and Hygiene.	(PGDIPTM&H) Witwatersrand.

(b) the substitution in paragraph (b), for Diploma in Child Health, of the following qualification: -

Witwatersrand, University of	Postgraduate Diploma in Child Health.	(PGDIPCHILD HEALTH) Witwatersrand.

(c) the substitution in paragraph (b), for Diploma in Occupational Health, of the following qualification: -

Witwatersrand, University of	Postgraduate Diploma in Occupational Health.	(PGDIPOCCHEALTH) Witwatersrand.

(d) the substitution in paragraph (b), for Diploma in Public Health, of the following qualification: -

Witwatersrand, University of	Postgraduate Diploma in Public Health.	(PGDIPPUPLICHEALTH) Witwatersrand.

(e) the insertion, in alphabetical order and in paragraph (b), of the following qualification:

-

Witwatersrand, University of	Master of Science in Medicine (Biokinetics)	MSc Med (Biokinetics) Witwatersrand
	Master of Science in Medicine Child Health (Community Paediatrics)	MSc Med Child Health (Community Paediatrics) Witwatersrand
	Master of Science in Medicine Child Health (Neurodevelopment)	MSc Med Child Health (Neurodevelopment) Witwatersrand
	Master of Science in Medicine (Child Life and Paediatric Psychological care)	MSc Med (Child Life and Paediatric Psychological care) Witwatersrand
	Master of Science in Medicine (Emergency Medicine)	MSc Med (Emergency Medicine) Witwatersrand
	Master of Science in Medicine (Exposure Science)	MSc Med (Exposure Science) Witwatersrand
	Master of Science in Medicine (Genetic Counselling)	MSc Med (Genetic Counselling) Witwatersrand
	Master of Science in Medicine (Genomic Medicine)	MScMed (Genomic Medicine) Witwatersrand
	Master of Science in Medicine (Pharmaceutical Affairs)	MSc Med (Pharmaceutical Affairs) Witwatersrand

	Master of Science in Medicine (Clinical Pharmacy)	MSc Med (Clinical Pharmacy) Witwatersrand
	Master of Science in Medicine (Sports Medicine)	MSc Med (Sports Medicine) Witwatersrand
	Master of Science in Medicine (Sports Science)	MSc Med (Sports Science) Witwatersrand
	Master of Science in Medicine (Vaccinology)	MSc Med (Vaccinology) Witwatersrand

(f) the substitution in paragraph (b), for Master of Medicine (Community Health) MMed (Comm Health) Stell, of the following qualification: -

Examination authority	**Qualifications**	**Abbreviation for registration**
Stellenbosch, University of	Master of Medicine (Public Health).	MMed (Public Health) Stell

(g) the insertion, in alphabetical order and in paragraph (b), of the following qualifications: -

Examination authority	**Qualifications**	**Abbreviation for registration**
Sefako Makgatho Health Sciences University	Postgraduate Diploma in Clinical Forensic Medicine	(PGDIPCFM) SMU.
	Master of Medicine (Clinical Pharmacology).	MMed (Clin Pharm) SMU
Pretoria, University of	Master of Medicine (Occupational Medicine).	MMed (Occupational Medicine) Pret

Free State, University of	Master of Medicine (Clinical Pharmacology).	MMed (Clinical Pharmacology) Free State
Cape Town, University of	Master of Medicine (Occupational Medicine).	MMed (Occ Medicine) Cape Town
	Master of Medicine (Public Health Medicine)	MMed (Public Health Medicine) Cape Town
	Master of Medicine (Clinical Pharmacology)	MMed (Clinical Pharmacology) Cape Town
	Master of Philosophy (Palliative Medicine)	MPhil (Palliative Medicine) Cape Town
	Postgraduate Diploma (Palliative Medicine)	PGDip (Palliative Medicine) Cape Town
Limpopo, University of	Master of Medicine (Public Health Medicine)	MMed (Public Health Medicine) Limpopo
Walter Sisulu University	Master of Medicine (Urology)	MMed (Urology) Walter Sisulu University
	Master of Medicine (Chemical Pathology)	MMed (Chemical Pathology) Walter Sisulu University
	Master of Medicine (Anatomical)	MMed (Anatomical) Walter Sisulu University
	Master of Medicine (Dermatology)	MMed (Dermatology Walter Sisulu University

	Master of Medicine (Emergency Medicine)	MMed (Emergency Medicine) Walter Sisulu University
College of Family Physicians of South Africa	Fellowship in the Subspeciality in Allergology	FSA(SA) Fam Phys
	Higher Diploma in Family Medicine	H Dip Fam Med(SA)
College of Physicians of South Africa	Fellowship in the Subspeciality in Allergology	FSA(SA) Phys
	Fellowship in the Subspeciality in Cardiology	FSC(SA) Phys
	Fellowship in the Subspeciality in Clinical Haematology	FSCH(SA) Phys
	Fellowship in the Subspeciality IN Critical Care	FSCC(SA) Phys
	Fellowship in the Subspeciality in Endocrinology and Metabolism	FSEM(SA) Phys
	Fellowship in the Subspeciality in Gastroenterology	FSG(SA) Phys
	Fellowship in the Subspeciality in Geriatric Medicine	FSGM(SA) Phys
	Fellowship in the Subspeciality in Infectious Diseases	FSID(SA) Phys
	Fellowship in the Subspeciality in Nephrology	FSN(SA) Phys
	Fellowship in the Subspeciality in Pulmonology	FSP(SA) Phys

	Fellowship in the Subspeciality in Rheumatology	FSR(SA) Phys
	Diploma in Internal Medicine	Dip Int Med(SA)
	Diploma in Geriatric Medicine	DGM(SA)
College of Paediatricians	Fellowship in the Subspeciality in Allergology	FSA(SA) Paed
	Fellowship in the Subspeciality in Cardiology	FSC(SA) Paed
	Fellowship in the Subspeciality in Clinical Haematology	FSCH(SA) Paed
	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Paed
	Fellowship in the Subspeciality in Endocrinology and Metabolism	FSEM(SA) Paed
	Fellowship in the Subspeciality in Gastroenterology	FSG(SA) Paed
	Fellowship in the Subspeciality in Infectious Diseases	FSID(SA) Paed
	Fellowship in the Subspeciality in Medical Oncology	FSMC(SA) Paed
	Fellowship in the Subspeciality in Nephrology	FSN(SA) Paed
	Fellowship in the Subspeciality in Developmental Paediatrics	FSDP(SA) Paed
	Fellowship in the Subspeciality in Neonatology	FS Neo(SA) Paed

	Fellowship in the Subspeciality in Paediatric Neurology	FSPN(SA) Paed
	Fellowship in the Subspeciality in Pulmonology	FSP(SA) Paed
	Fellowship in the Subspeciality in Rheumatology	FSR(SA) Paed
College of Pathologists	Fellowship in the Subspeciality in Clinical Haematology	FSCH(SA) Path
	Fellowship in the Subspeciality in Infectious Diseases	FSID(SA) Path
College of Anaestheologists	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Anaes
College of Cardiothoracic Surgeons of South Africa	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Cardio
College of Emergency Medicine of South Africa	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Emerg Med
	Higher Diploma in Emergency Medicine	H Dip Emerg Med(SA)
College of Neurosurgeons of South Africa	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Neuro
Obstetricians and Gynaecologists of South Africa	Fellowship in the Subspeciality in Critical Care	FSCC(SA) O&G
	Fellowship in the Subspeciality in Gynaecological Oncology	FSGO(SA) O&G
	Fellowship in the Subspeciality in Maternal and Fetal Medicine	FSMF(SA) O&G

	Fellowship in the Subspeciality in Reproductive Medicine	FSRM(SA) O&G
	Fellowship in the Subspeciality in Urogynaecology	FSU(SA) O&G
College of Surgeons of South Africa	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Surg
	Fellowship in the Subspeciality in Gastroenterology	FSG(SA) Surg
	Fellowship in the Subspeciality in Trauma Surgery	FSTS(SA) Surg
	Fellowship in the Subspeciality in Vascular Surgery	FSVS(SA) Surg
College of Psychiatrists of South Africa	Fellowship in the Subspeciality in Critical Care	FSCC(SA) Psych
	Fellowship in the Subspeciality in Child and Adolescent Psychiatry	FSCAP(SA) Psych
	Fellowship in the Subspeciality in Forensic Psychiatry	FSFP(SA) Psych
	Fellowship in the Subspeciality in Geriatric Psychiatry	FSGP(SA) Psych
	Fellowship in the Subspeciality in Neuropsychiatry	FSNP(SA) Psych

(h) the insertion, in alphabetical order and in paragraph (c), of the following qualification: -

Examination authority	**Qualifications**	**Abbreviation for registration**

Buckingham, University of	Master of Science (Women's Health).	MSc (Women's Health) Buckingham

3. Rule 3 of the rules is hereby amended by the insertion, in alphabetical order and in paragraph (b), of the following qualification: -

Examining Authority	***Qualification***	***Abbreviation for the qualification***
College of Maxillo-Facial and Oral Surgeons of South Africa	Diploma in Oral Surgery	Dip Oral Surg(SA)

Signed by:DR. K. S. CHETTY
Signed at:2026-07-28 21:50:48 +02:00
Reason:Witnessing DR. K. S. CHETTY

K'S CHETTY

DR. KARMANI S CHETTY
INTERIM REGISTRAR

Printed by and obtainable from the Government Printer, Bosman Street, Private Bag X85, Pretoria, 0001
Contact Centre Tel: 012-748 6200. eMail: info.egazette@gpw.gov.za
Publications: Tel: (012) 748 6053, 748 6061, 748 6065

This gazette is also available free online at **www.gpwonline.co.za**